



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Credo Petroleum Corp.			
		Well Toburen No. 1-29			
		Field Wildcat			
		County	Lane	State	Kansas
15-101-22,254-00-00		Location		1388' FNL & 1400' FWL	
		Sec: 29	Twp: 19 S	Rge: 28 W	
Permanent Datum		Ground Level	Elevation 2800		Other Services CNL/CDL DIL/BHCS
Log Measured From		Kelly Bushing	5	Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing			
Date		8/24/2010			Elevation K.B. 2805 D.F. 2805 G.L. 2800
Run Number		Two			
Depth Driller		4750			
Depth Logger		4749			
Bottom Logged Interval		4748			
Top Log Interval		1150			
Casing Driller		8.625 @ 210			
Casing Logger		206			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		4.400			
Density / Viscosity		9.3	54		
pH / Fluid Loss		10.0	8.8		
Source of Sample		Flowline			
Rm @ Meas. Temp		.75 @ 68			
Rmf @ Meas. Temp		.56 @ 68			
Rmc @ Meas. Temp		1.01 @ 68			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.41 @ 126			
Operating Rig Time		6 Hours			
Max Rec. Temp. F		126			
Equipment Number		4			
Location		Hays			
Recorded By		K. Bange			
Witnessed By		Jim Musgrove		Don Guy	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Dighton, 6 S, 1 E, 1 1/4 S, E into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

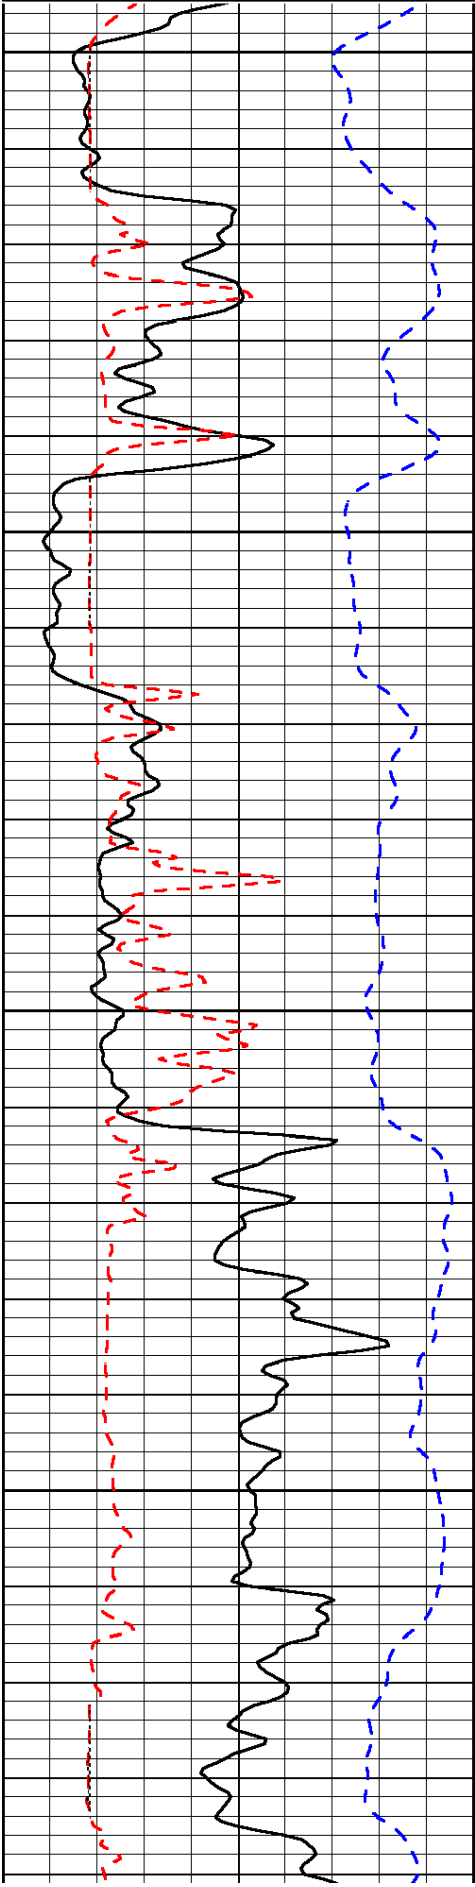

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

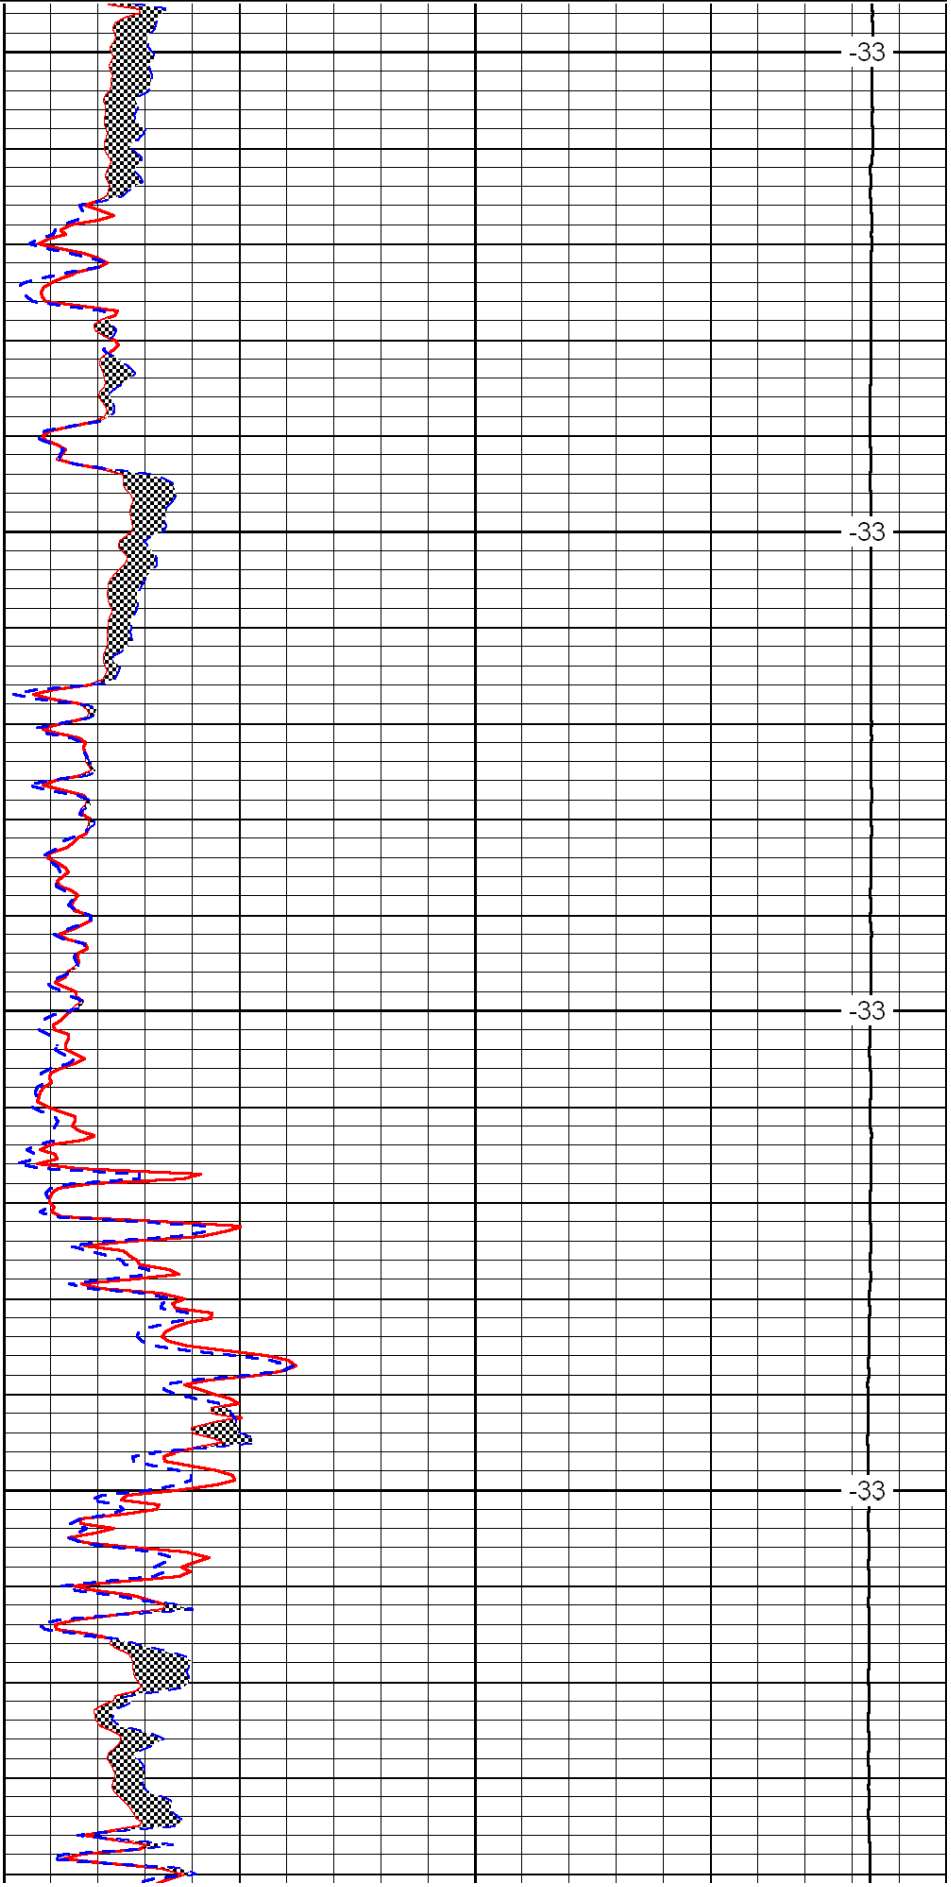

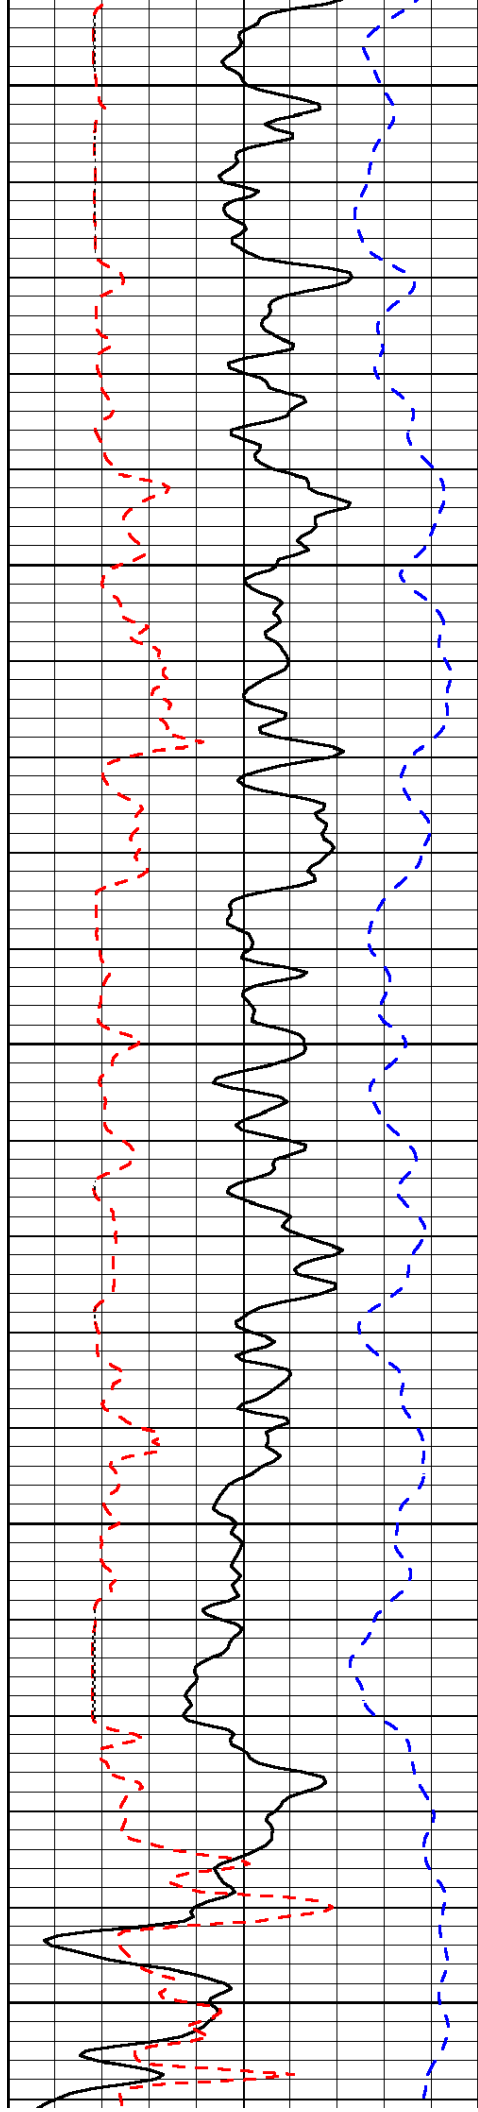


1350

1400

1450

1500

1550

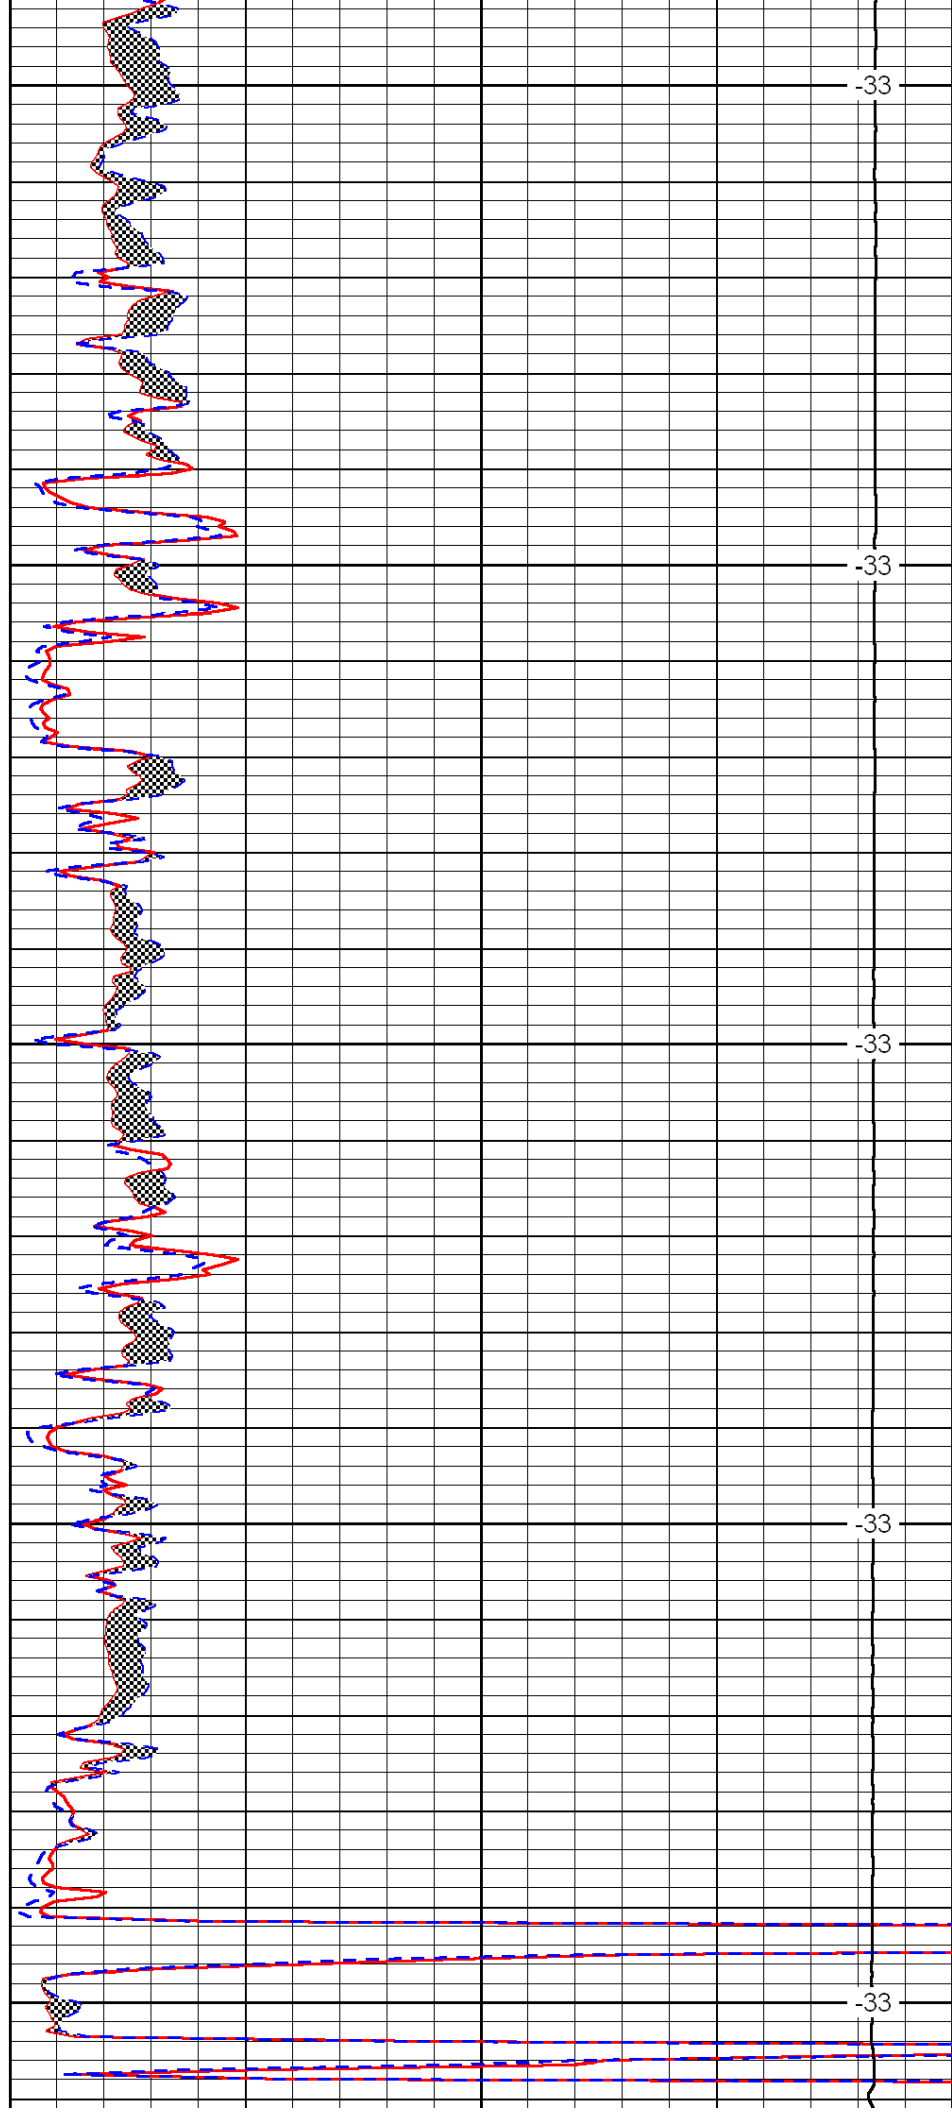


-33

-33

-33

-33

-33

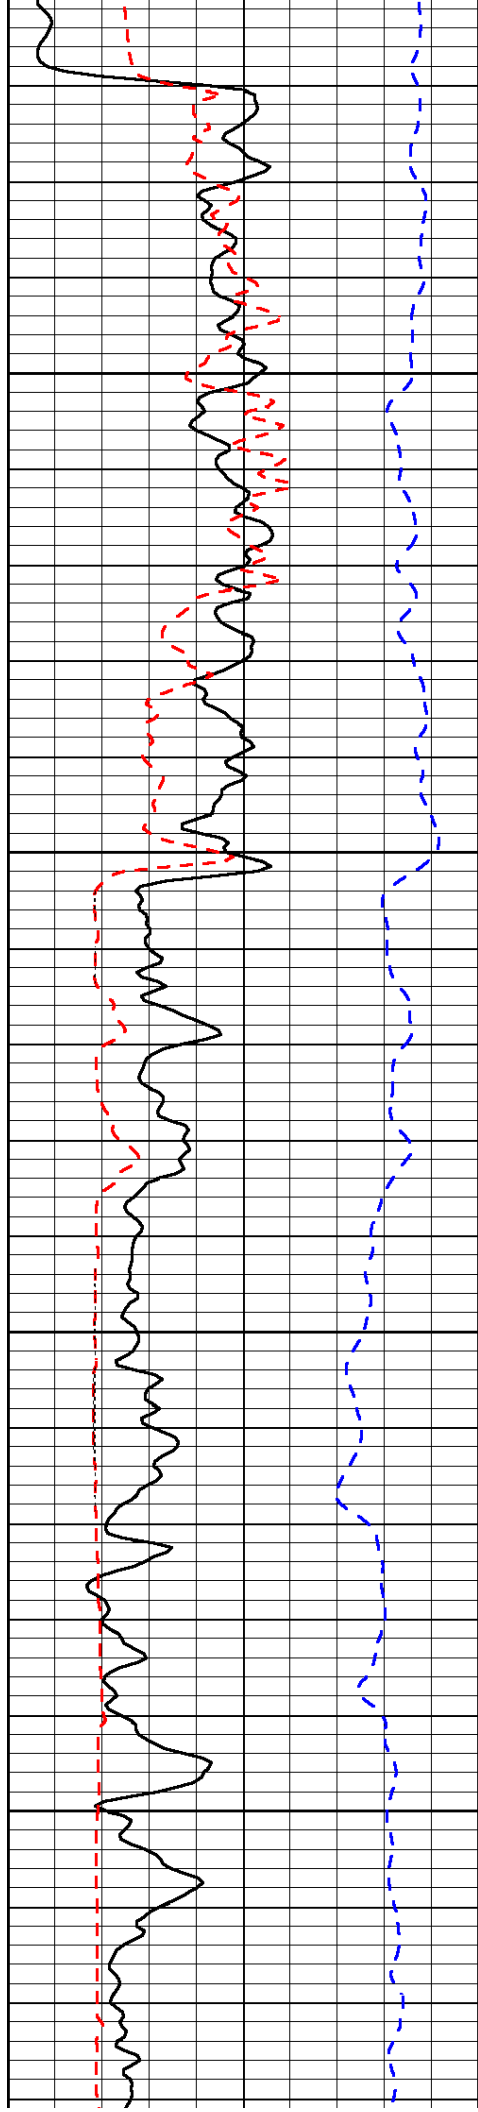


1600

1650

1700

1750

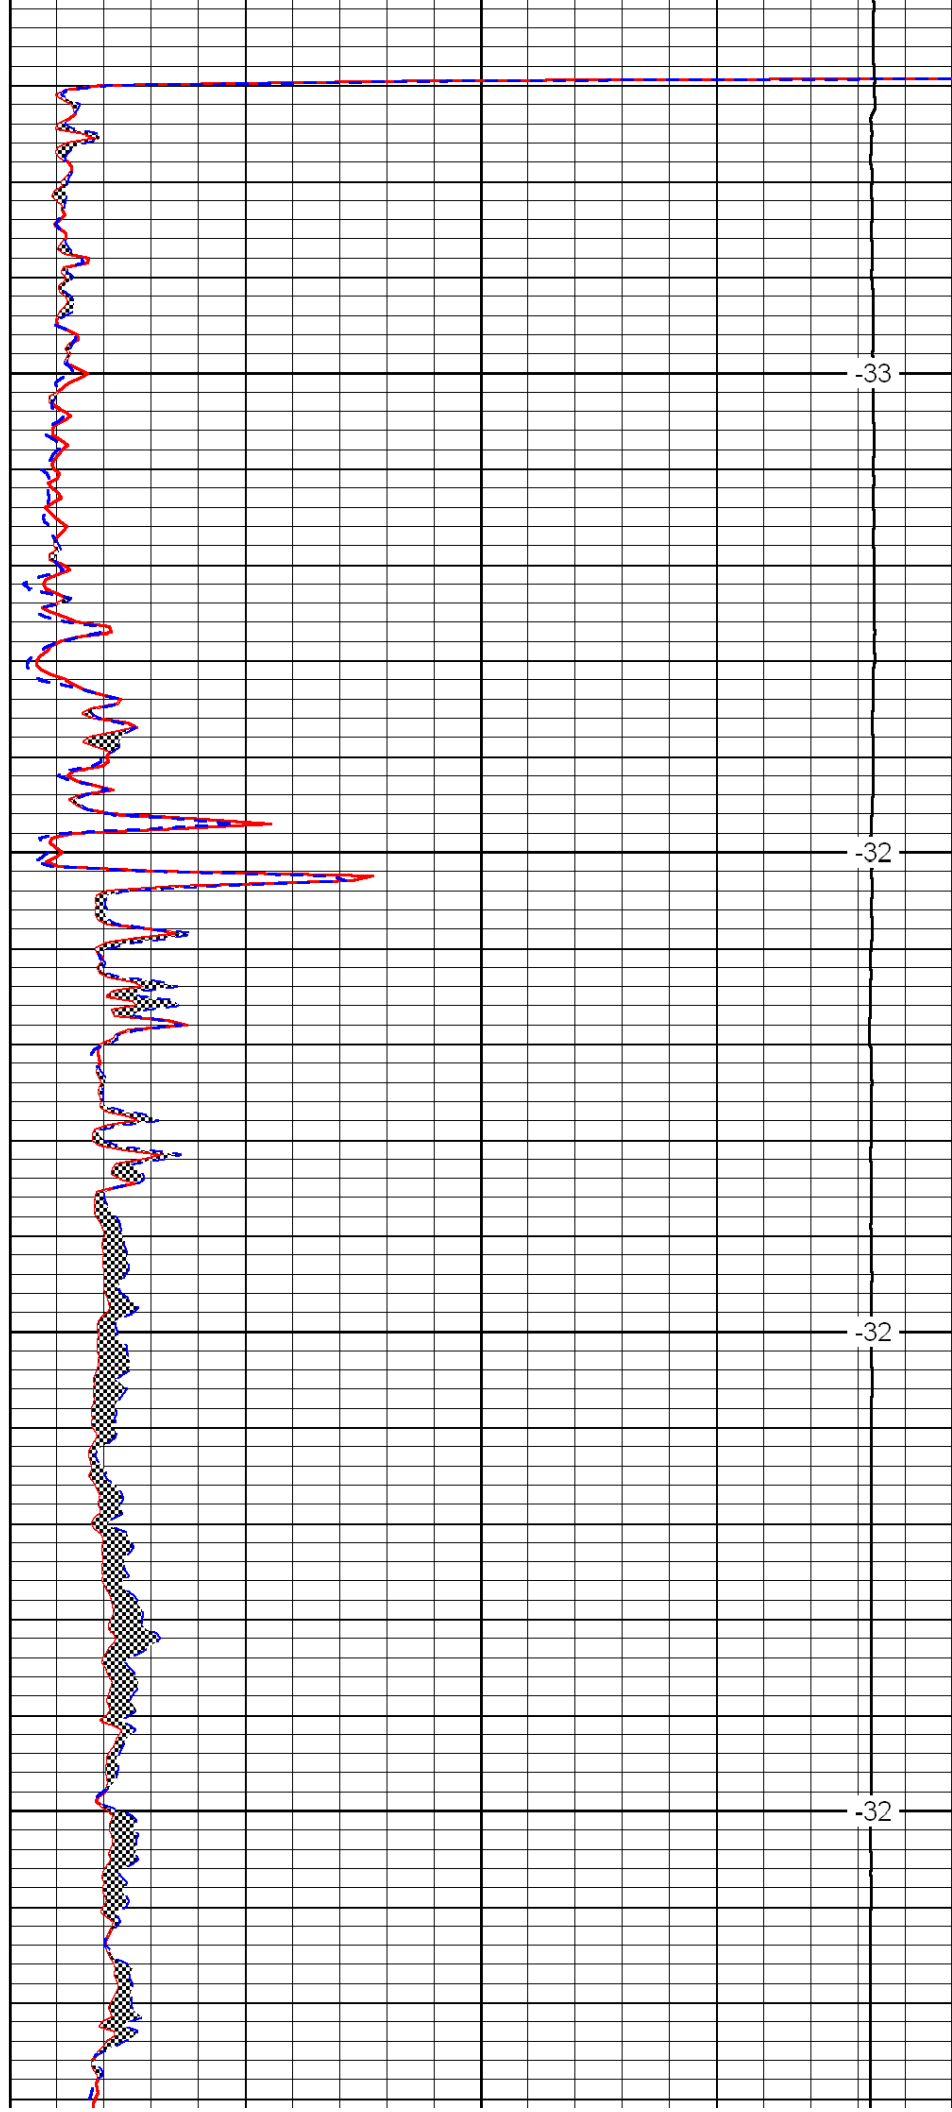


-33

-32

-32

-32

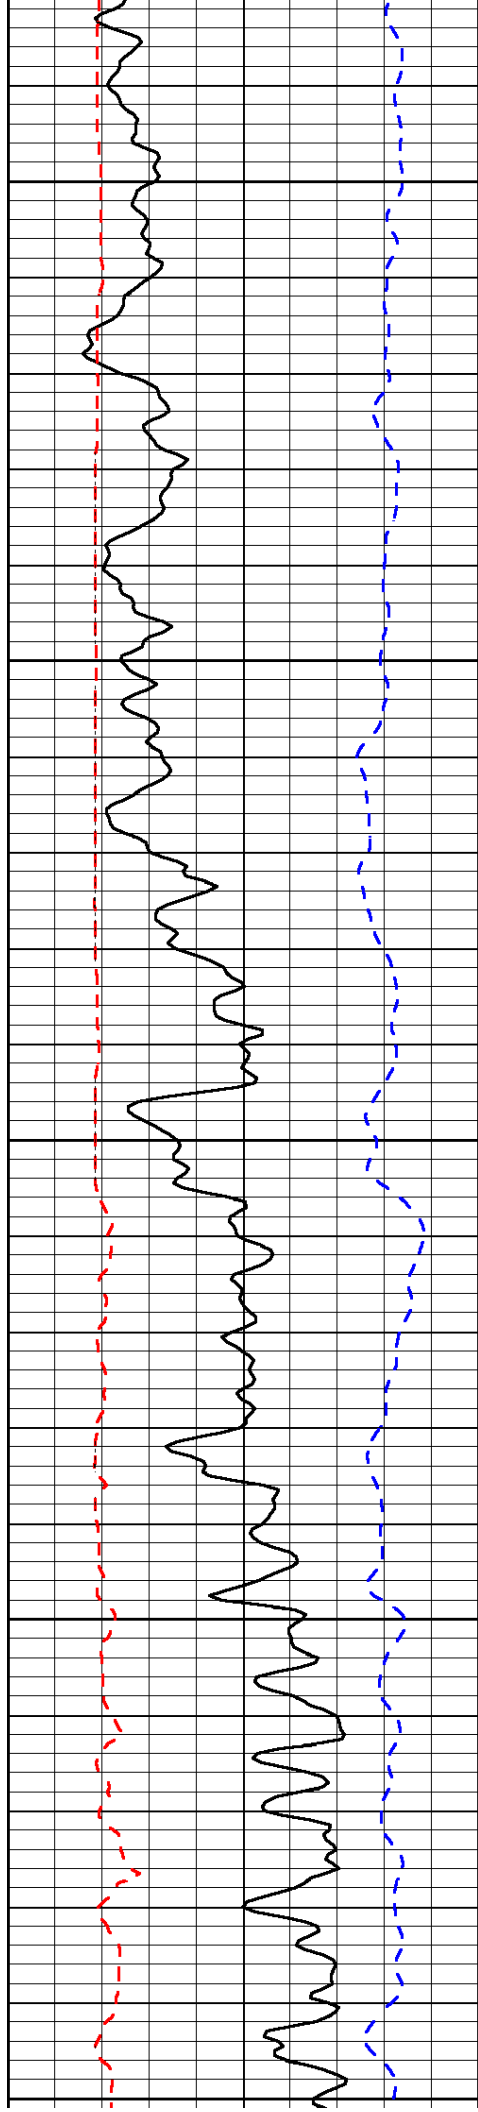


1800

1850

1900

1950

2000

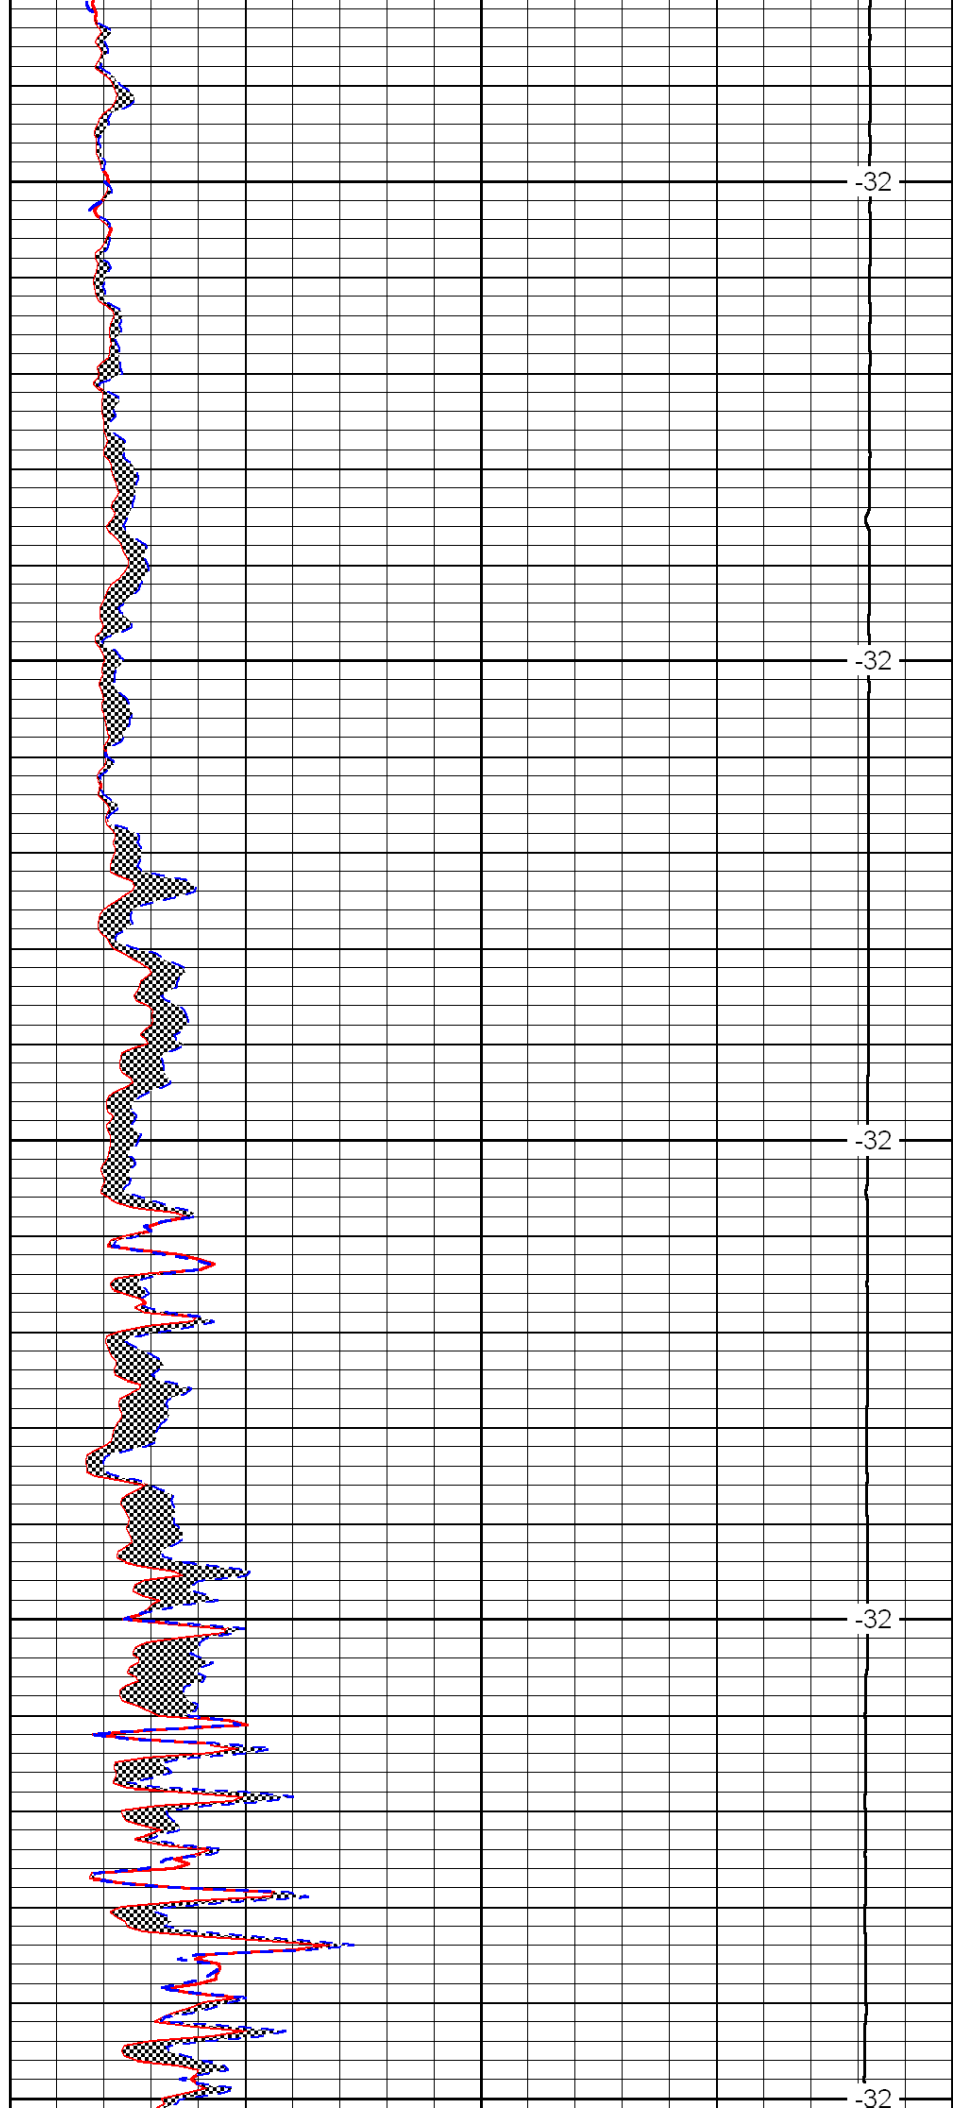


-32

-32

-32

-32

-32

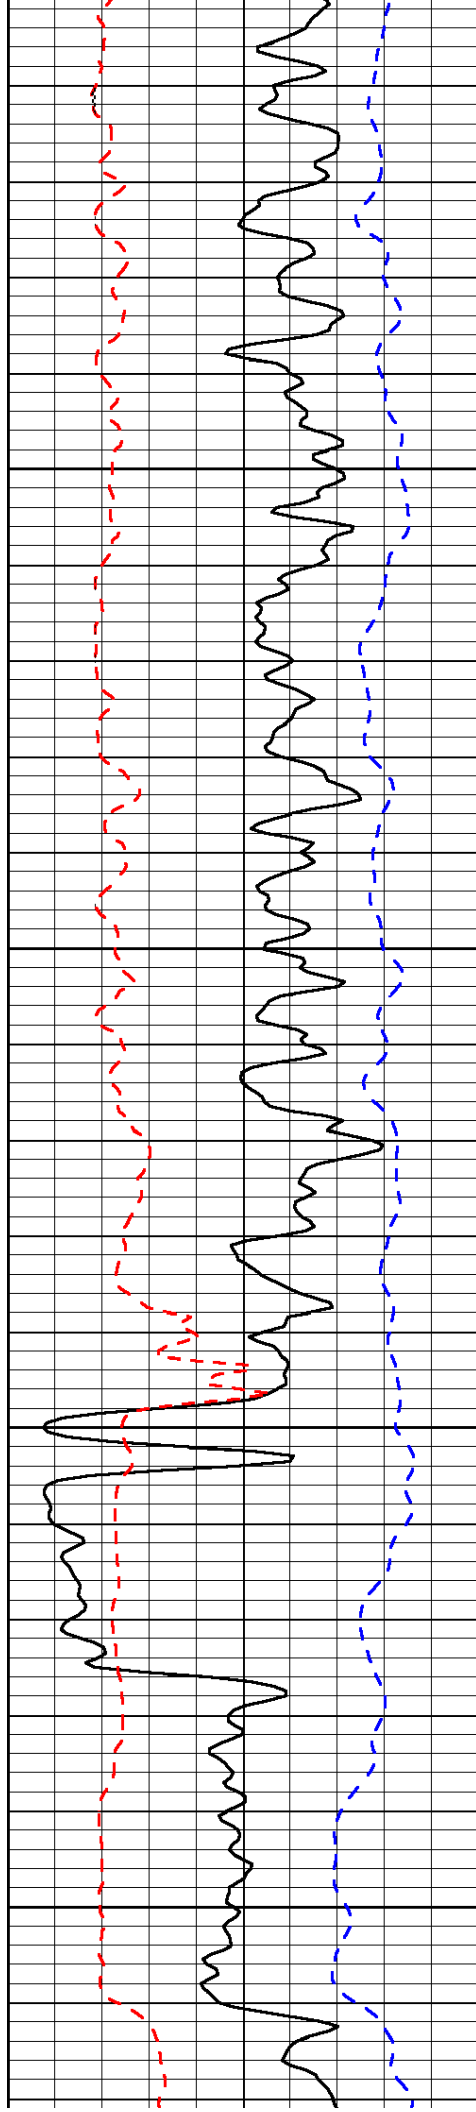


2050

2100

2150

2200

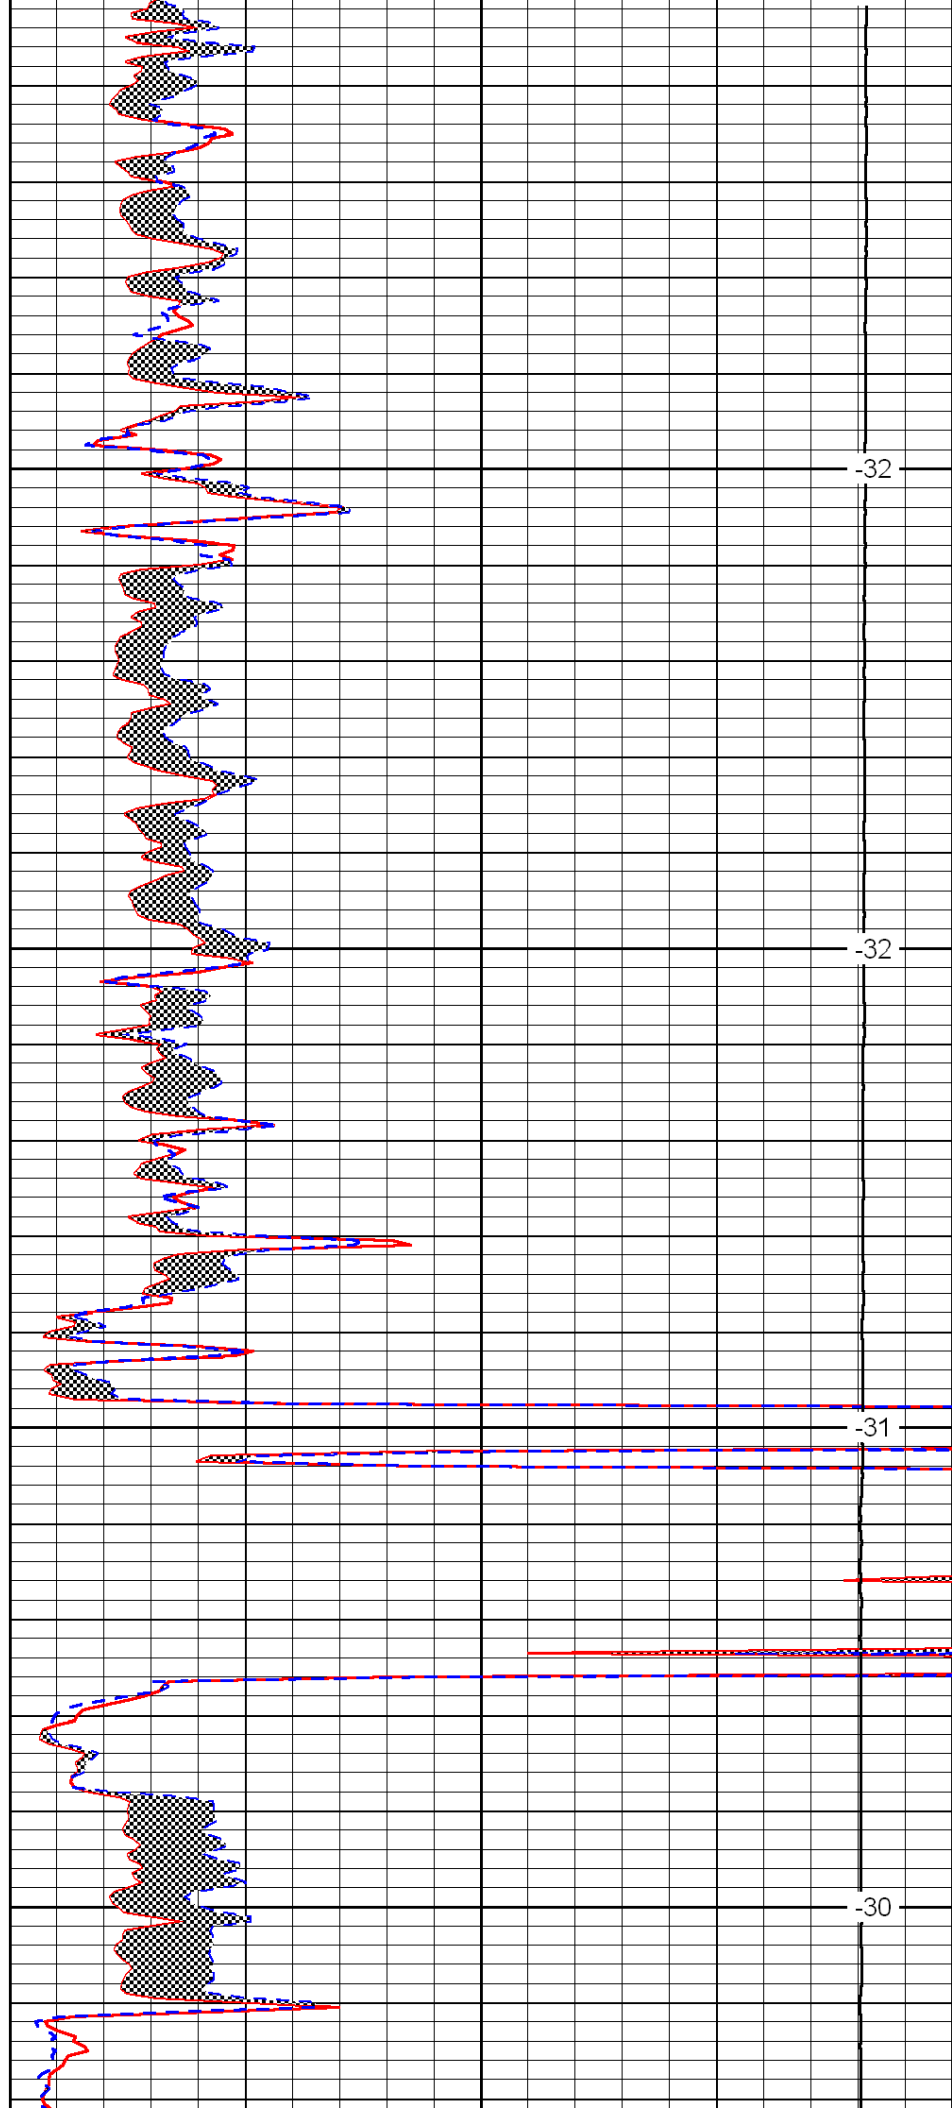


-32

-32

-31

-30

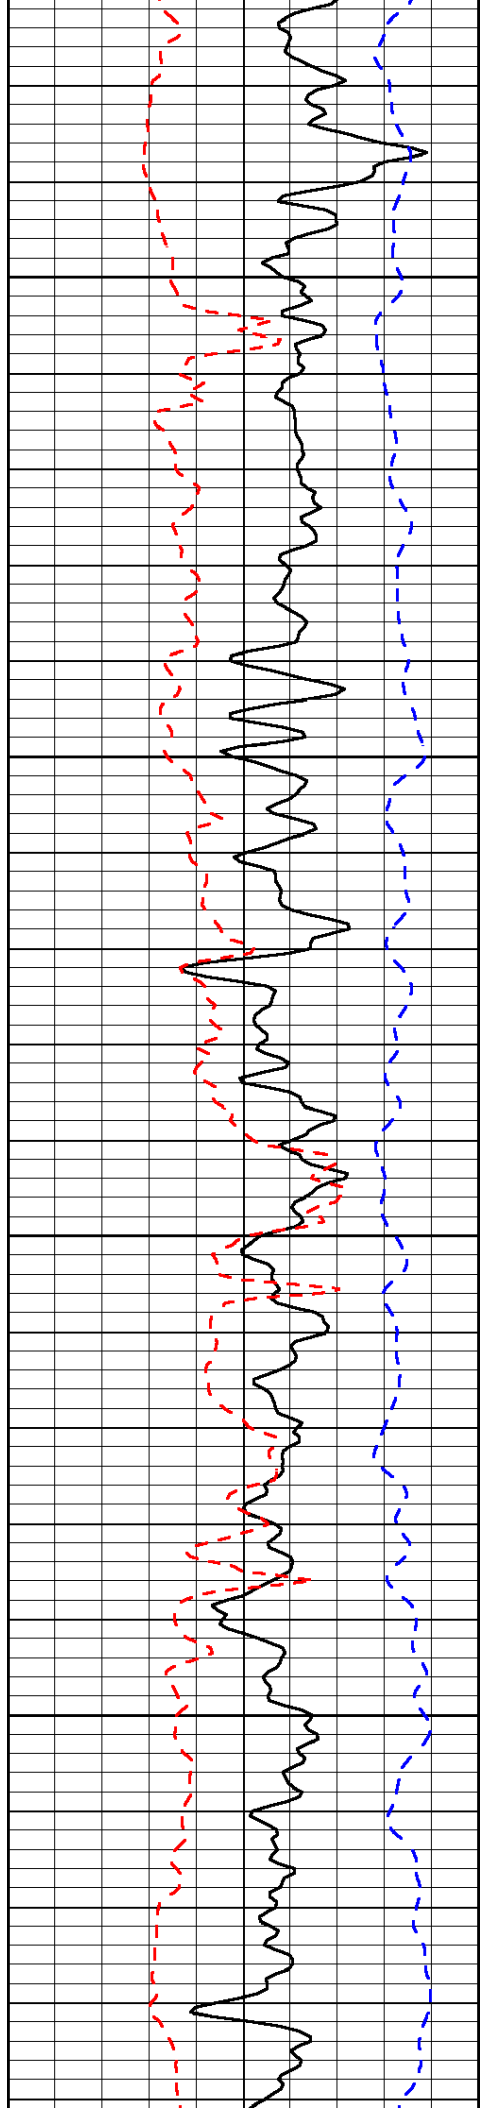

2250

2300

2350


2400



-31


-30

-30

-30

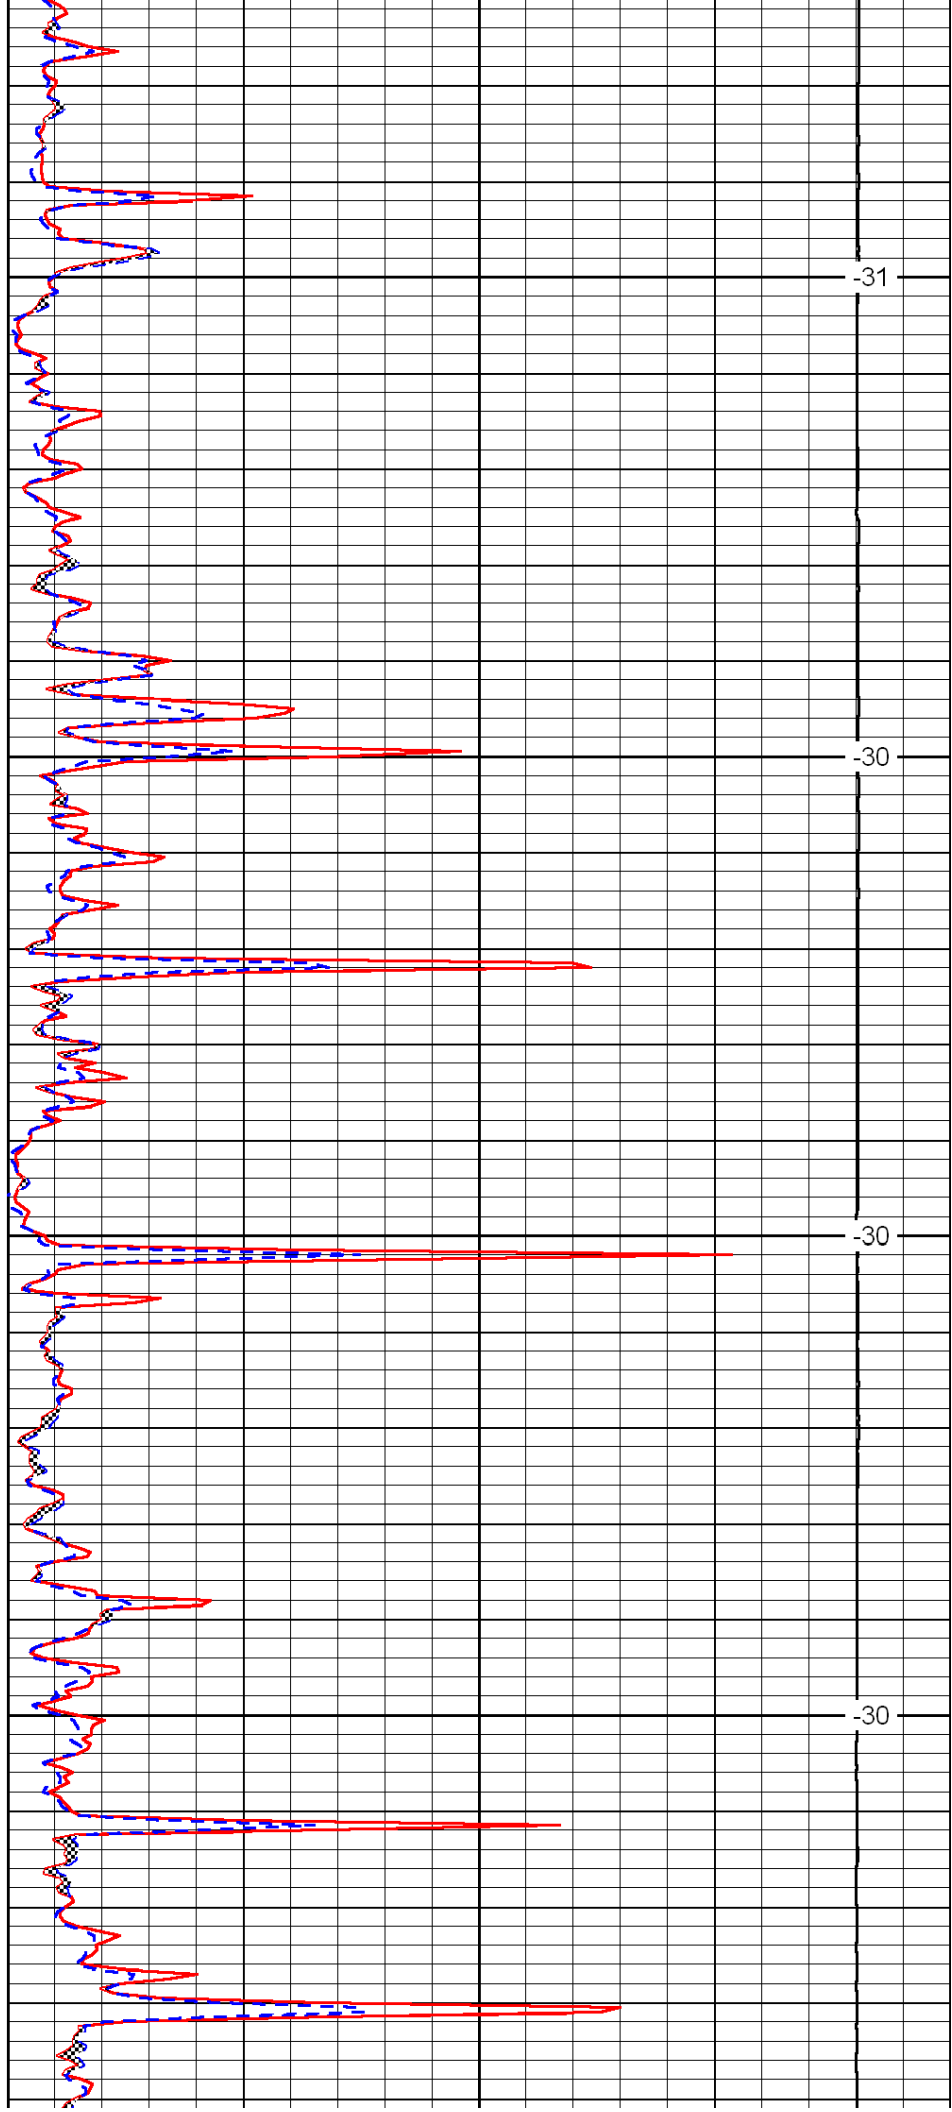

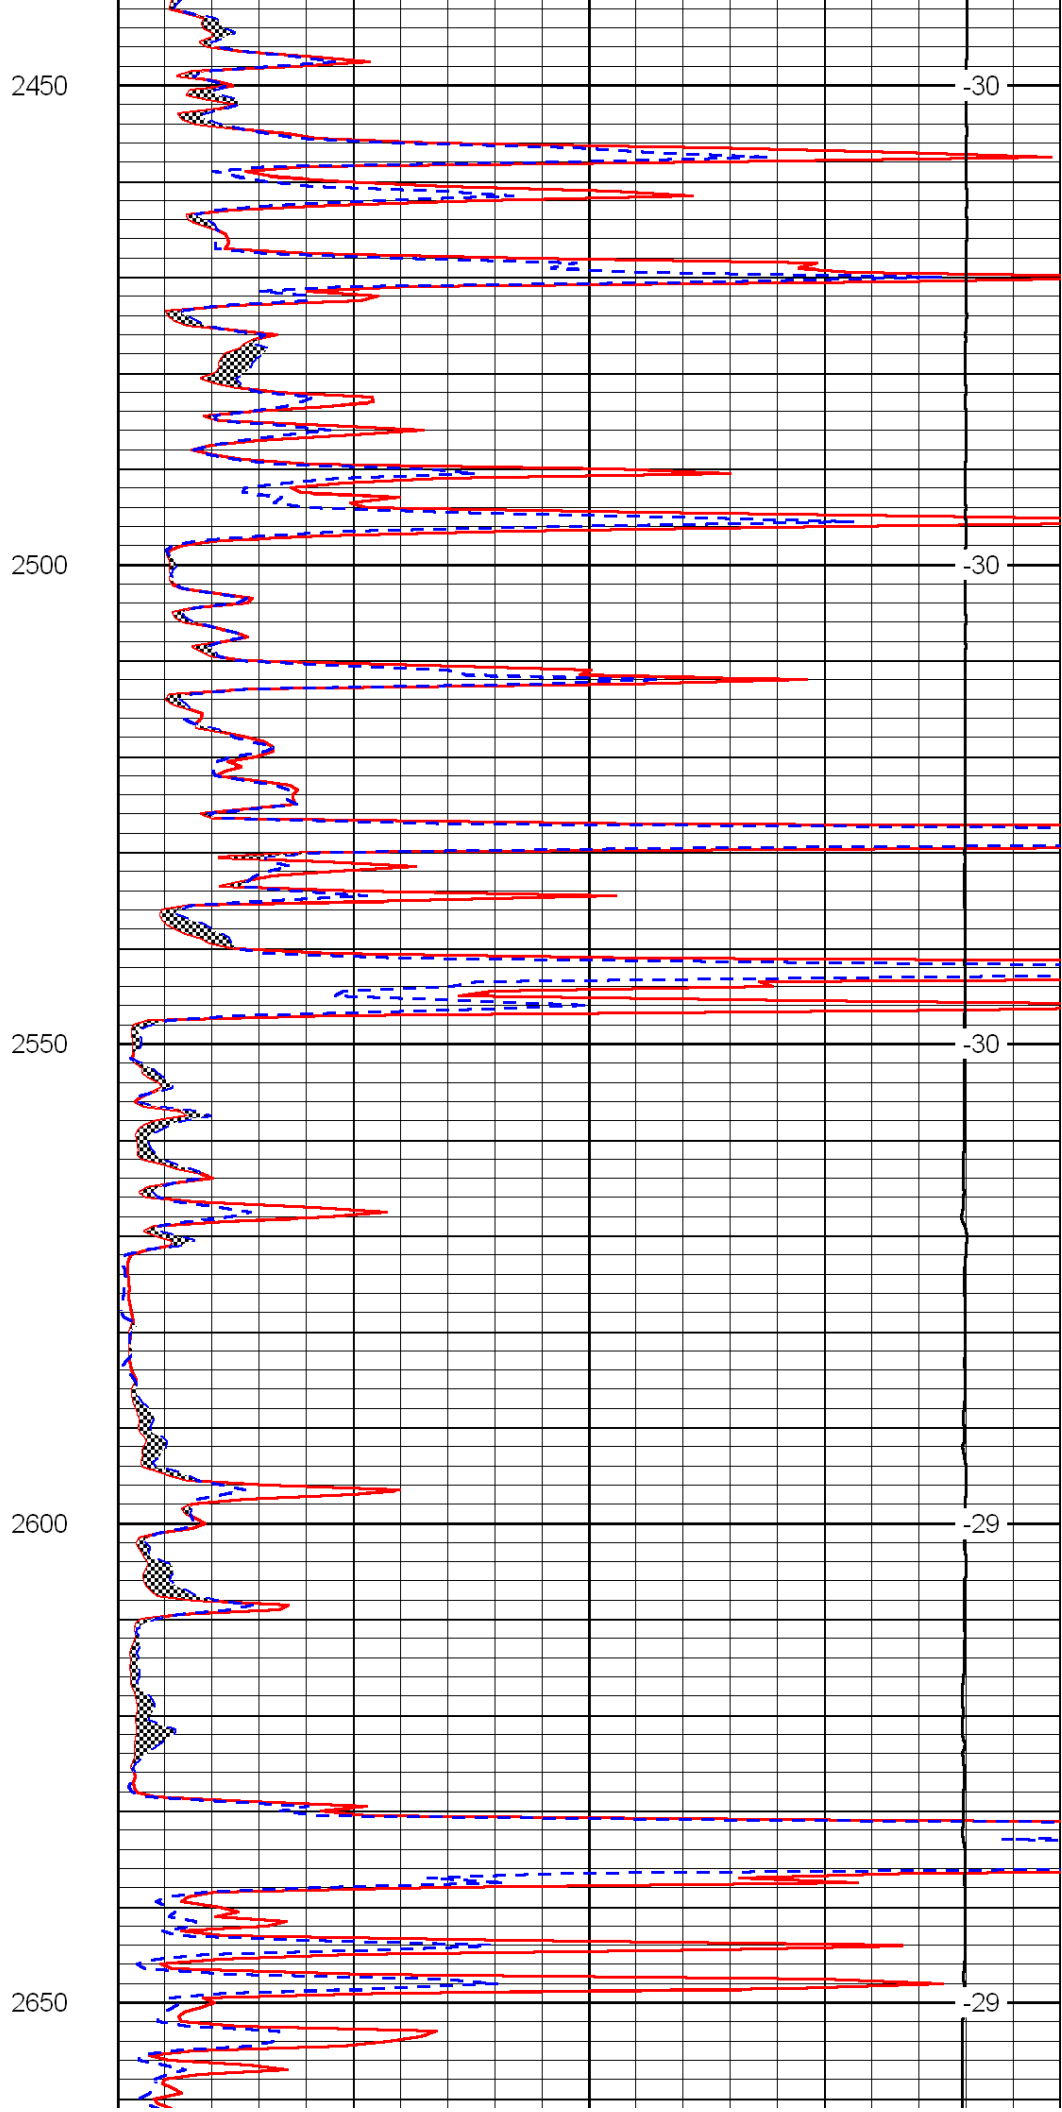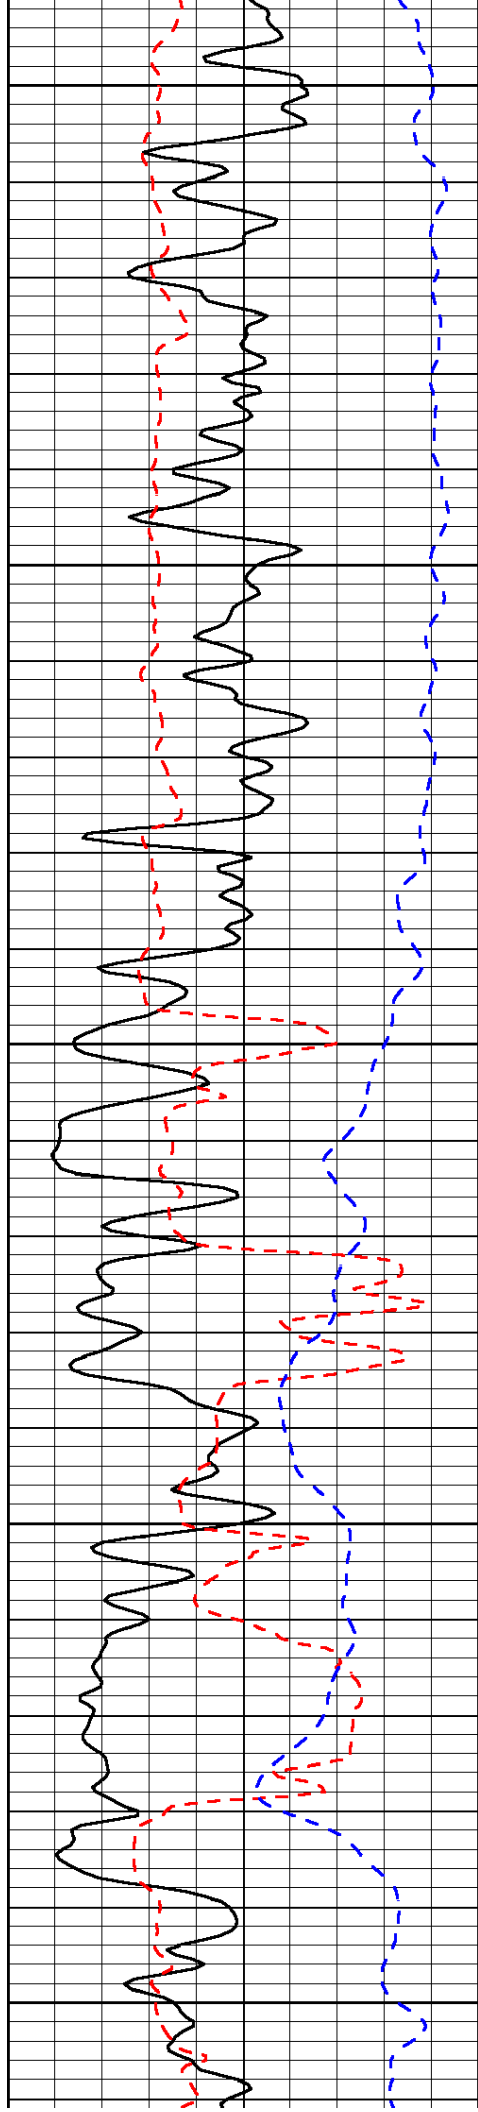

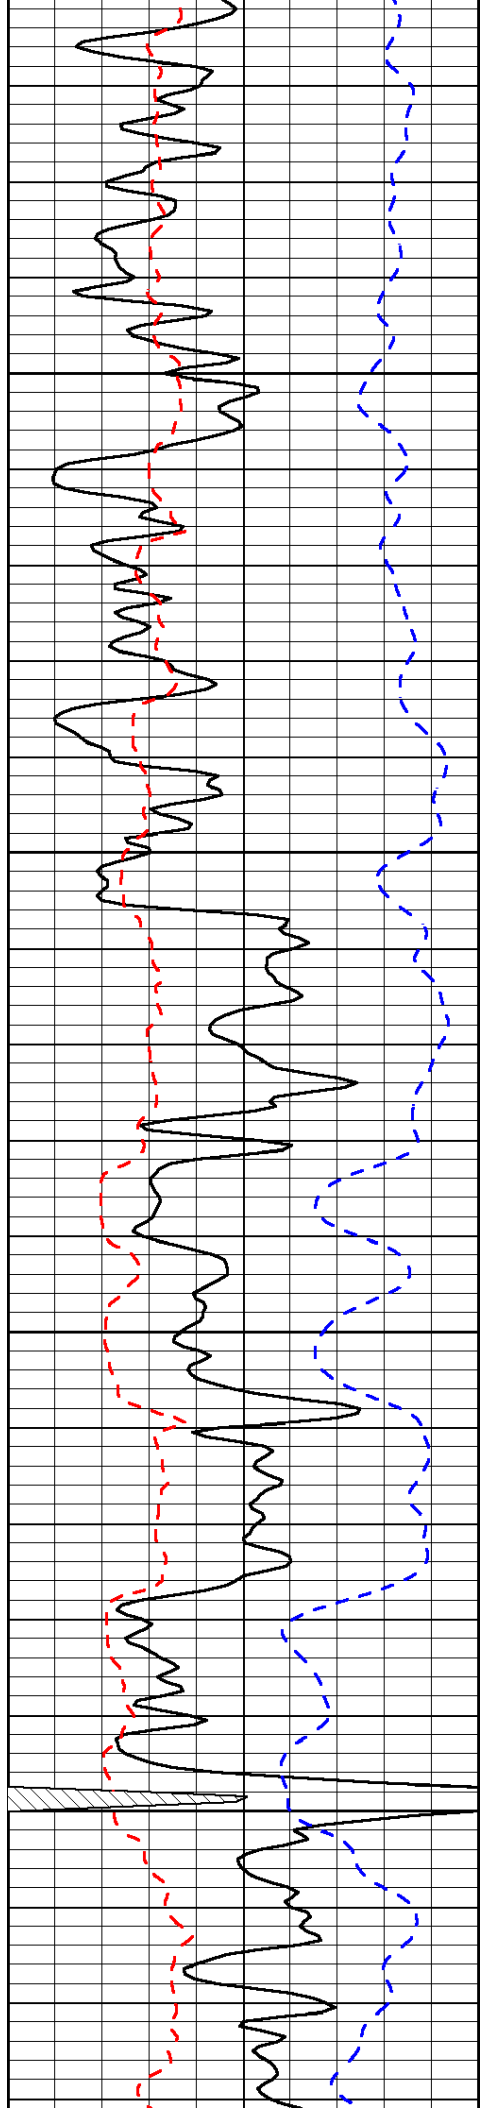


2700

2750

2800

2850

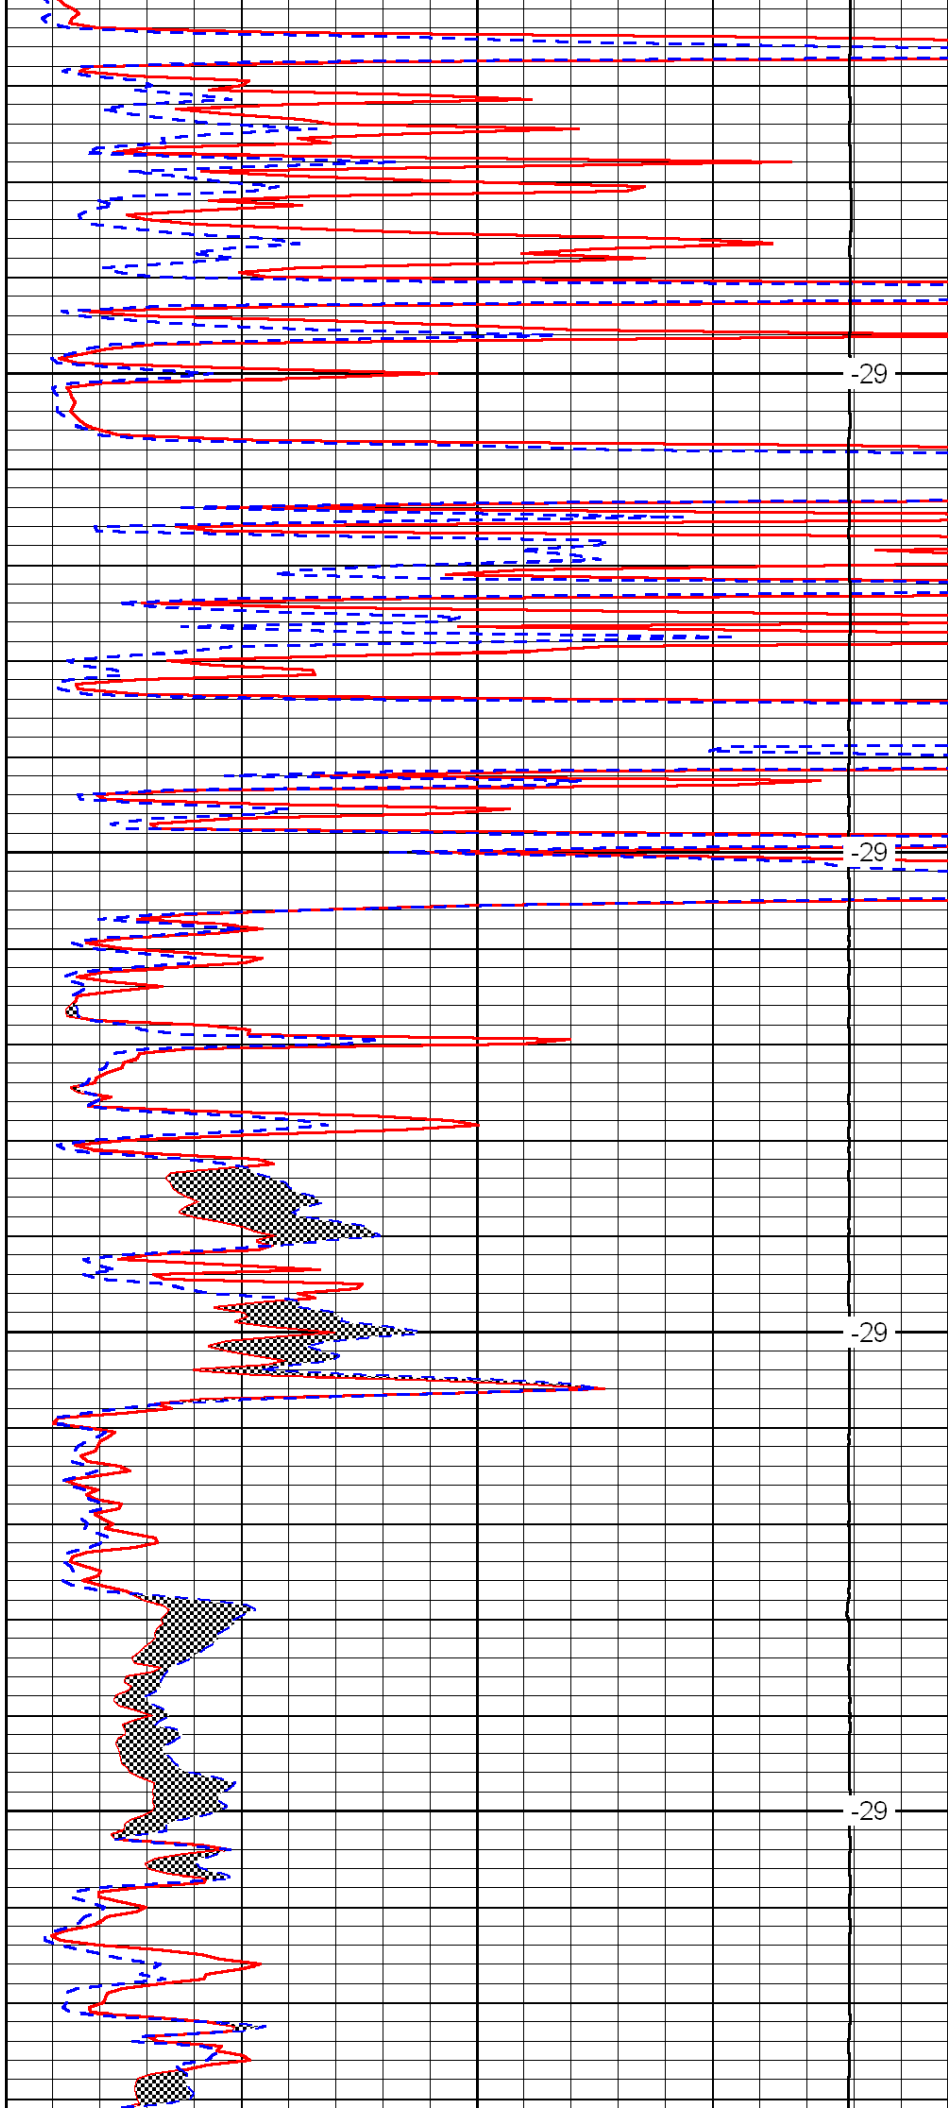


-29

-29

-29

-29

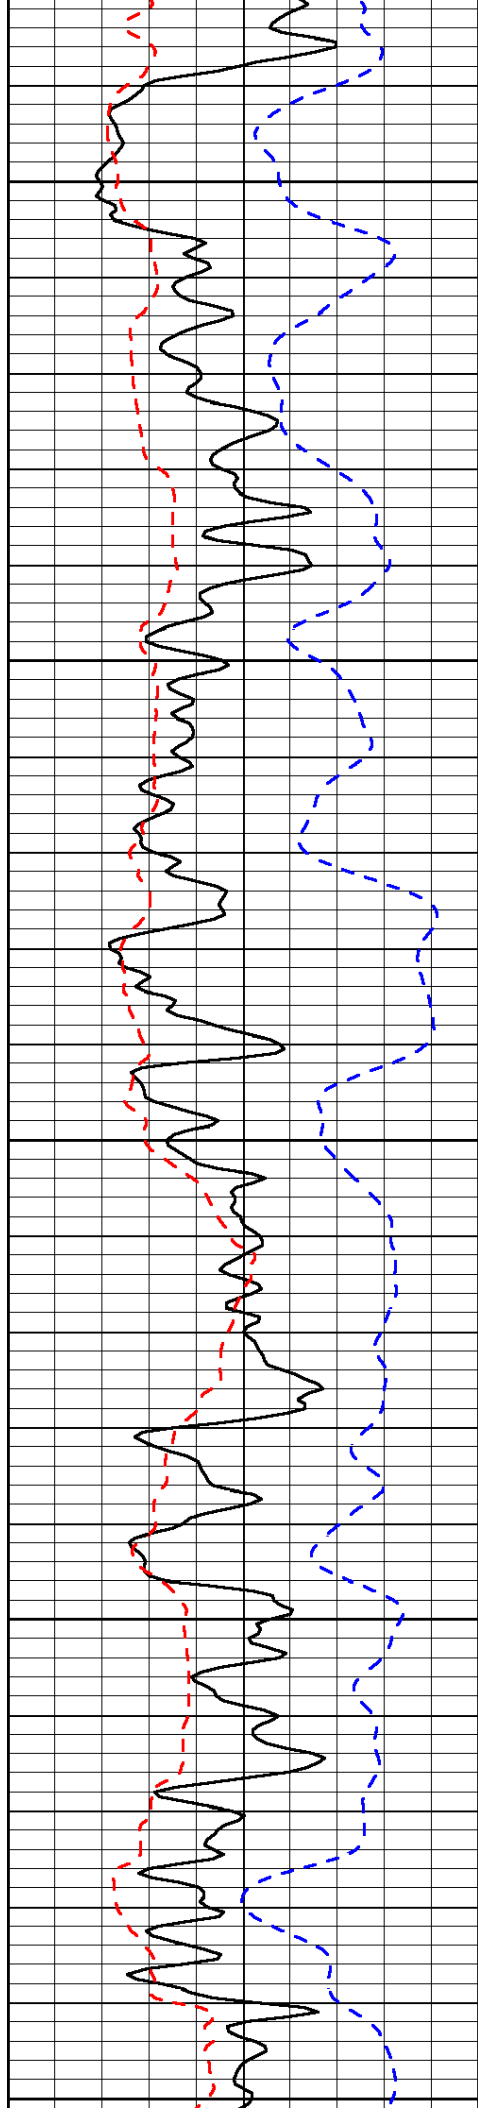


2900

2950

3000

3050

3100

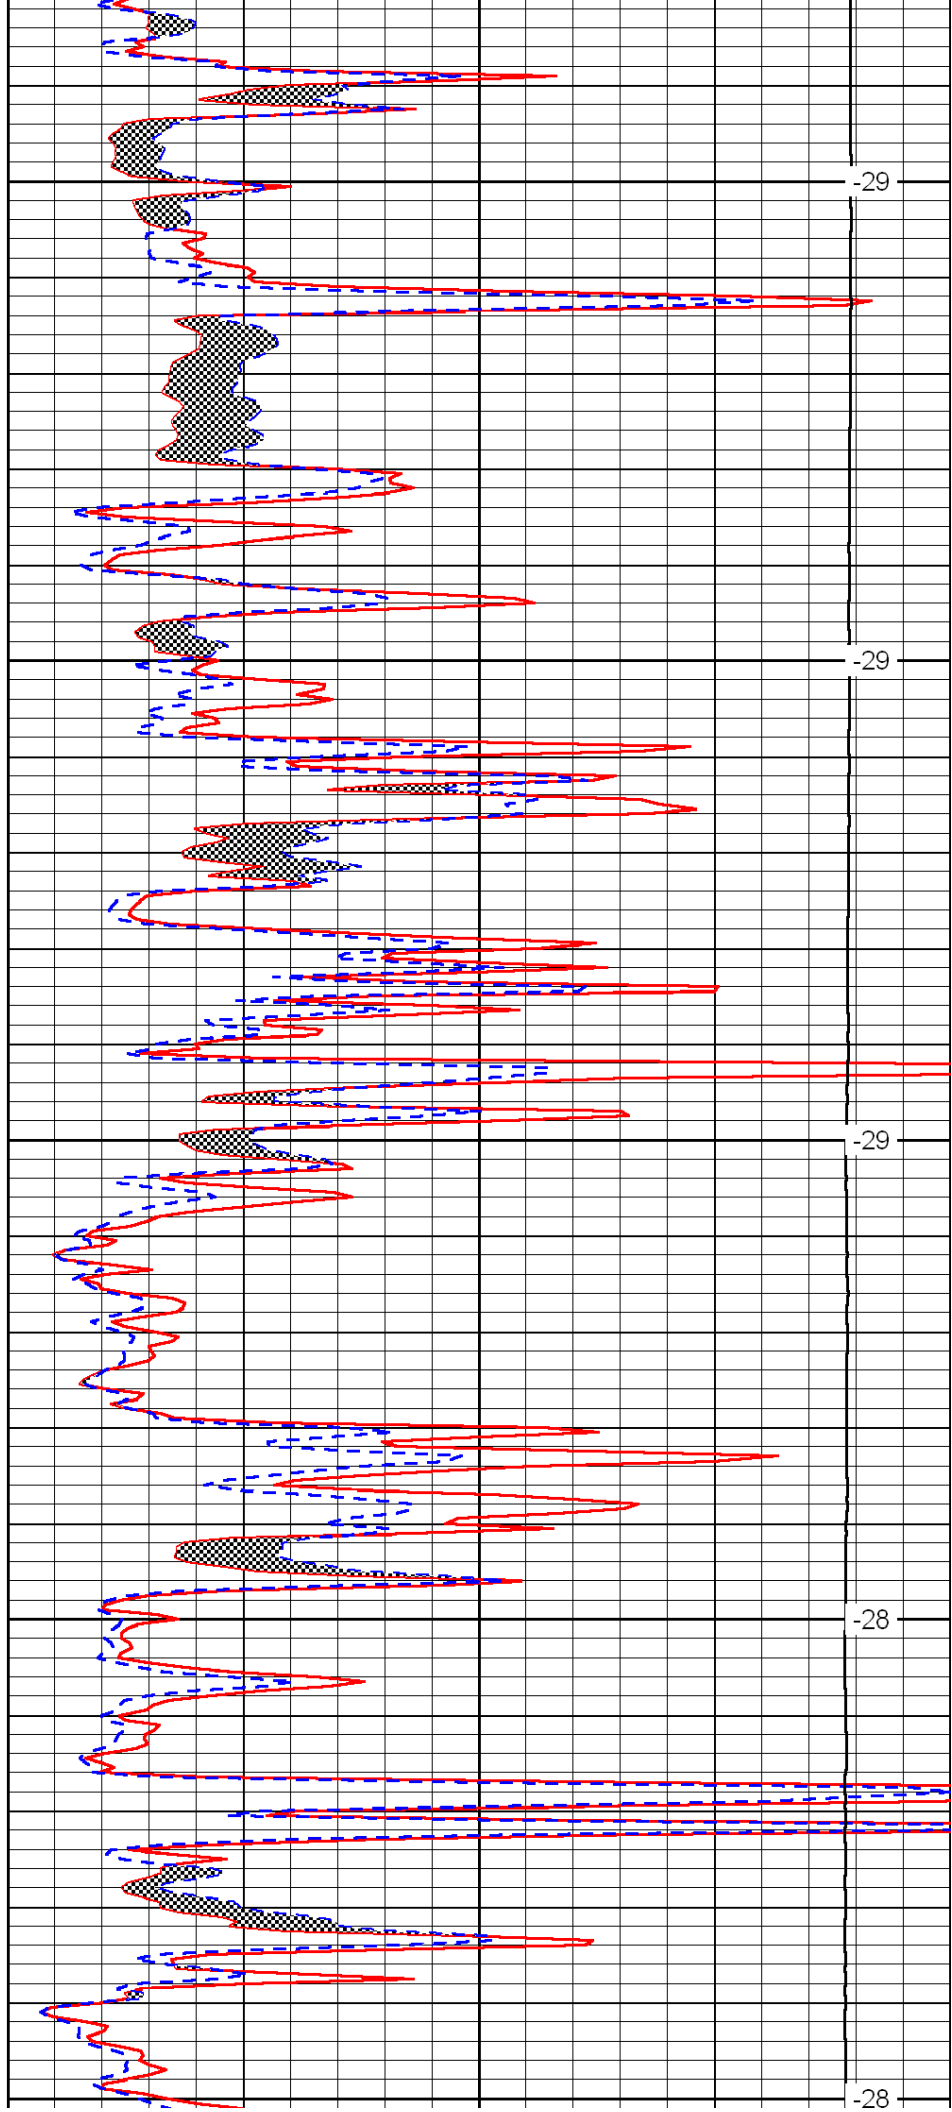



-29


-29

-29

-28

-28

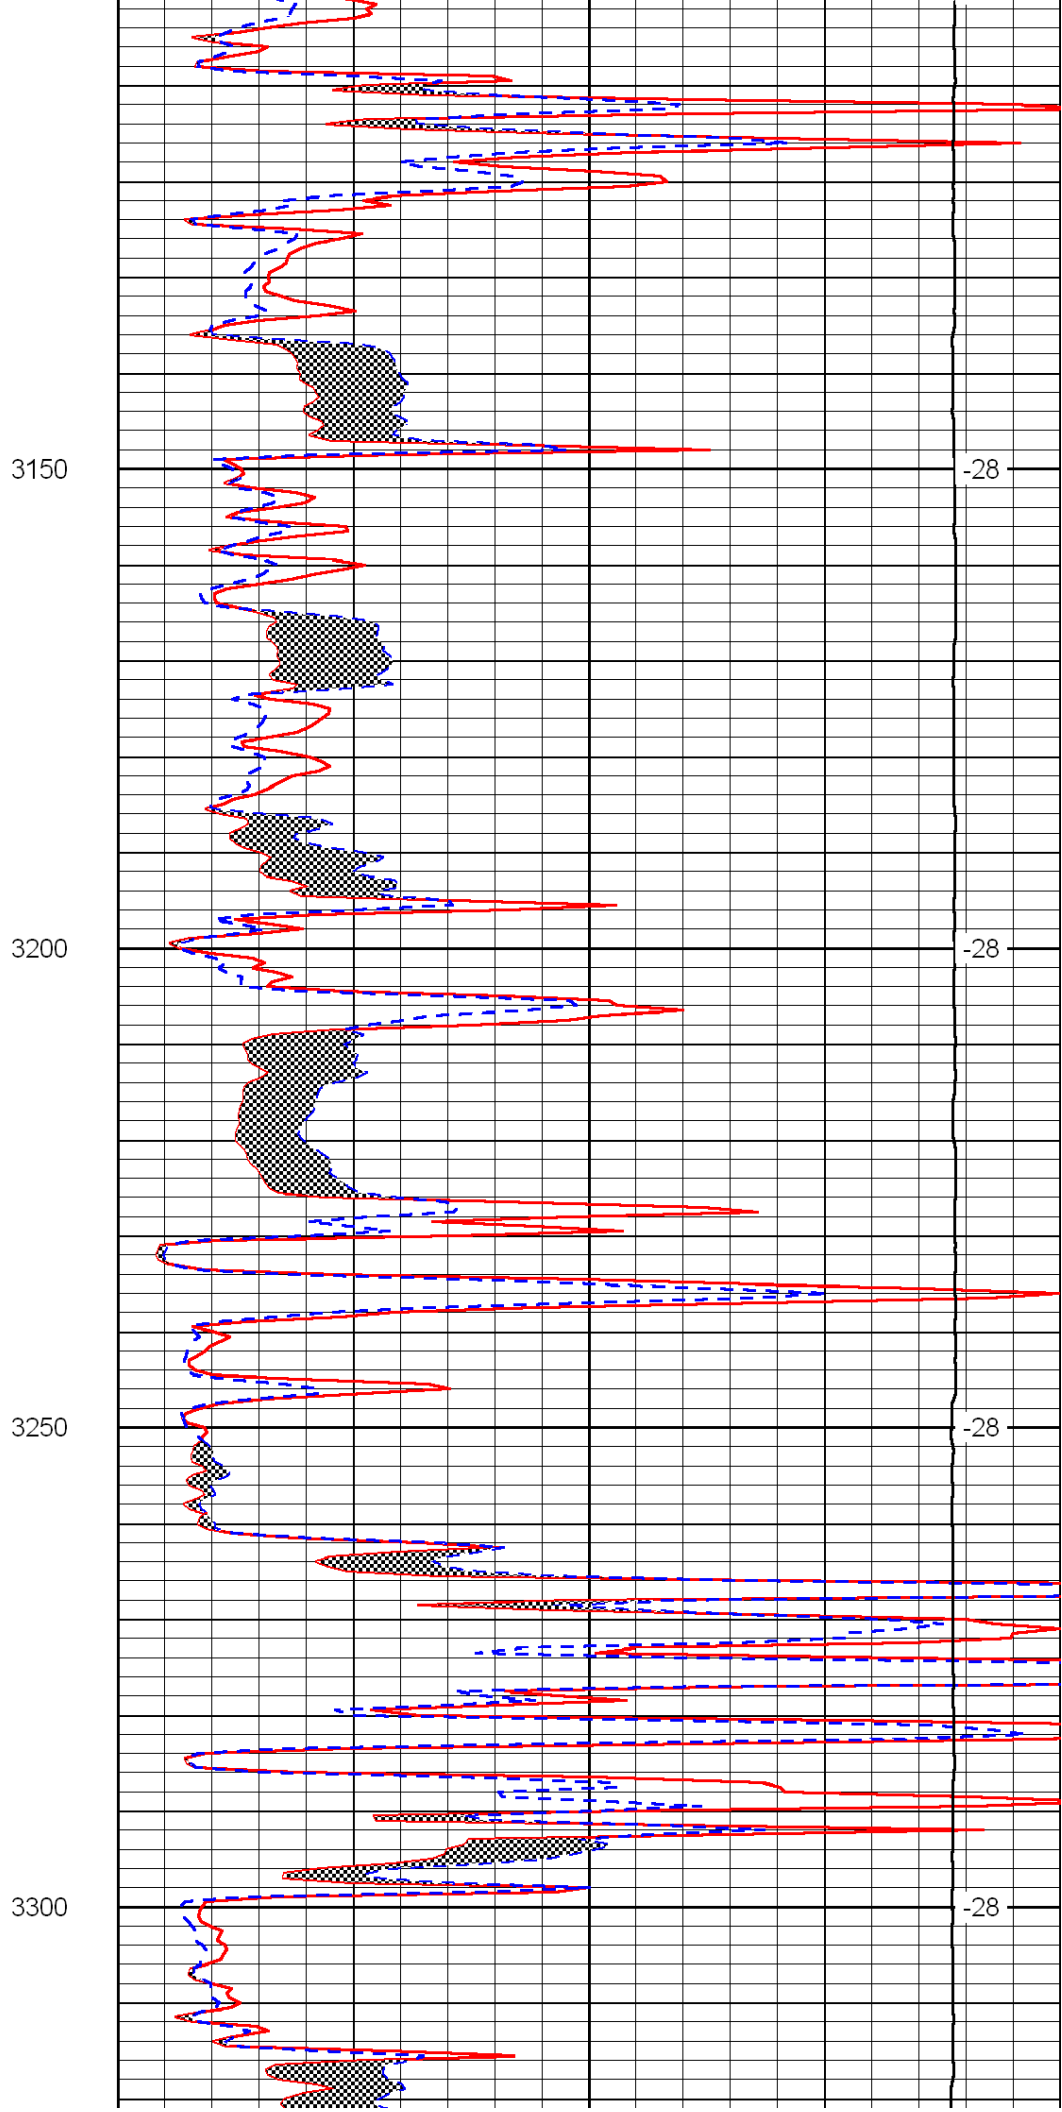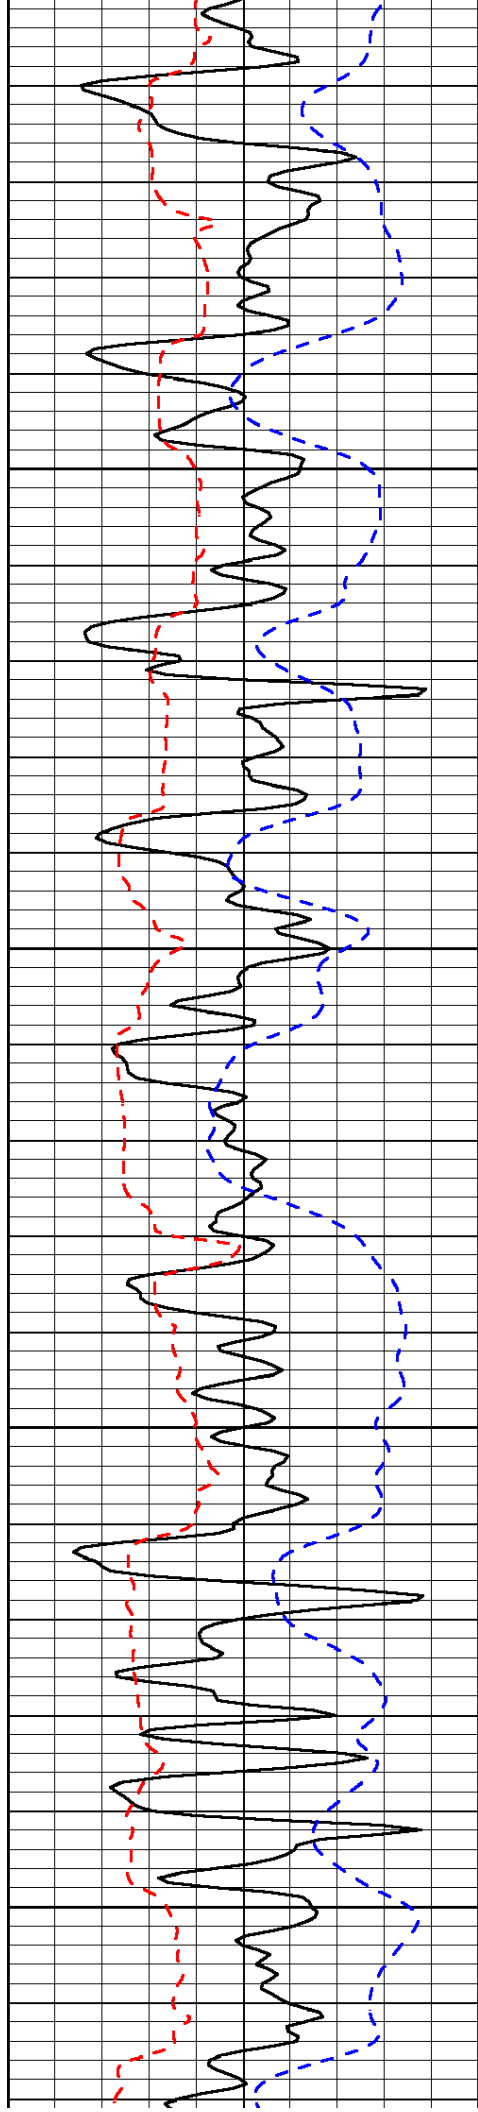

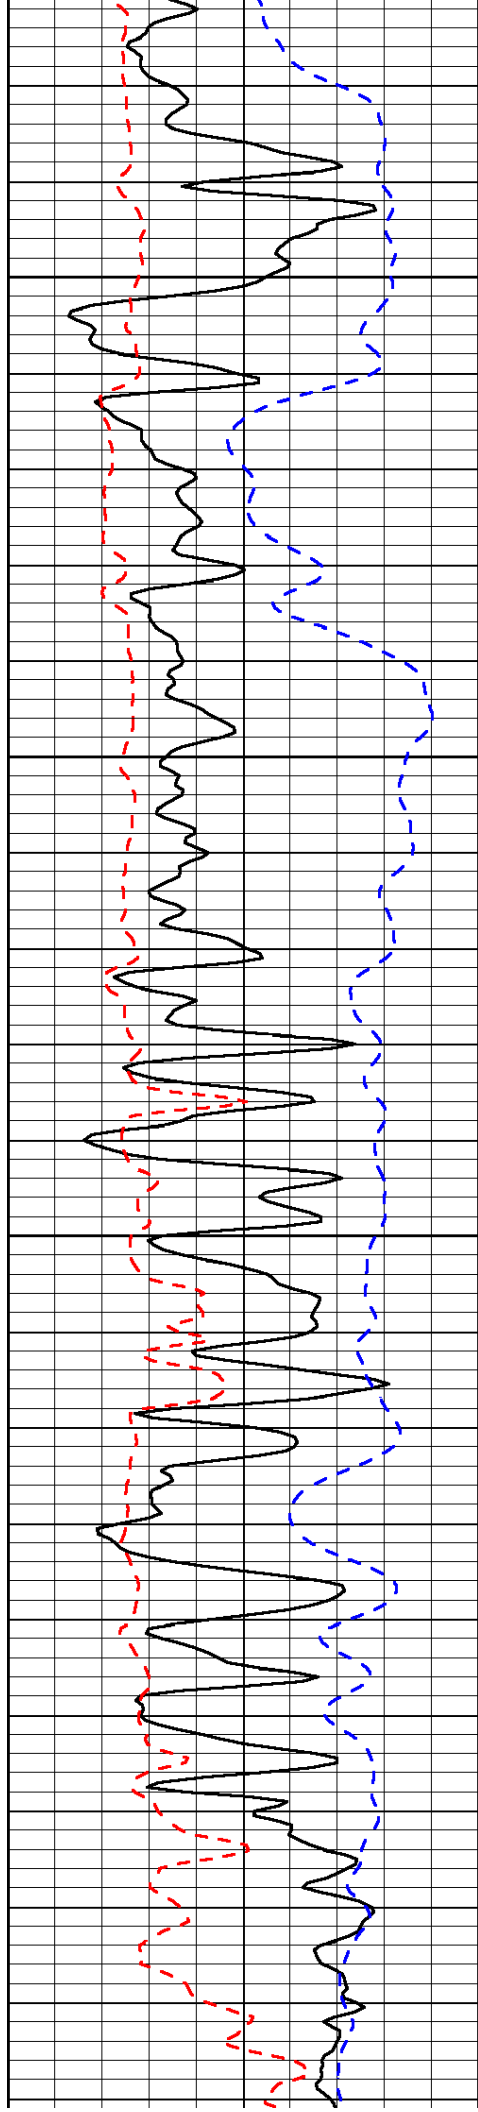


3350

3400

3450

3500

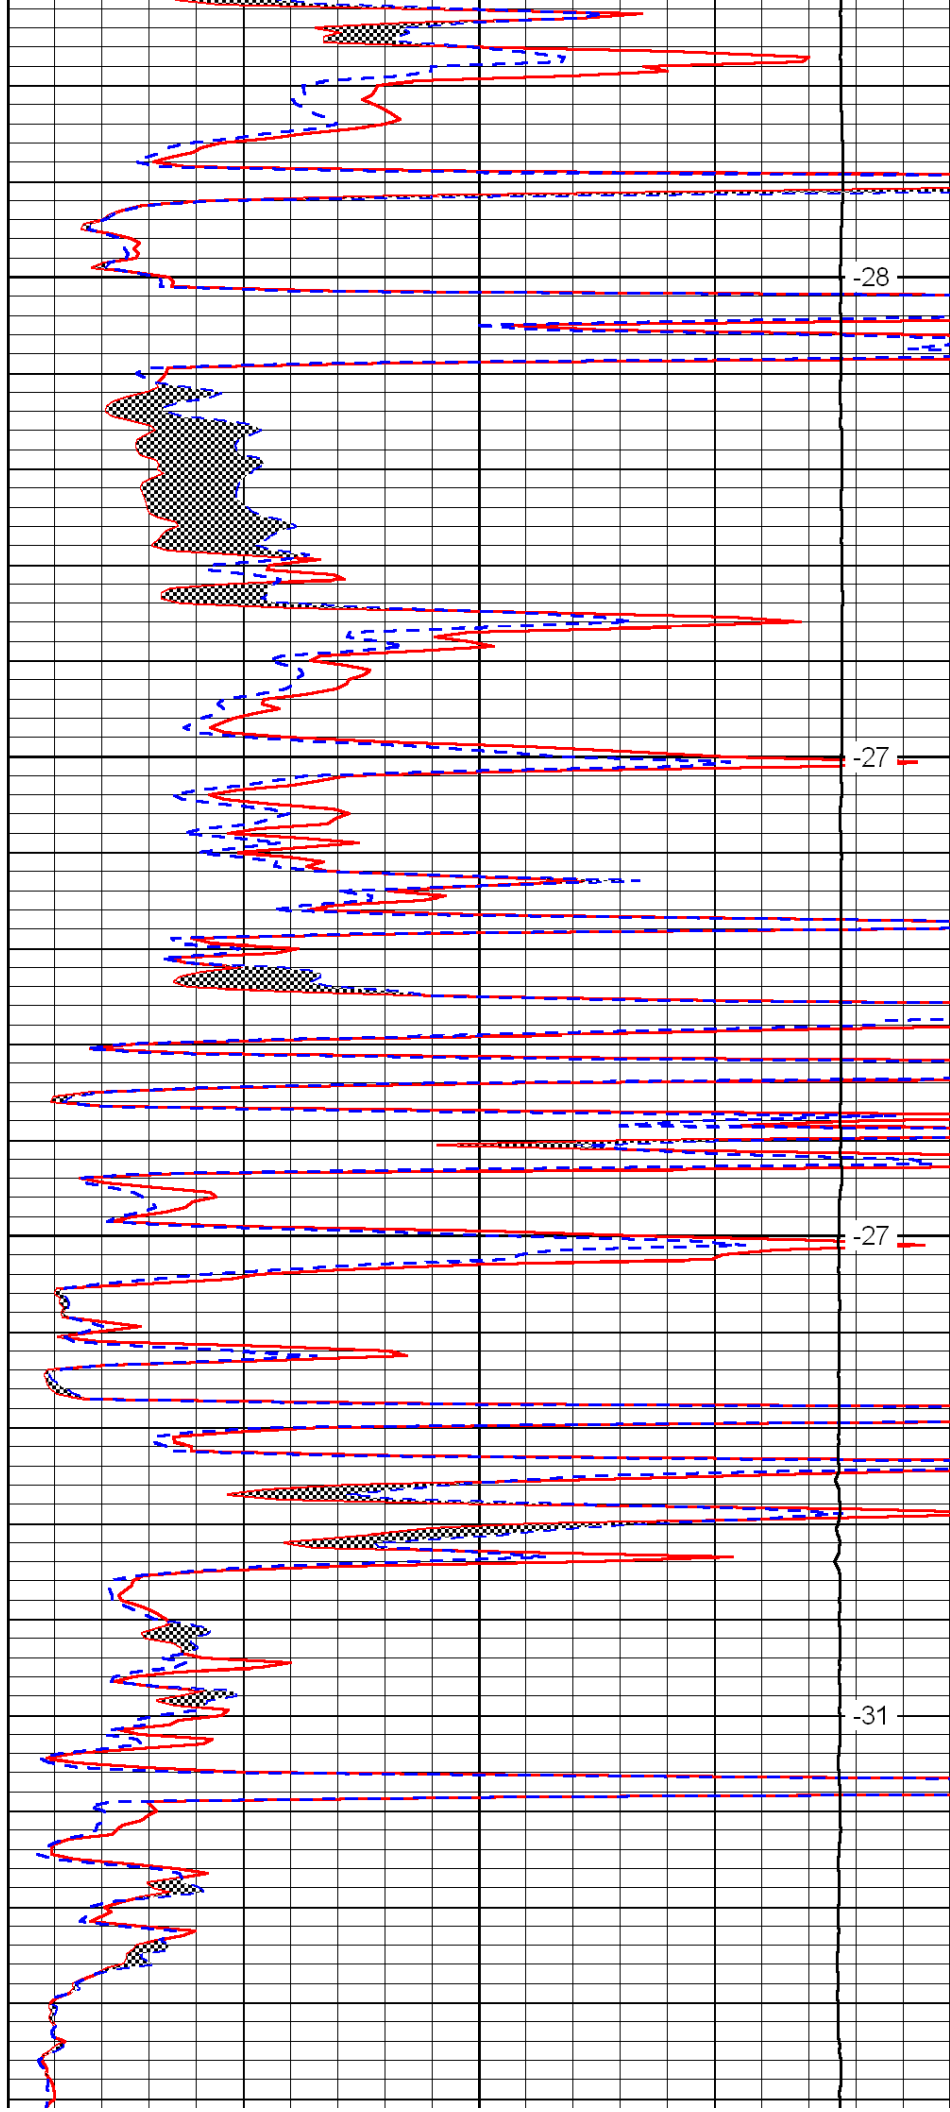


-28

-27

-27

-31

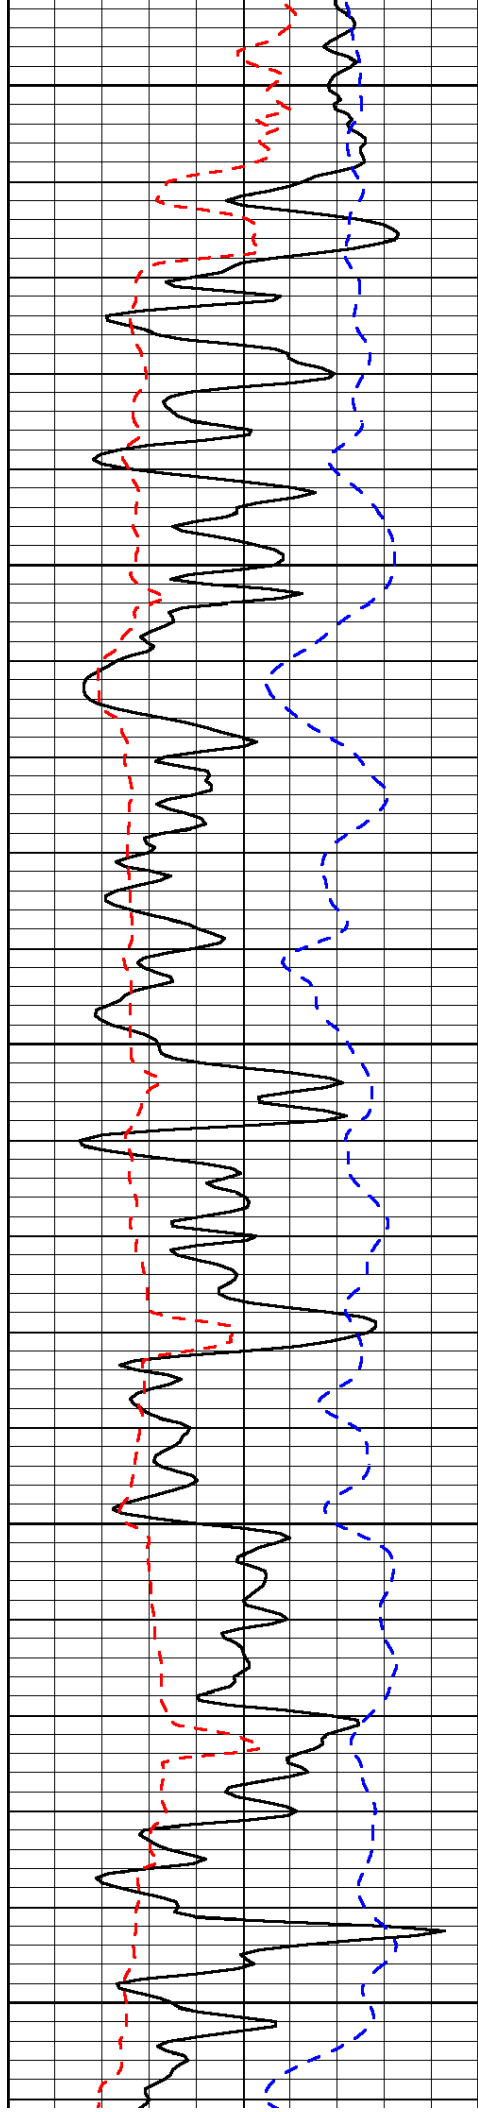


3550

3600

3650

3700

3750

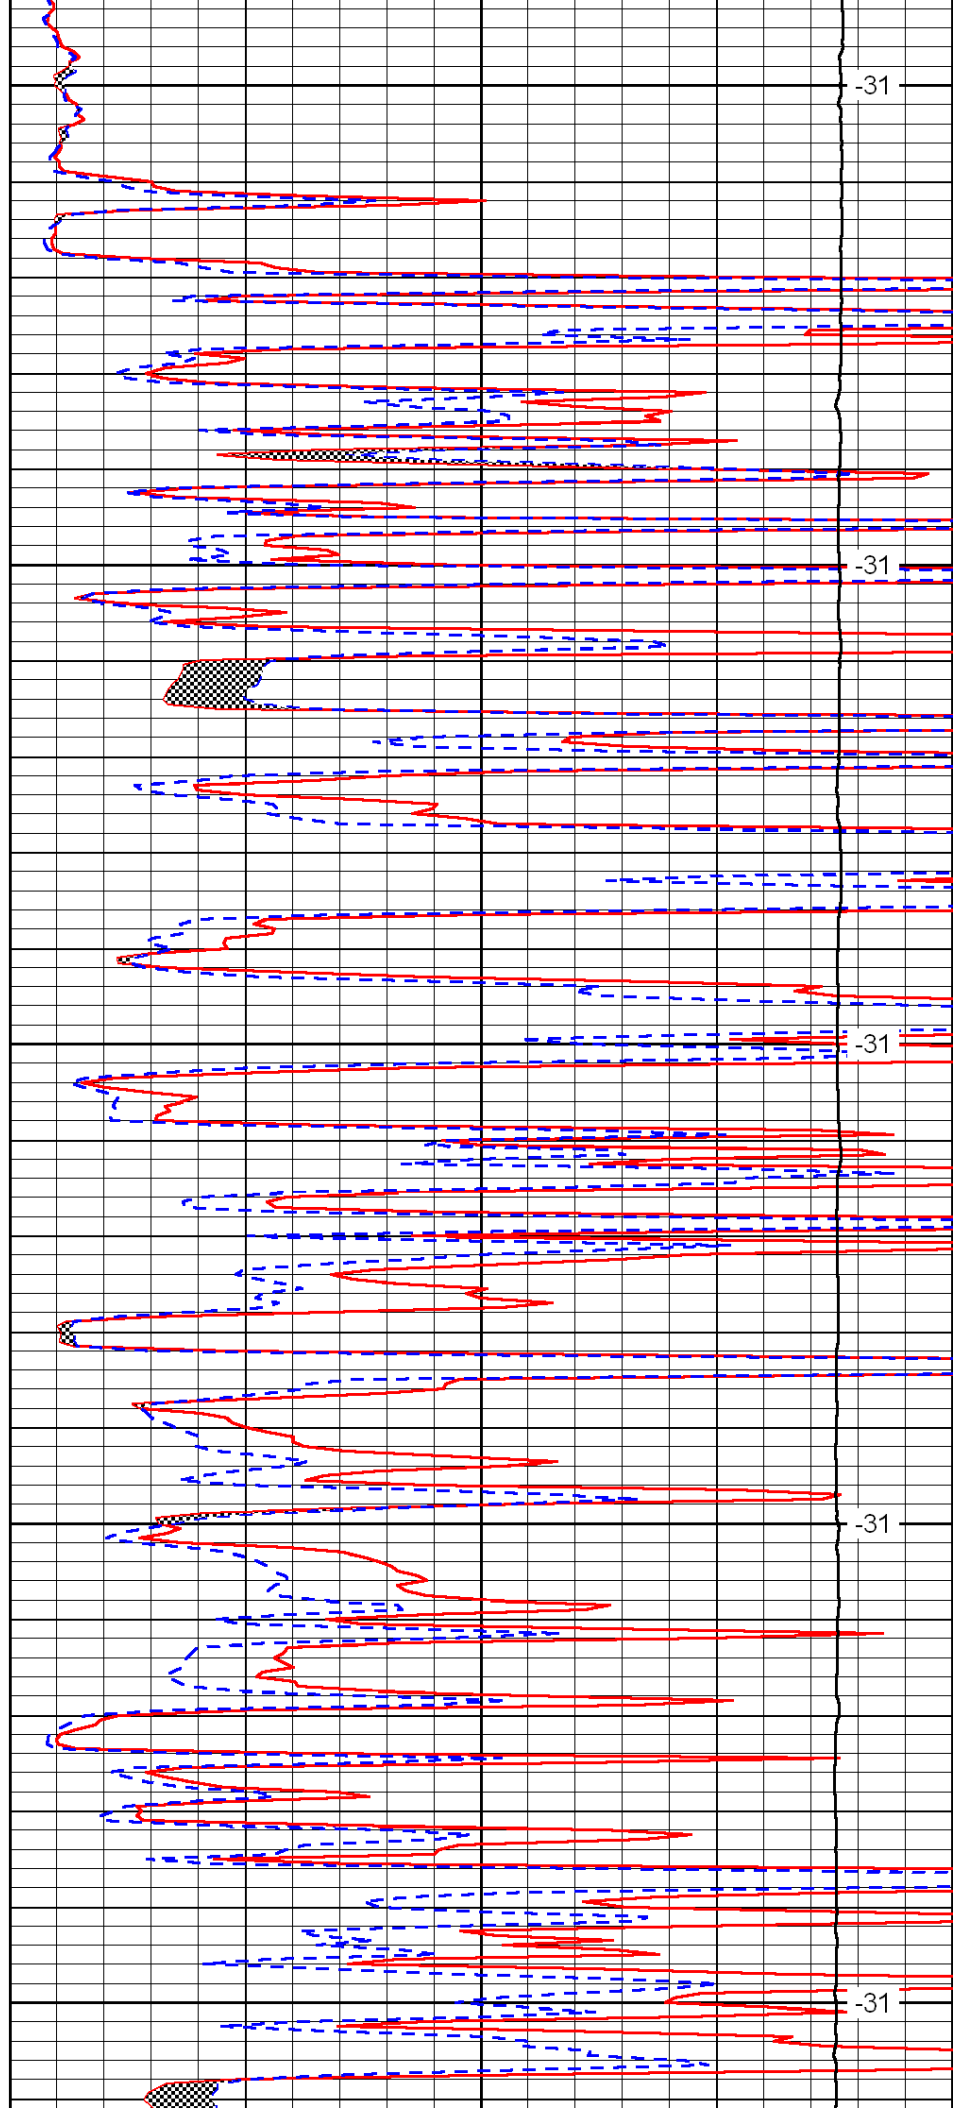


-31

-31

-31

-31

-31

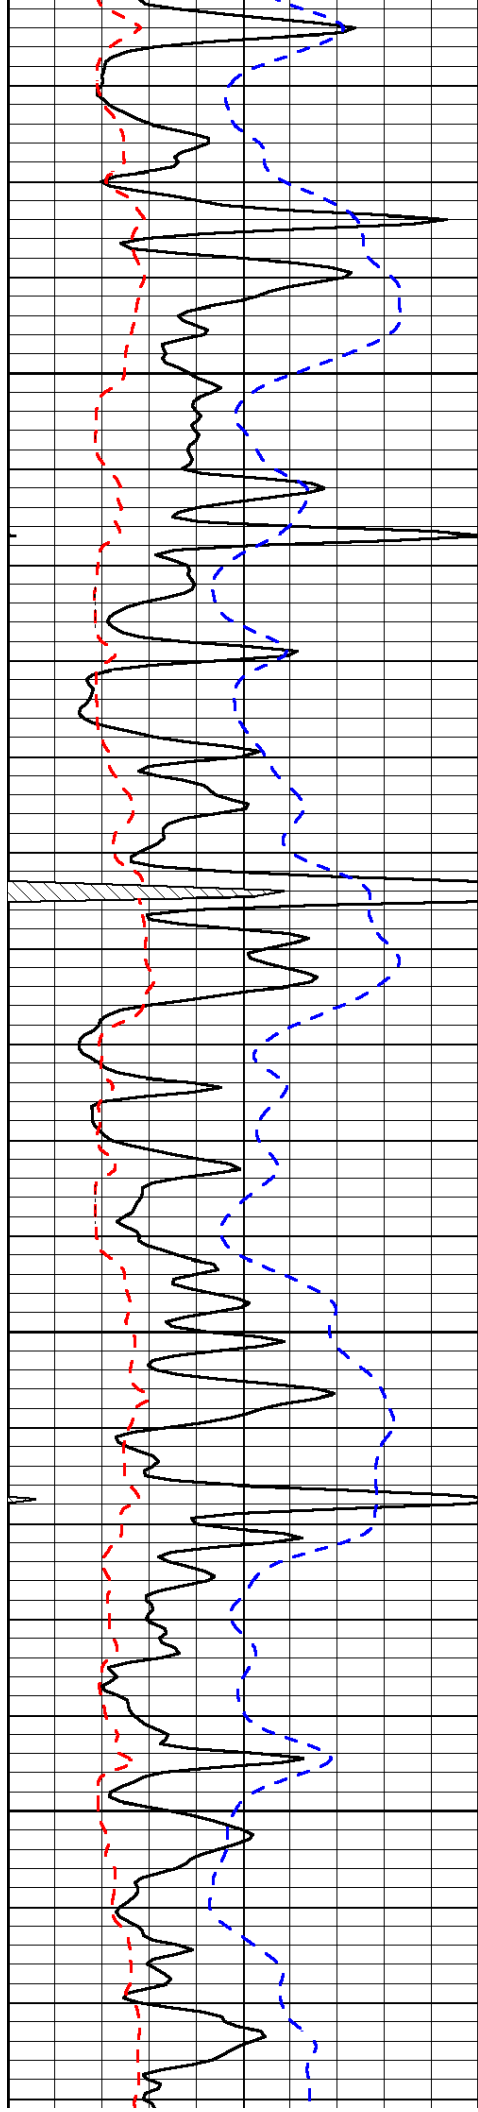


3800

3850

3900

3950

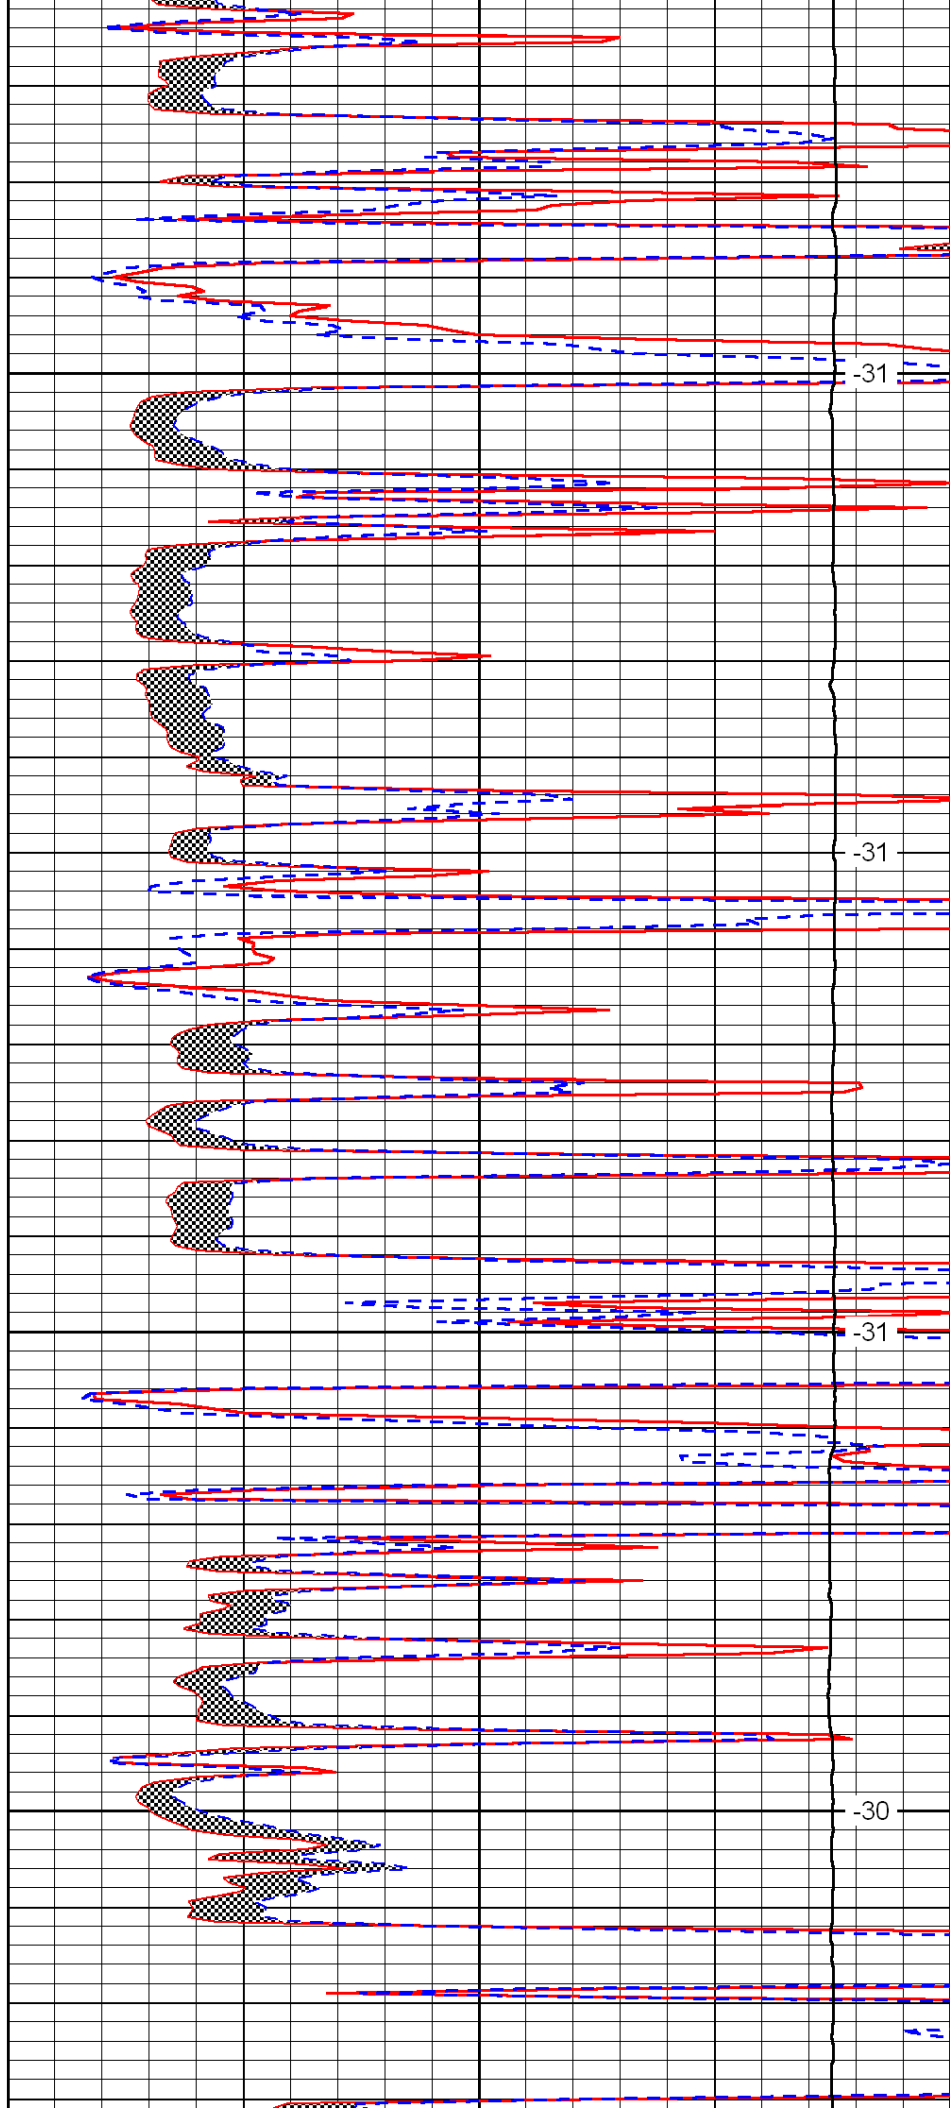


-31

-31

-31

-30

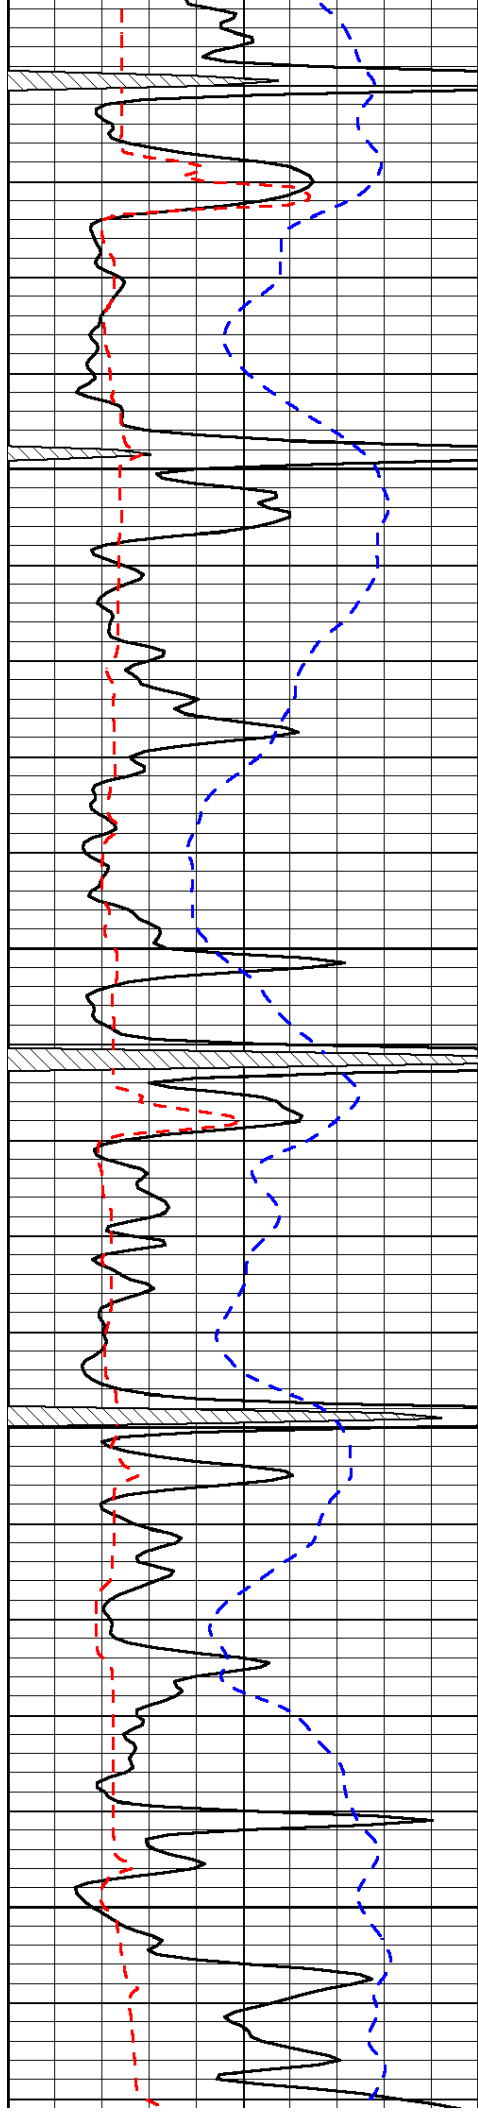



4250

4300

4350

4400

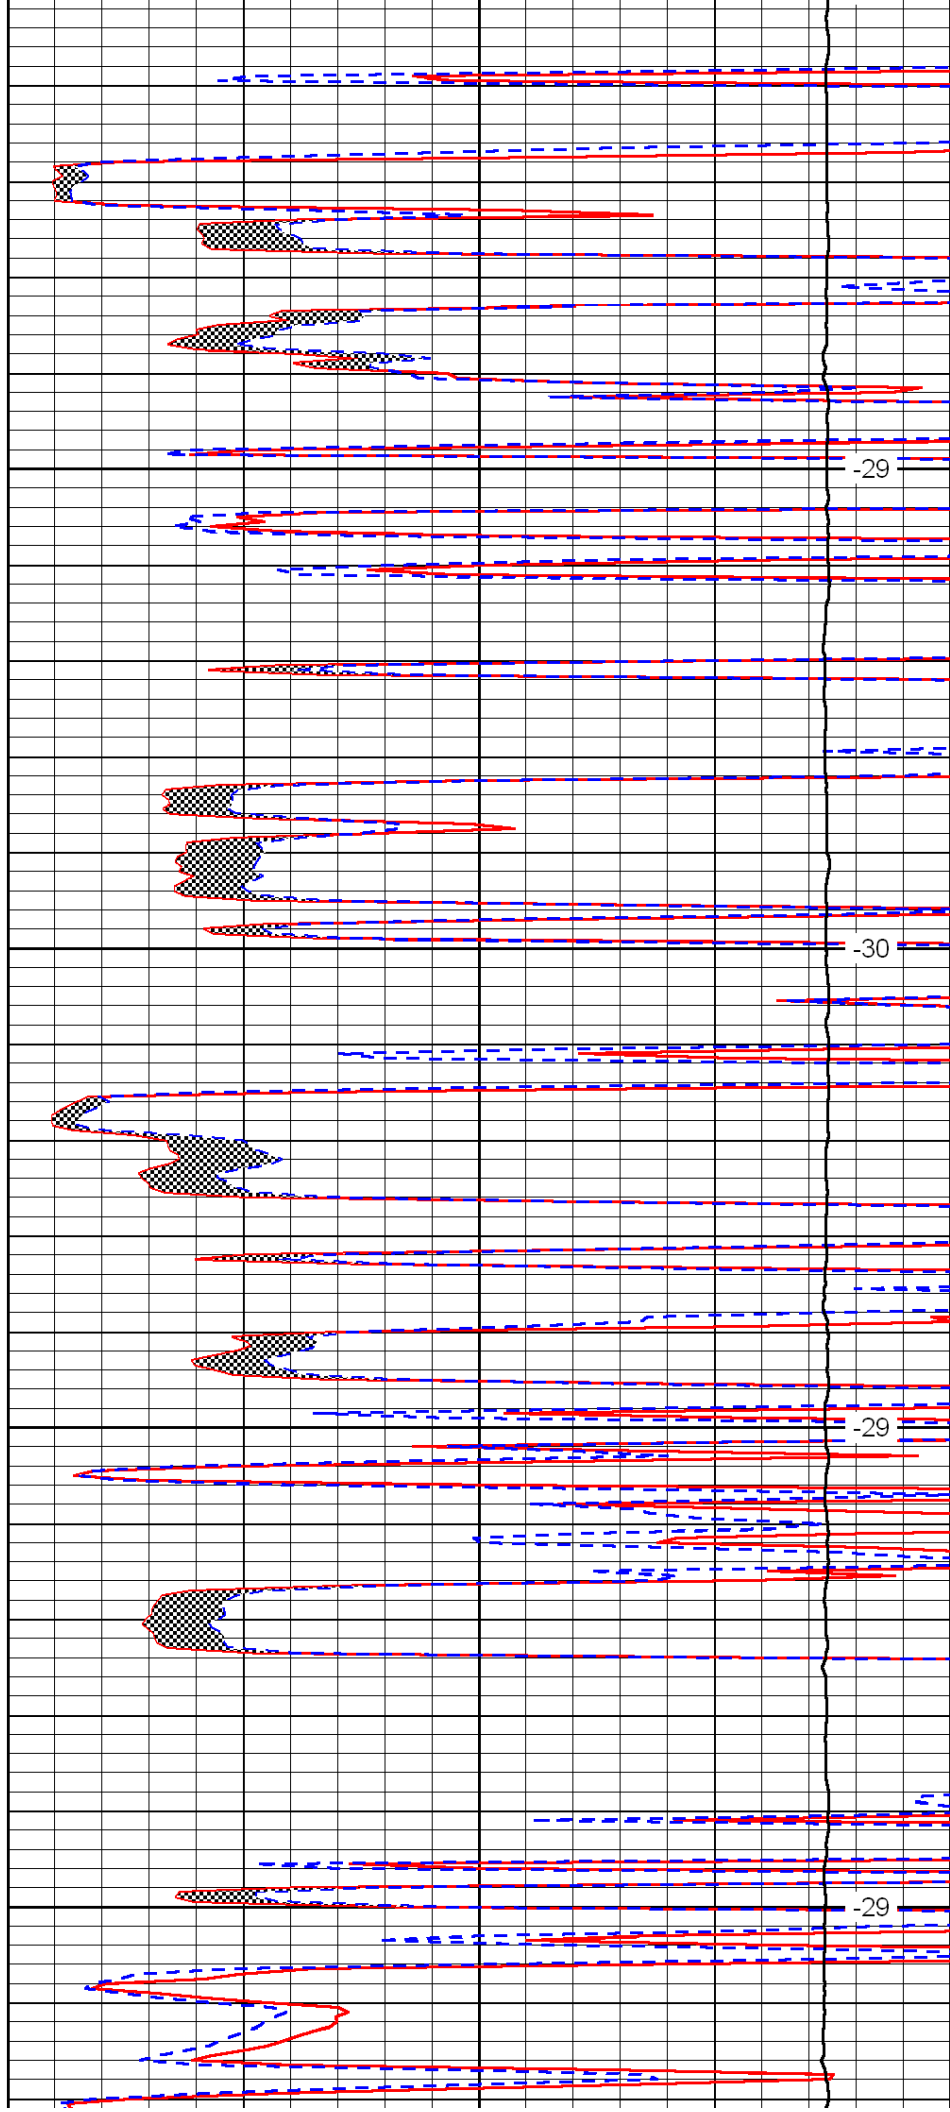

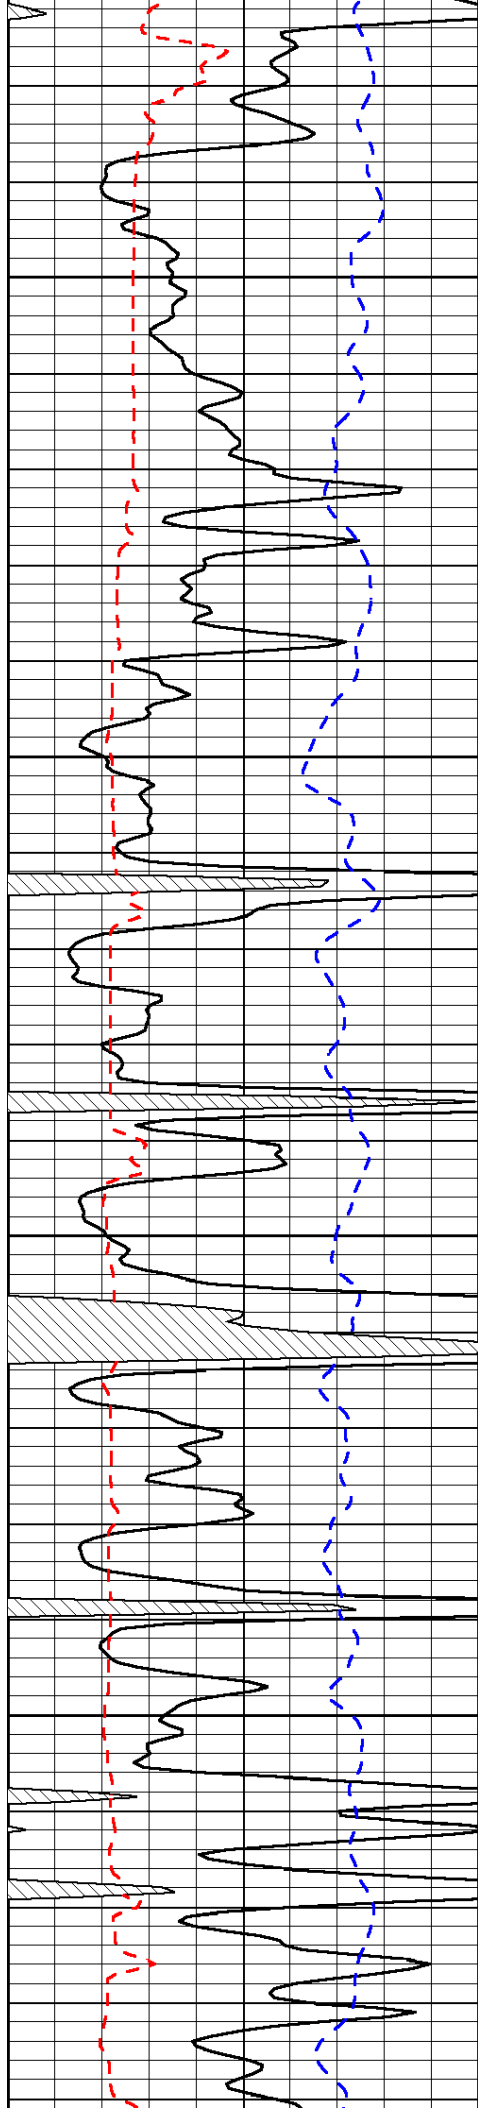


4450

4500

4550

4600

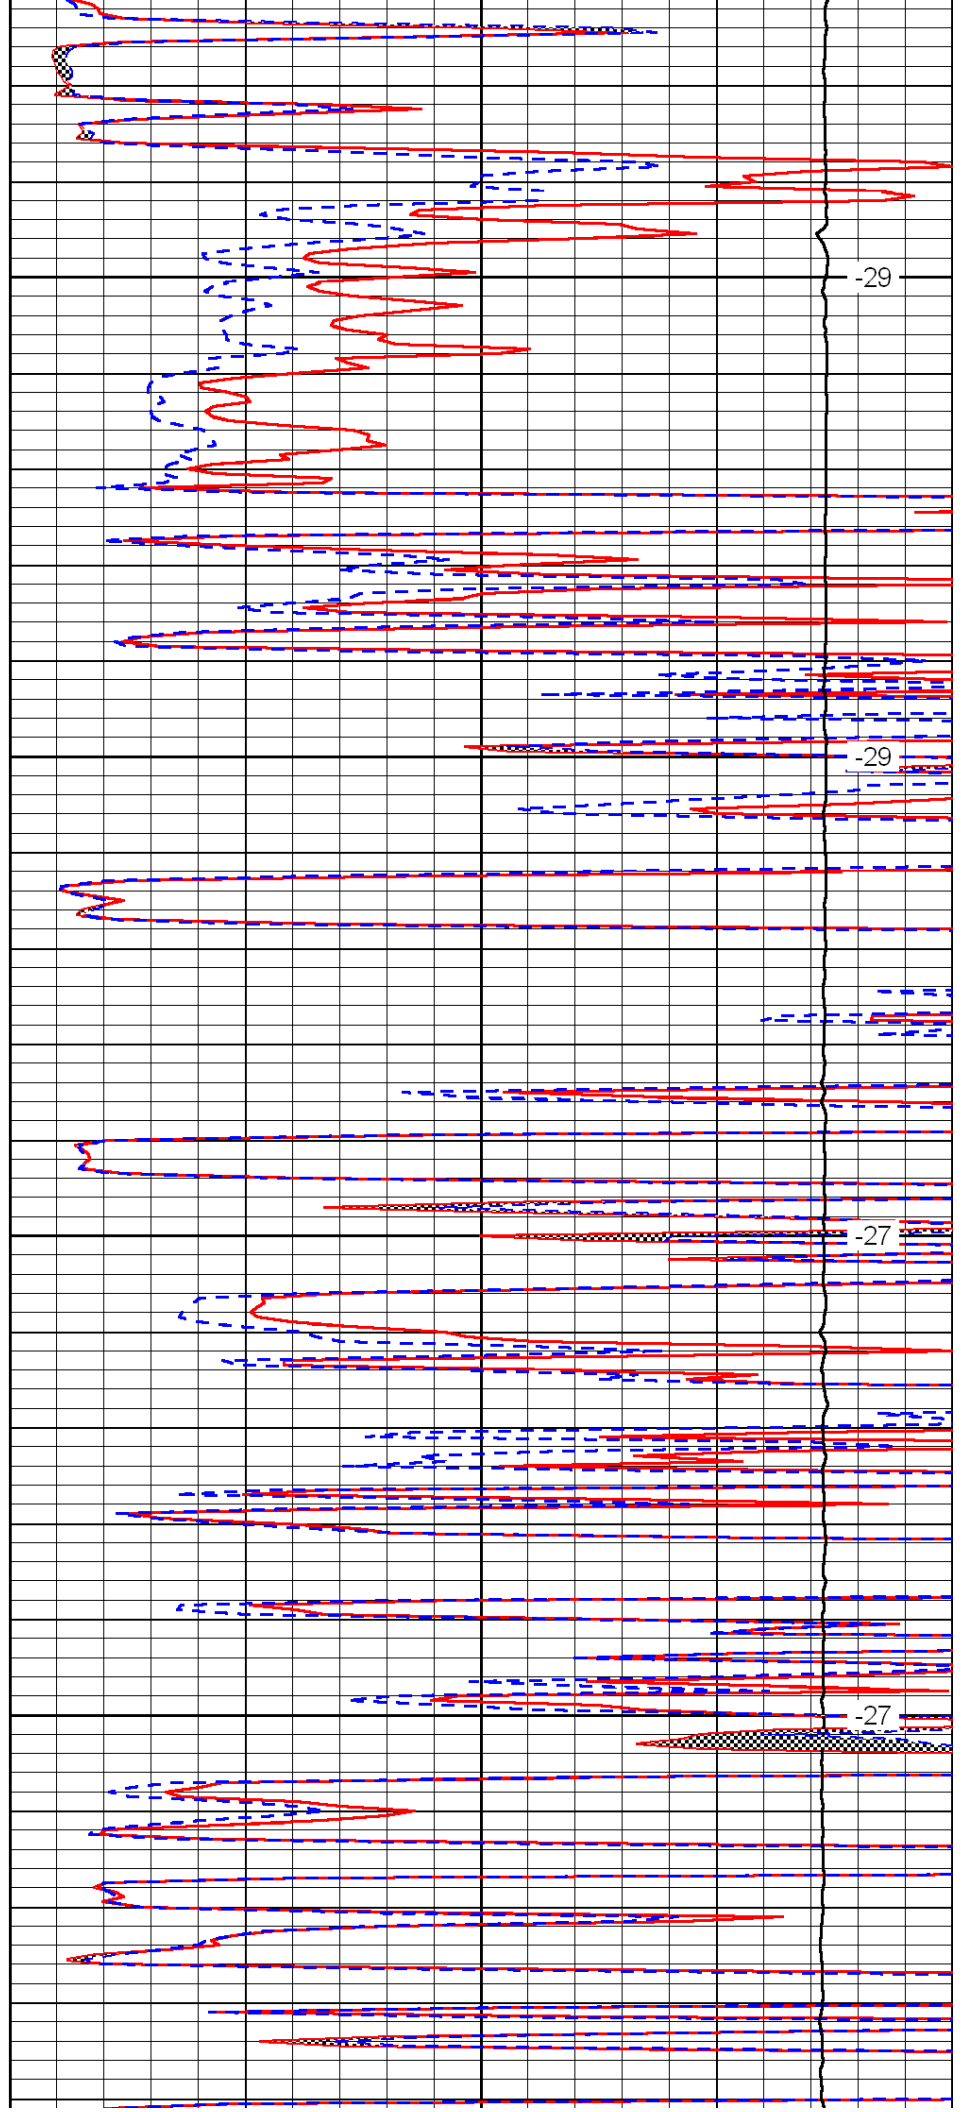

-29

-29

-27

-27

