



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company		EDISON OPERATING CO., LLC.	
Well		STERLING #1-31	
Field		HARDTNER	
County		BARBER	
State		KANSAS	
Company		EDISON OPERATING COMPANY, LLC	
Well		STERLING #1-31	
Field		HARDTNER	
County		BARBER	
State		KANSAS	
Location:		API # : 15-007-23765-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 10' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 31 TWP 34S RGE 12W		Elevation	
1320' FNL & 330' FWL		CDL/CNL/PE	
		DIL/SON	
		Elevation	
		K.B. 1471	
		D.F. 1469	
		G.L. 1461	
Date	9/24/11		
Run Number	TWO		
Depth Driller	5476		
Depth Logger	5477		
Bottom Logged Interval	5469		
Top Log Interval	3500		
Casing Driller	8 5/8"@331'		
Casing Logger	332'		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,000 PPM	
Density / Viscosity	9.1/48		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85@88F		
Rmt @ Meas. Temp	.64@88F		
Rmc @ Meas. Temp	1.02@88F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.58@129F		
Time Circulation Stopped	5 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	129F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF GRONEWEG		
Witnessed By	DEREK PATTERSON		


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HARDTNER, KS - NORTH ON BLACKTOP 2 1/2 MILES TO RATTLESNAKE TRAIL
2 1/2 MILES WEST - SOUTH INTO

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

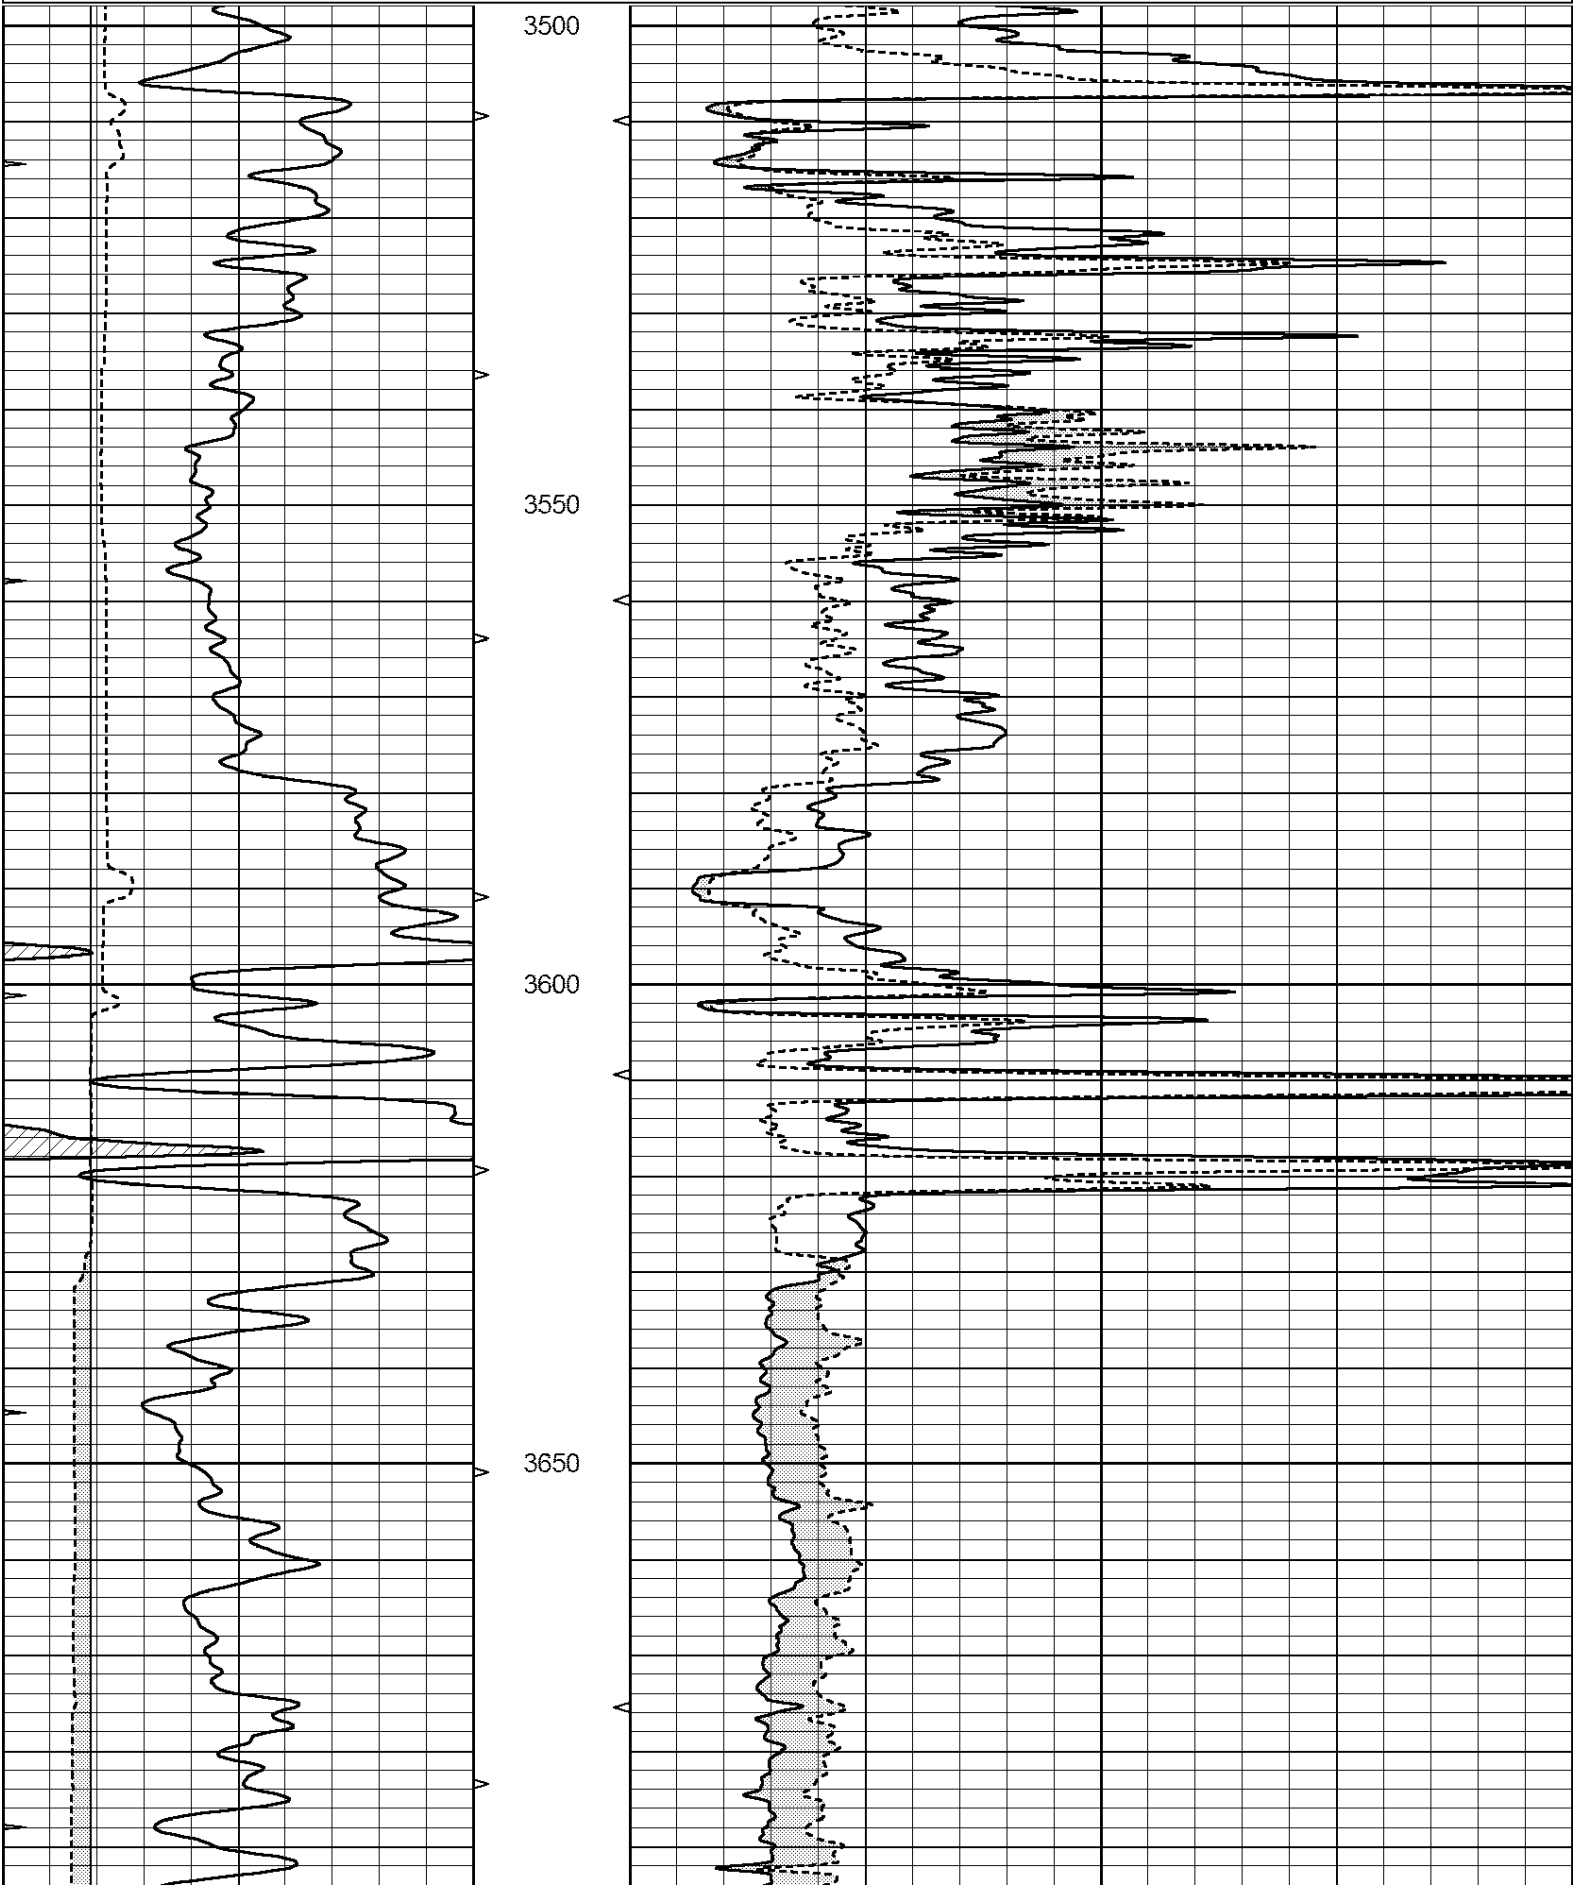

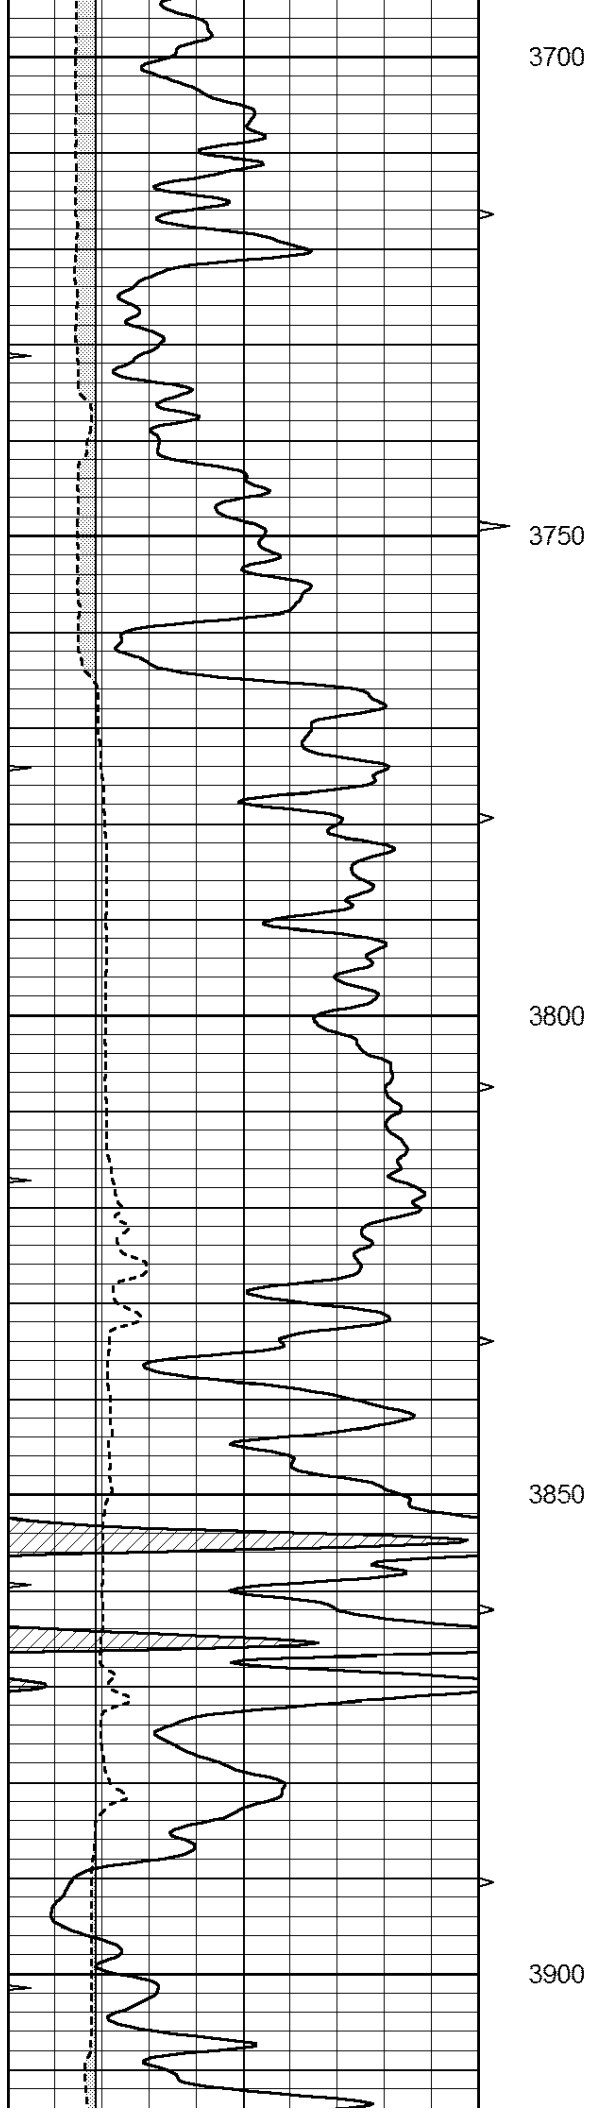


3700



3750



3800


3850

3900

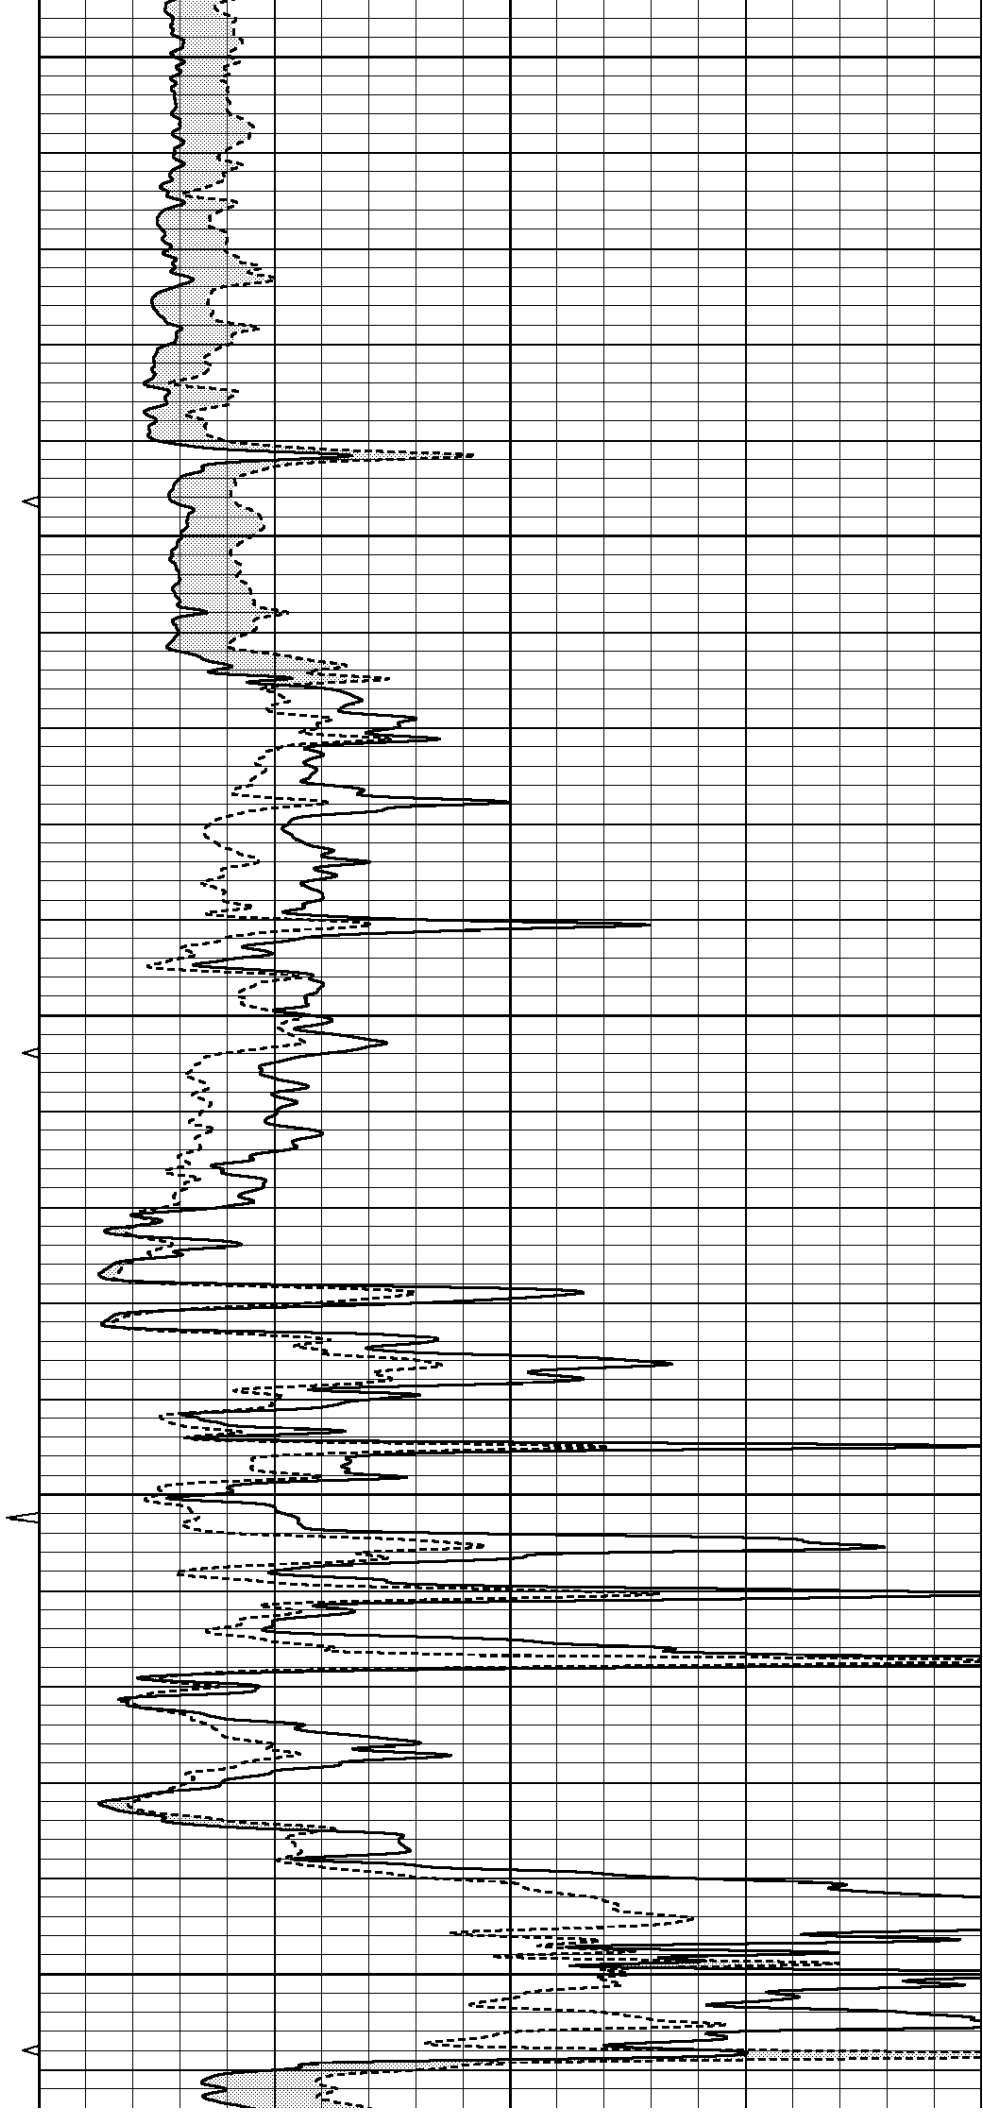

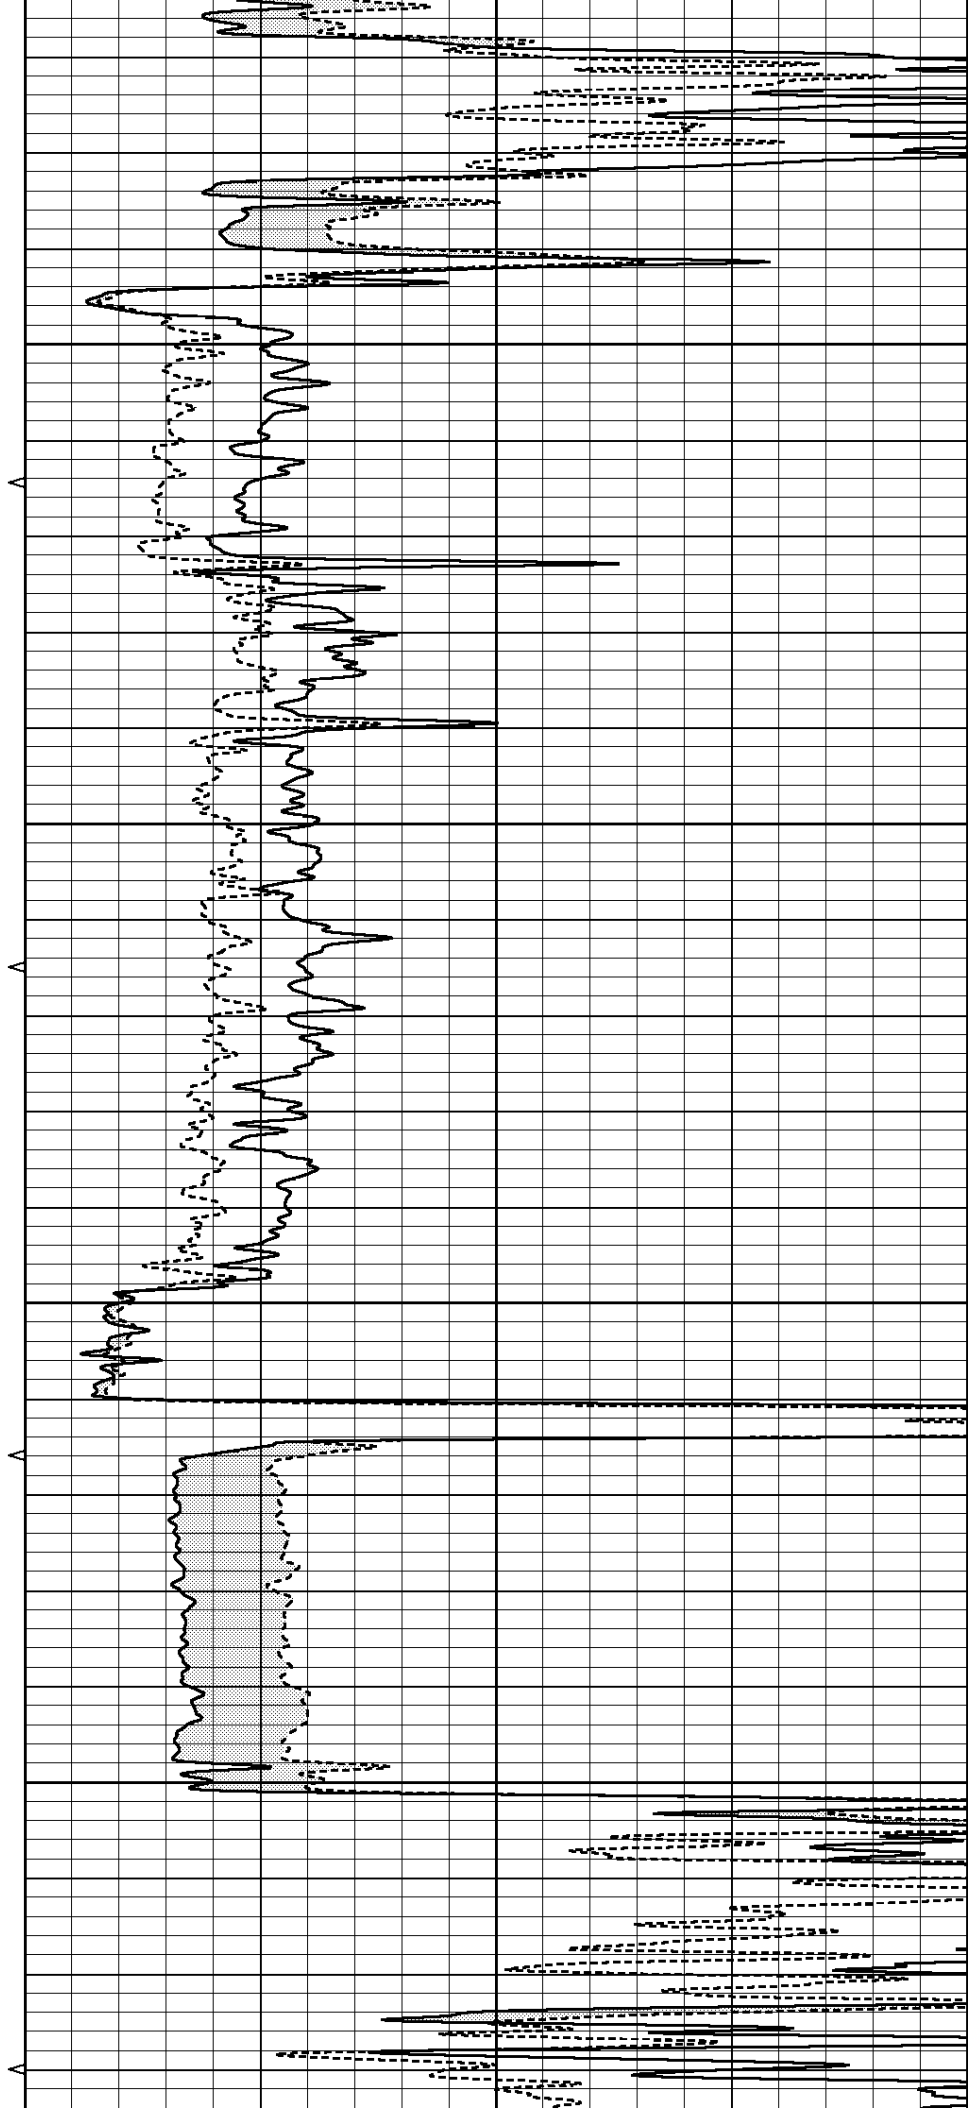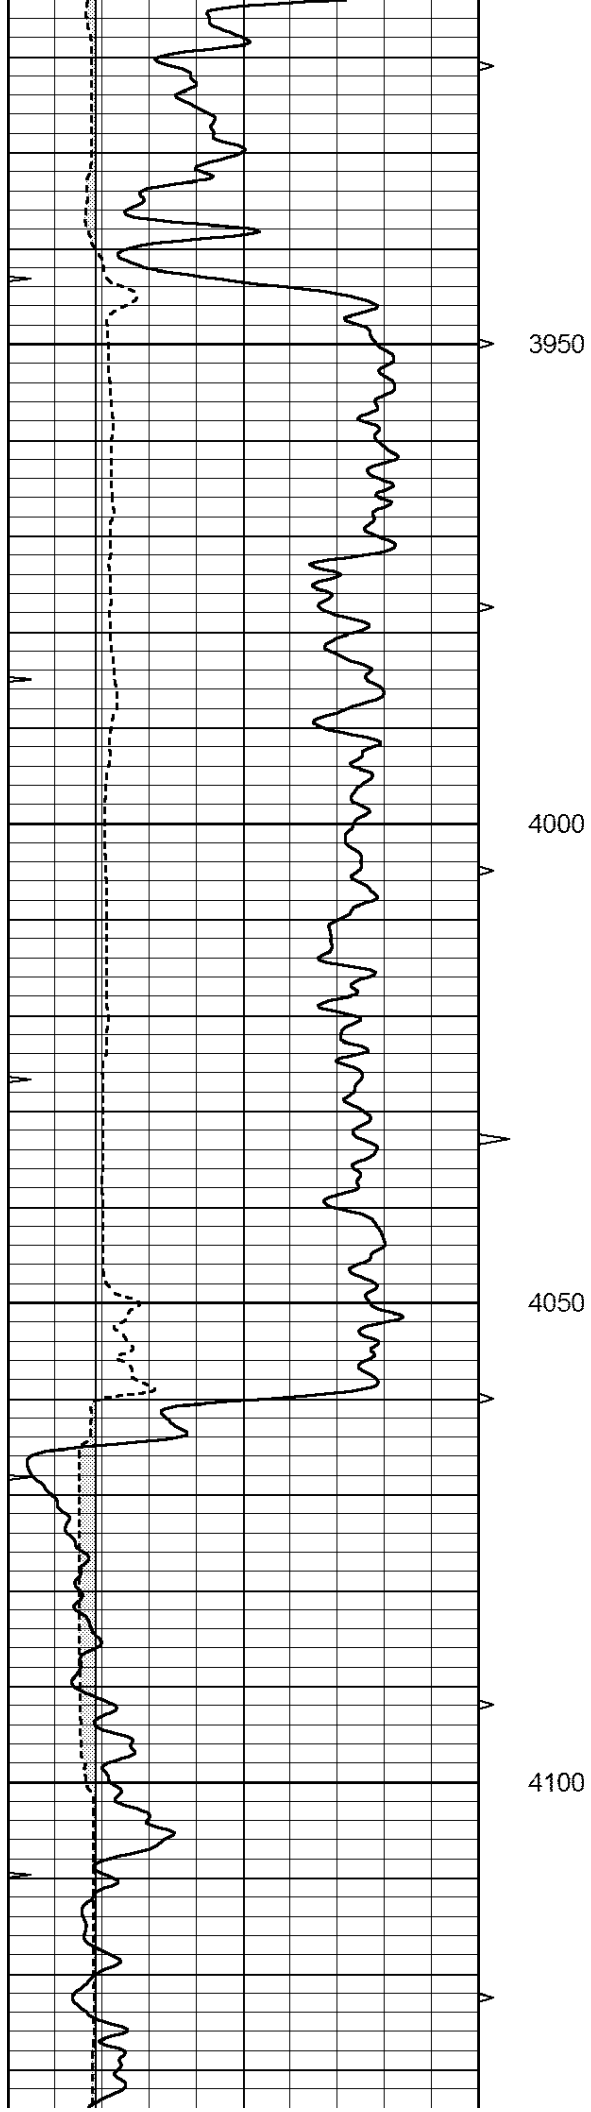

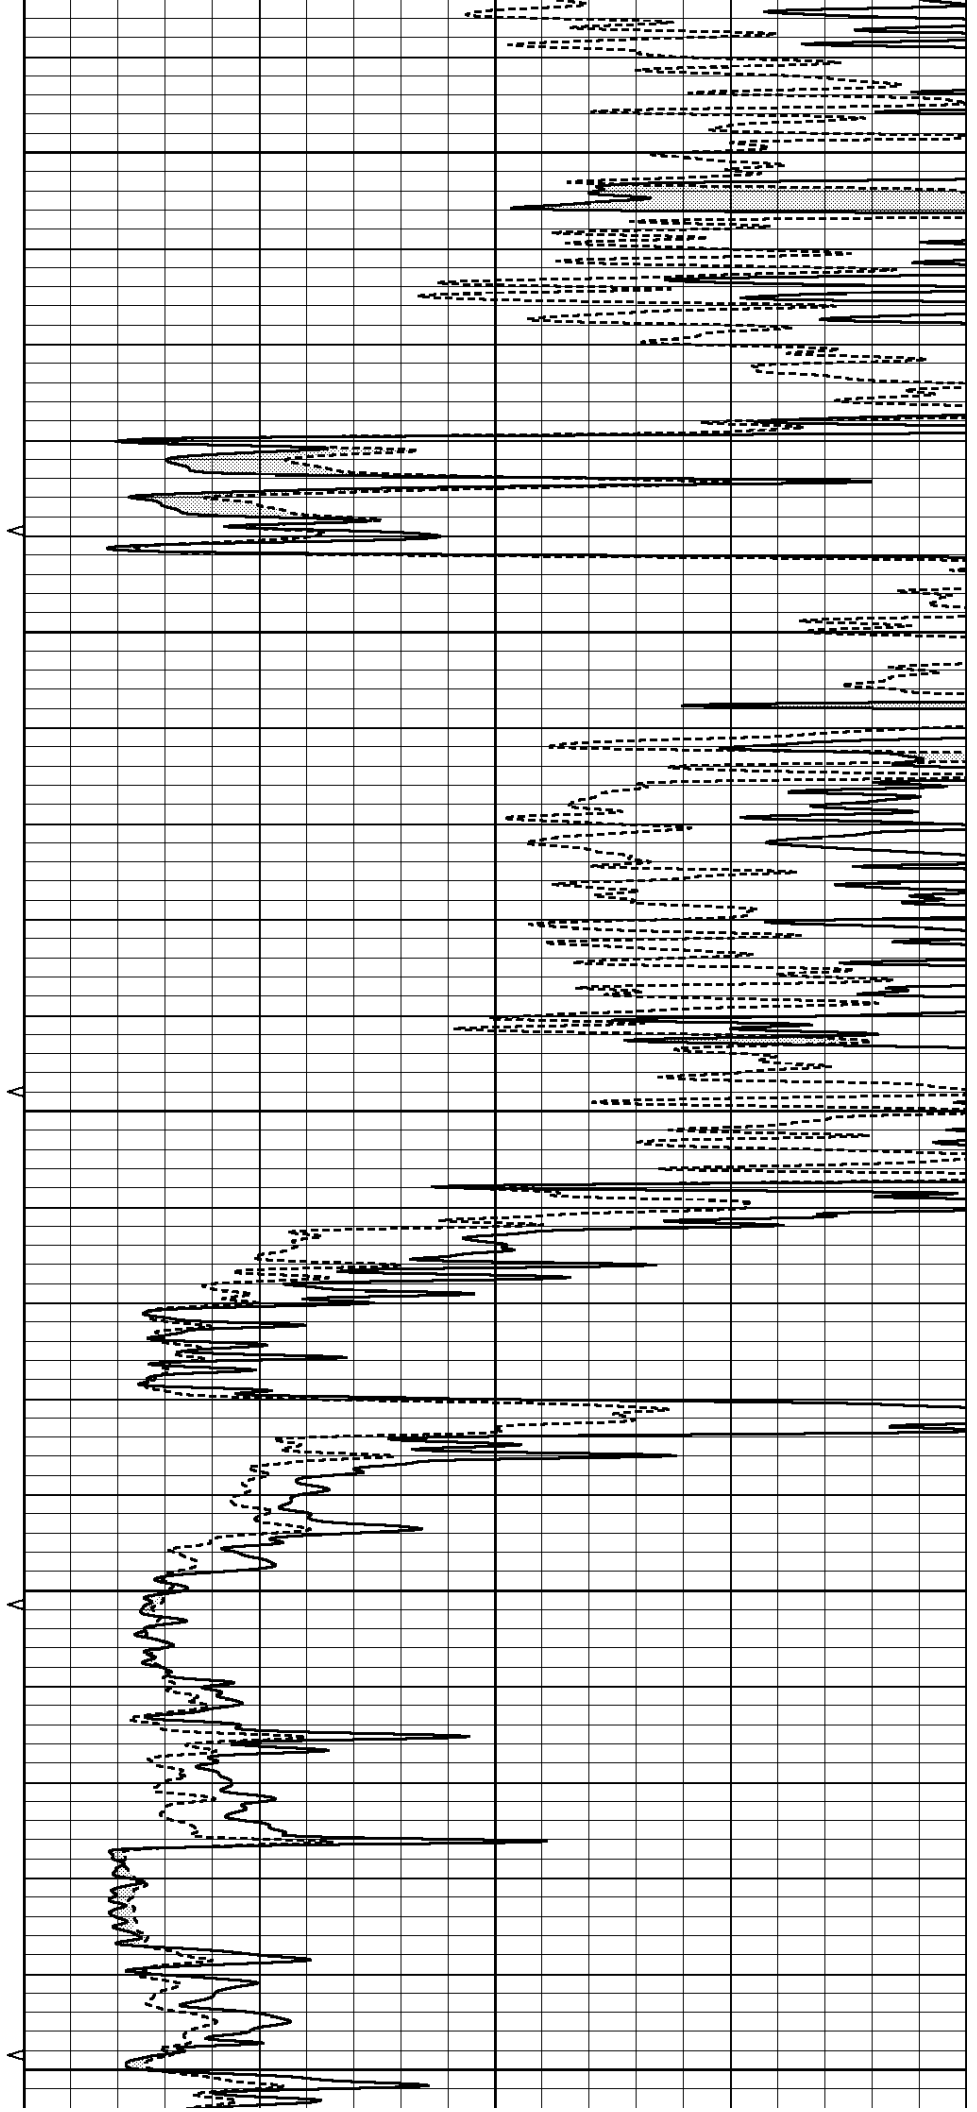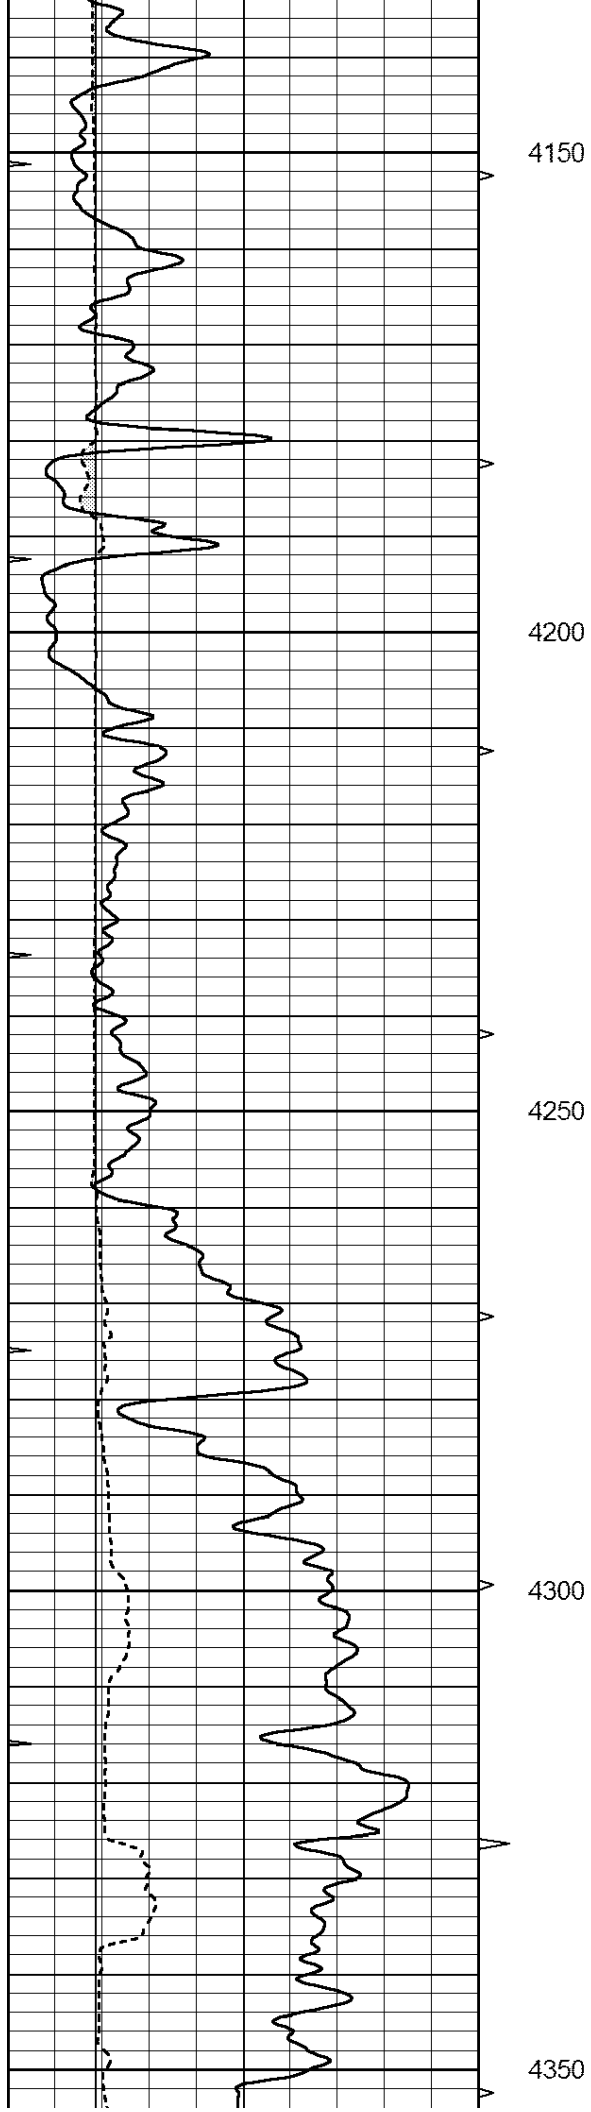

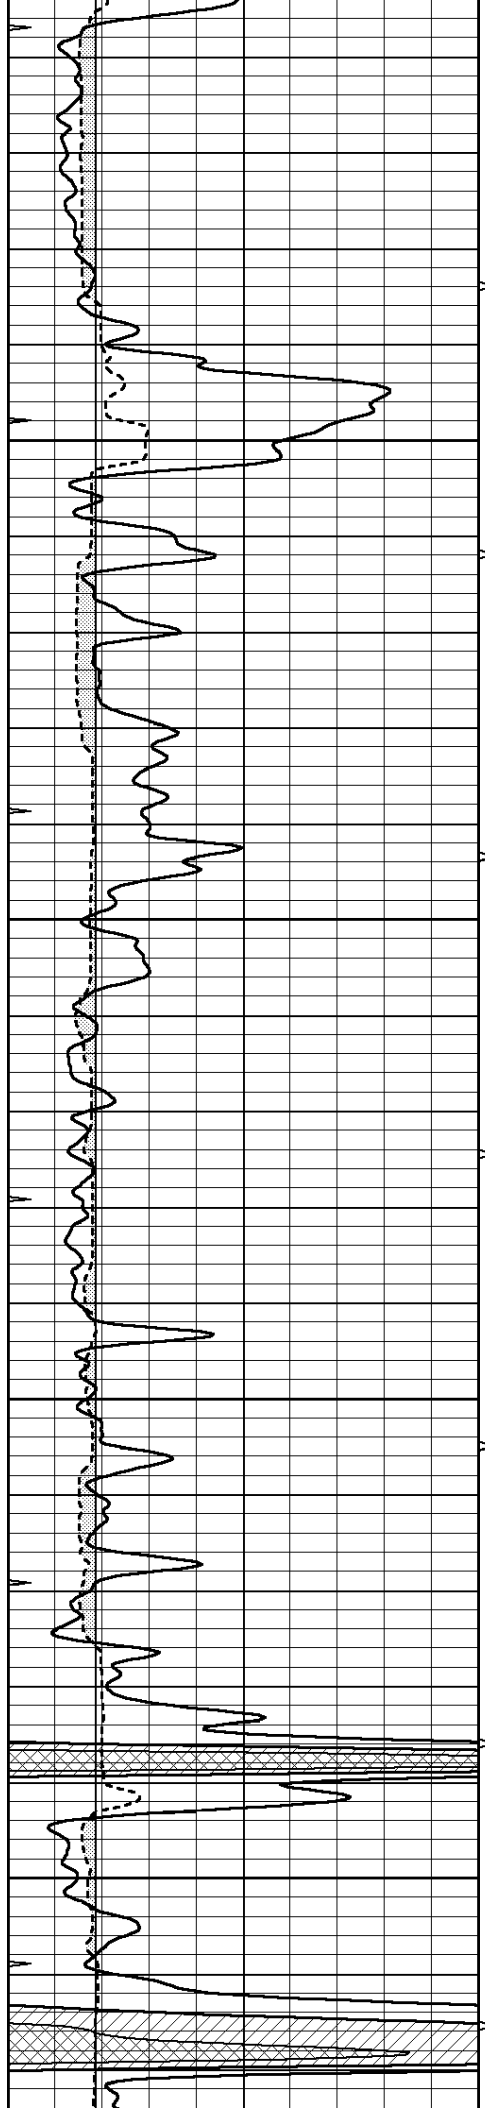



4400

4450

4500

4550

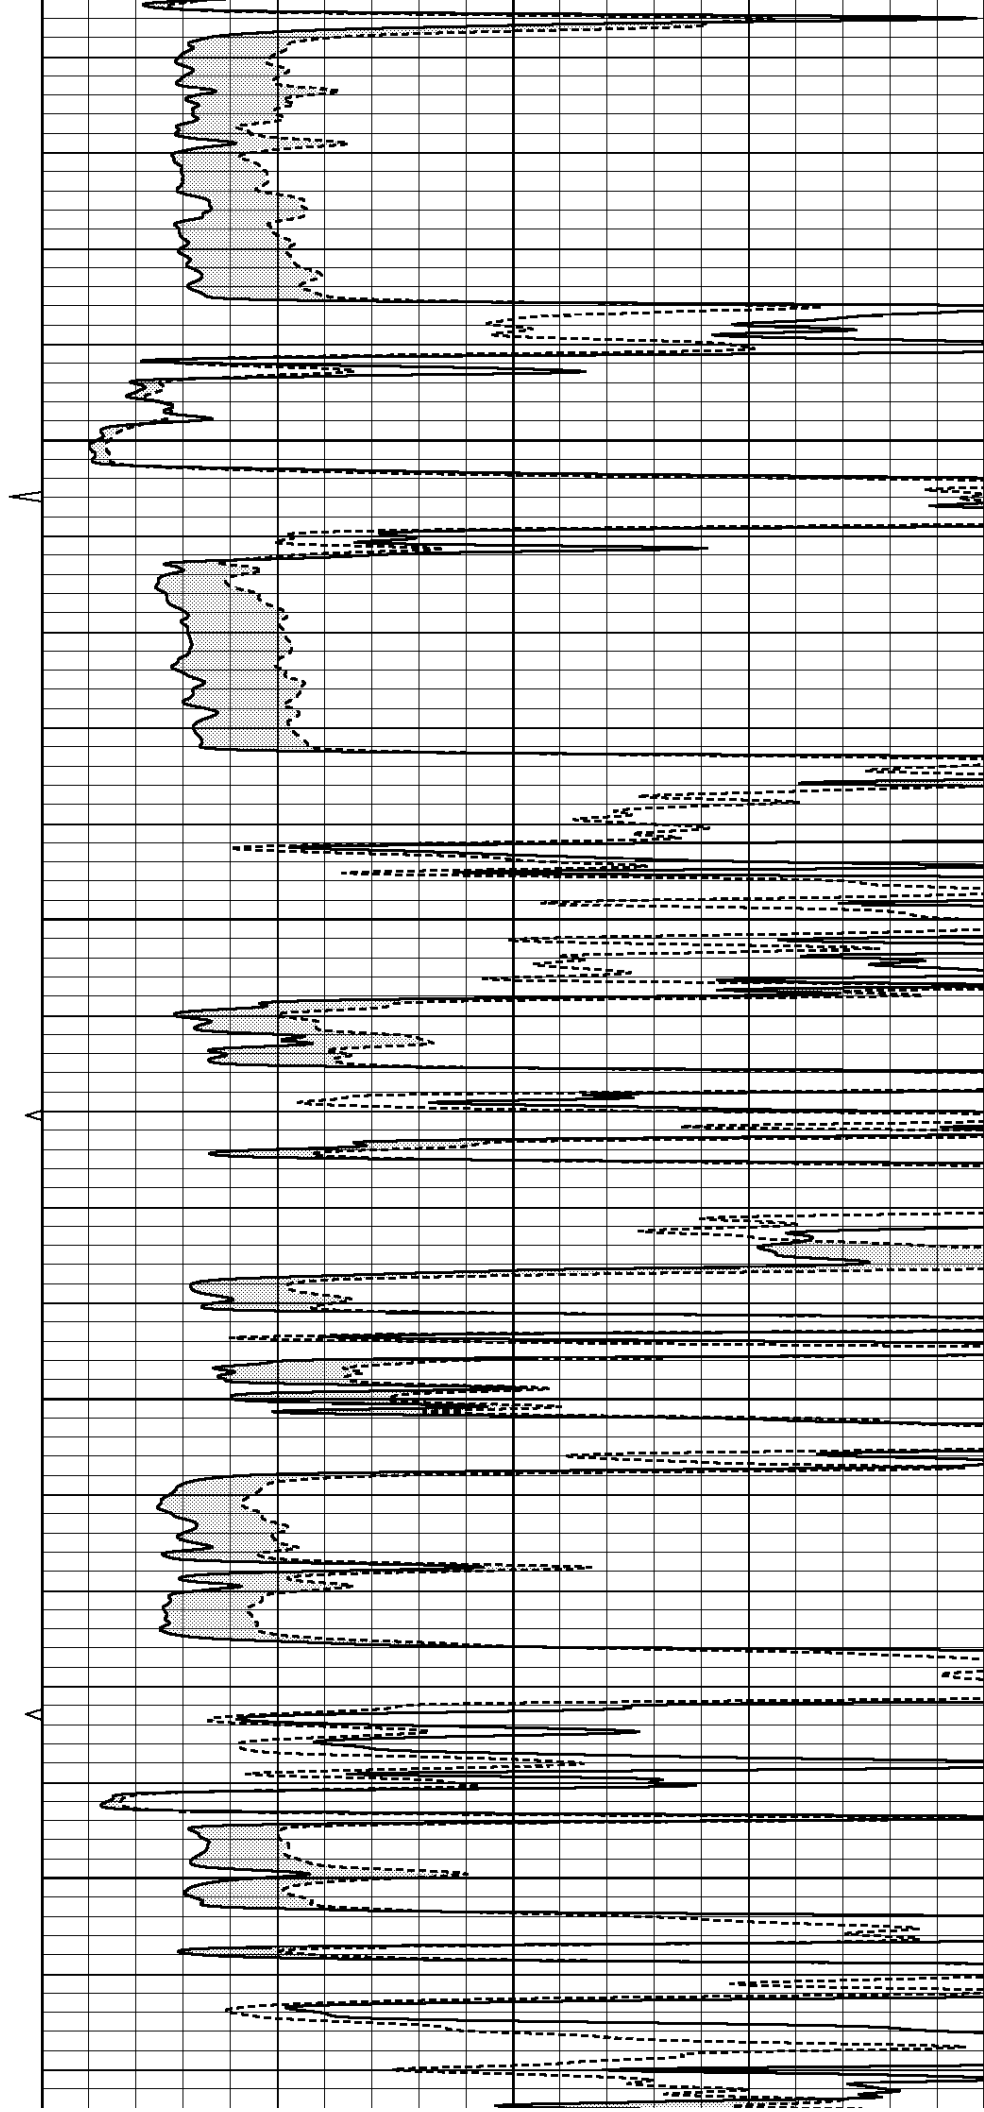

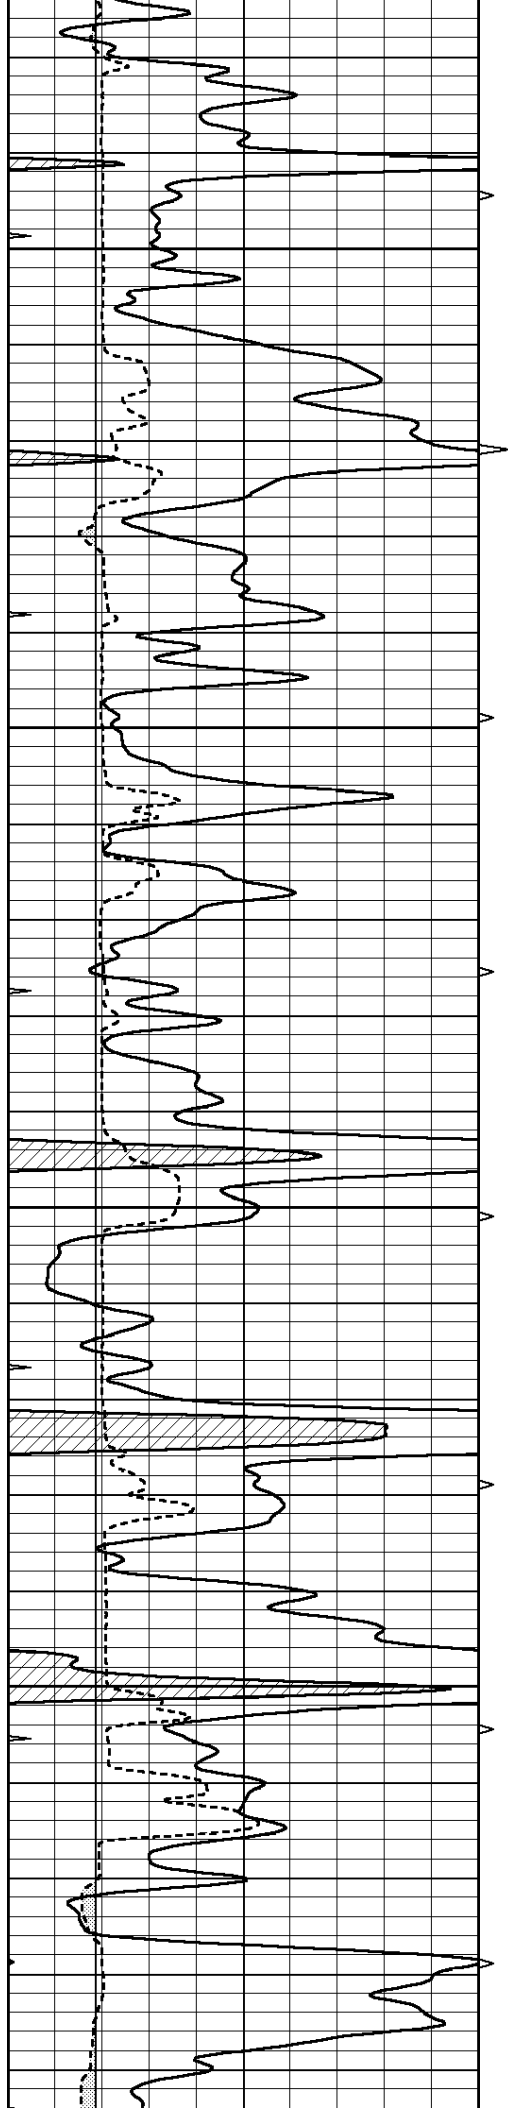




4600



4650


4700


4750

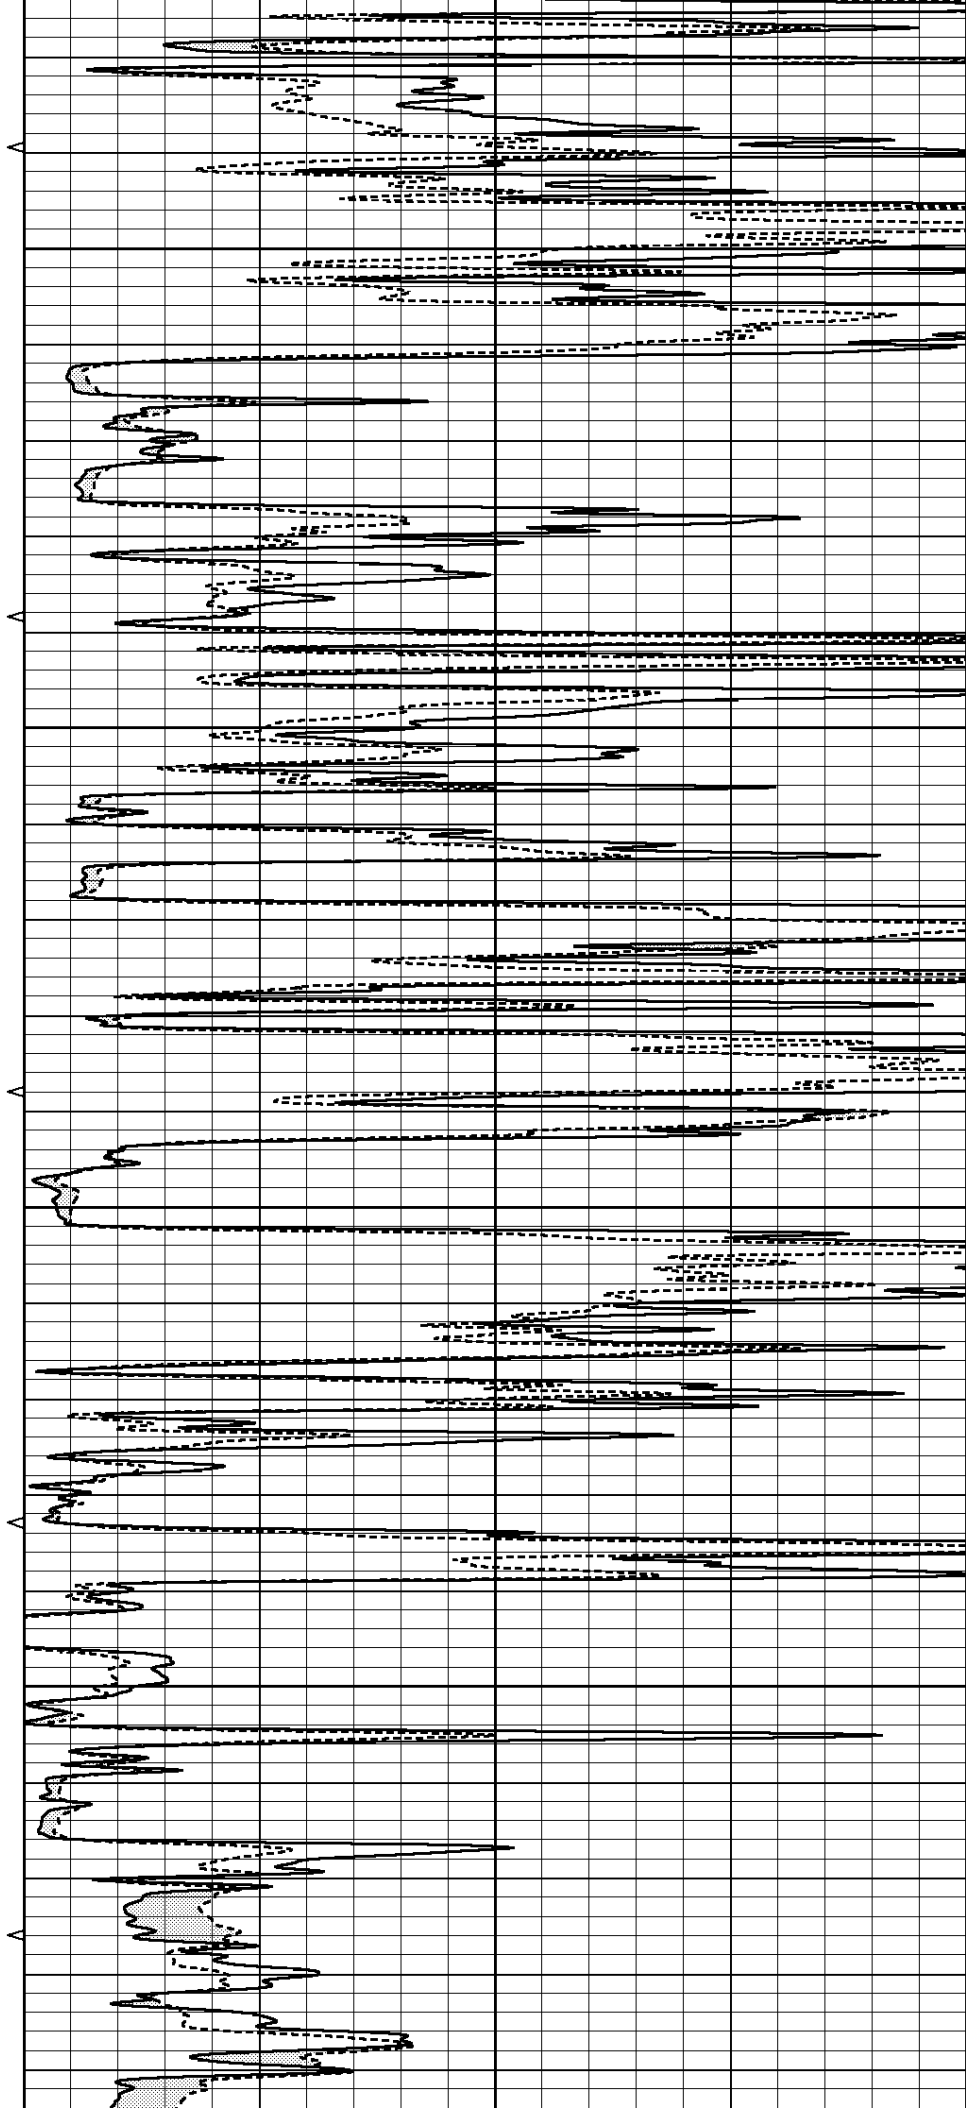

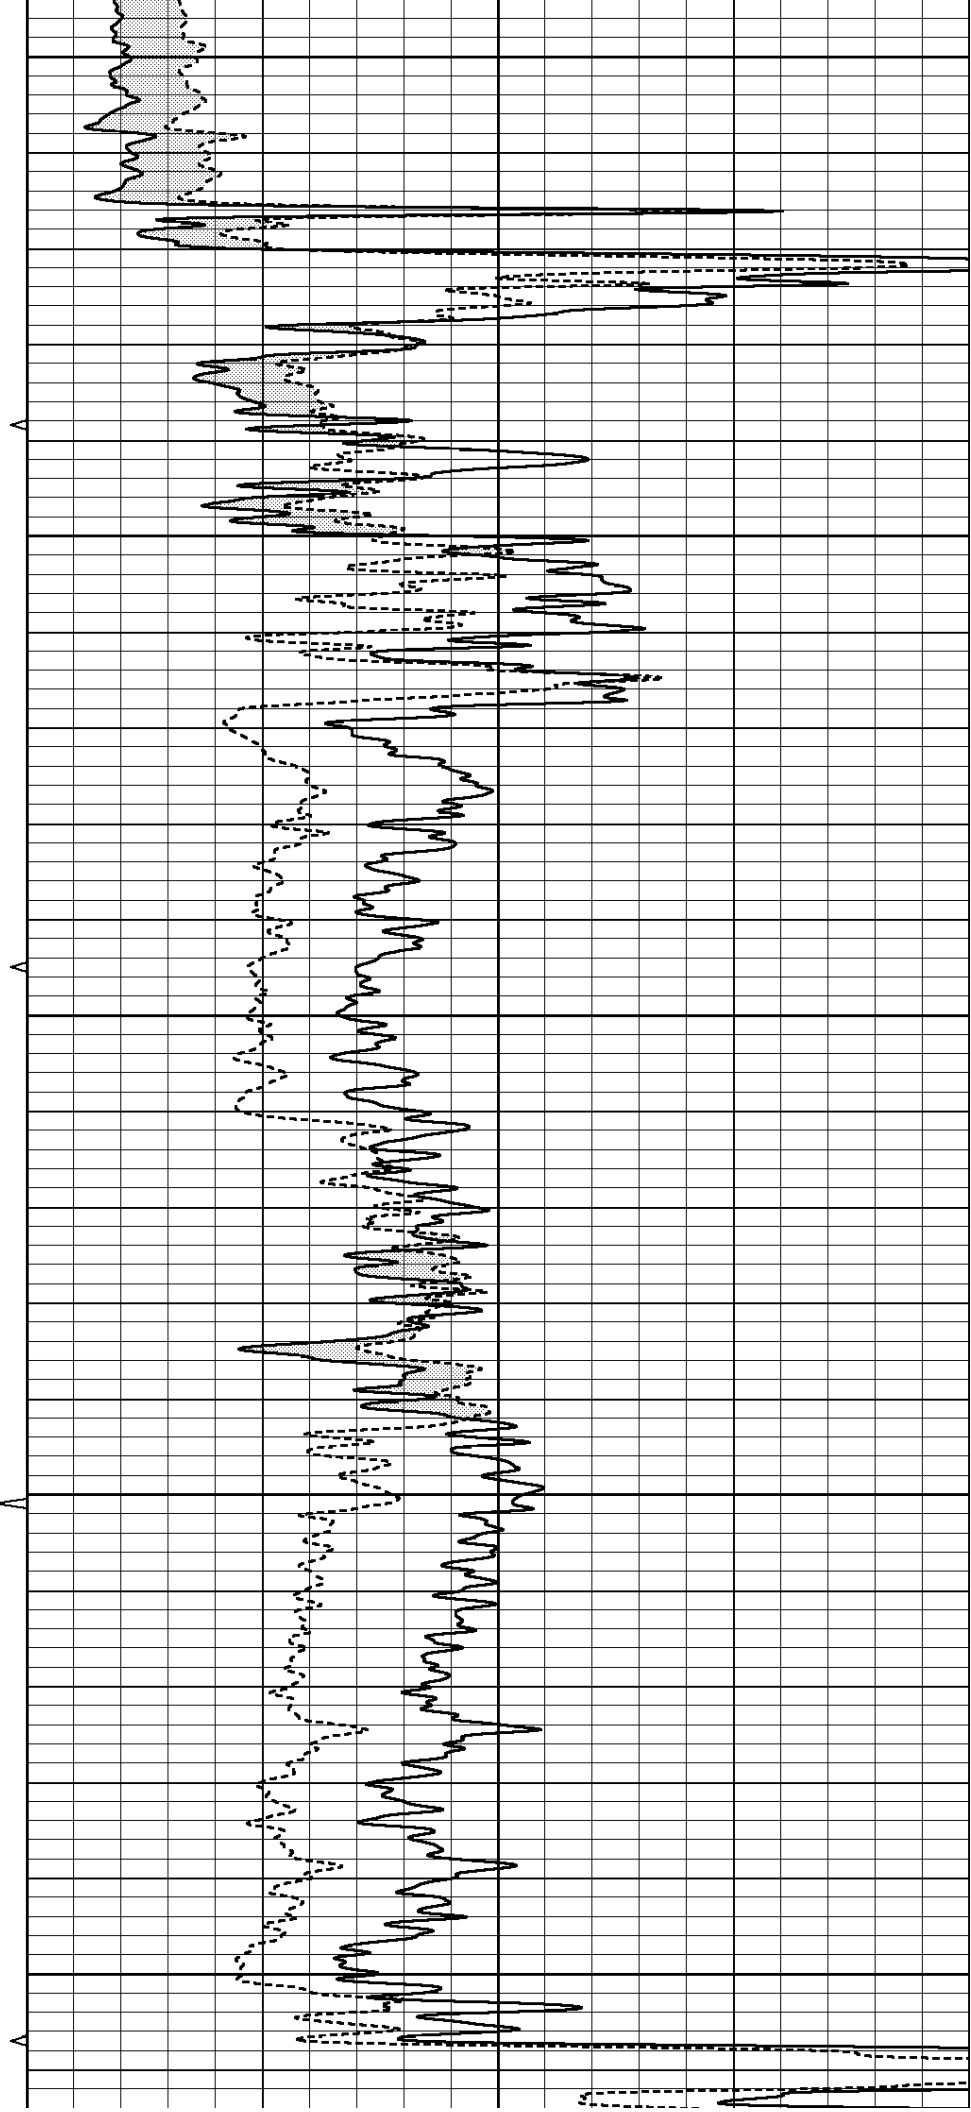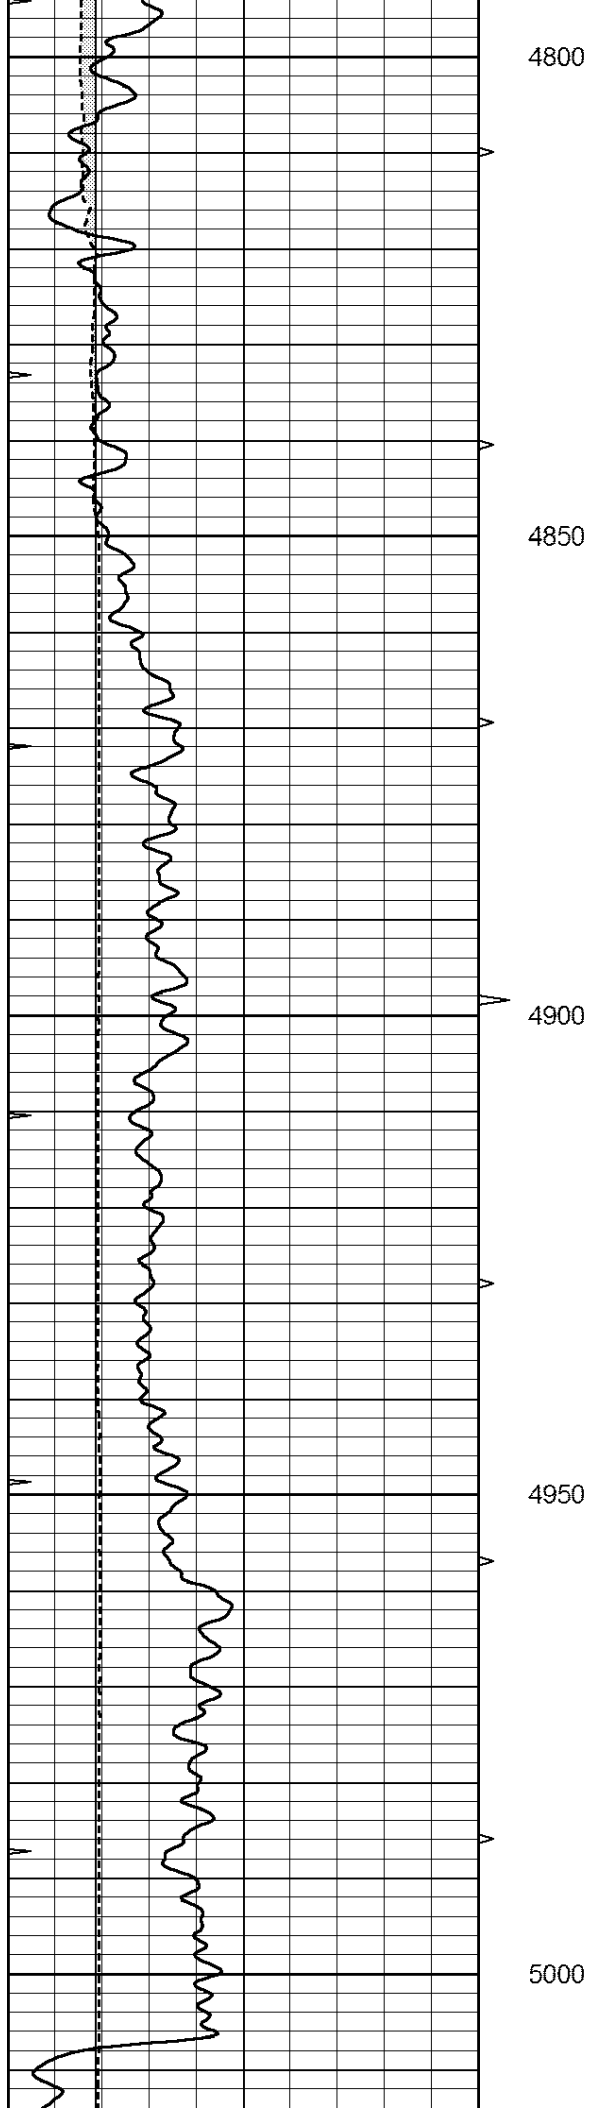

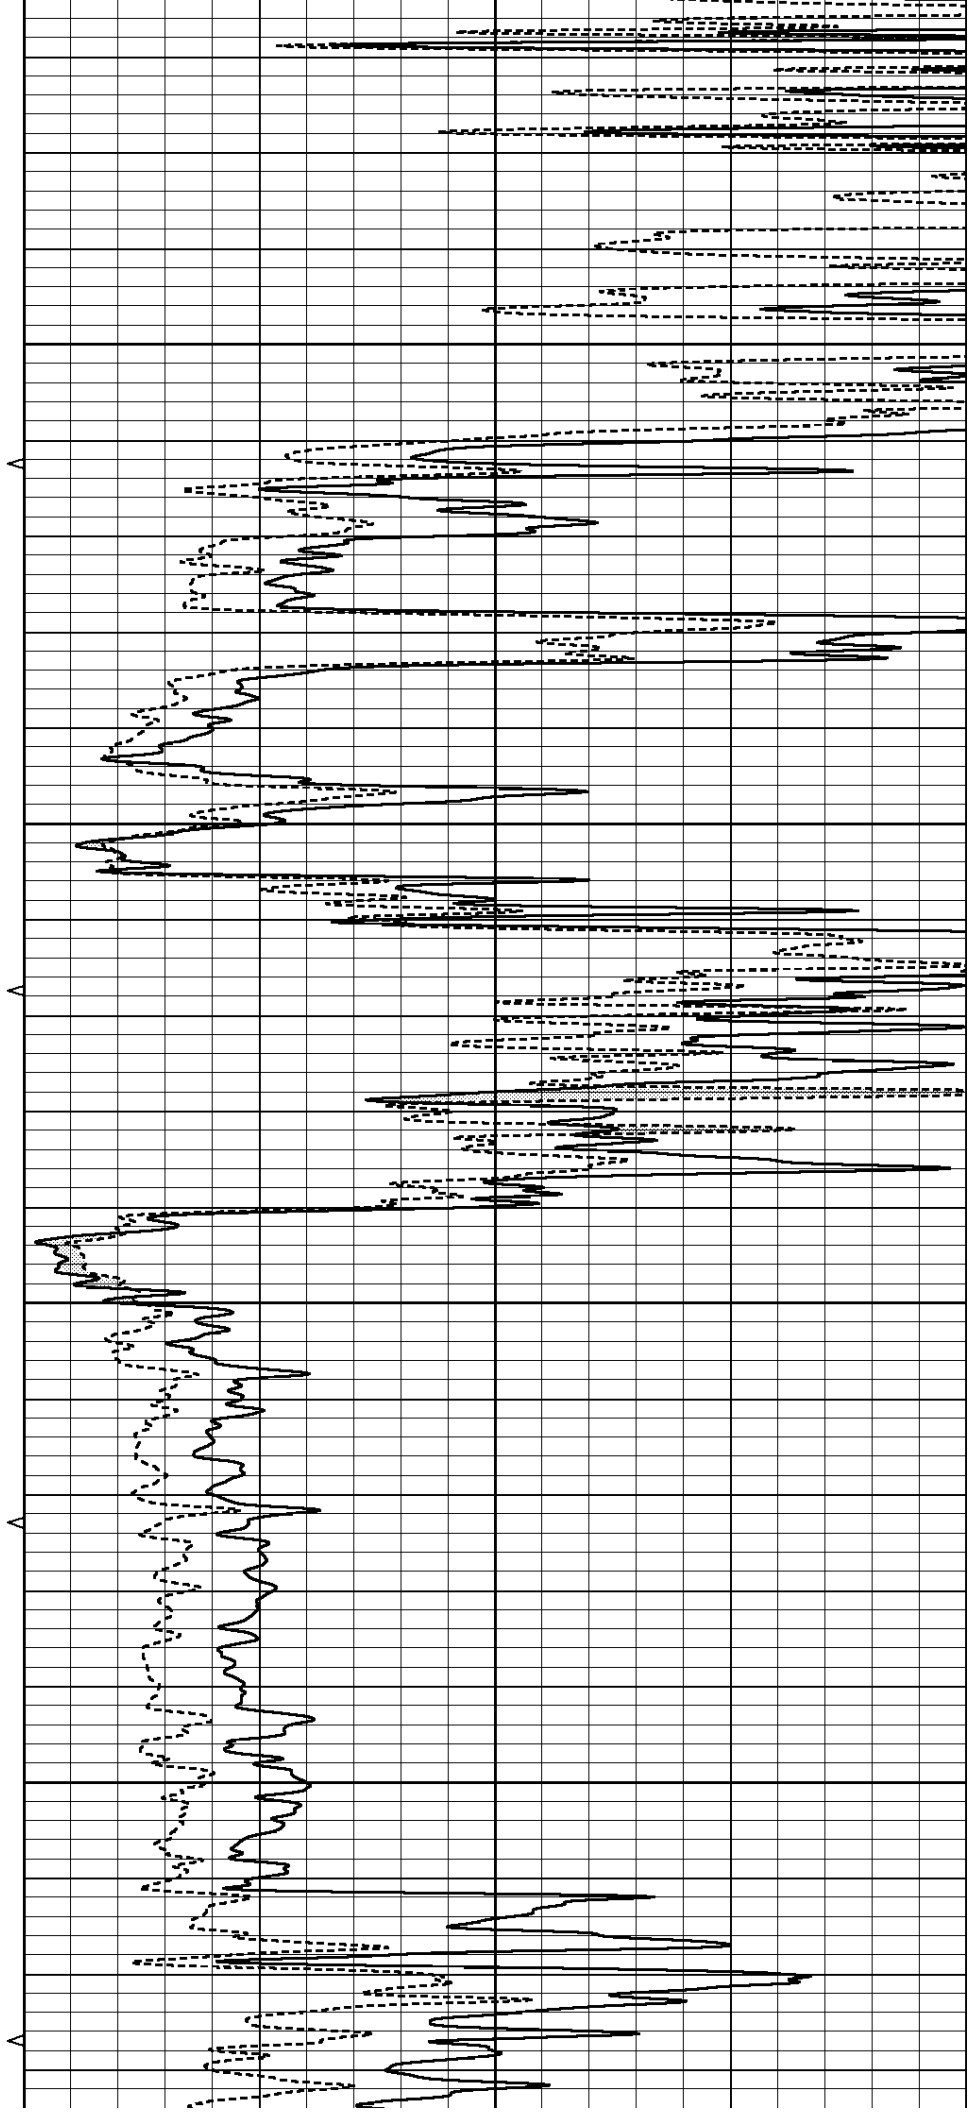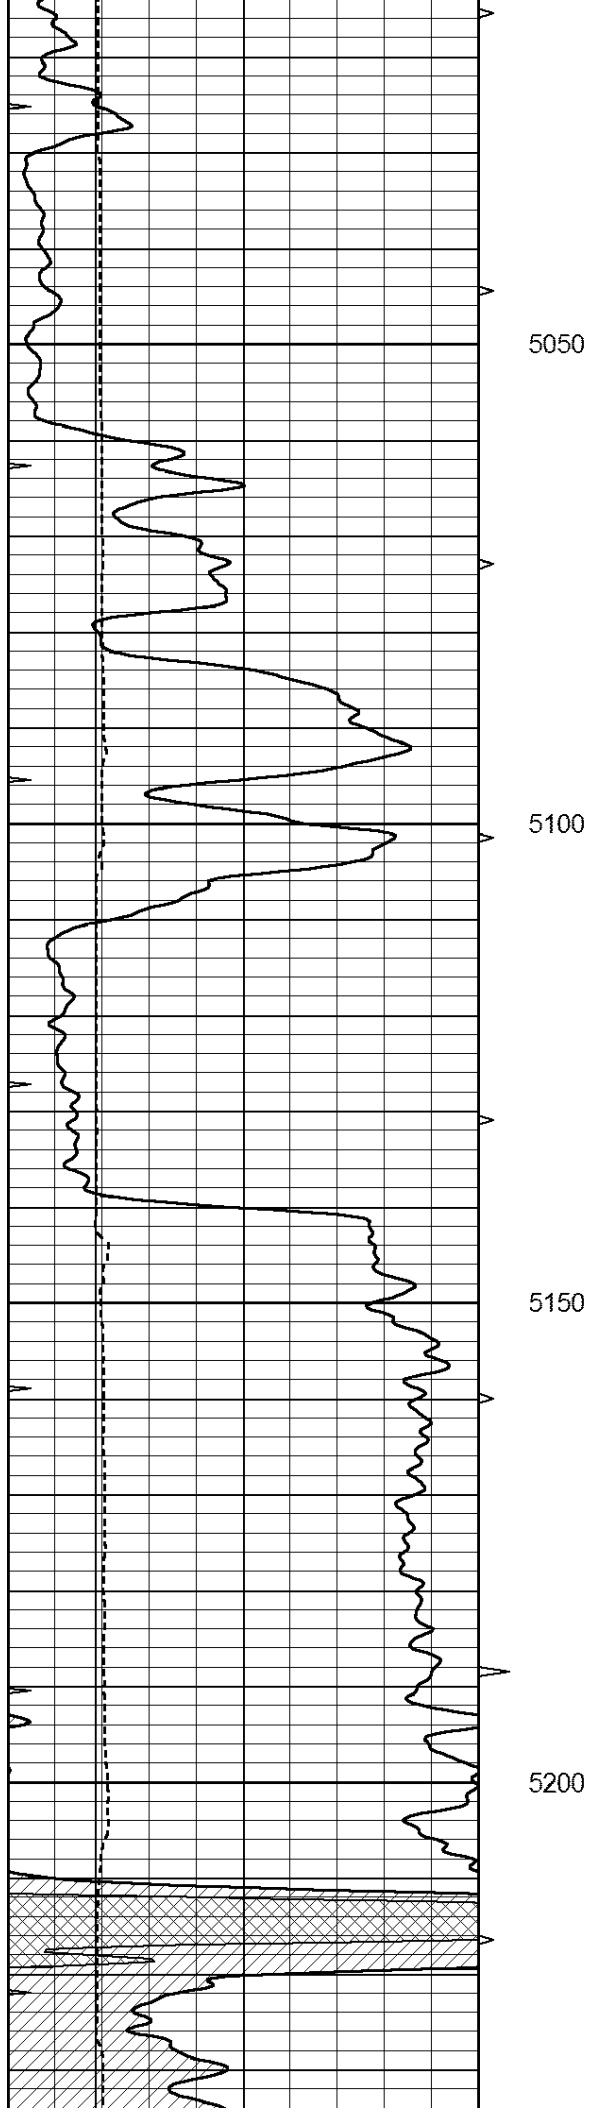

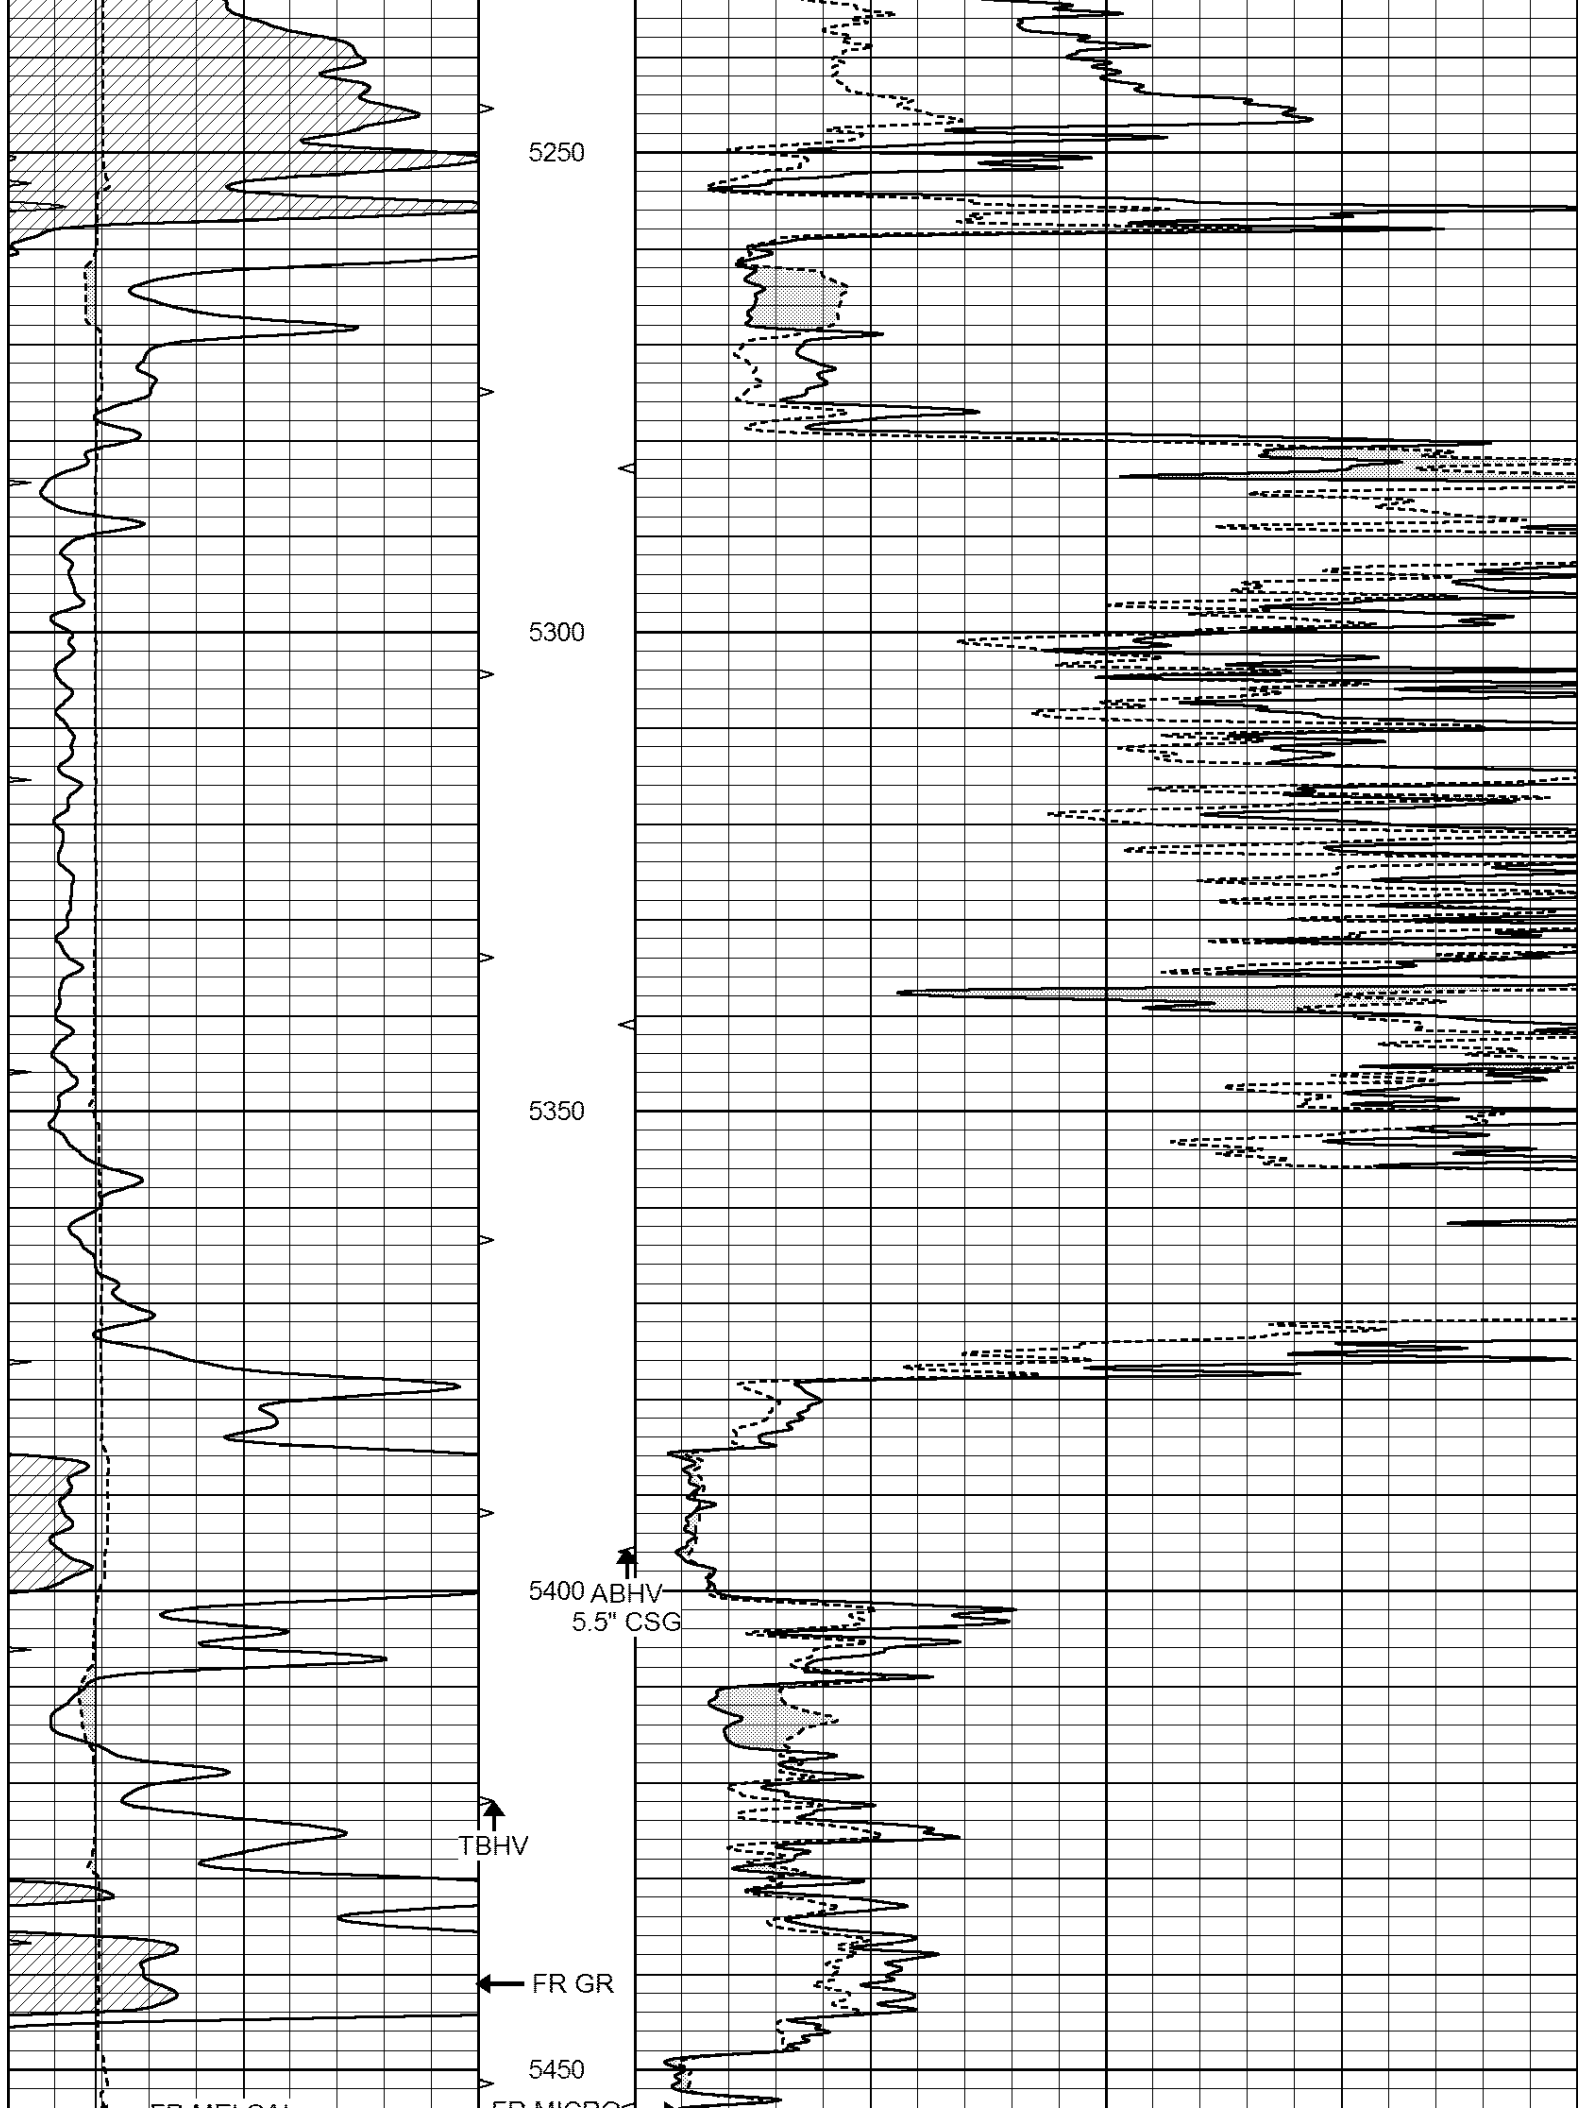

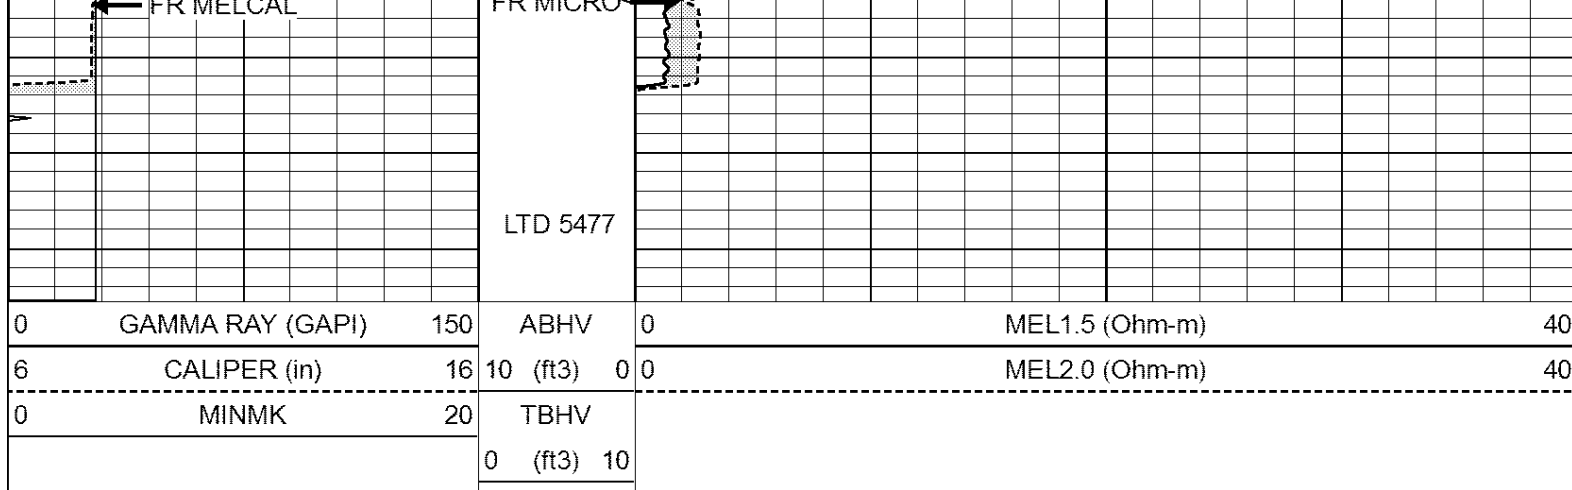



SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 007453pe.db
 Dataset Pathname: pass5.1
 Presentation Format: micro
 Dataset Creation: Sat Sep 24 16:23:38 2011 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

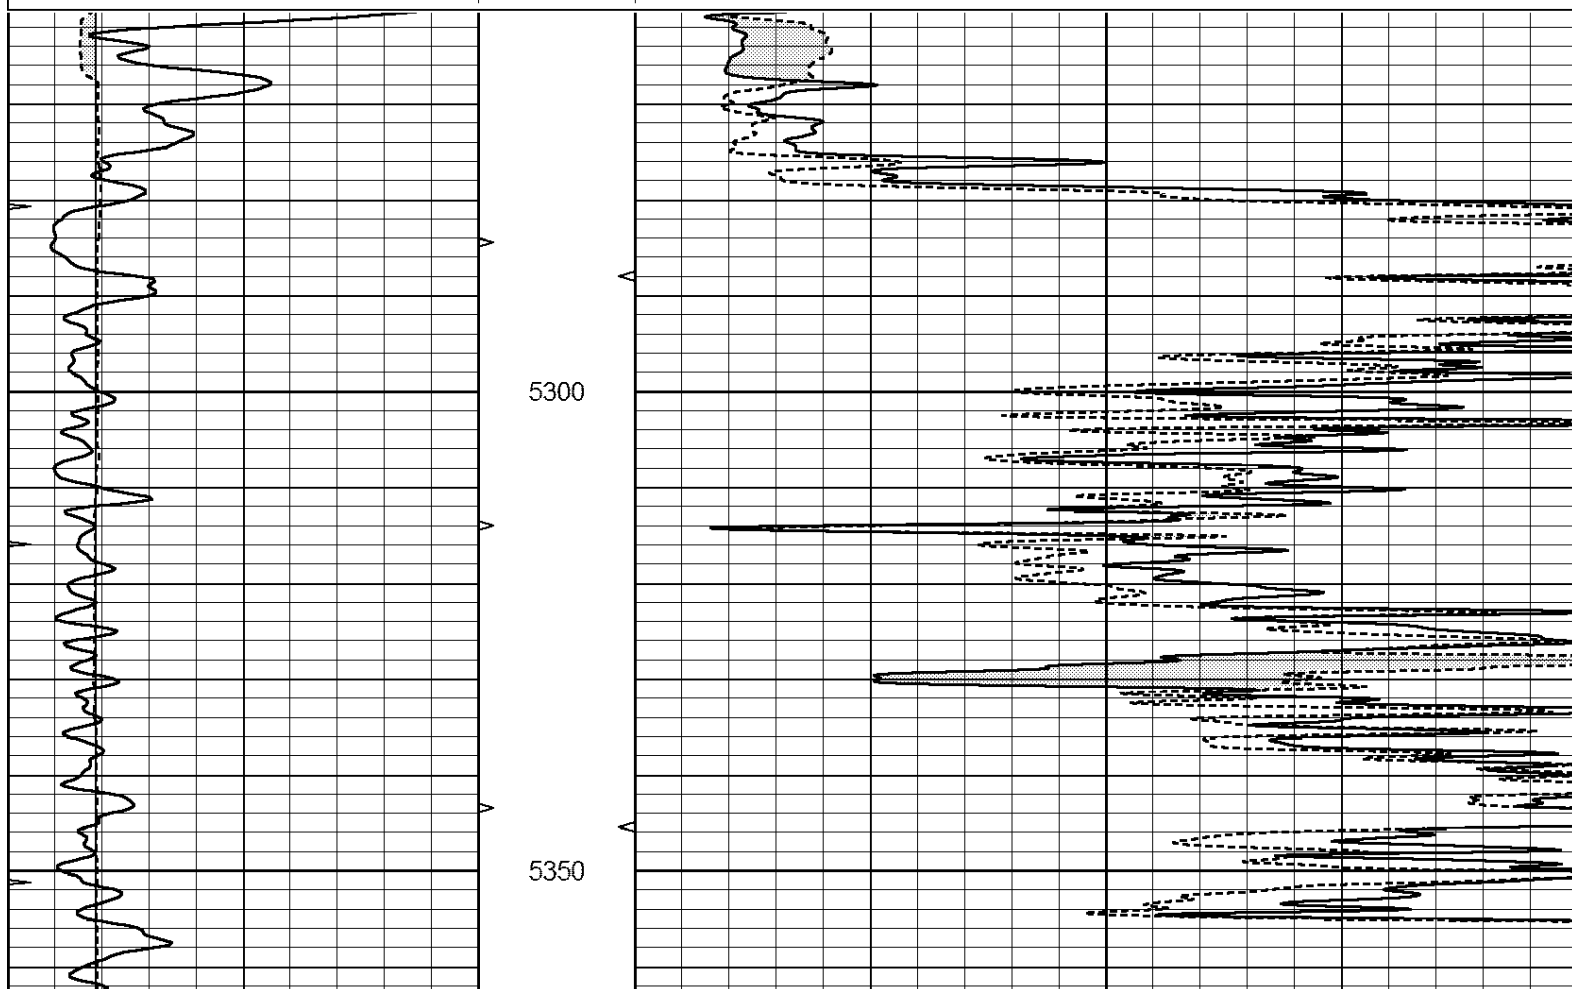

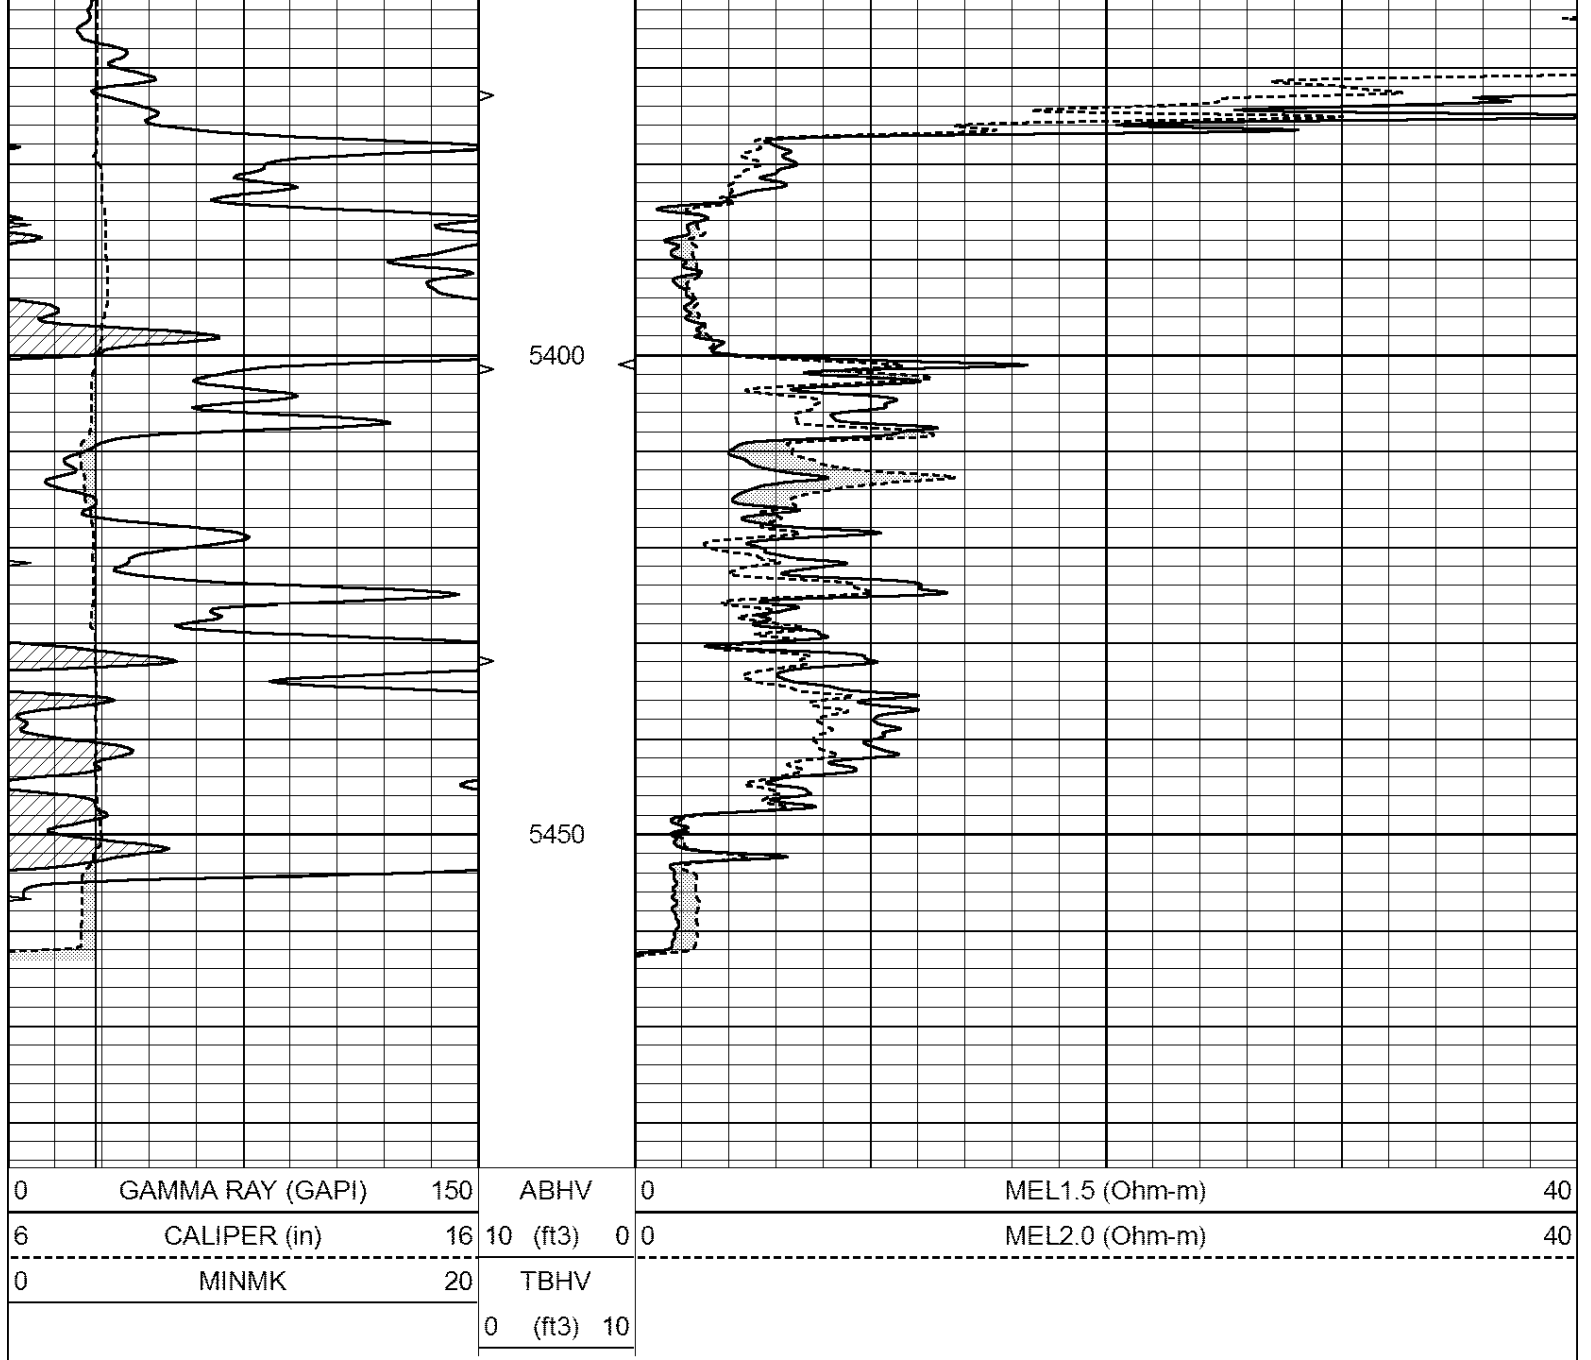

Database File: 007453pe.db		Calibration Report	
Dataset Pathname: pass6.2			
Dataset Creation: Sat Sep 24 18:33:19 2011			
MICRO Calibration Report			
Serial Number:	2		
Tool Model:	PROBE		
Performed:	Mon Sep 19 00:16:40 2011		
Caliper Calibration:	Gain=3.695	Offset=3.524	
References	Low Cal	High Cal	
Readings	7.700	14.000	
	1.130	2.835	
1.5" Calibration:	Gain=40.000	Offset=0.200	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.065	1.210	

2" Calibration:	Gain=52.000	Offset=1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.012	1.043

Gamma Ray Calibration Report

Serial Number:	GR3	
Tool Model:	OPEN	
Performed:	Mon Sep 19 00:16:36 2011	
Calibrator Value:	200.0	GAPI
Background Reading:	3.0	cps
Calibrator Reading:	186.0	cps
Sensitivity:	4.0000	GAPI/cps