



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company		VINCENT OIL CORPORATION	
Well	BLEUMER #2-33		
Field	WILDCAT		
County	FORD	State	KANSAS
Location:		API # : 15-057-20698-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 10' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 33 TWP 25S RGE 24W		Elevation	
1440' FSL & 1030' FWL		CDL/CNL/PE	
SE - SE - NW - SW		DIL/SON	
2505		K.B. 2515	
		D.F. 2513	
		G.L. 2505	
Date	10-15-10		
Run Number	TWO		
Depth Driller	5070		
Depth Logger	5075		
Bottom Logged Interval	5057		
Top Log Interval	3950		
Casing Driller	8 5/8" @ 393		
Casing Logger	393		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3300 PPM	
Density / Viscosity	9.3/47		
pH / Fluid Loss	9.5/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.75 @ 81F		
Rmf @ Meas. Temp	.56 @ 81F		
Rmc @ Meas. Temp	.90 @ 81F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.48 @ 126F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	126F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JEFF GRONEMEG		
Witnessed By	JIM HALL		


<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments



THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
WRIGHT, KS - 3 MILES NORTH TO GARNETT RD - 4 MILES WEST TO RD 114
1/3 MILE NORTH - EAST INTO


Charted by:		Depth in Feet scaled 1:2.15				
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
6	CALIPER (in)	16	TBHV			
			0 (ft3)	10		

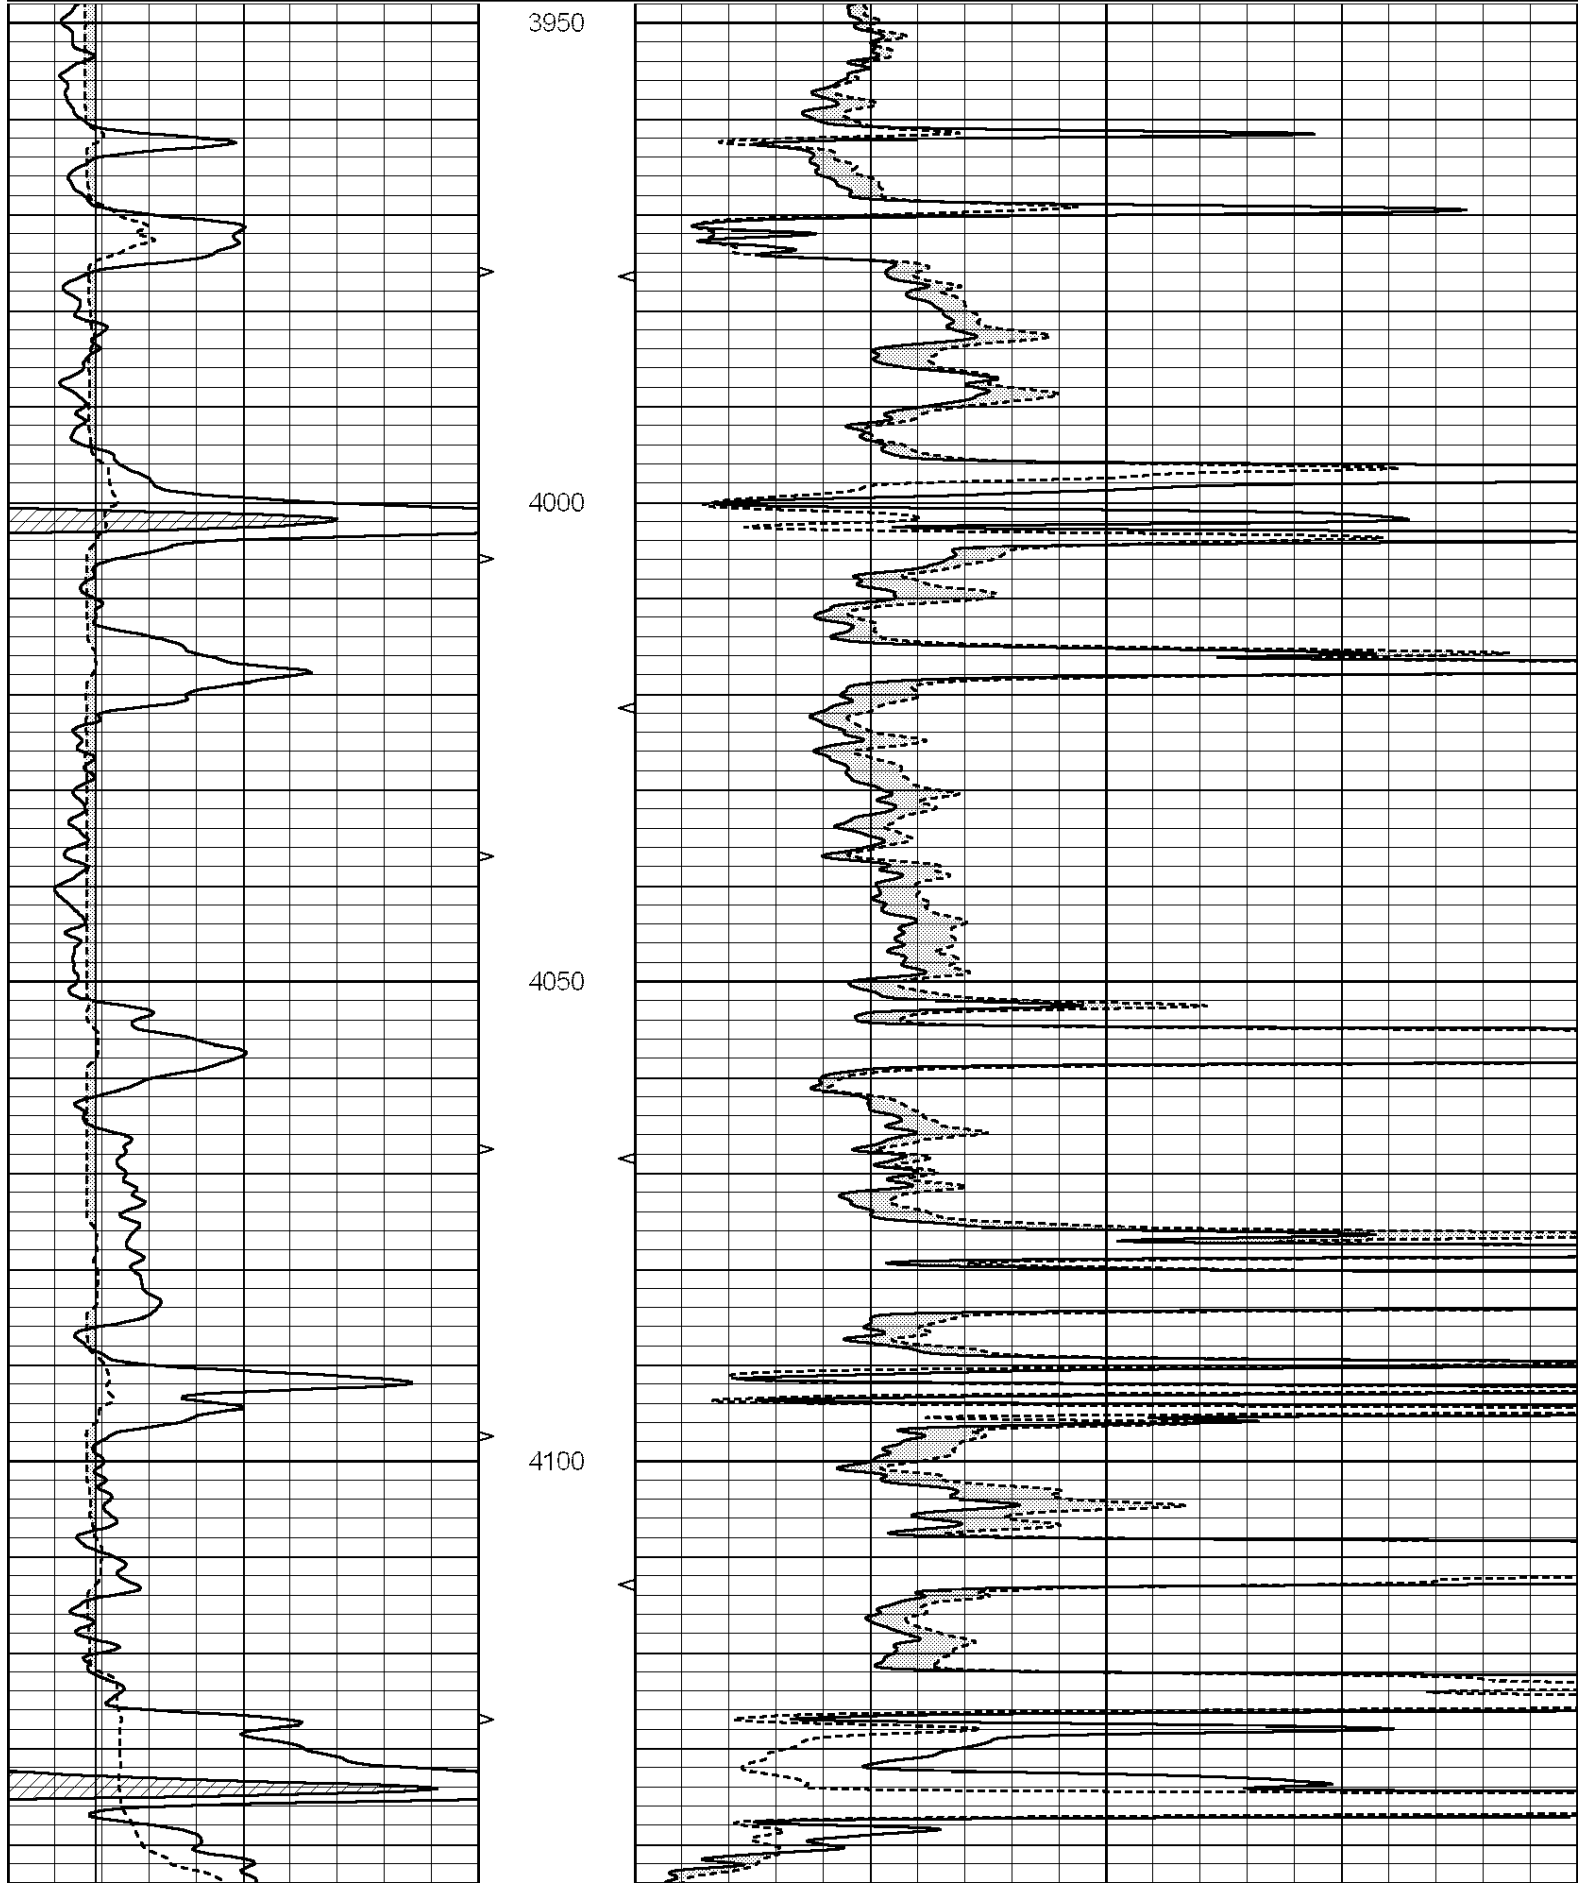

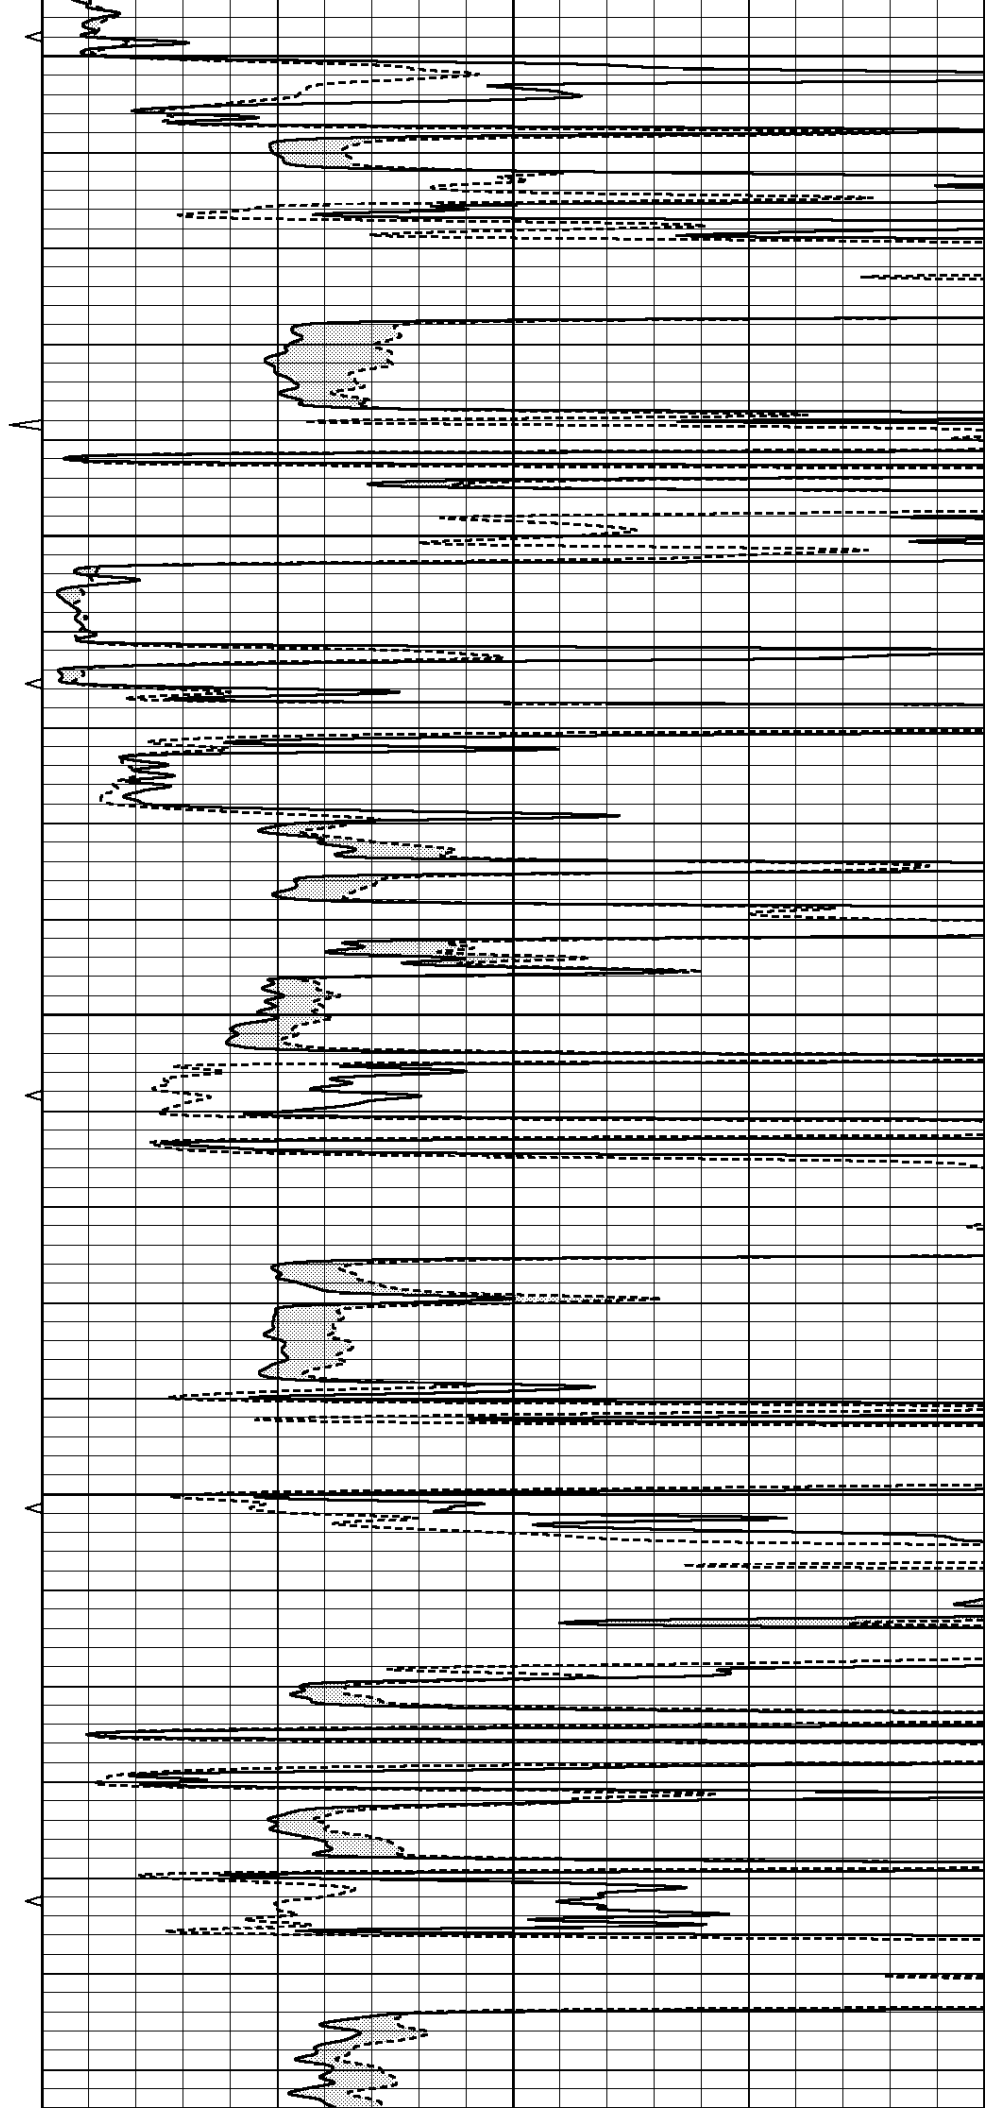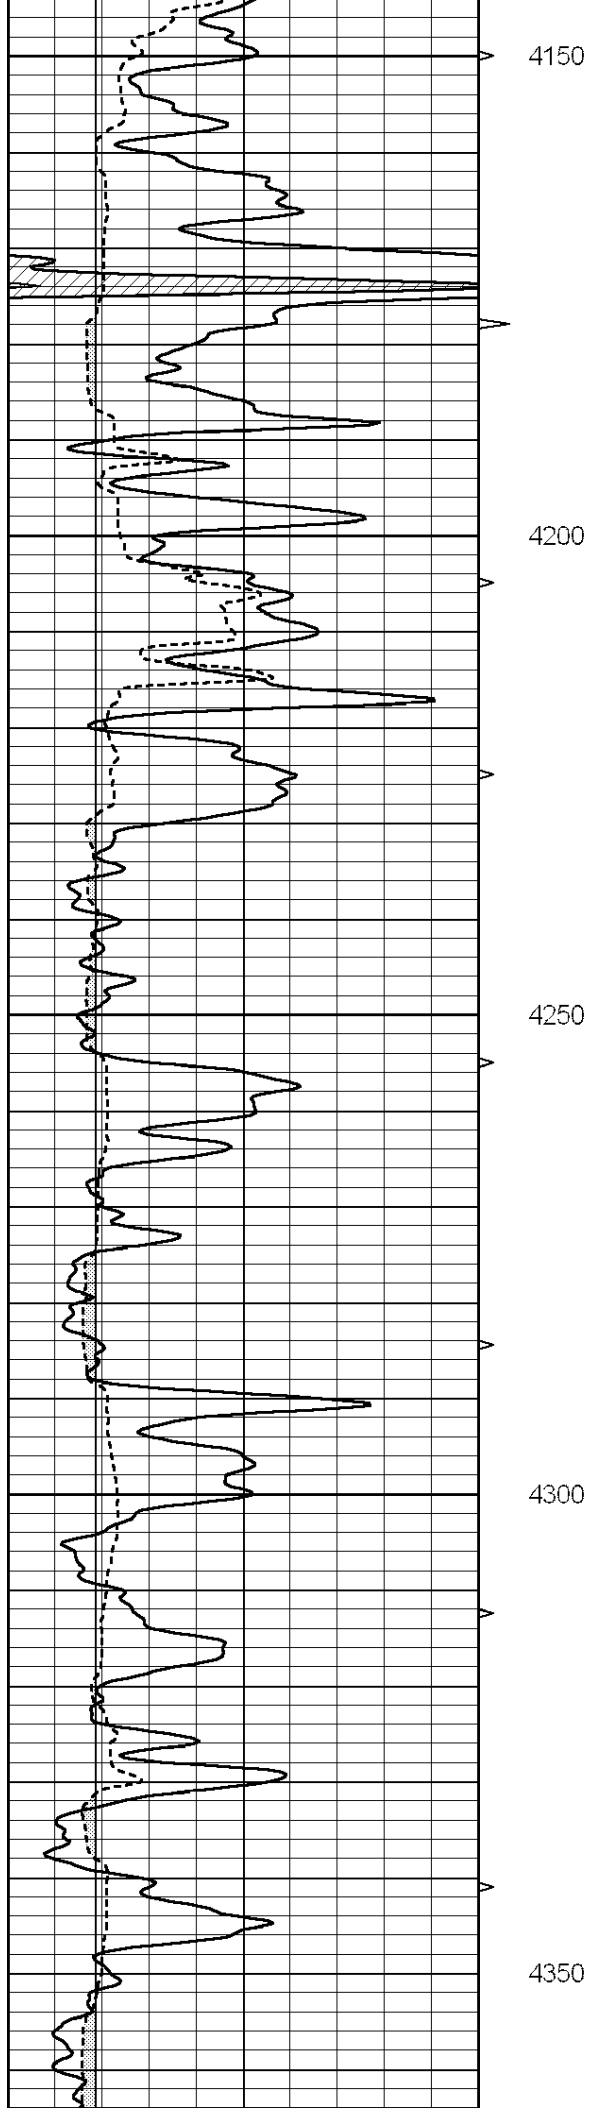

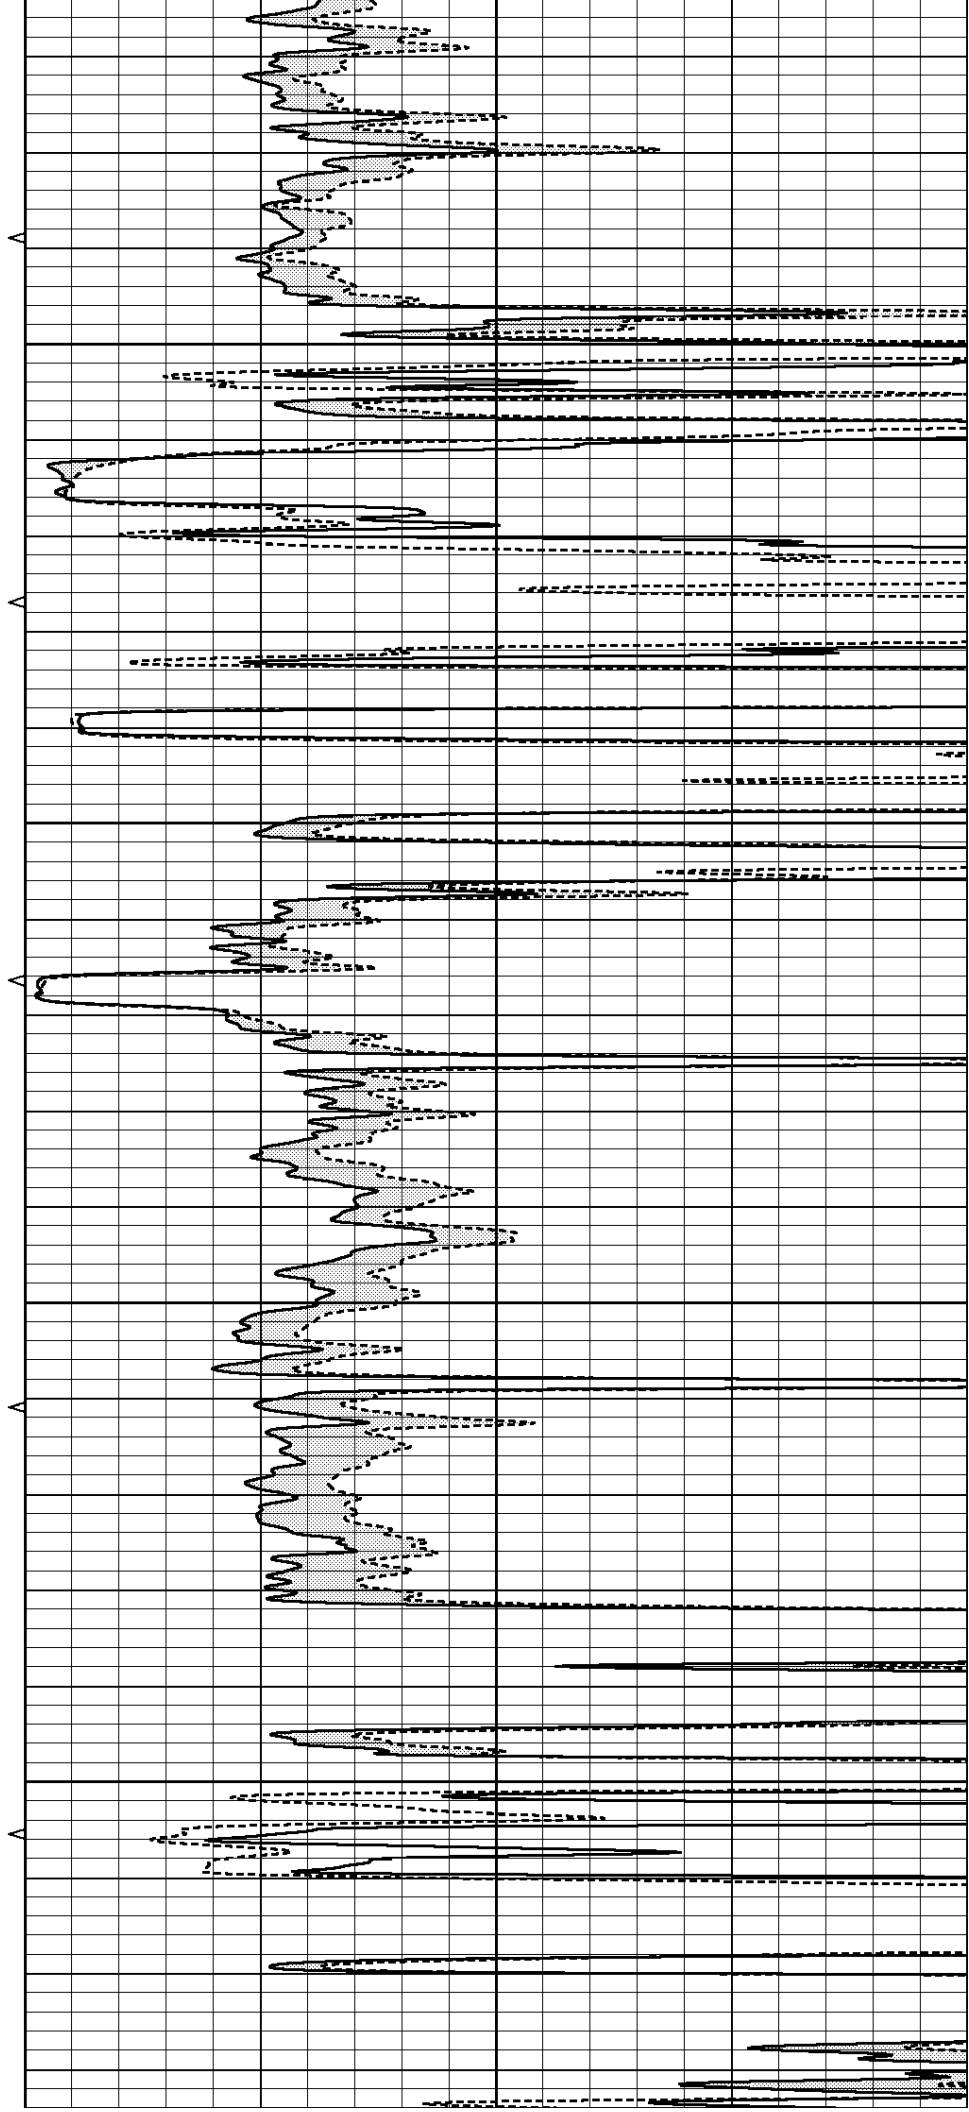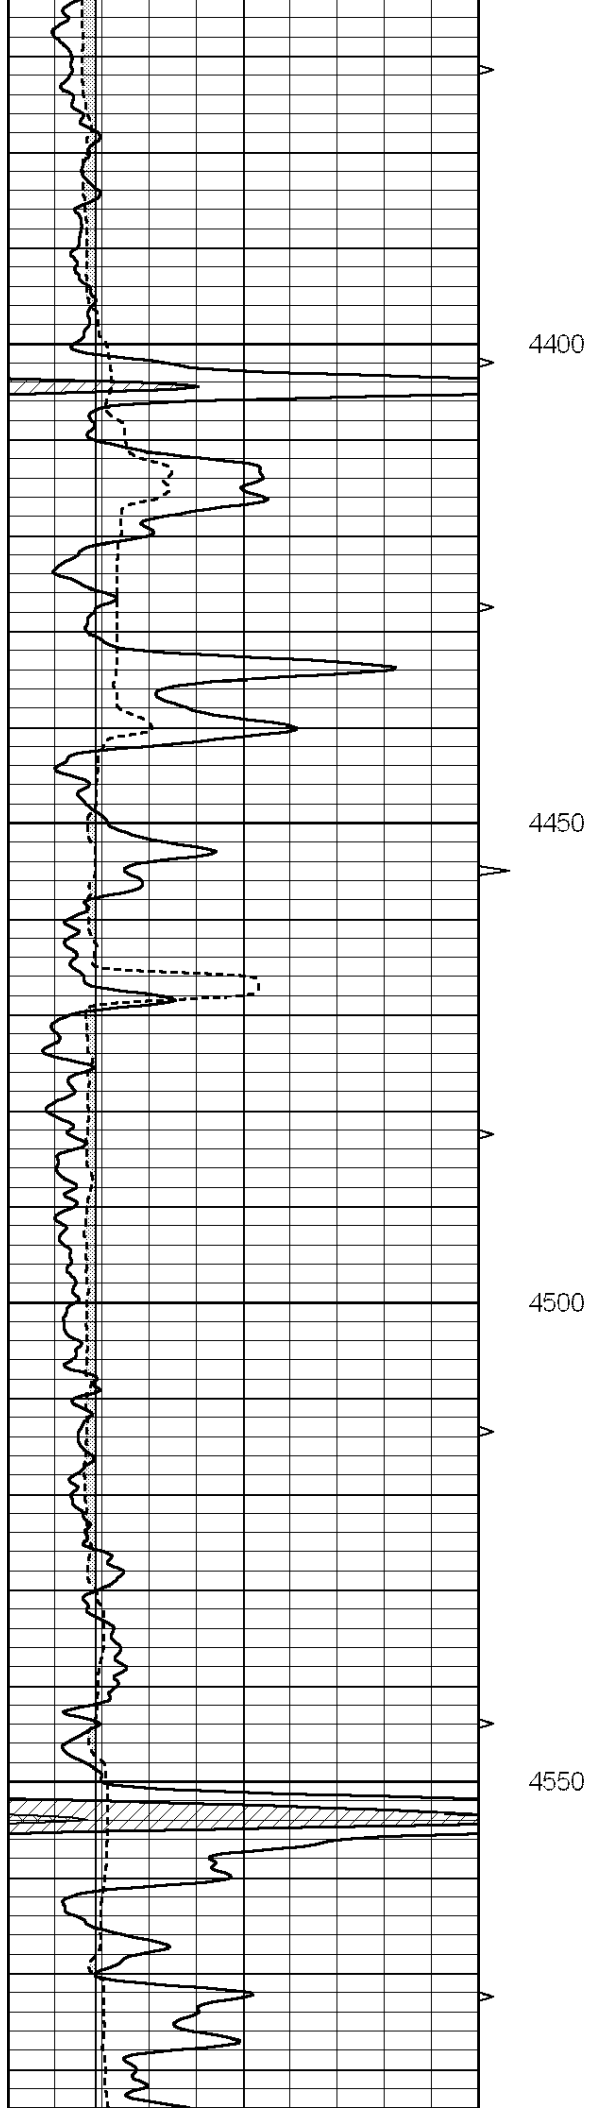

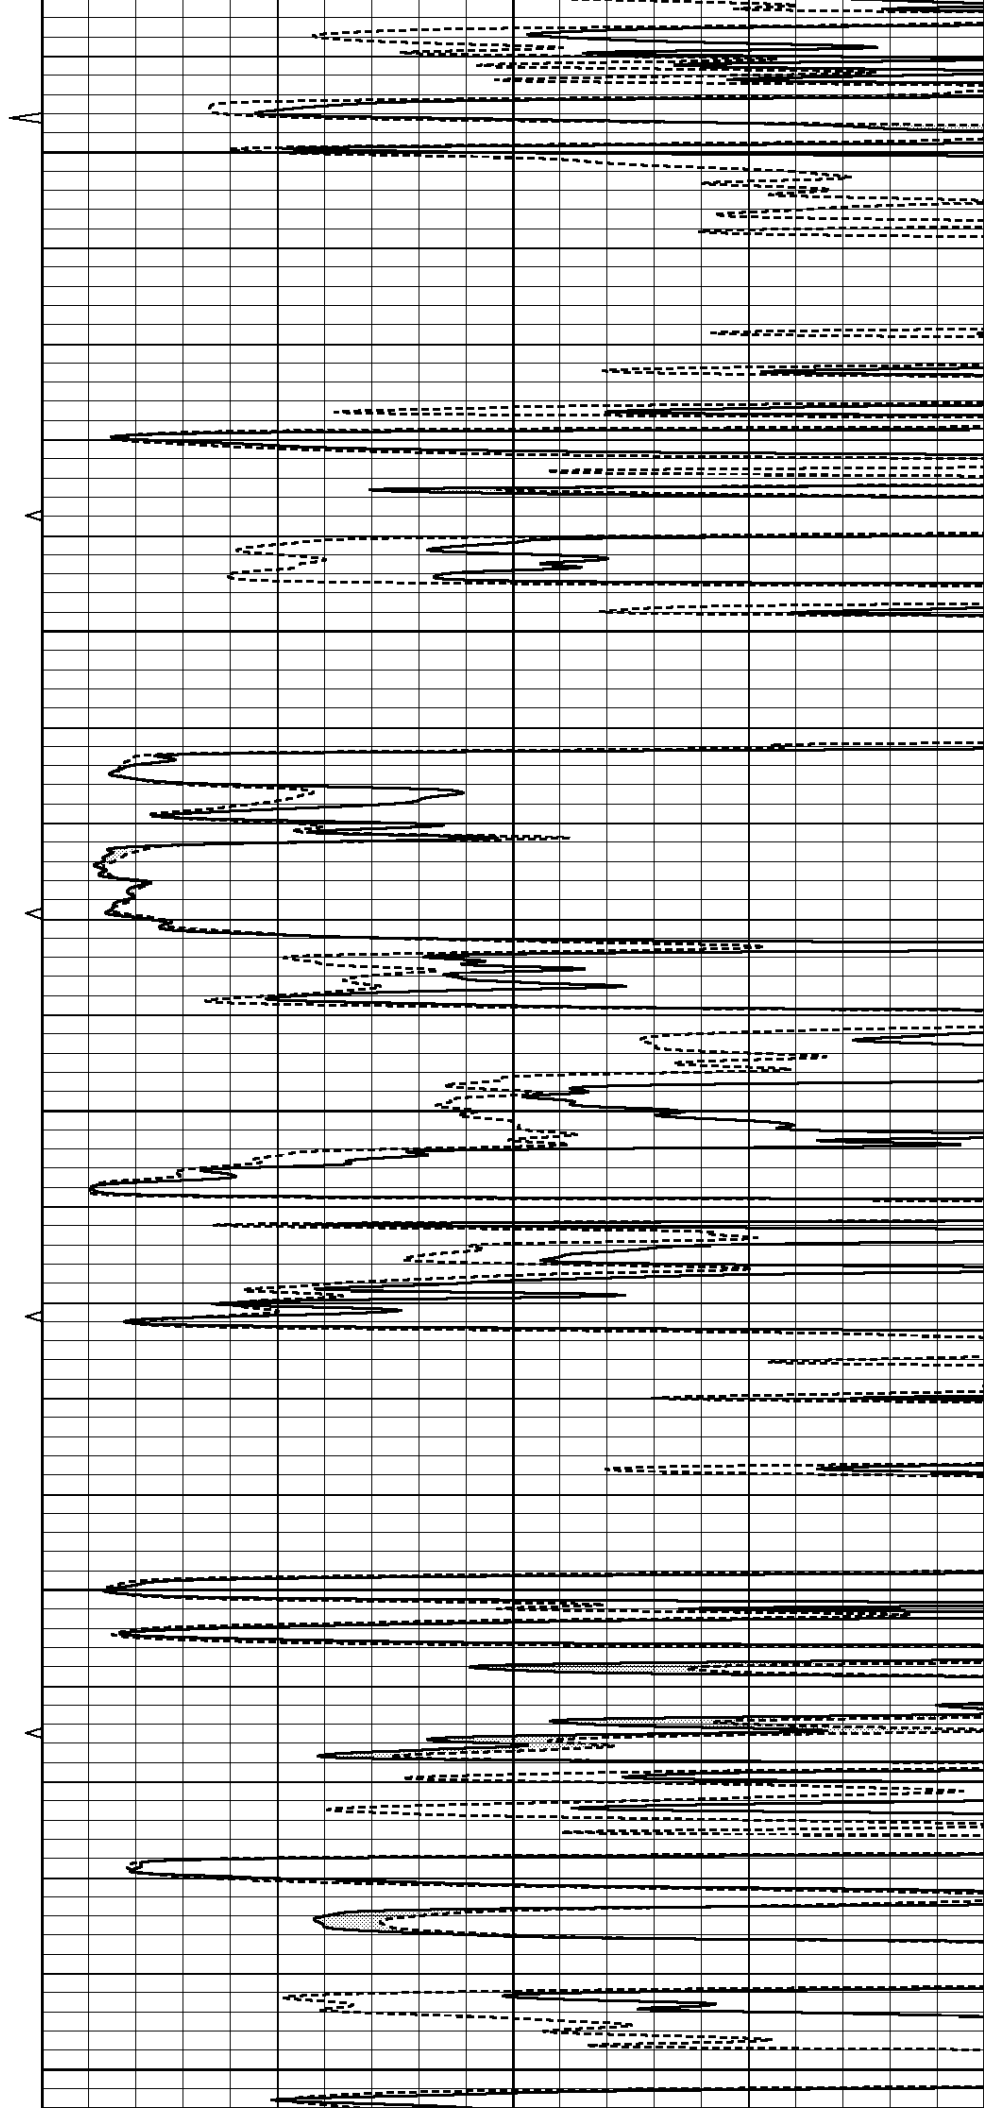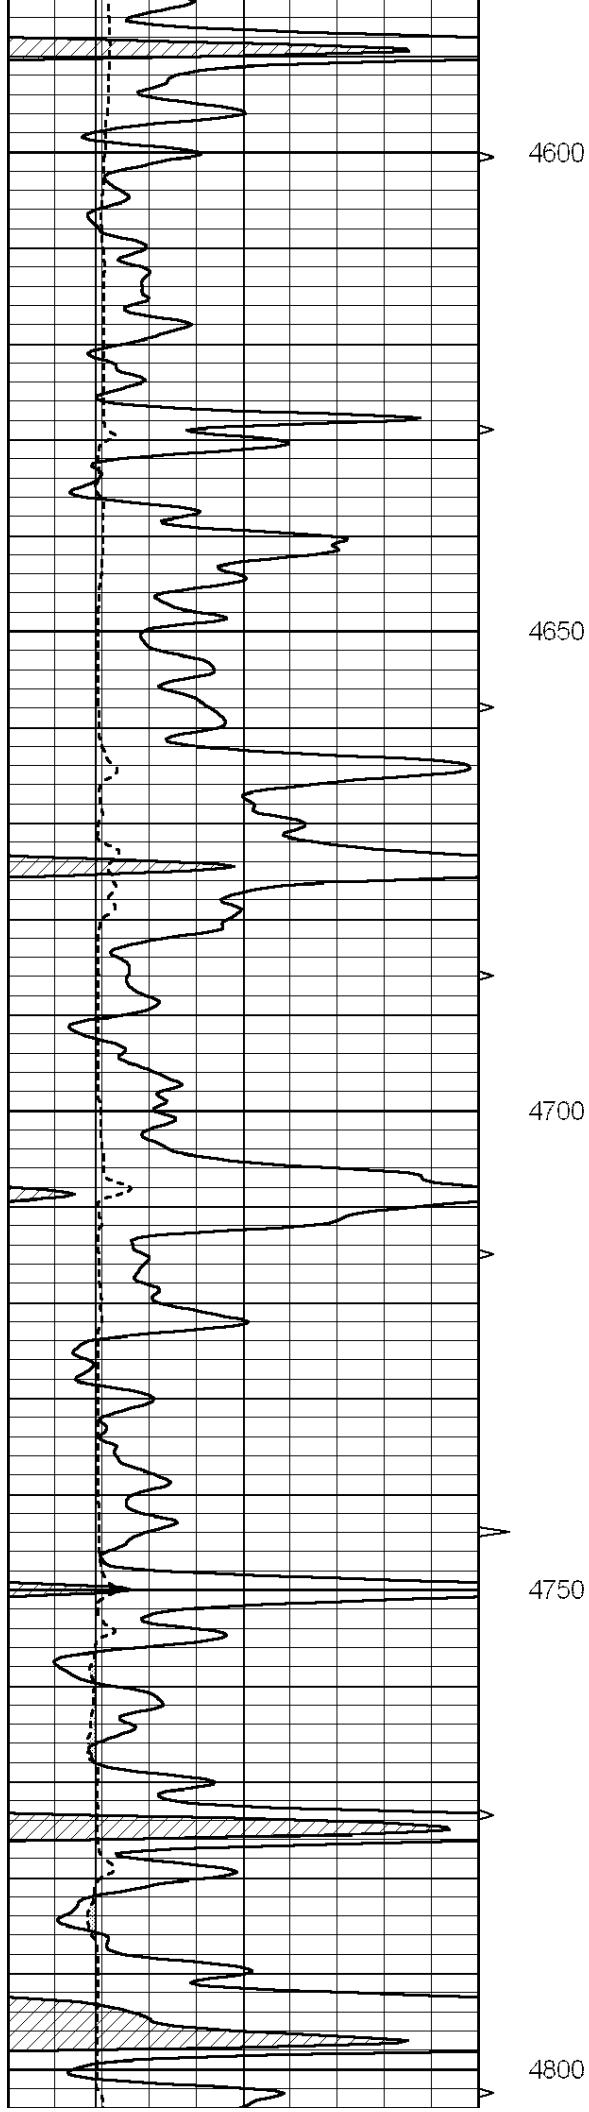

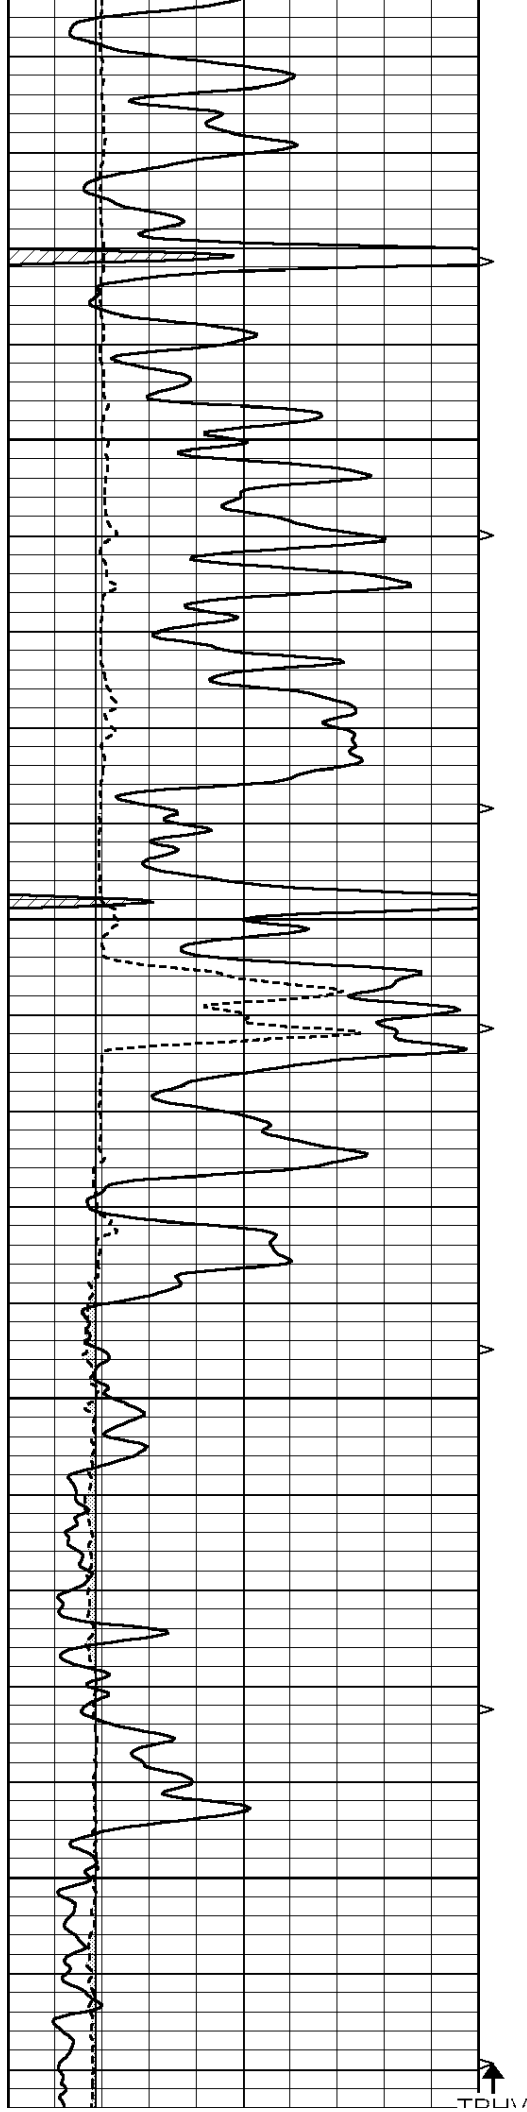



4850

4900

4950

ABHV
4.5" CSG
5000

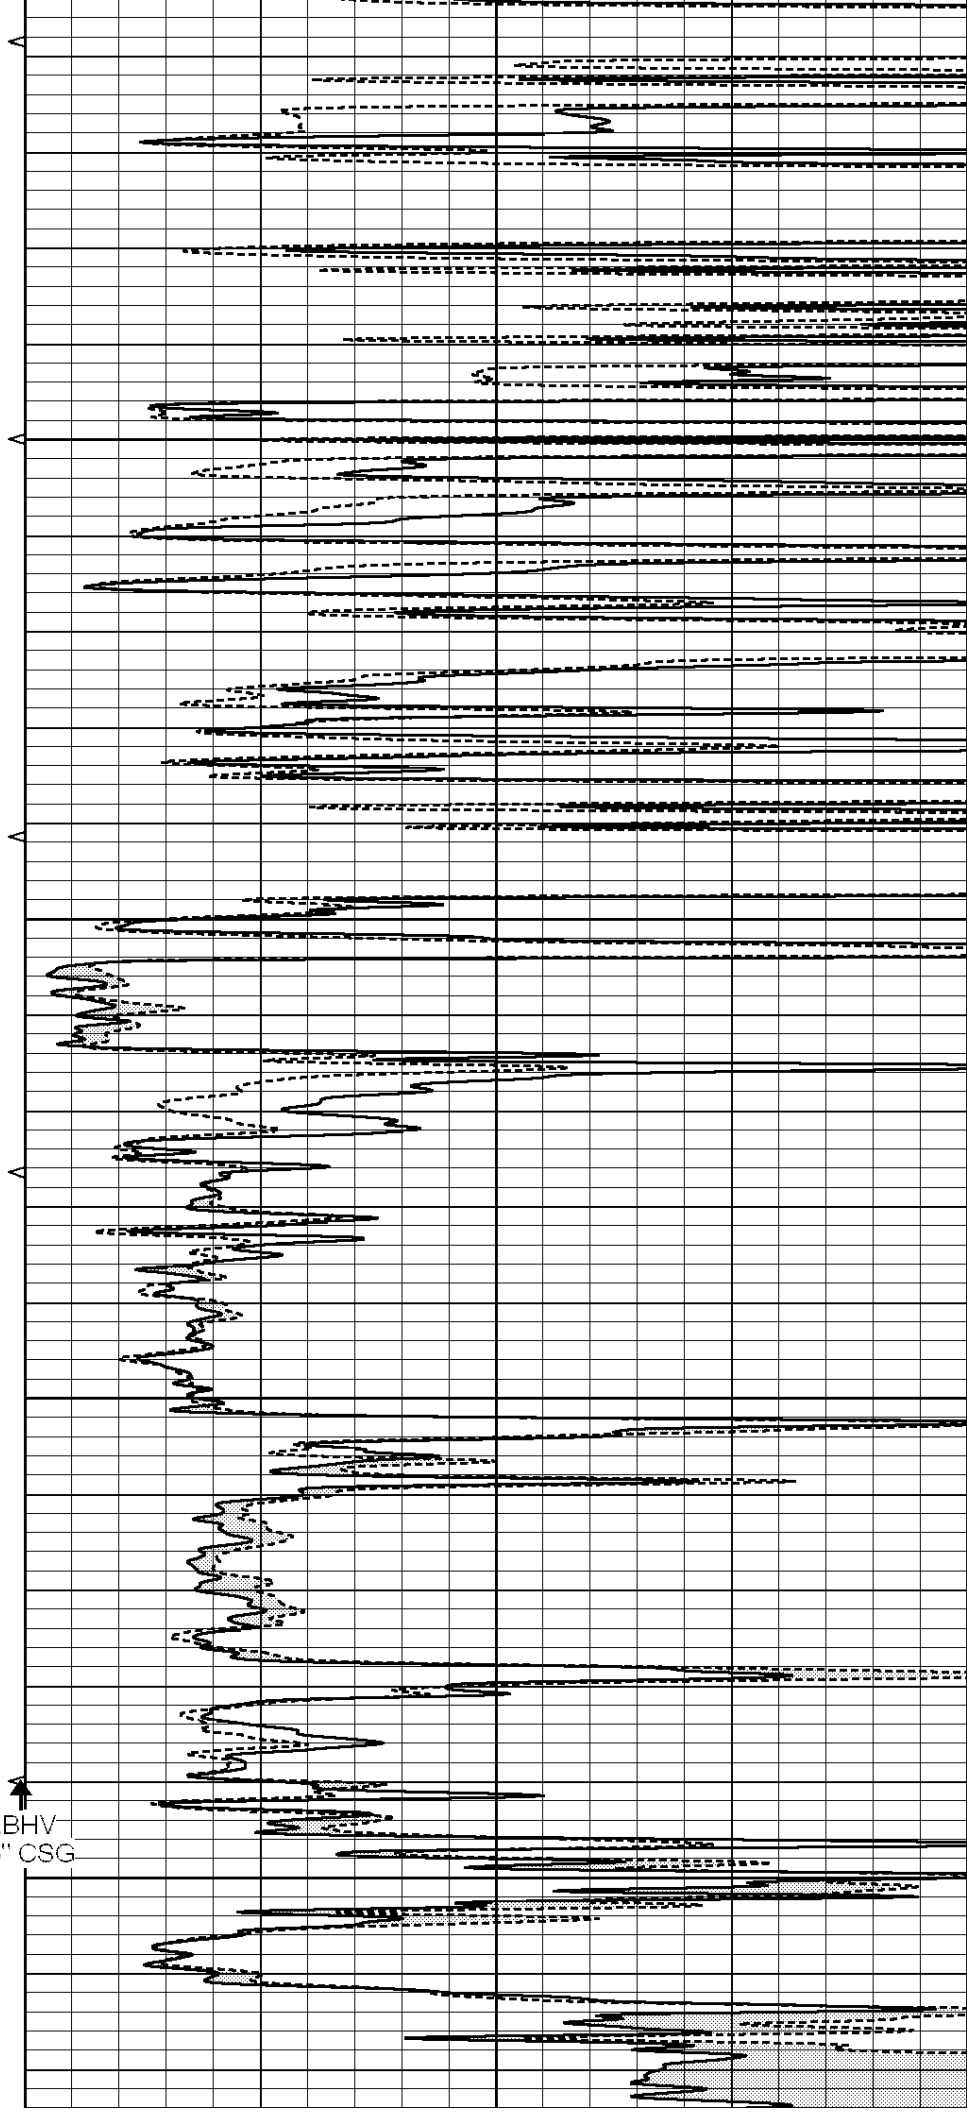

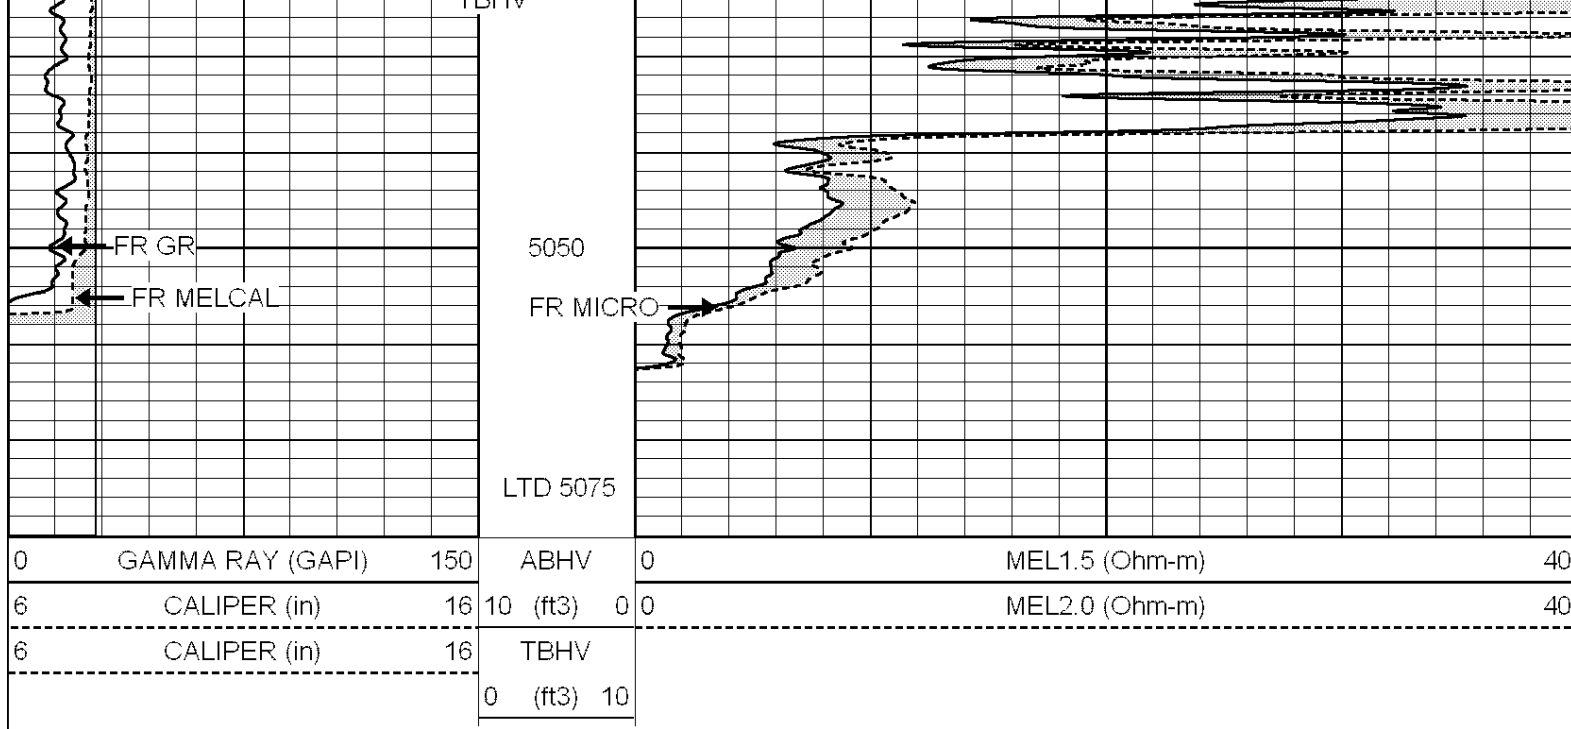



SUPERIOR


Hays,


Kansas

REPEAT SECTION

Database File: 005934pe.db
 Dataset Pathname: pass5.2
 Presentation Format: _micro
 Dataset Creation: Thu Oct 14 02:43:45 2010
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

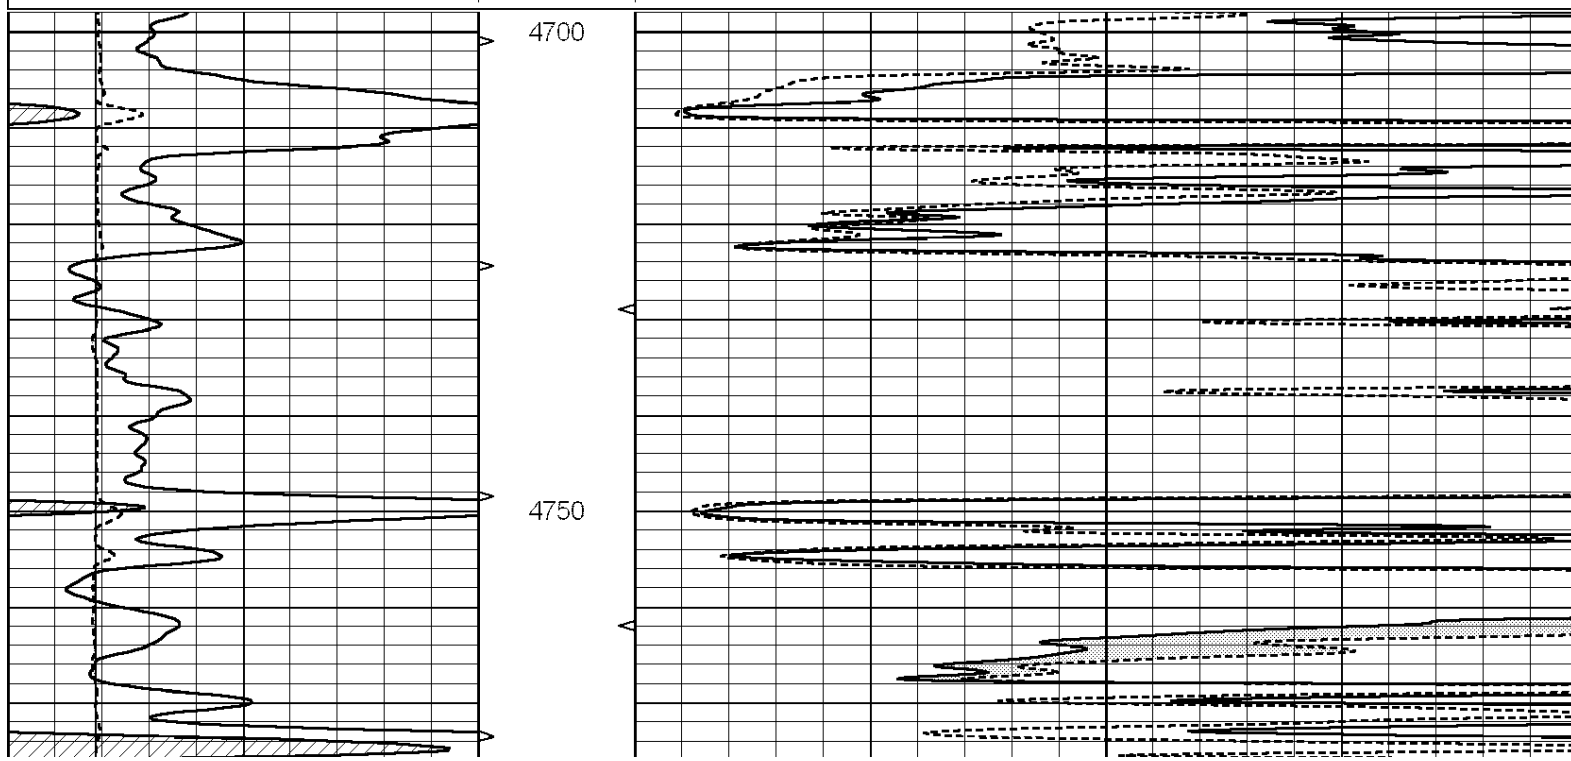

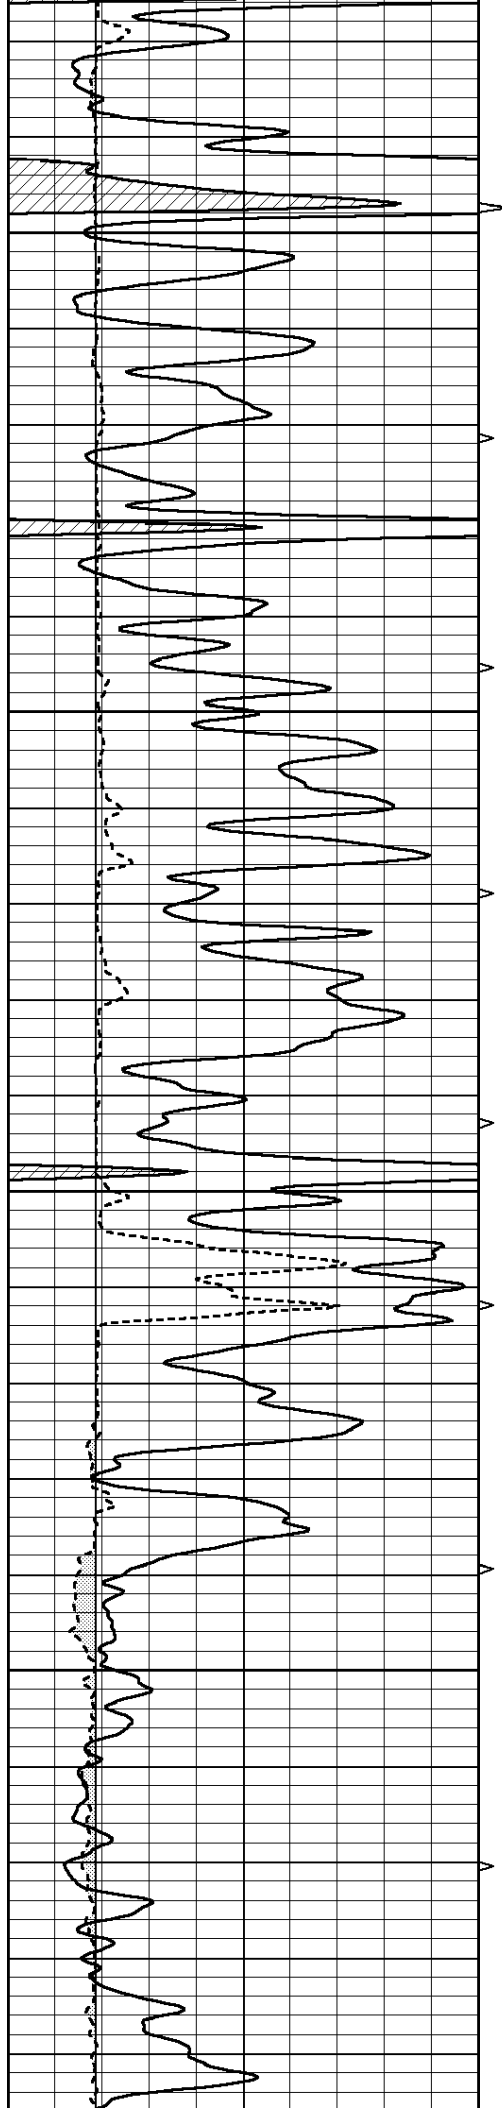



4800

4850

4900

4950

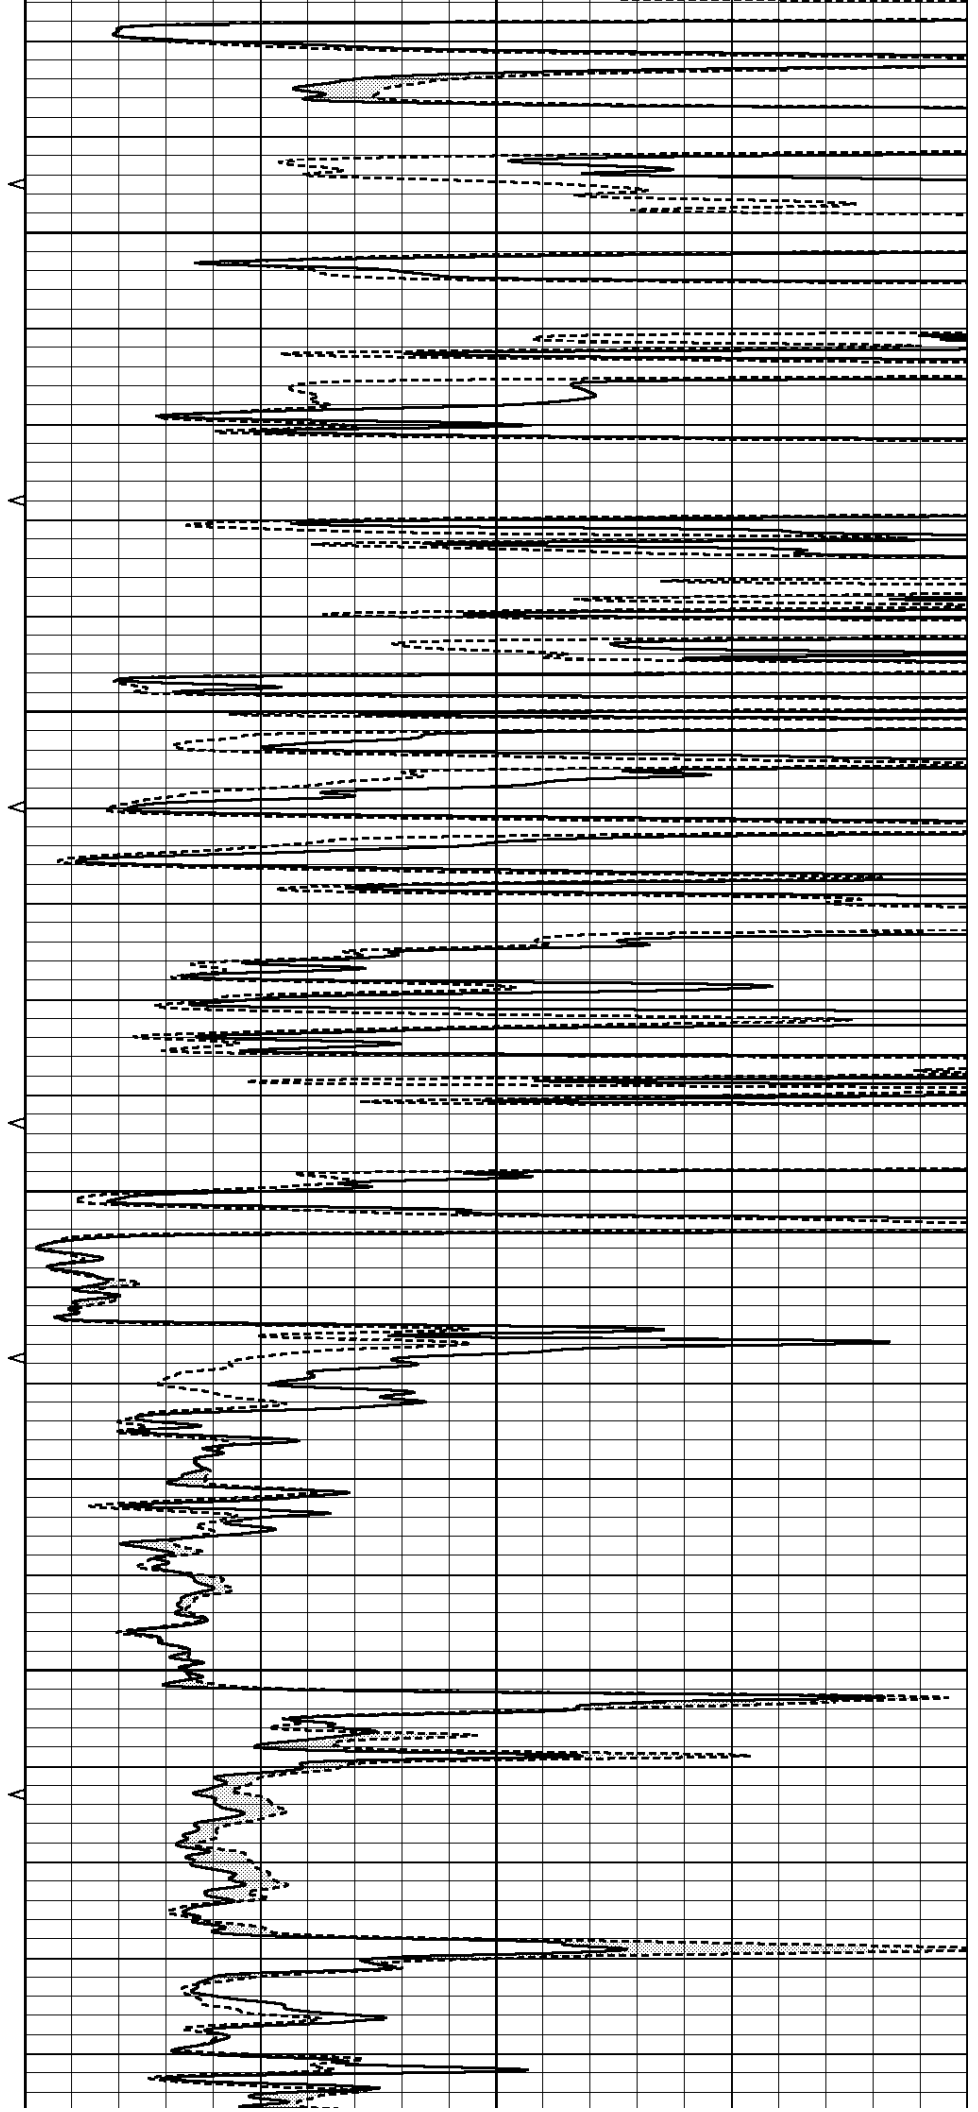

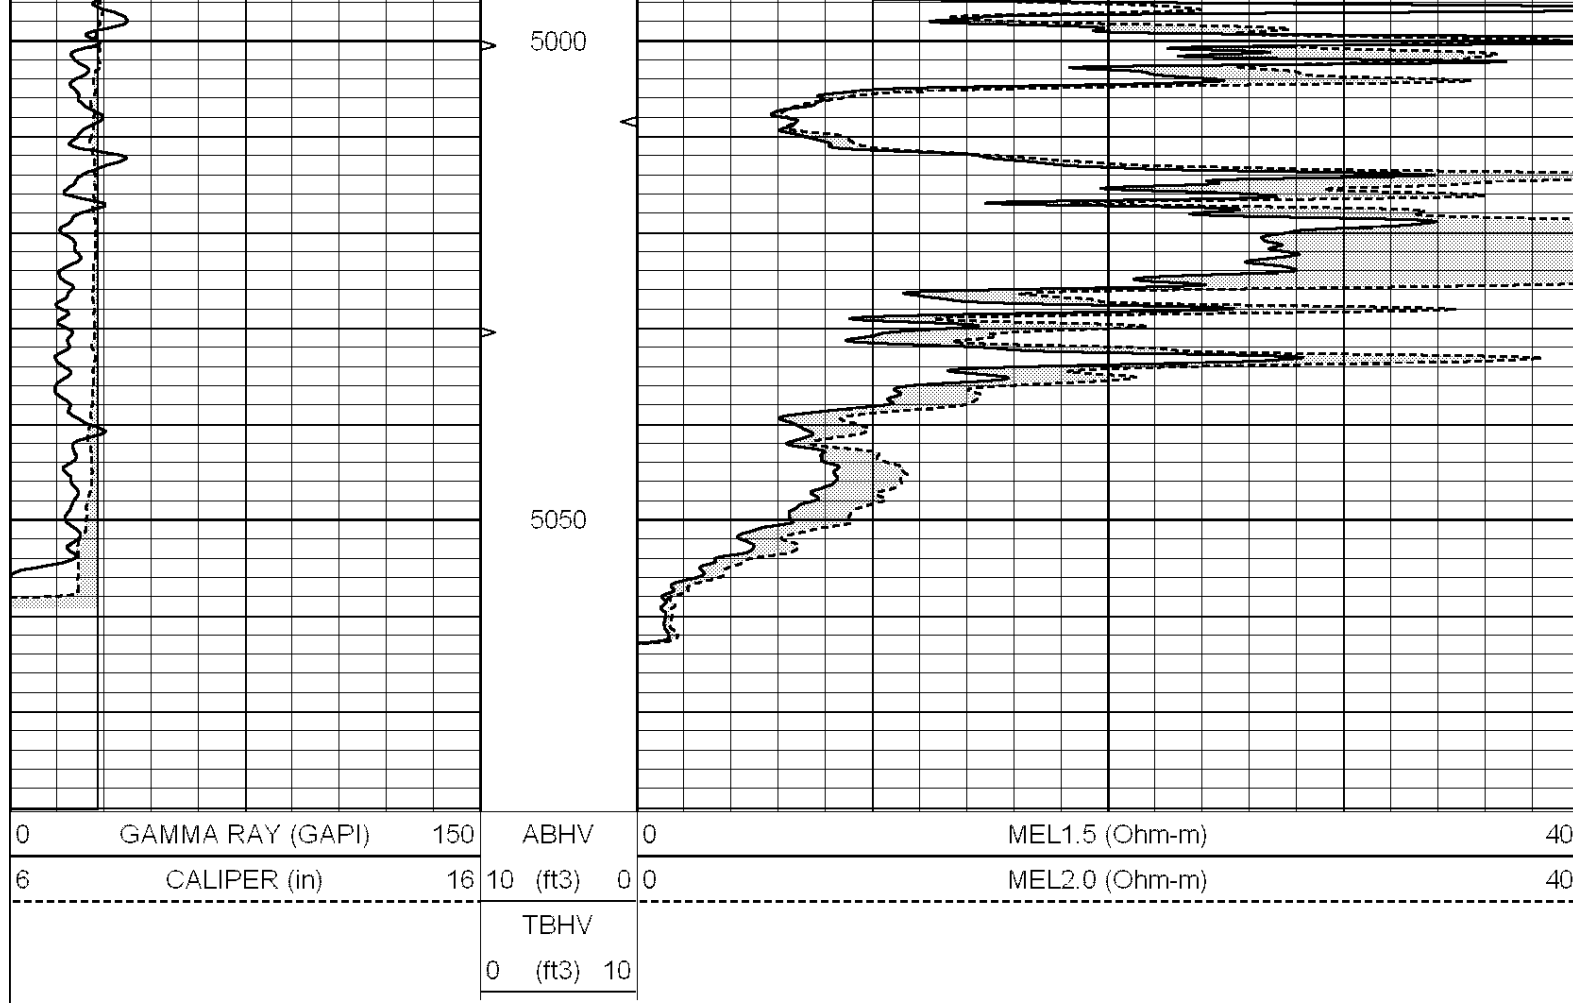

Calibration Report

Database File: 005934pe.db
 Dataset Pathname: pass6.3
 Dataset Creation: Thu Oct 14 03:12:01 2010

MICRO Calibration Report

Serial Number: MICRO3
 Tool Model: PROBE
 Performed: Mon Oct 11 05:03:14 2010

Caliper Calibration: Gain=3.841 Offset=-9.642
 Low Cal High Cal
 References 8.000 14.000
 Readings 4.333 5.895

1.5" Calibration: Gain=291.940 Offset=-2.025
 Low Cal High Cal
 References 0.000 20.000
 Readings 0.006 0.223

2" Calibration: Gain=290.050 Offset=-3.299
 Low Cal High Cal
 References 0.000 20.000
 Readings 0.009 0.177

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Wed Jul 14 14:14:30 2010

Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5335	GAPI/cps