



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-145-21,598-00-00	
Company	F. G. Holl Co.	
Well	Motley No. 1-5	
Field	Rutherford Extension	
County	Pawnee	State
		Kansas
Location	35' W of C N/2 N/2 NE 330' FNL & 1355' FEL	
Sec: 5	Twp: 20 S	Rge: 16 W
Permanent Datum	Ground Level	Elevation 2039
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	
		Other Services CNL/CDL DIL/BHCS
		Elevation K.B. 2047 D.F. 2039 G.L. 2039

Date	11/16/2009
Run Number	Two
Depth Driller	4405
Depth Logger	4404
Bottom Logged Interval	4403
Top Log Interval	1950
Casing Driller	8.625 @ 976
Casing Logger	972
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	5.600
Density / Viscosity	9.2 46
pH / Fluid Loss	10.5 8.0
Source of Sample	Flowline
Rm @ Meas. Temp	.52 @ 65
Rmf @ Meas. Temp	.39 @ 65
Rmc @ Meas. Temp	.70 @ 65
Source of Rmf / Rmc	Charts
Rm @ BHT	.28 @ 122
Operating Rig Time	6 1/2 Hours
Max Rec. Temp. F	122
Equipment Number	4
Location	Hays
Recorded By	K. Bange
Witnessed By	Rene Husted

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Albert BT, S to 10th st, W to CR370, 1 S, 1 W, S into





High Resolution


Database File: c:\warrior\data\fg holl_motley no. 1-5\fg holl111609hd.db
 Dataset Pathname: dil/fghires
 Presentation Format: micro
 Dataset Creation: Mon Nov 16 13:56:13 2009
 Charted by: Depth in Feet scaled 1:120

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

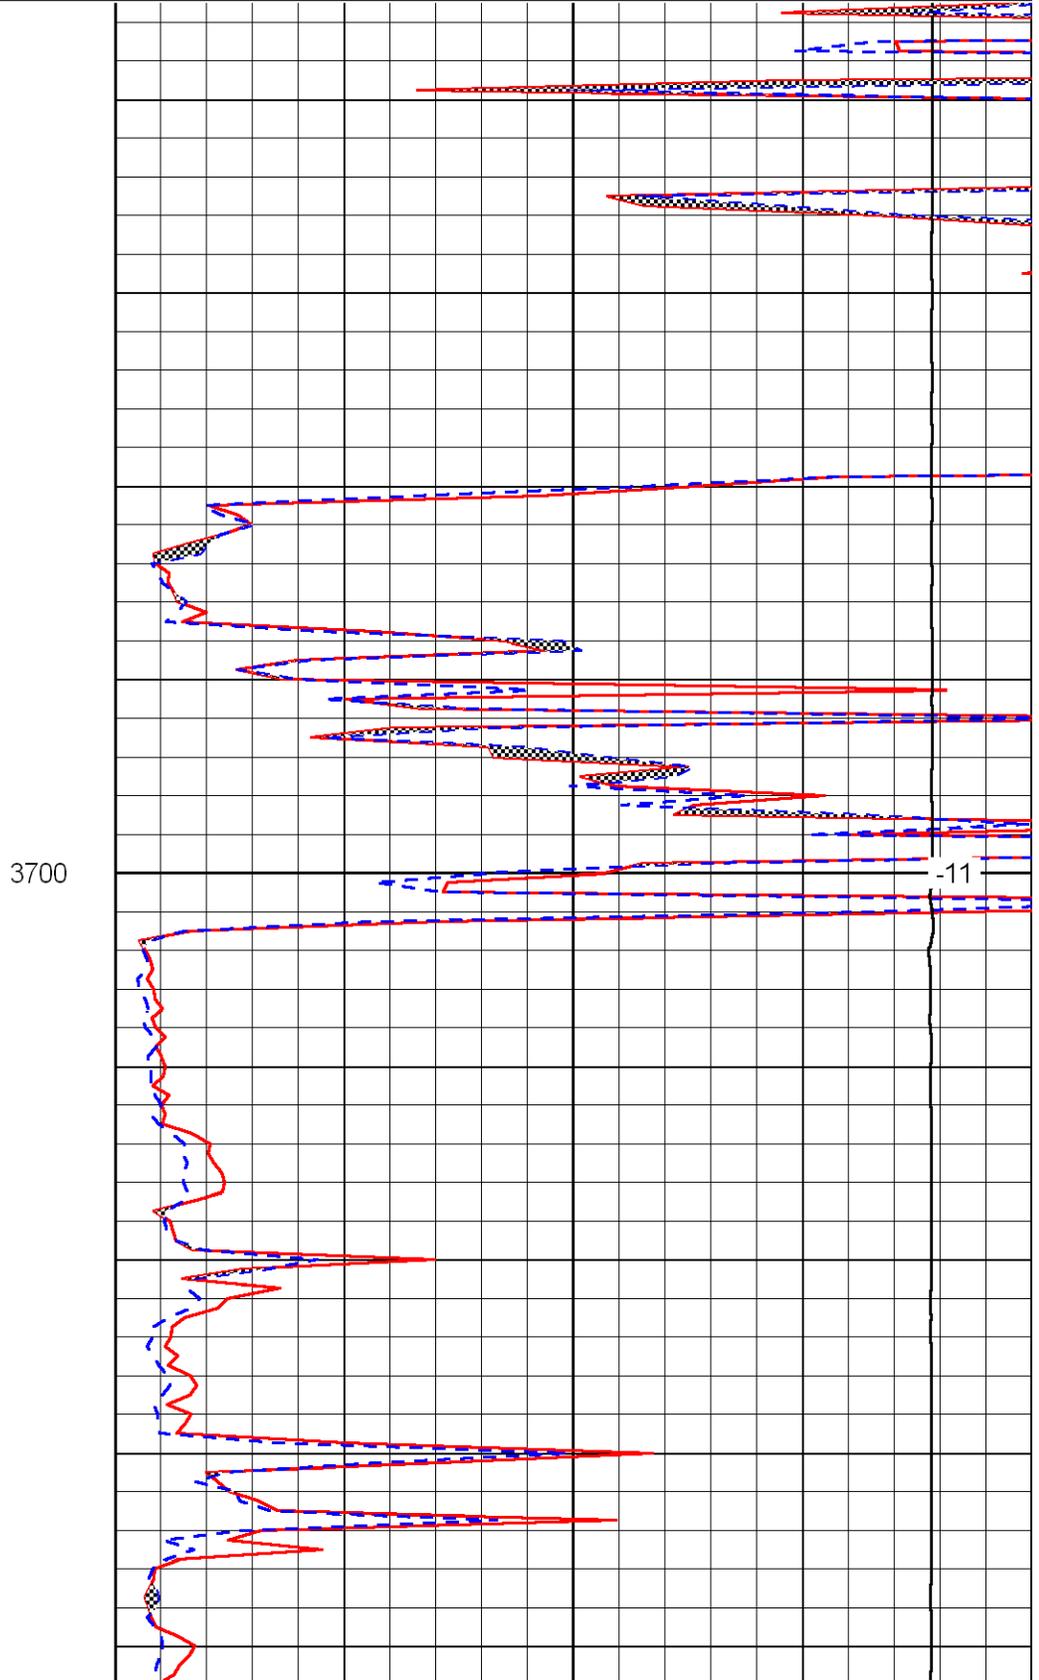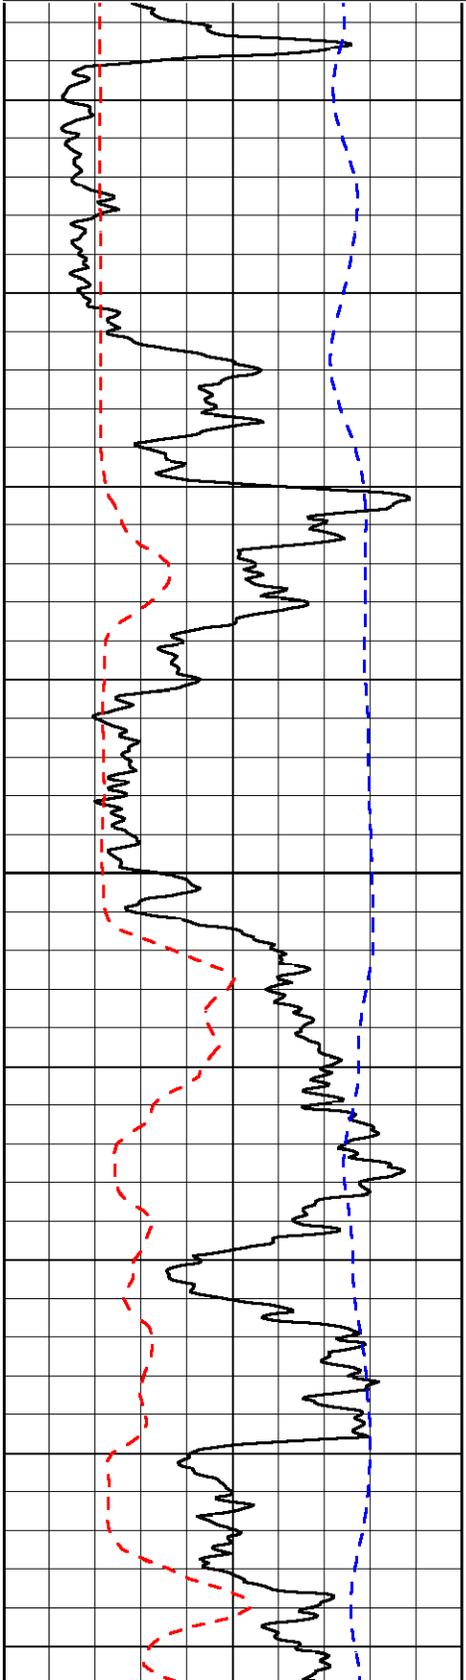


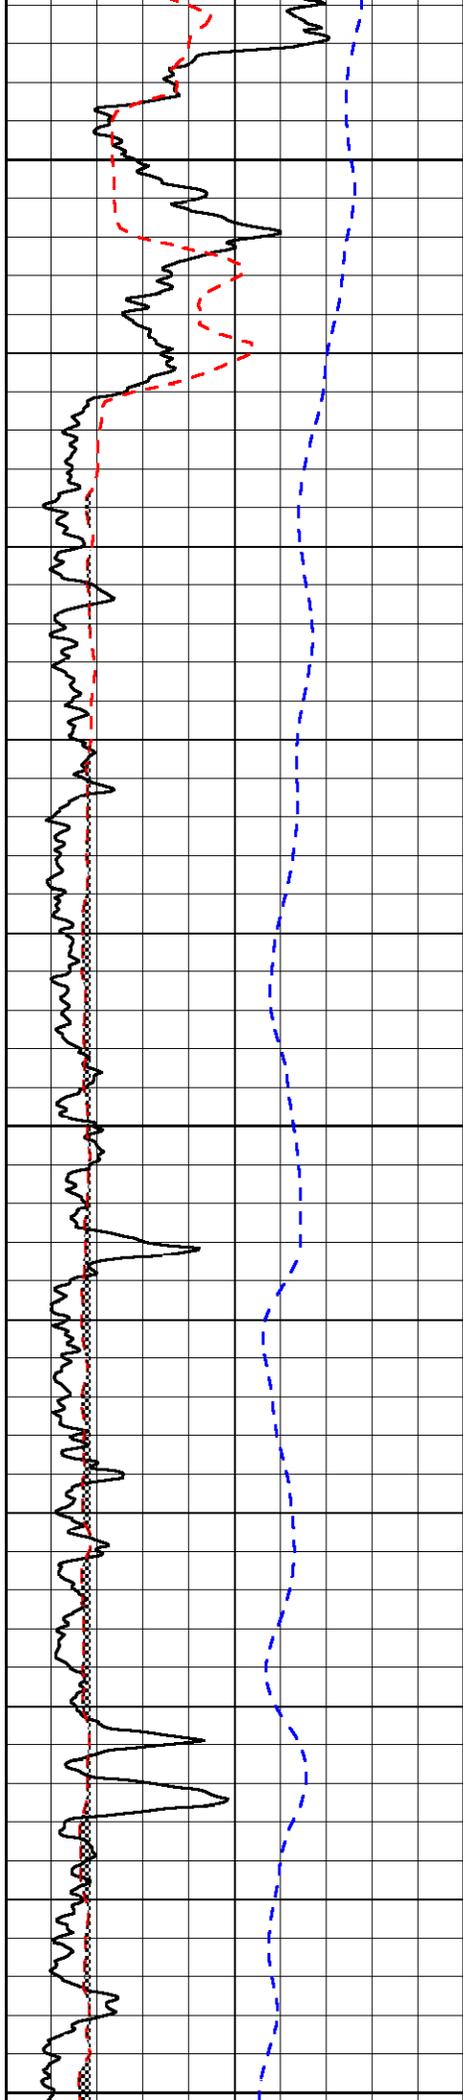

3750

3800

3850

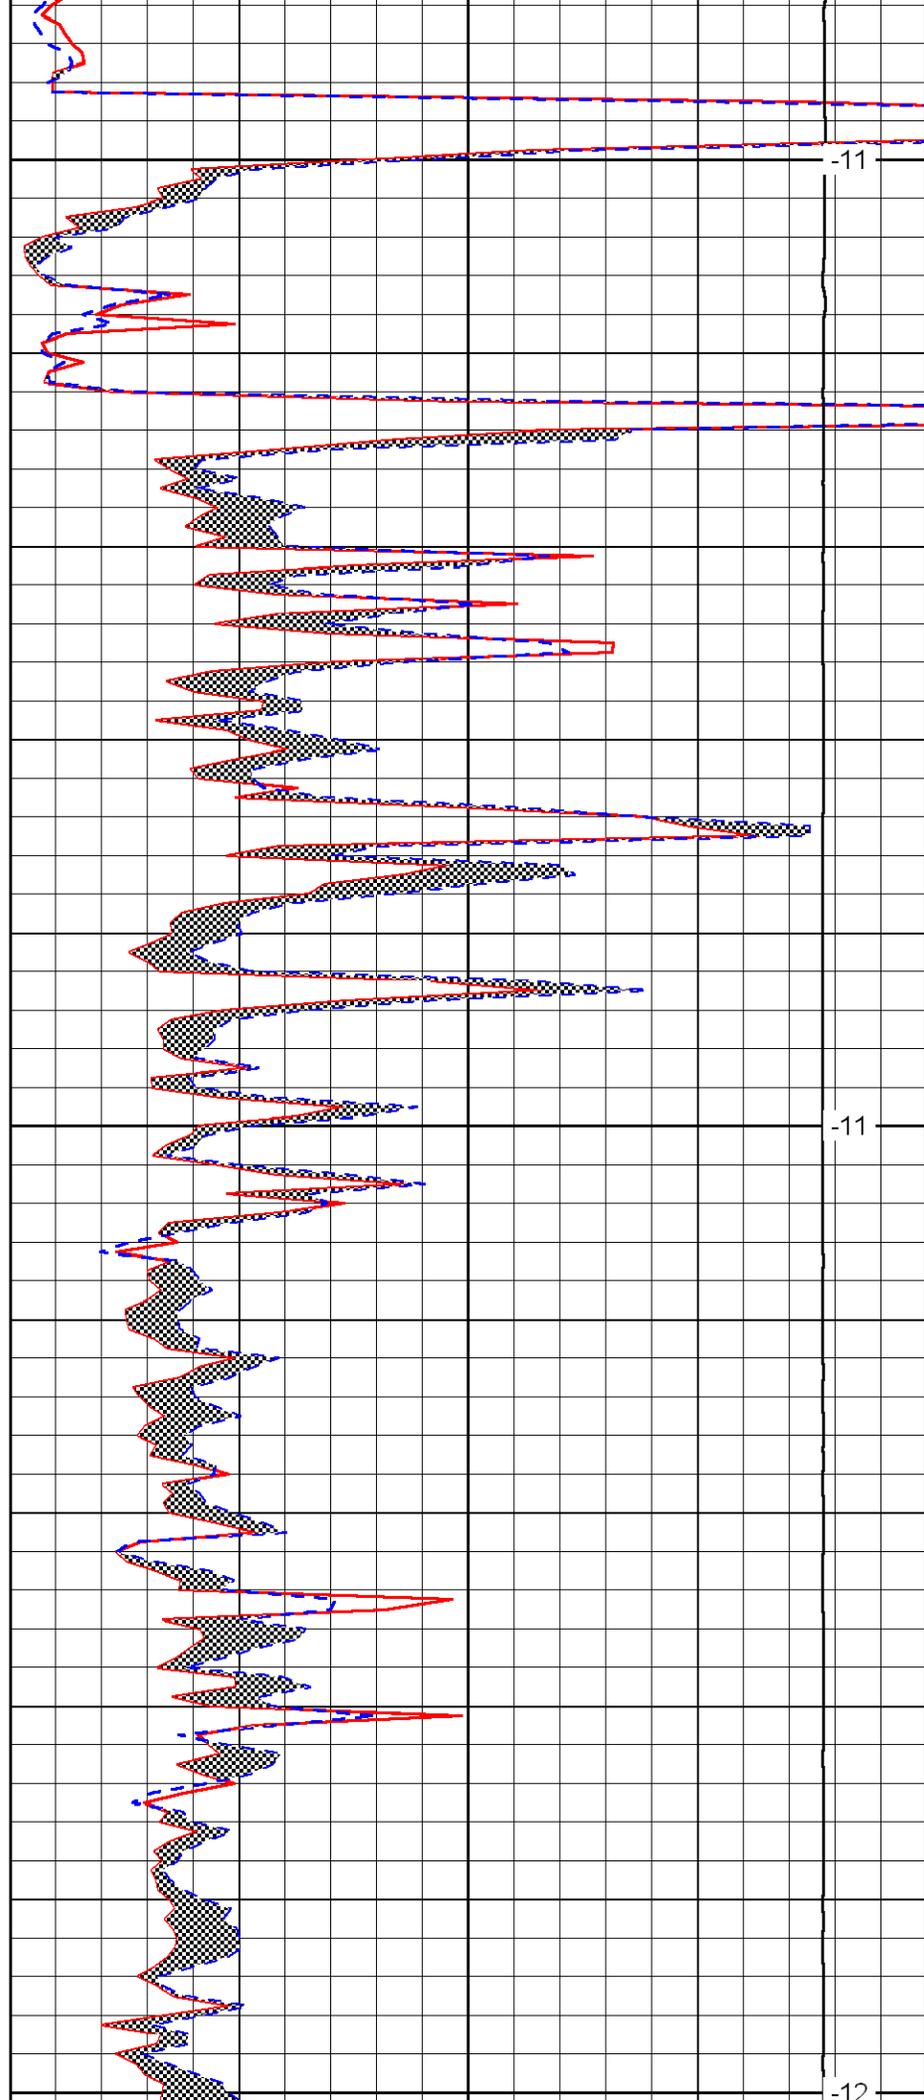

-11



-11


-12

3880

3900


3950

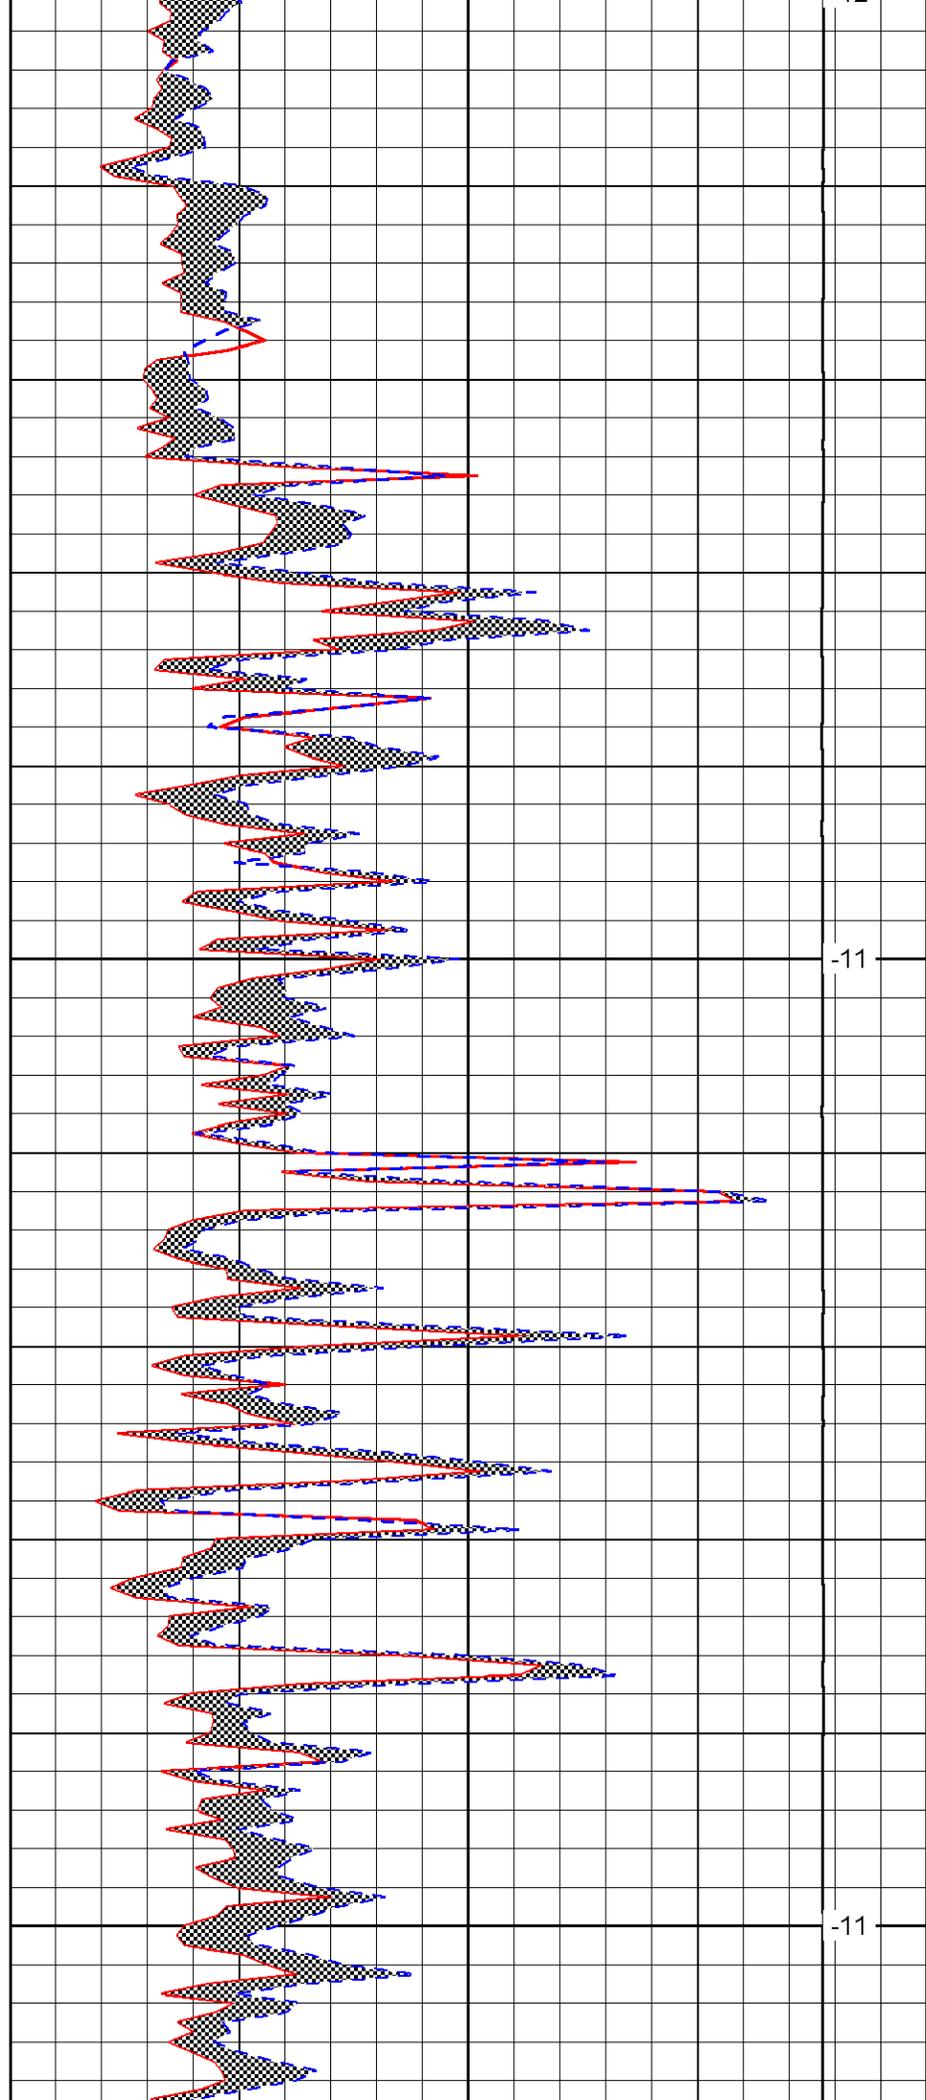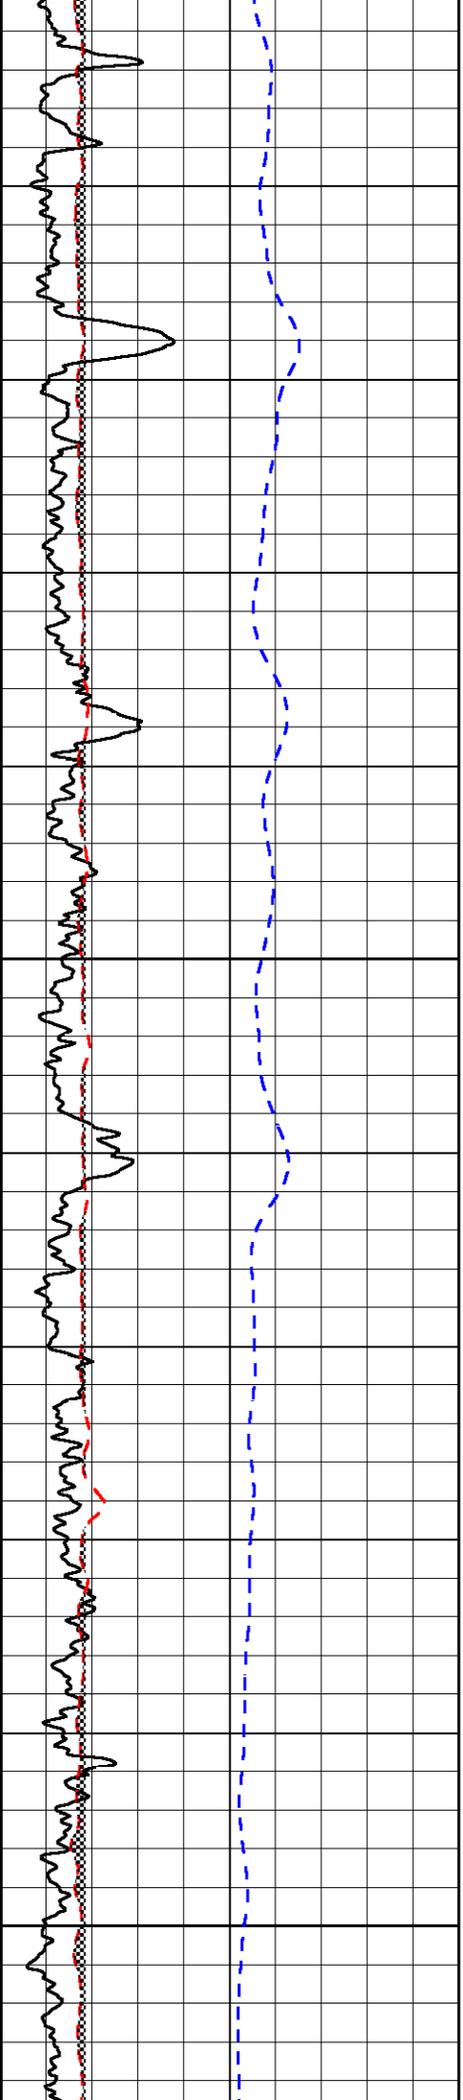

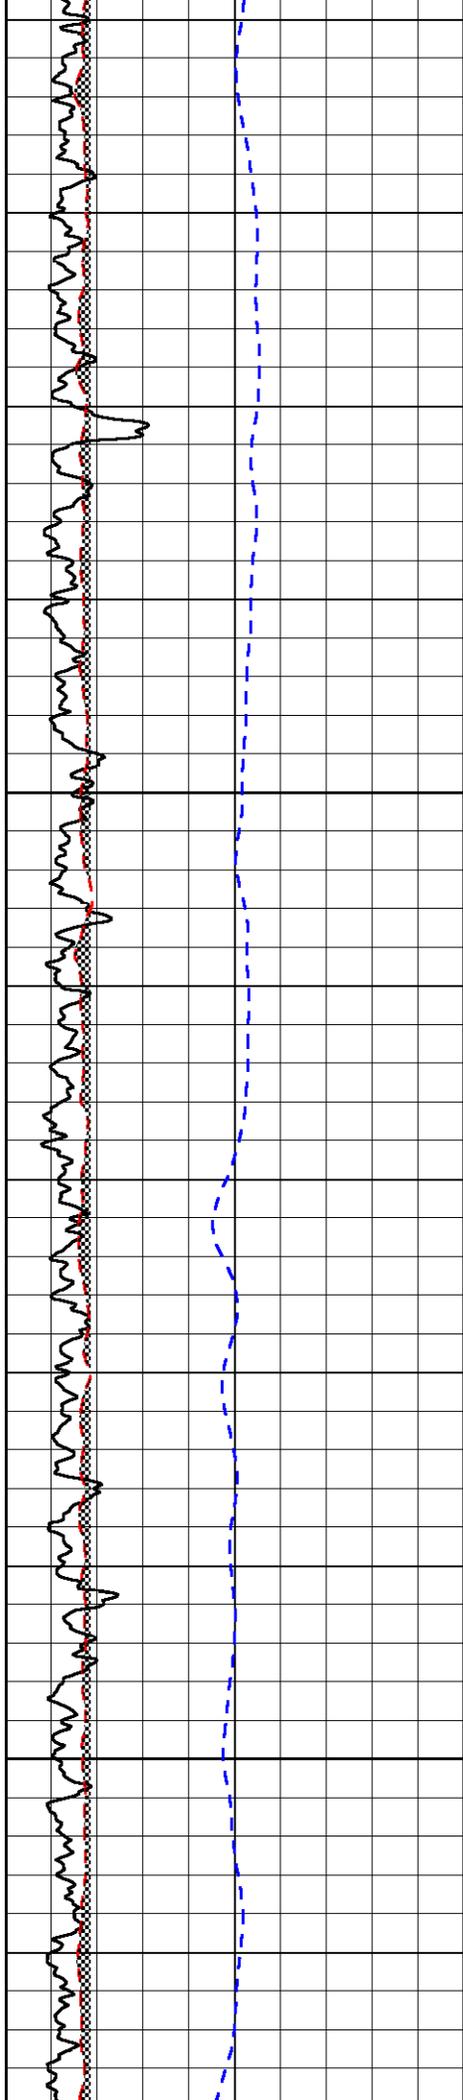


4000

4050

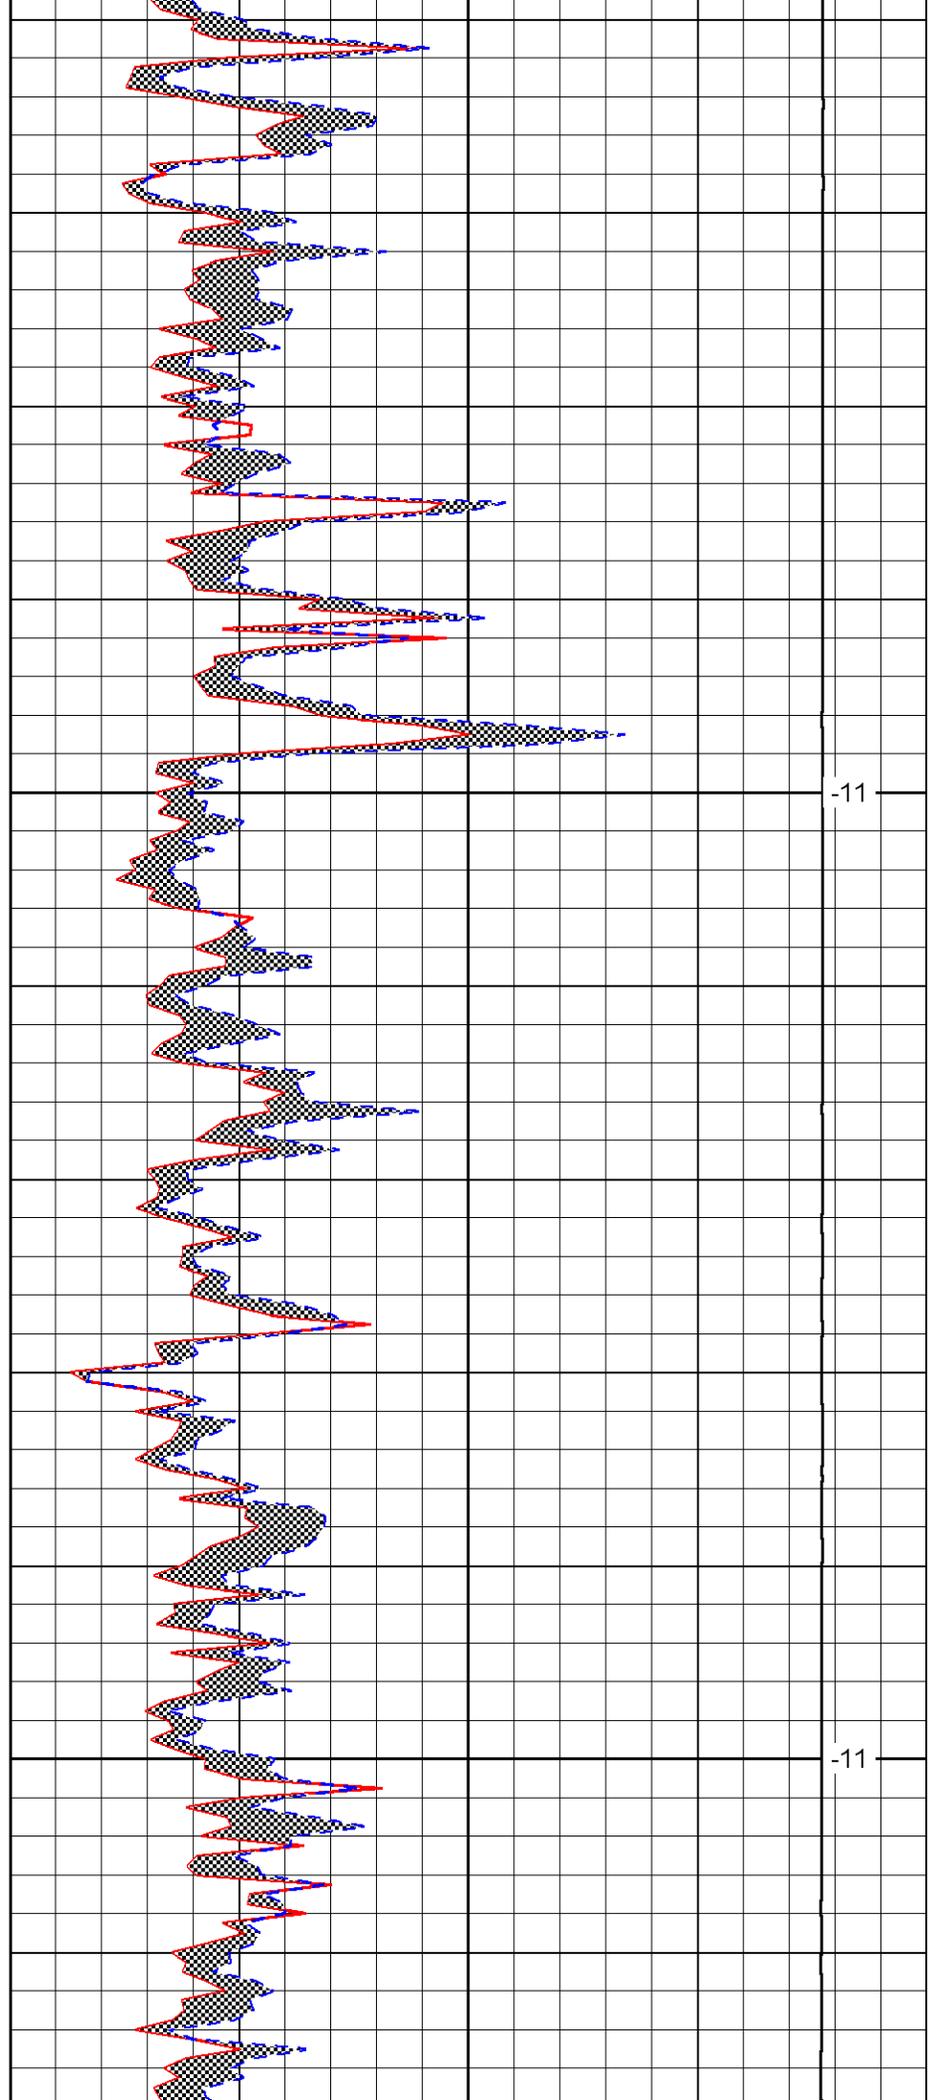


-11

-11

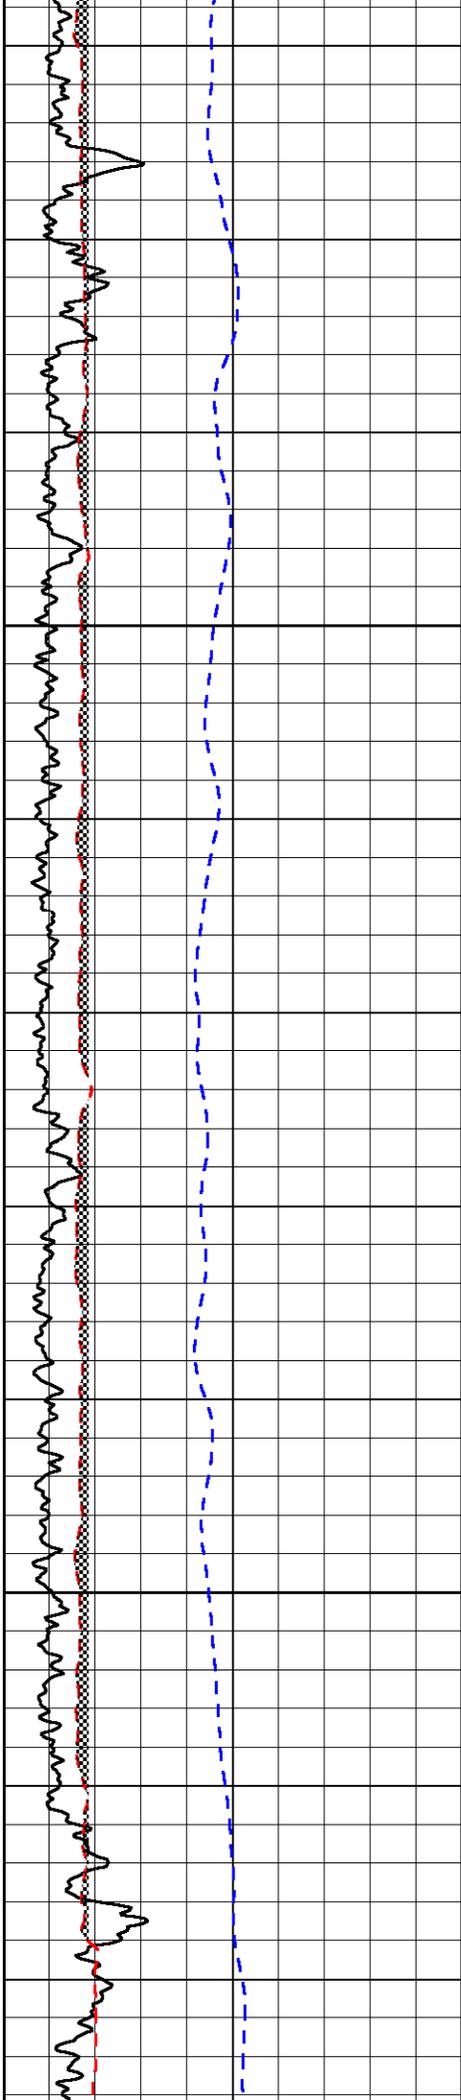


4100

4150

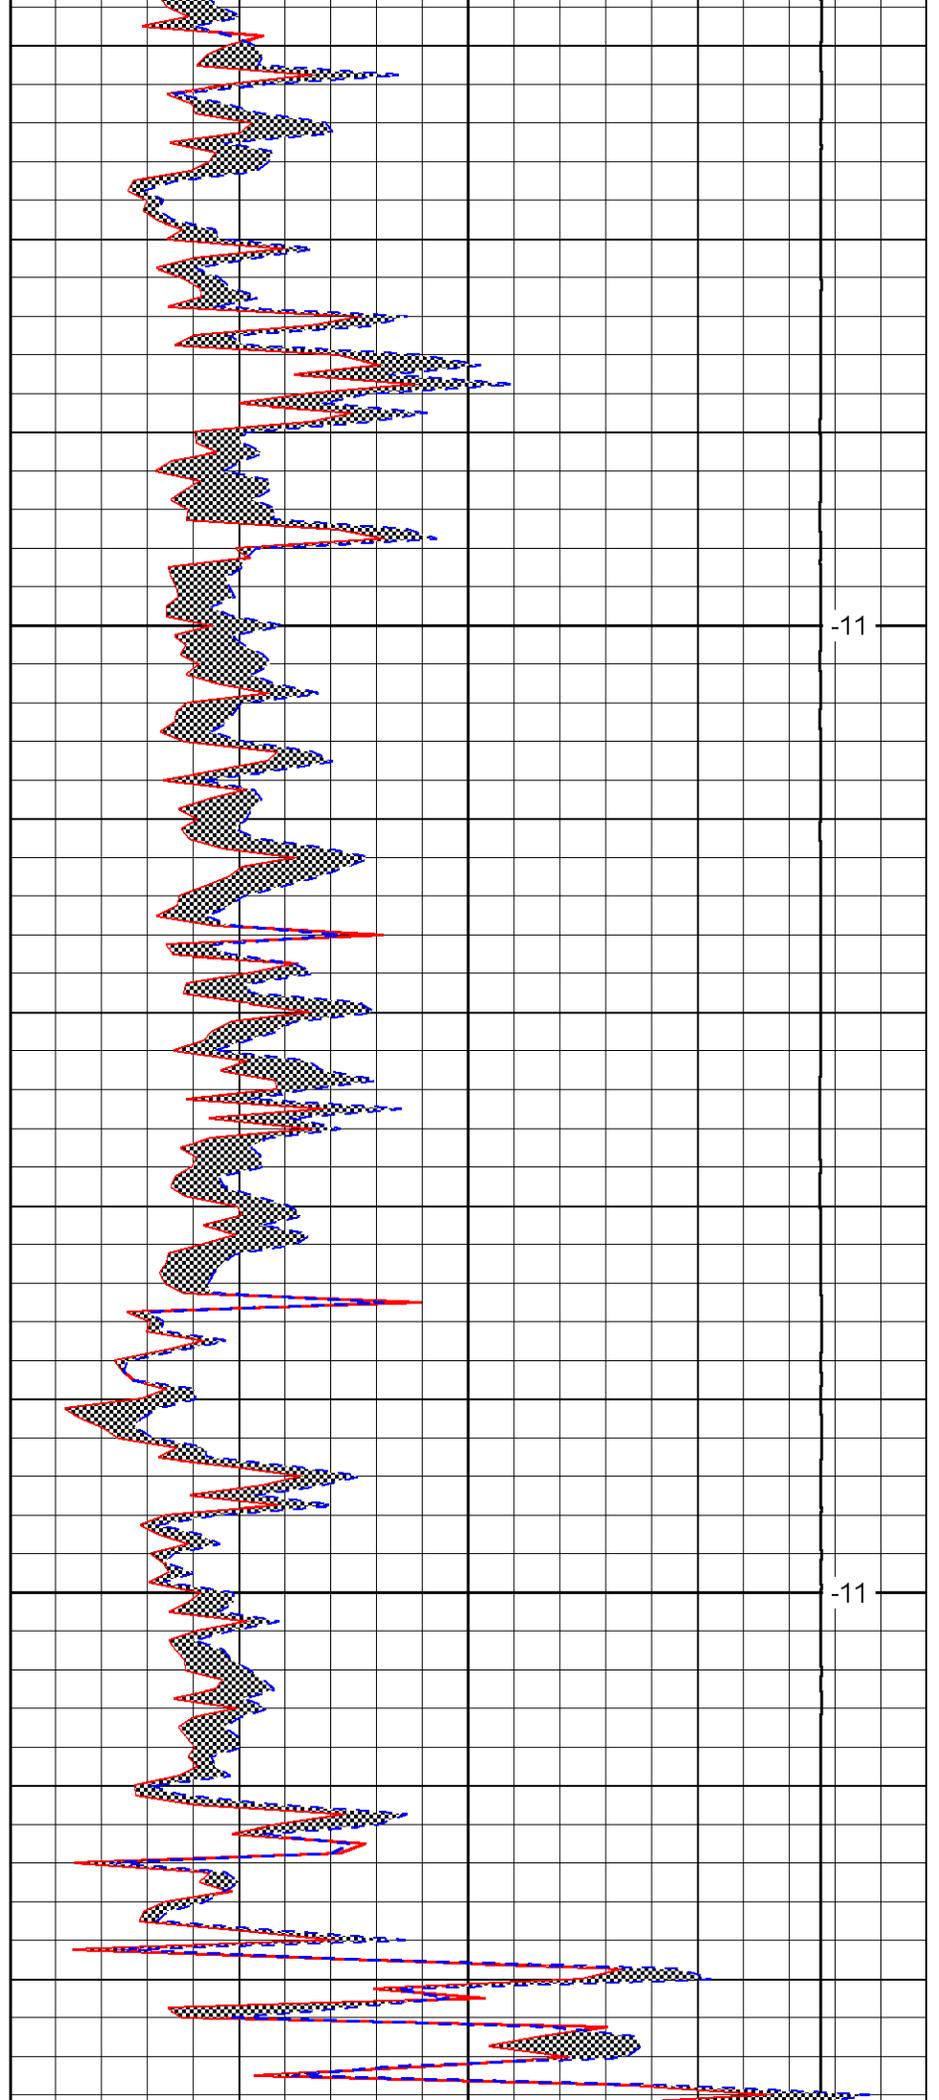


-11

-11

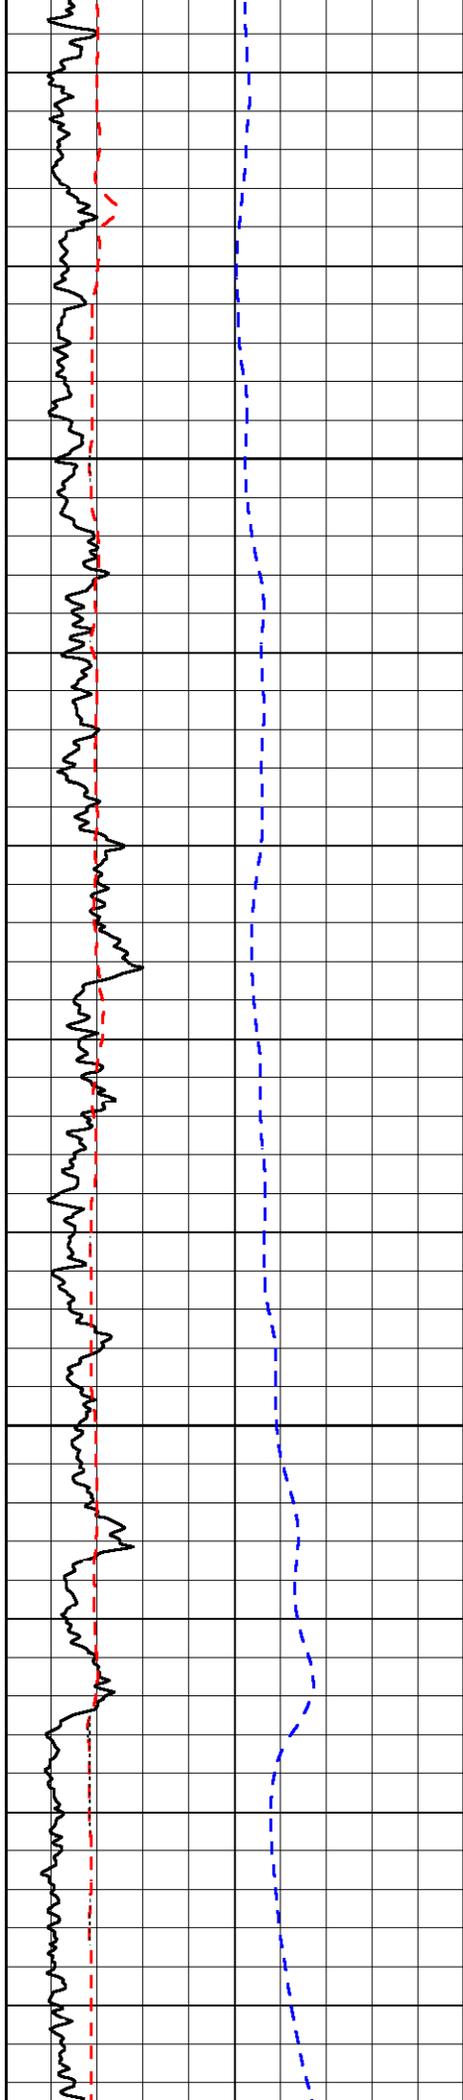


4200

4250

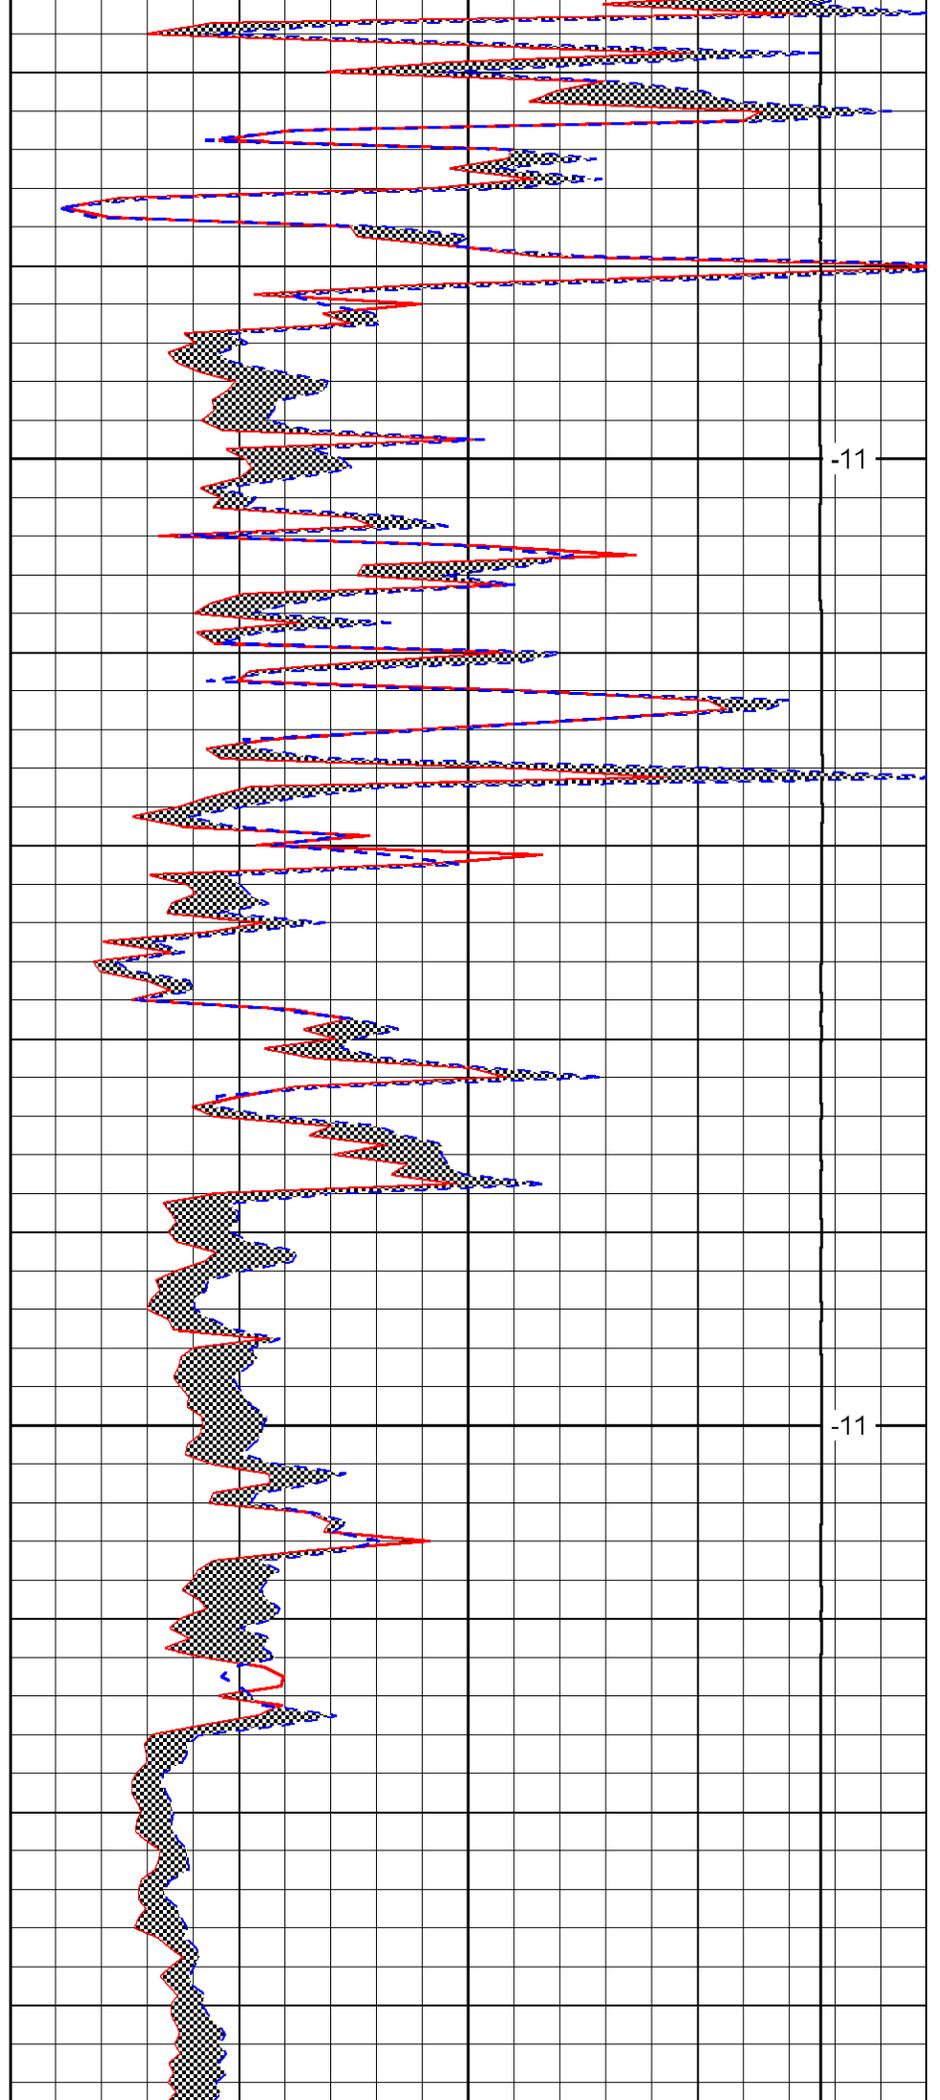


-11

-11

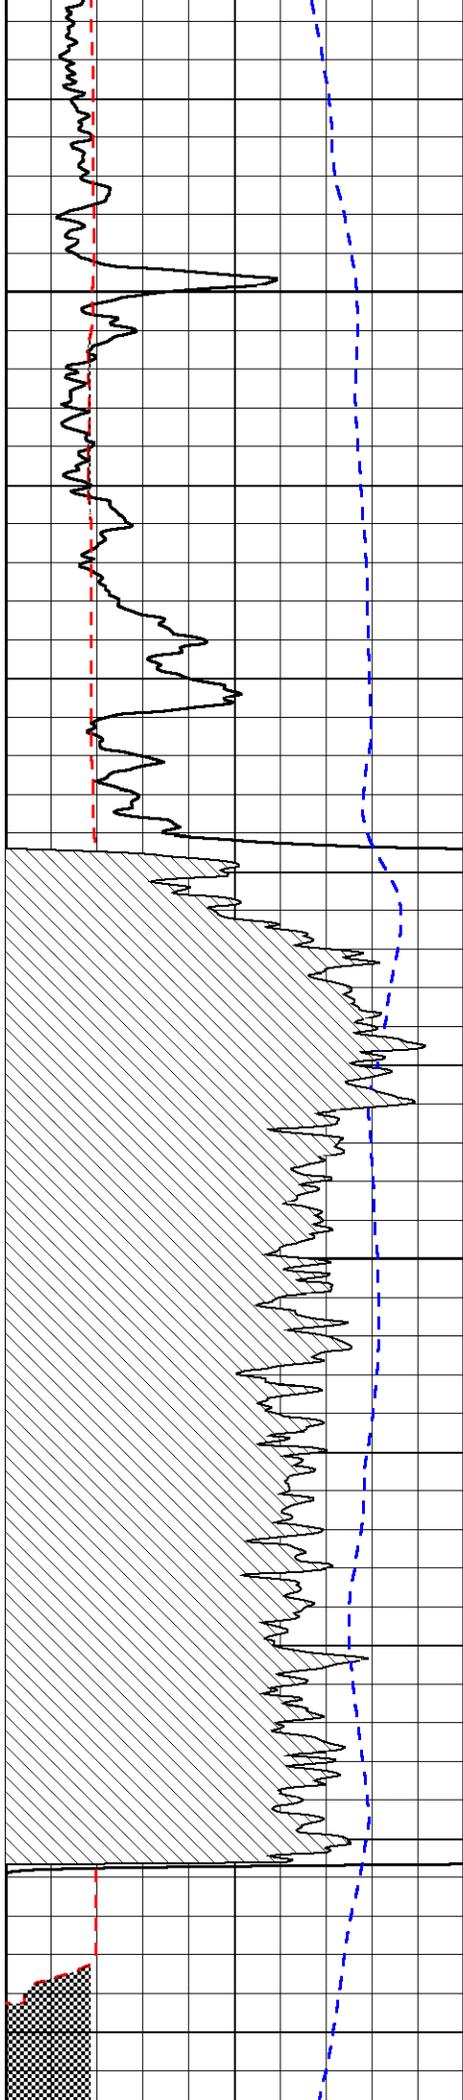


4300

4350

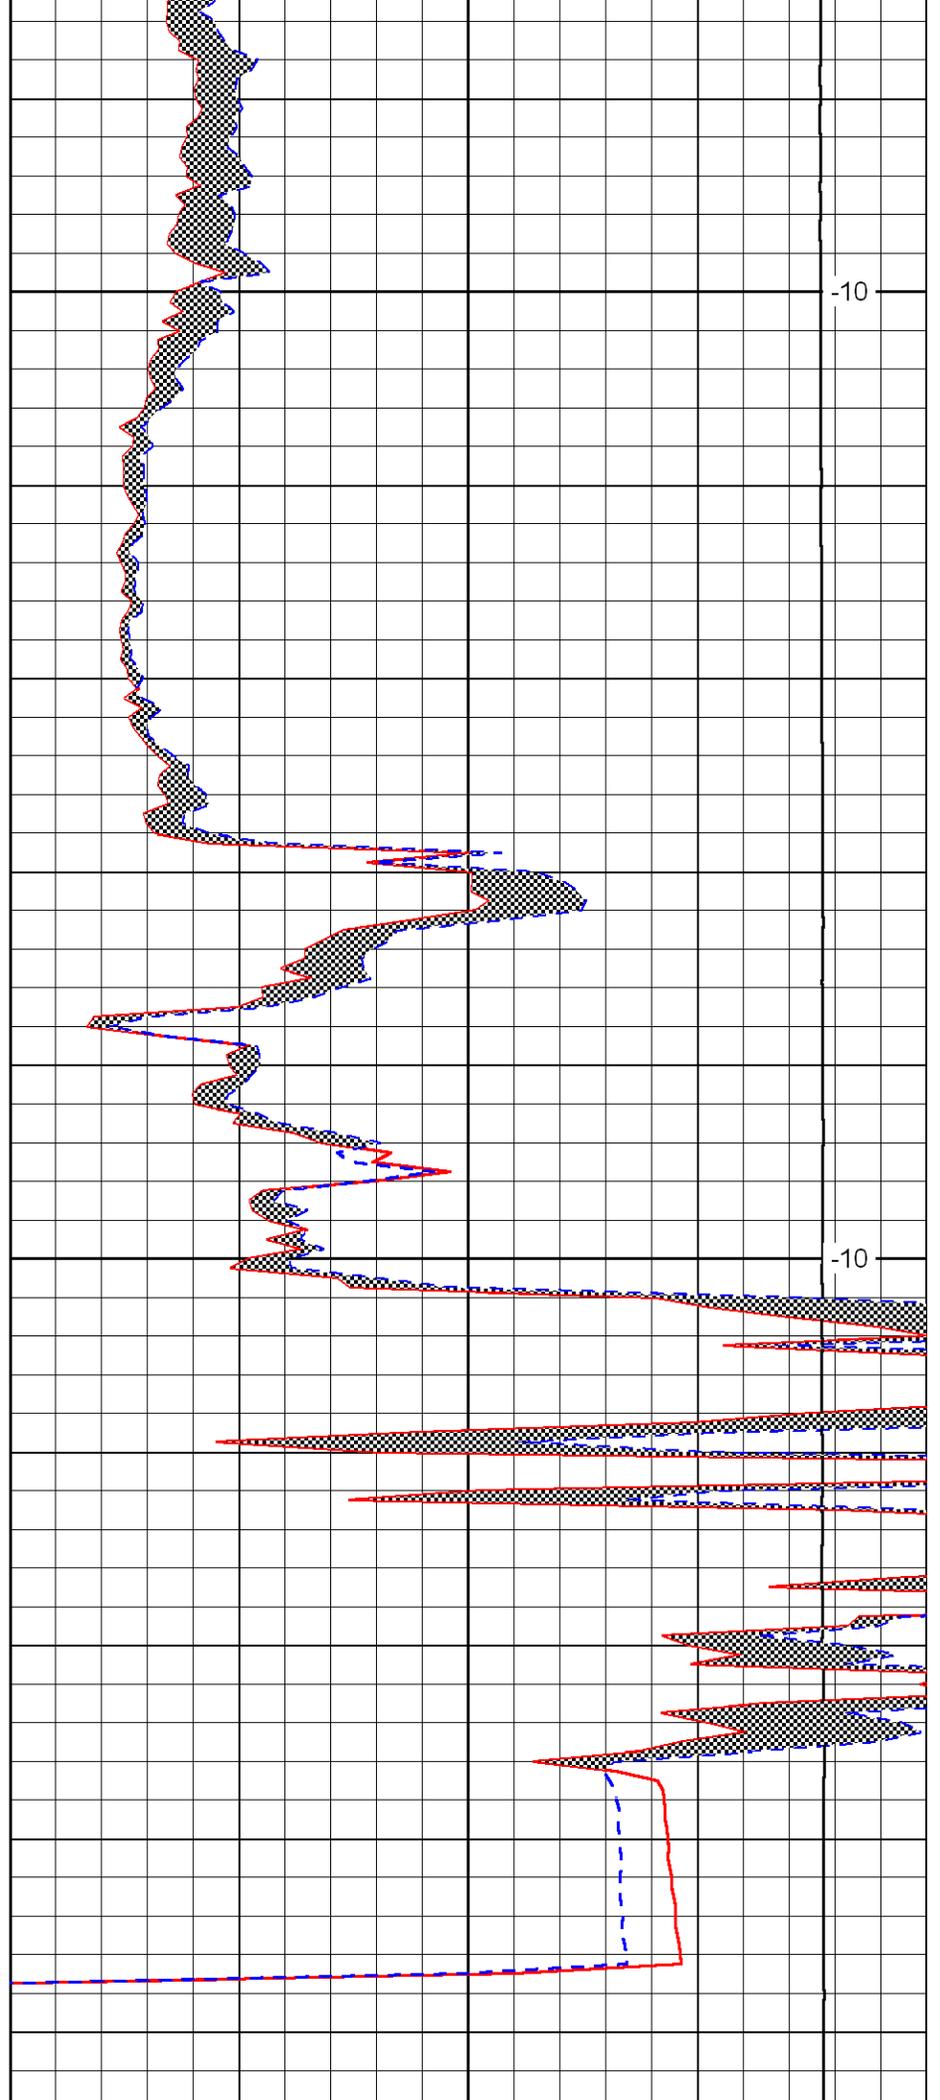


-10

-10

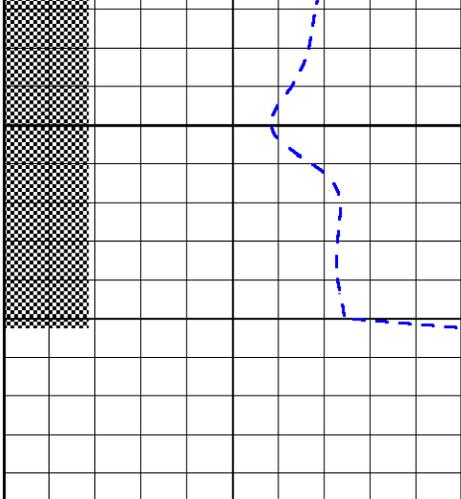

4400

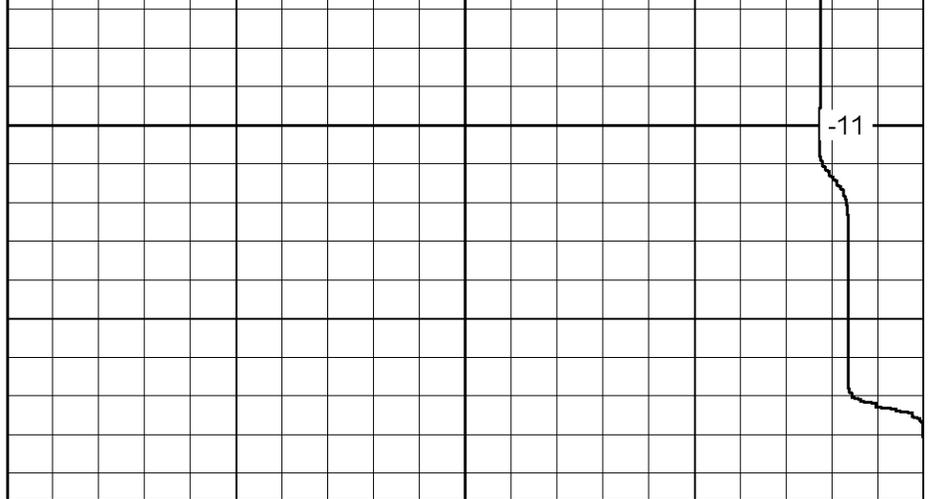

-11

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0


LSPD
(ft/min)

Database File: c:\warrior\data\fg holl_motley no. 1-5\fgholl111609hd.db
 Dataset Pathname: dil/fgstack
 Presentation Format: micro
 Dataset Creation: Mon Nov 16 13:56:18 2009
 Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

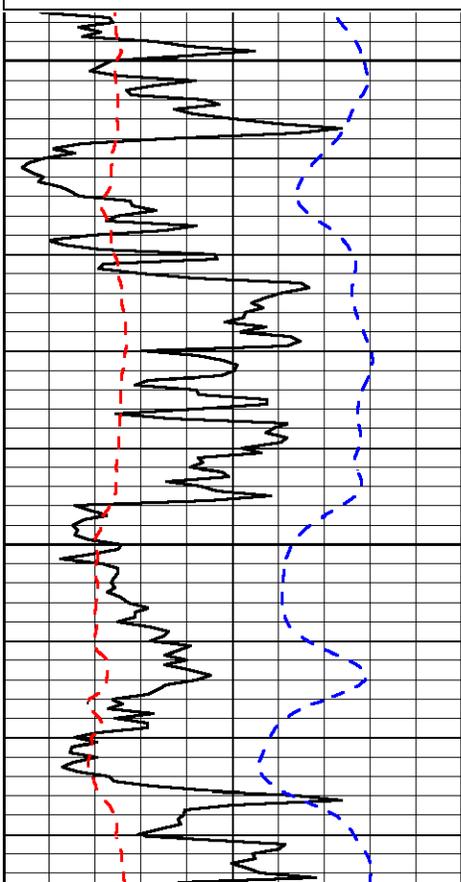


1950

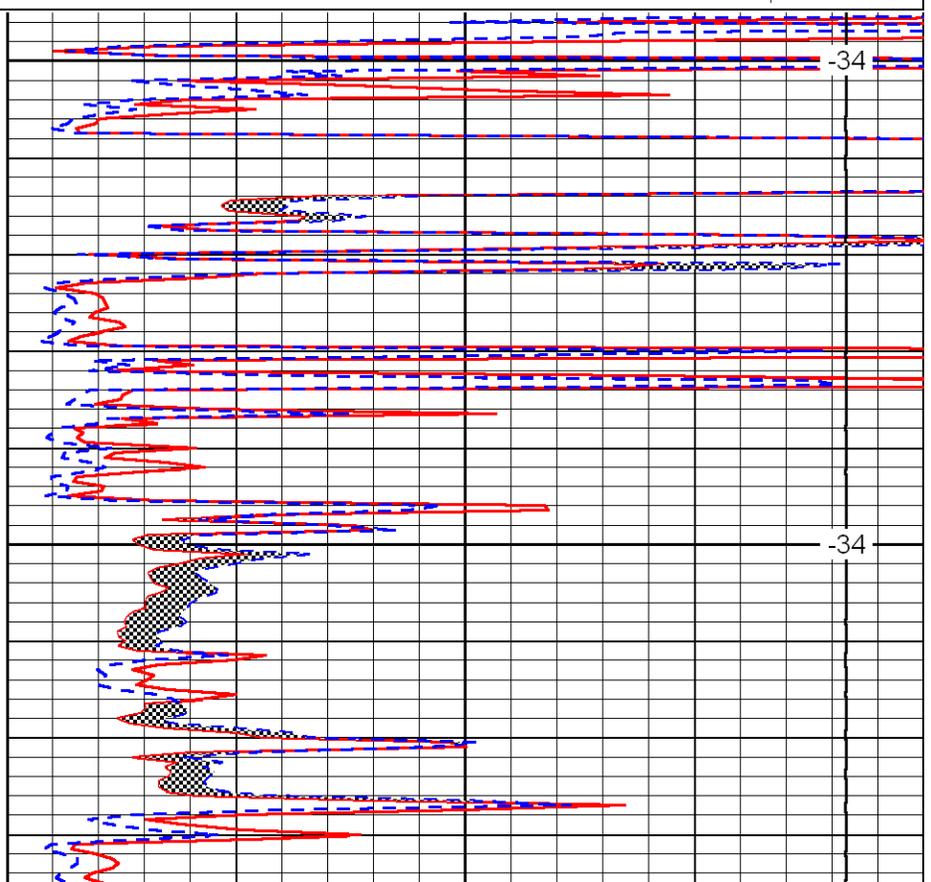

-34

2000

-34

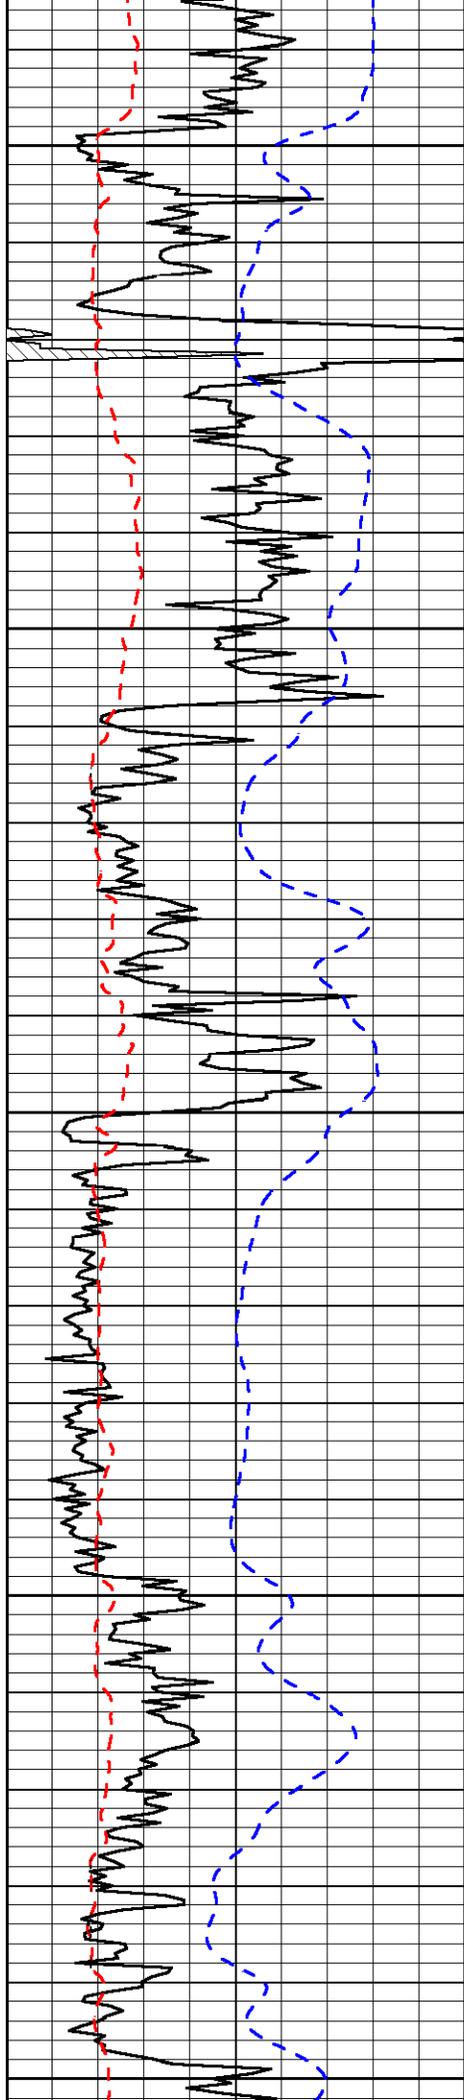


2050

2100

2150

2200

2250

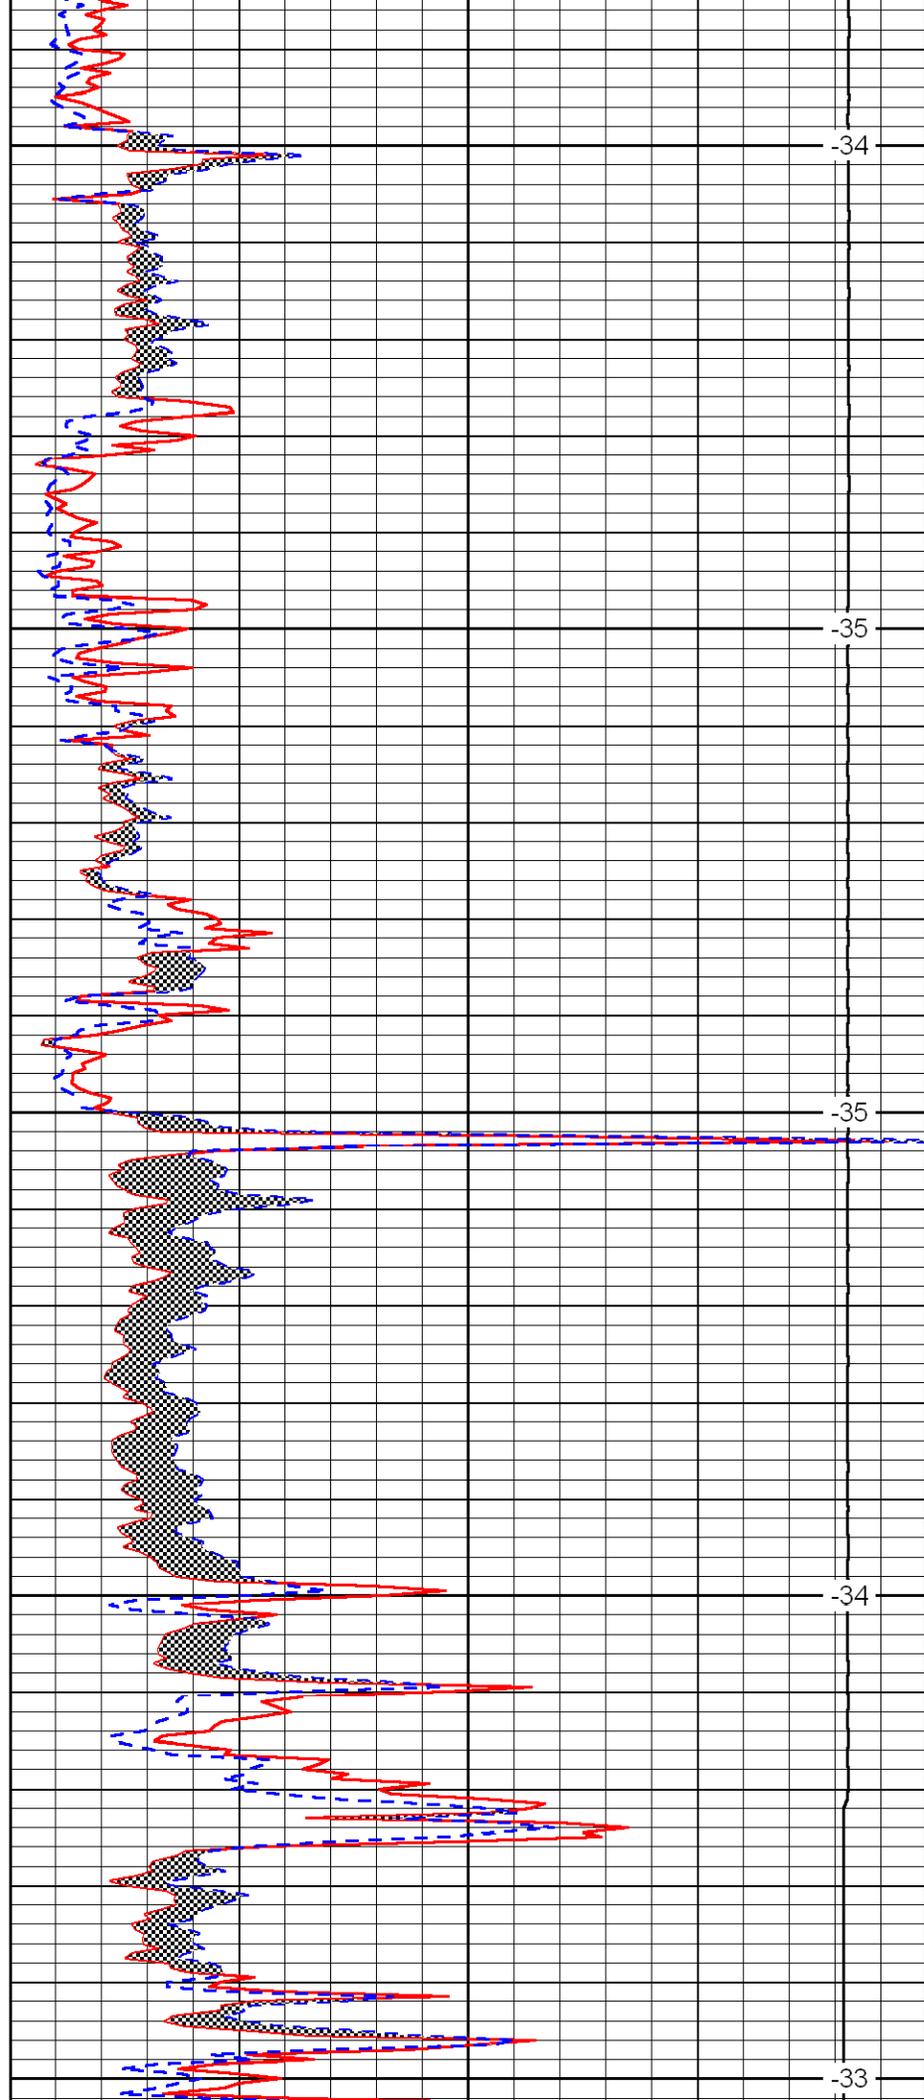


-34

-35

-35

-34

-33

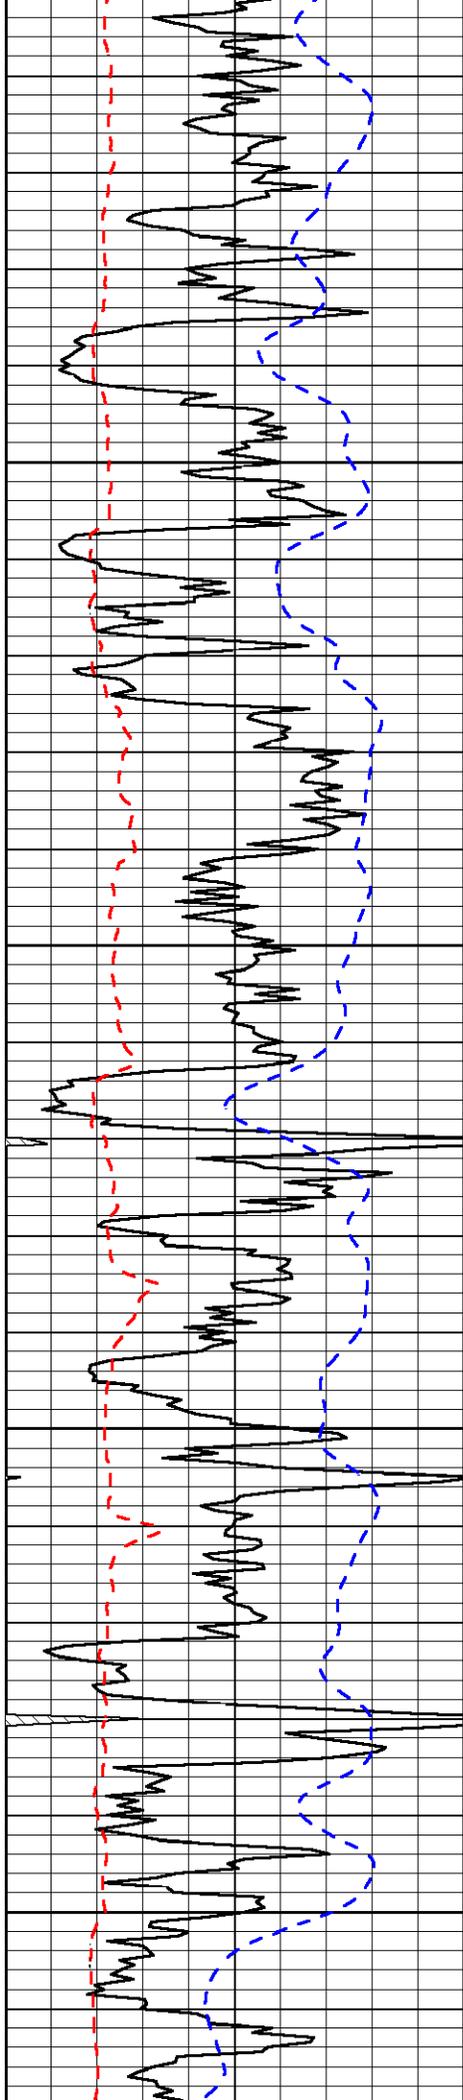


2300

2350

2400

2450

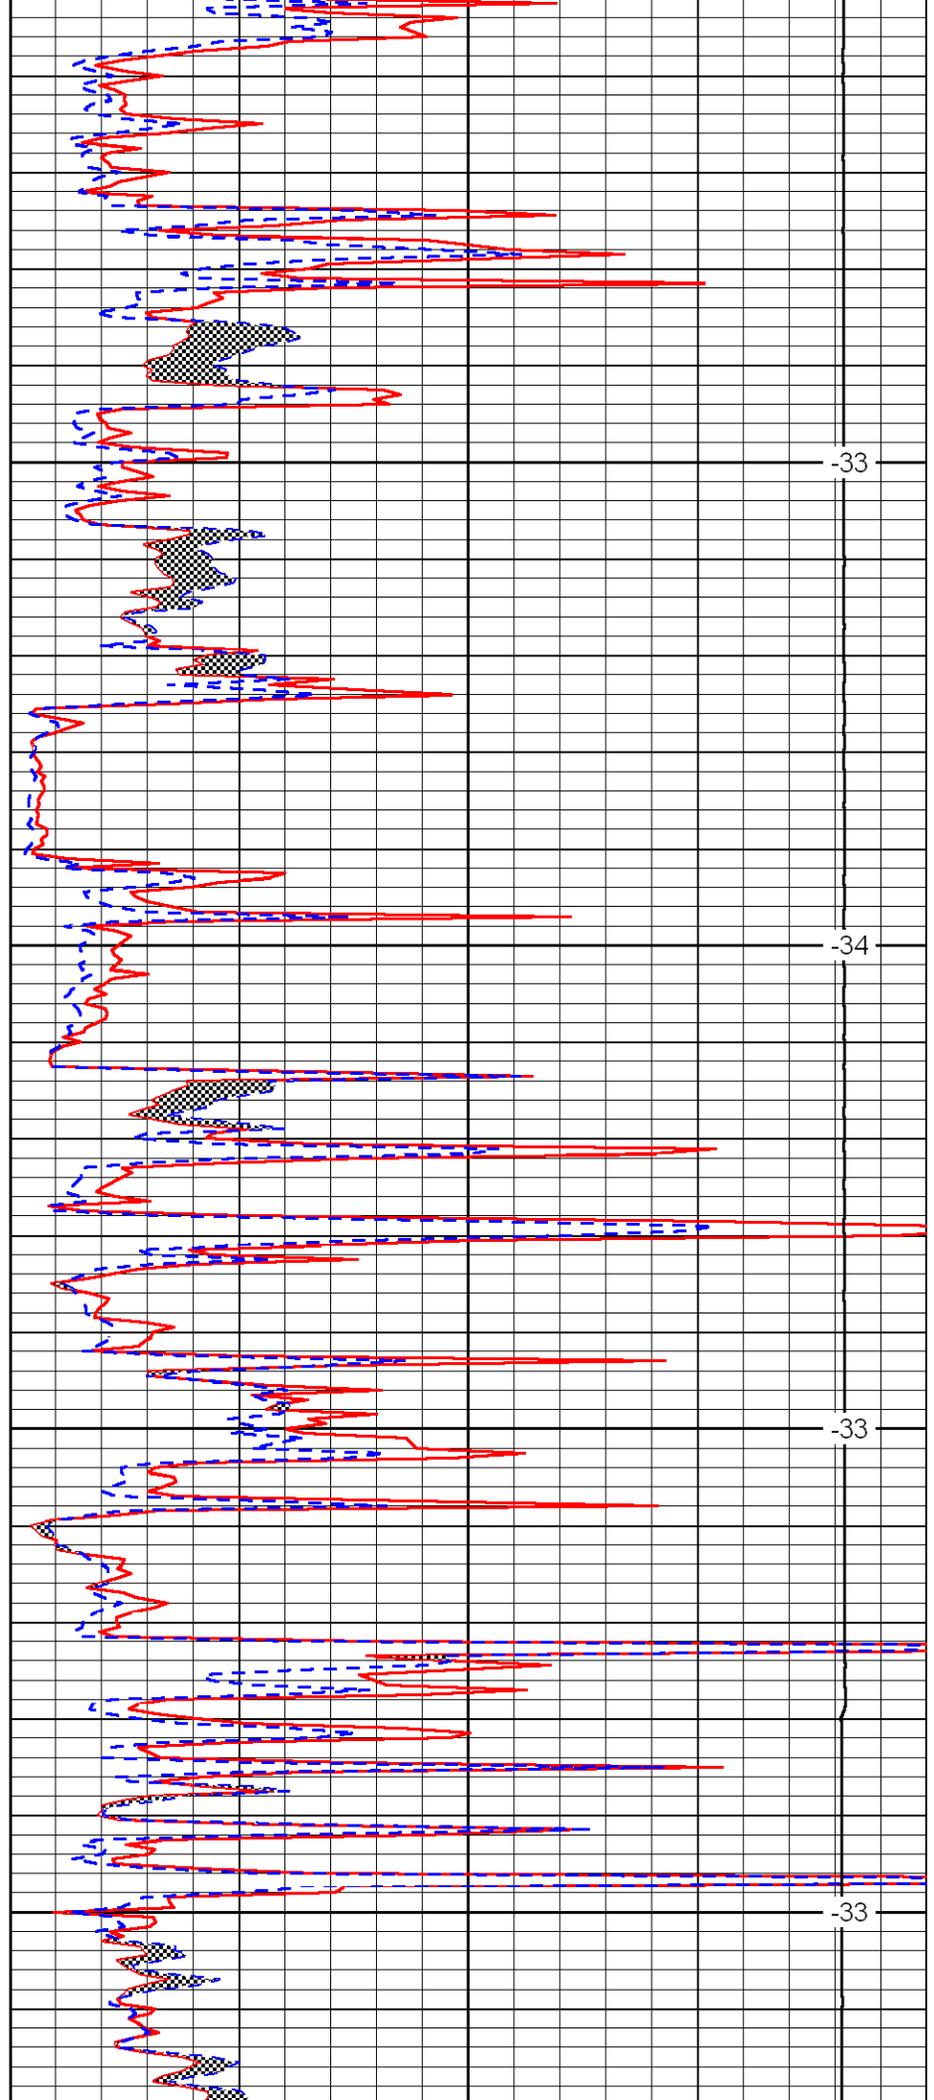


-33

-34

-33

-33

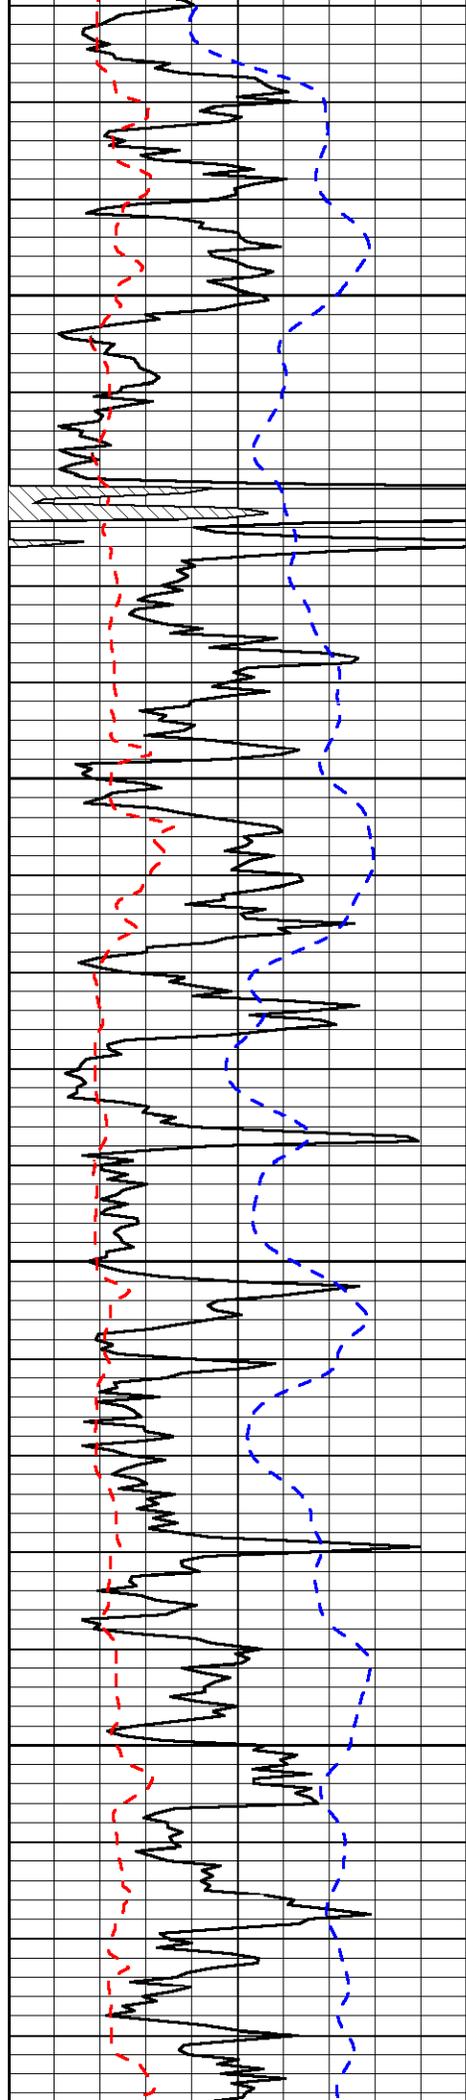


2500

2550

2600

2650

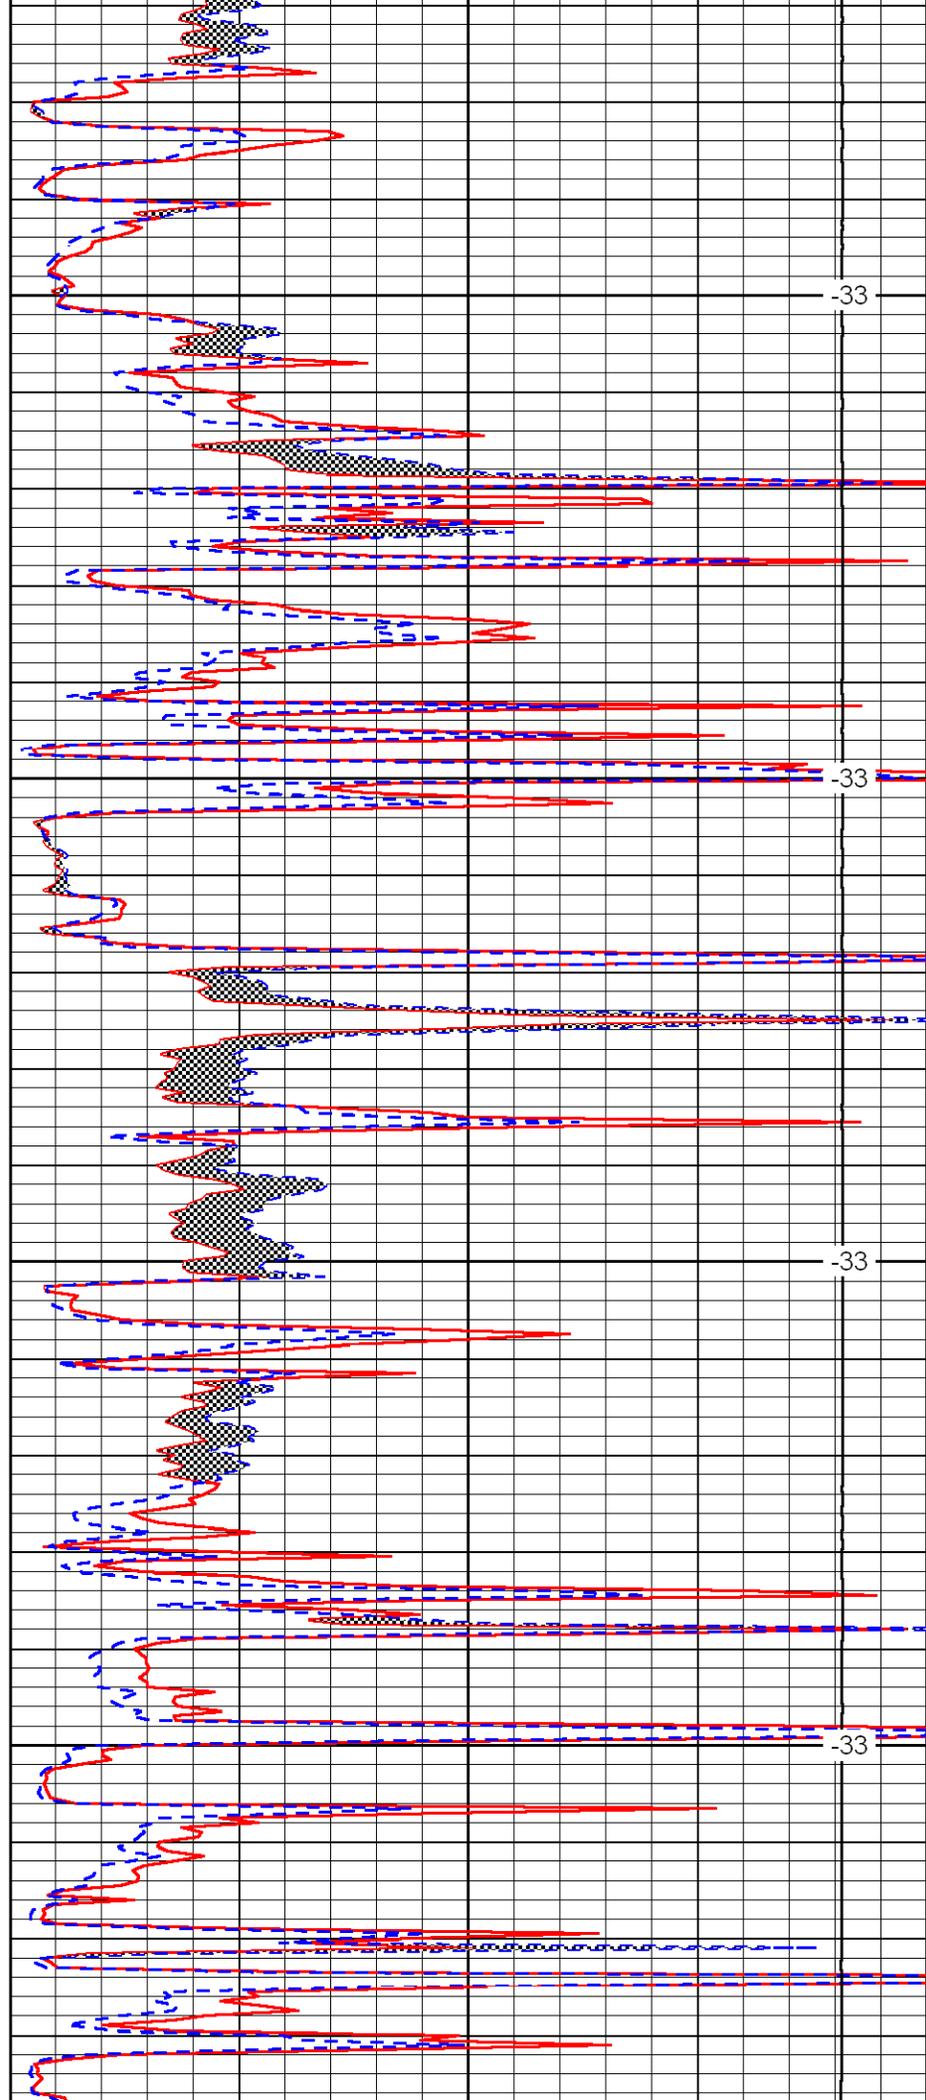


-33

-33

-33

-33

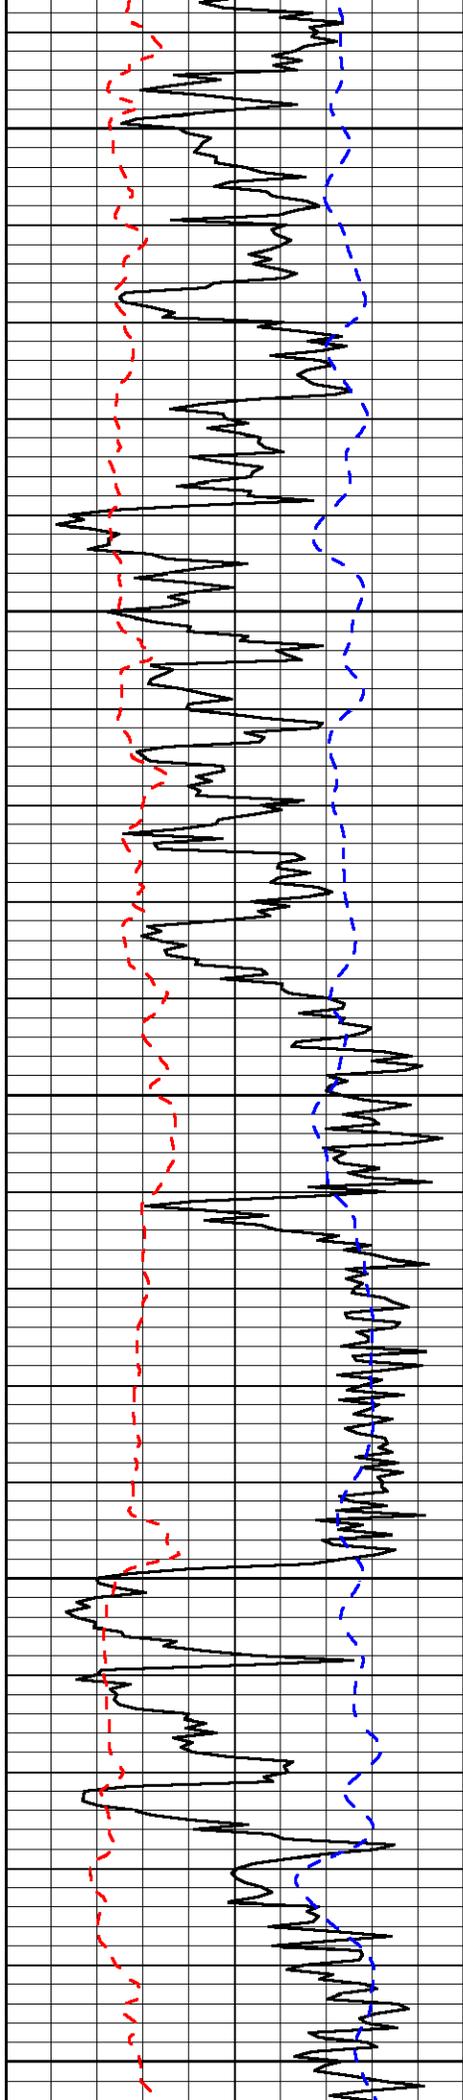


2700

2750

2800

2850

2900

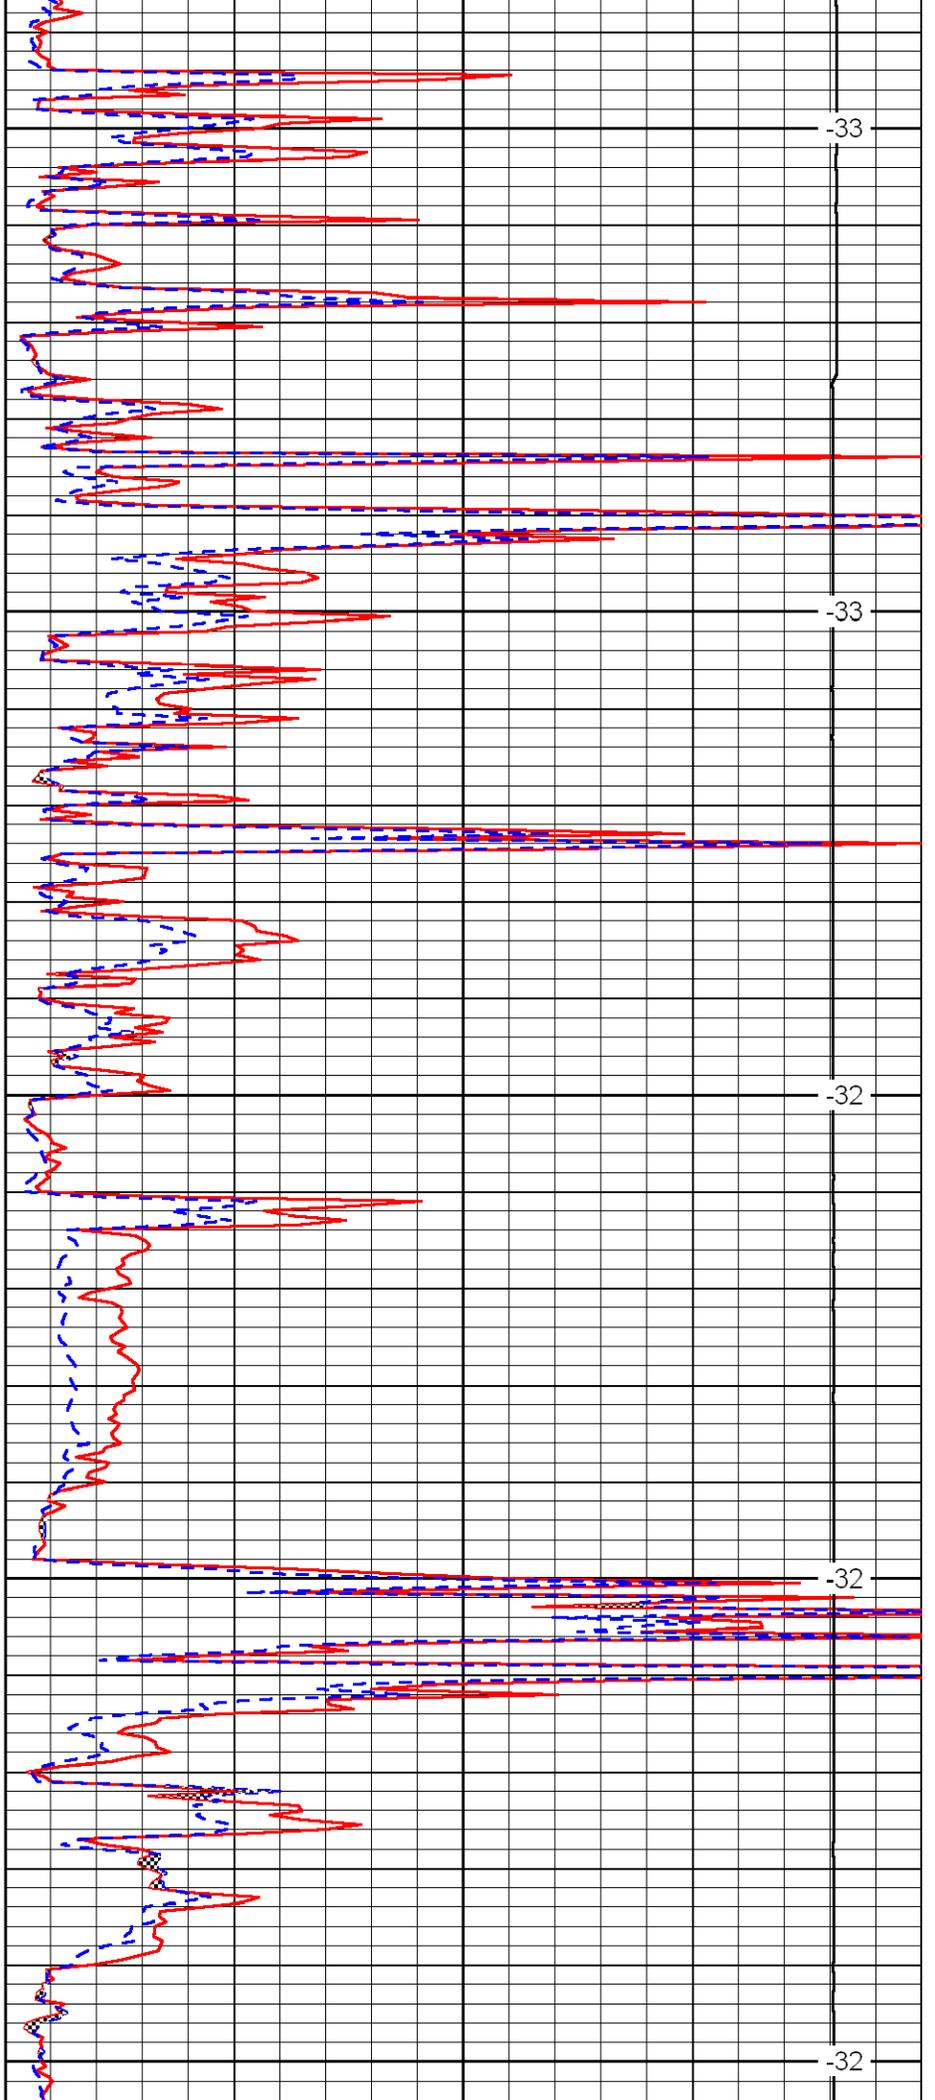


-33

-33

-32

-32

-32

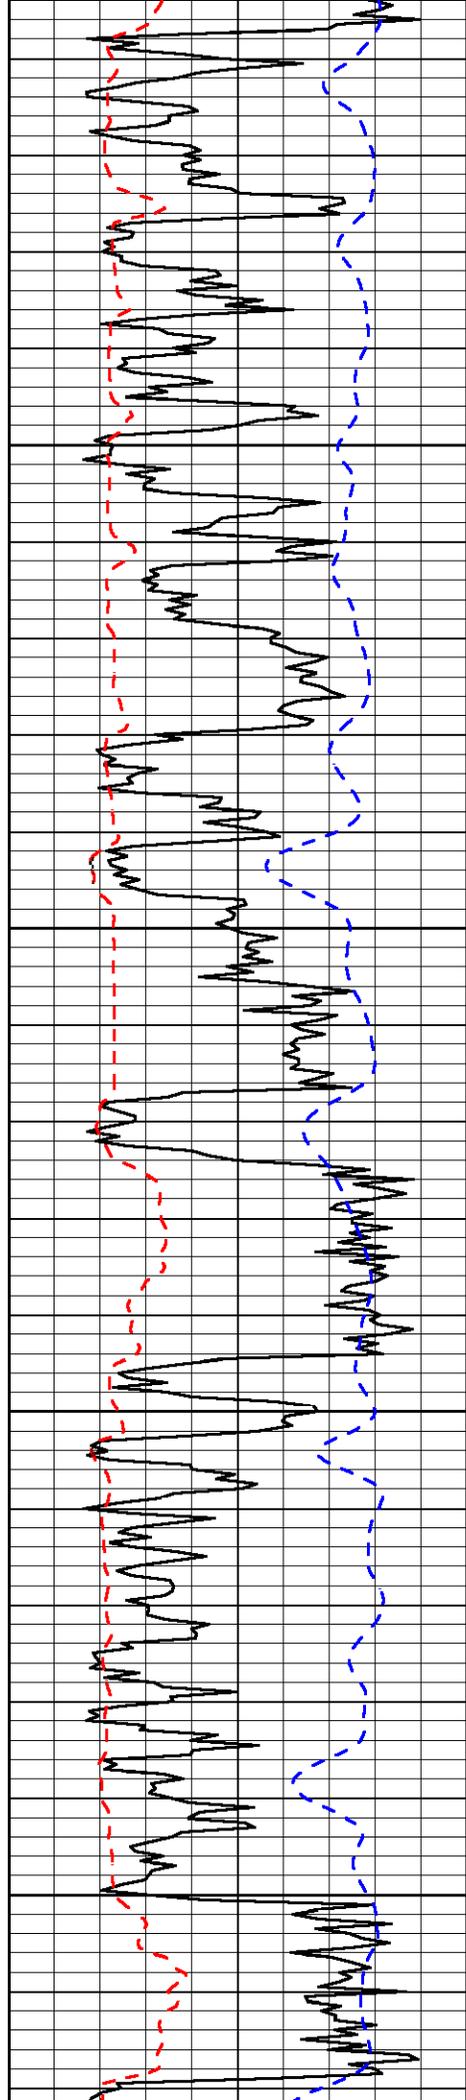


2950

3000

3050

3100

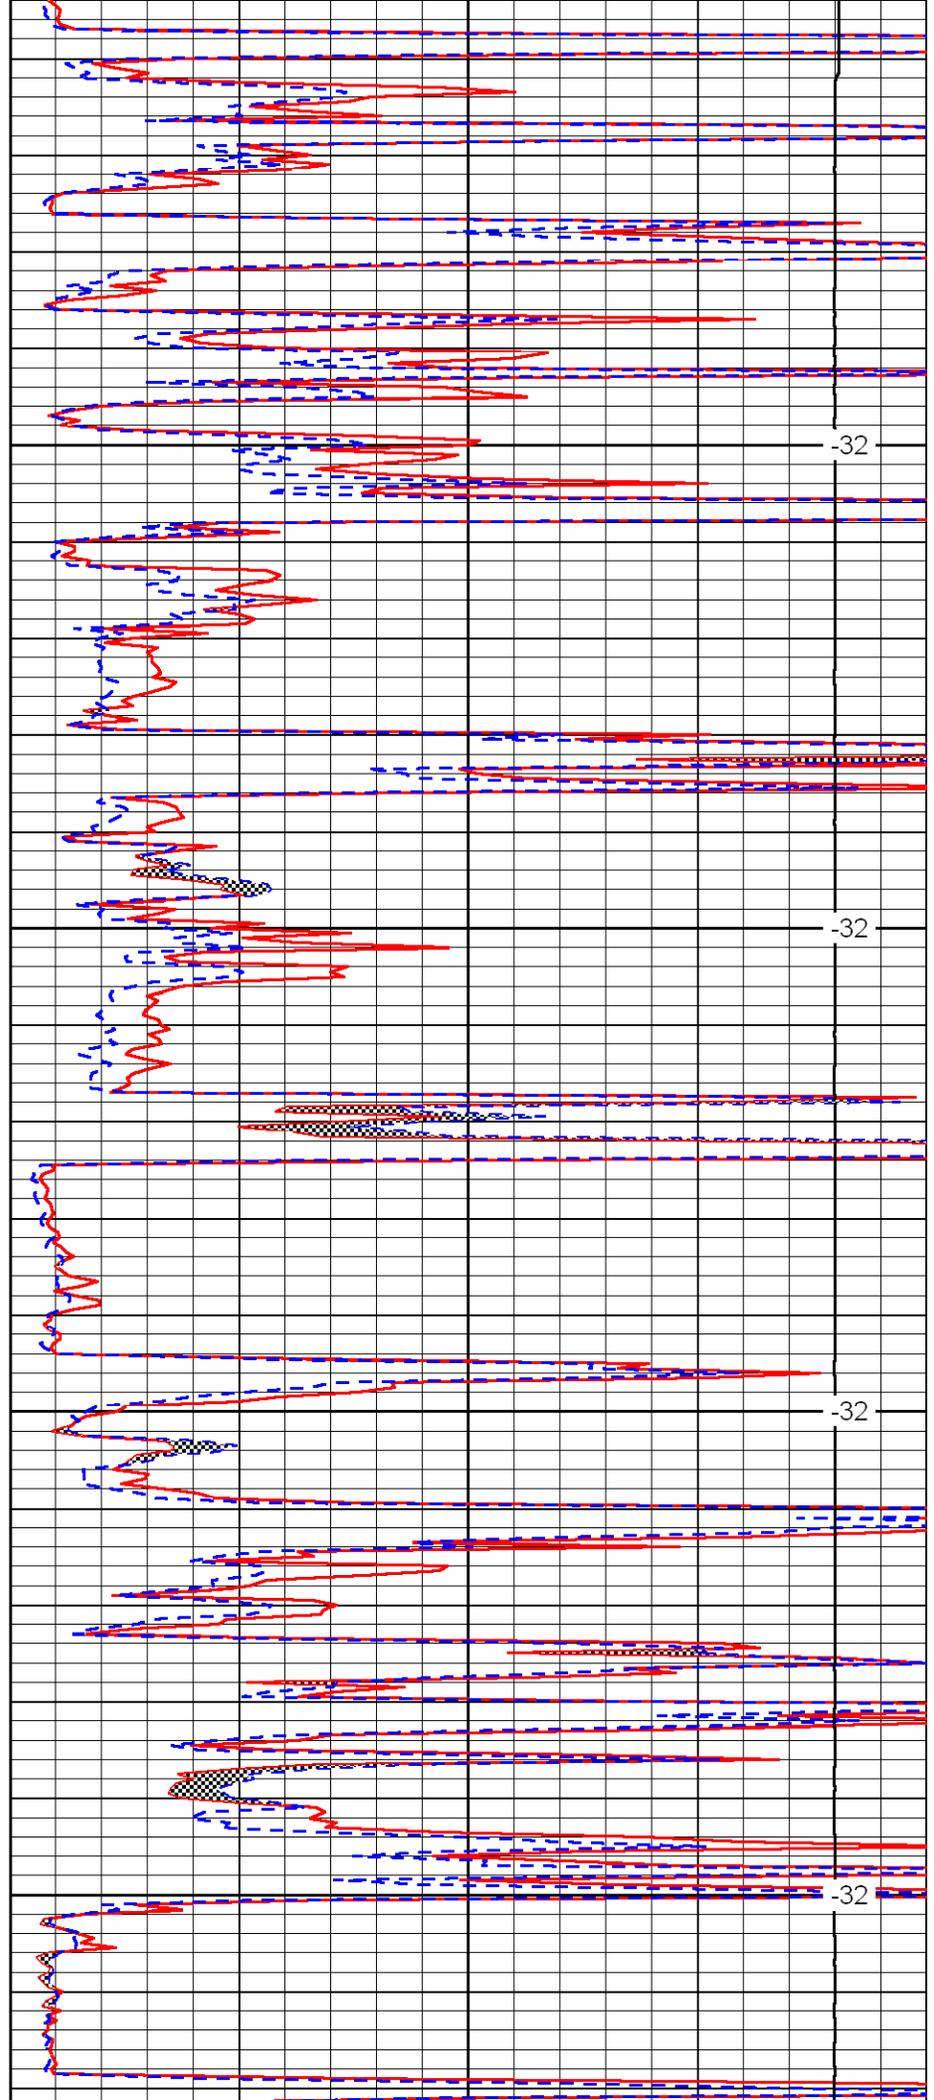


-32

-32

-32

-32

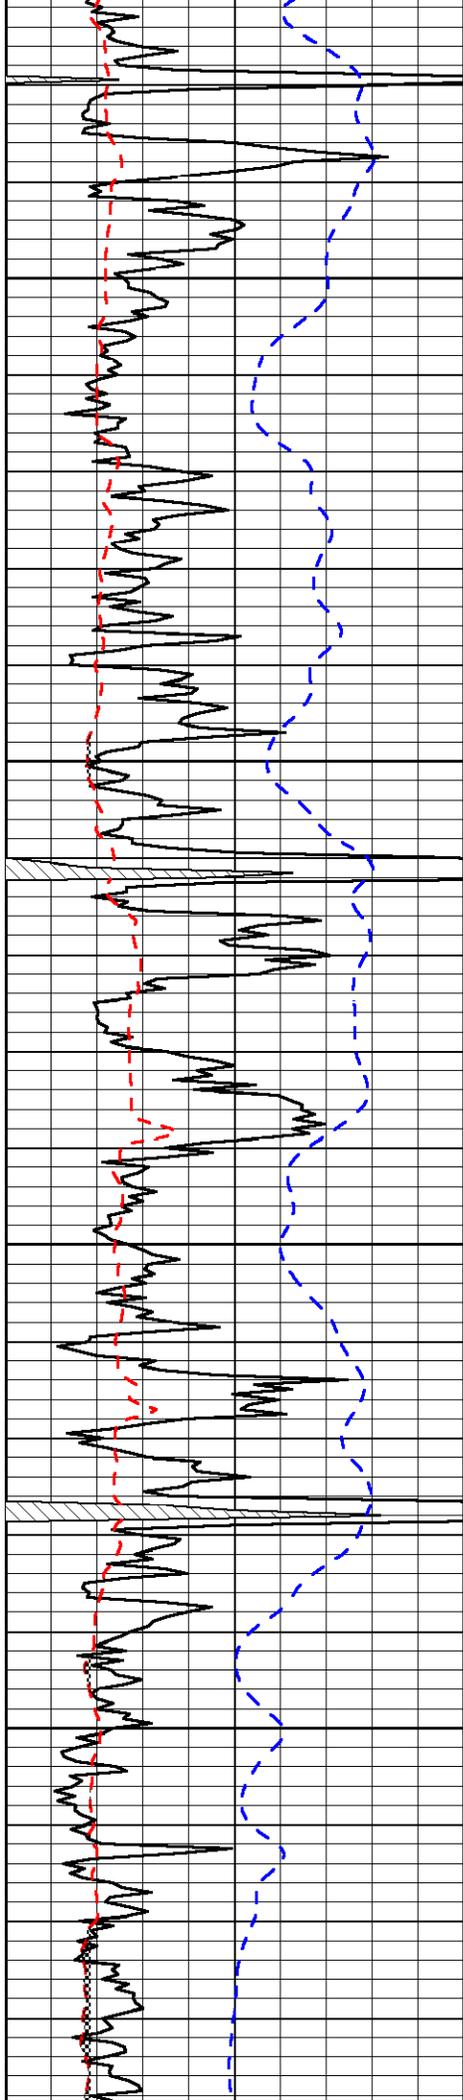


3150

3200

3250

3300

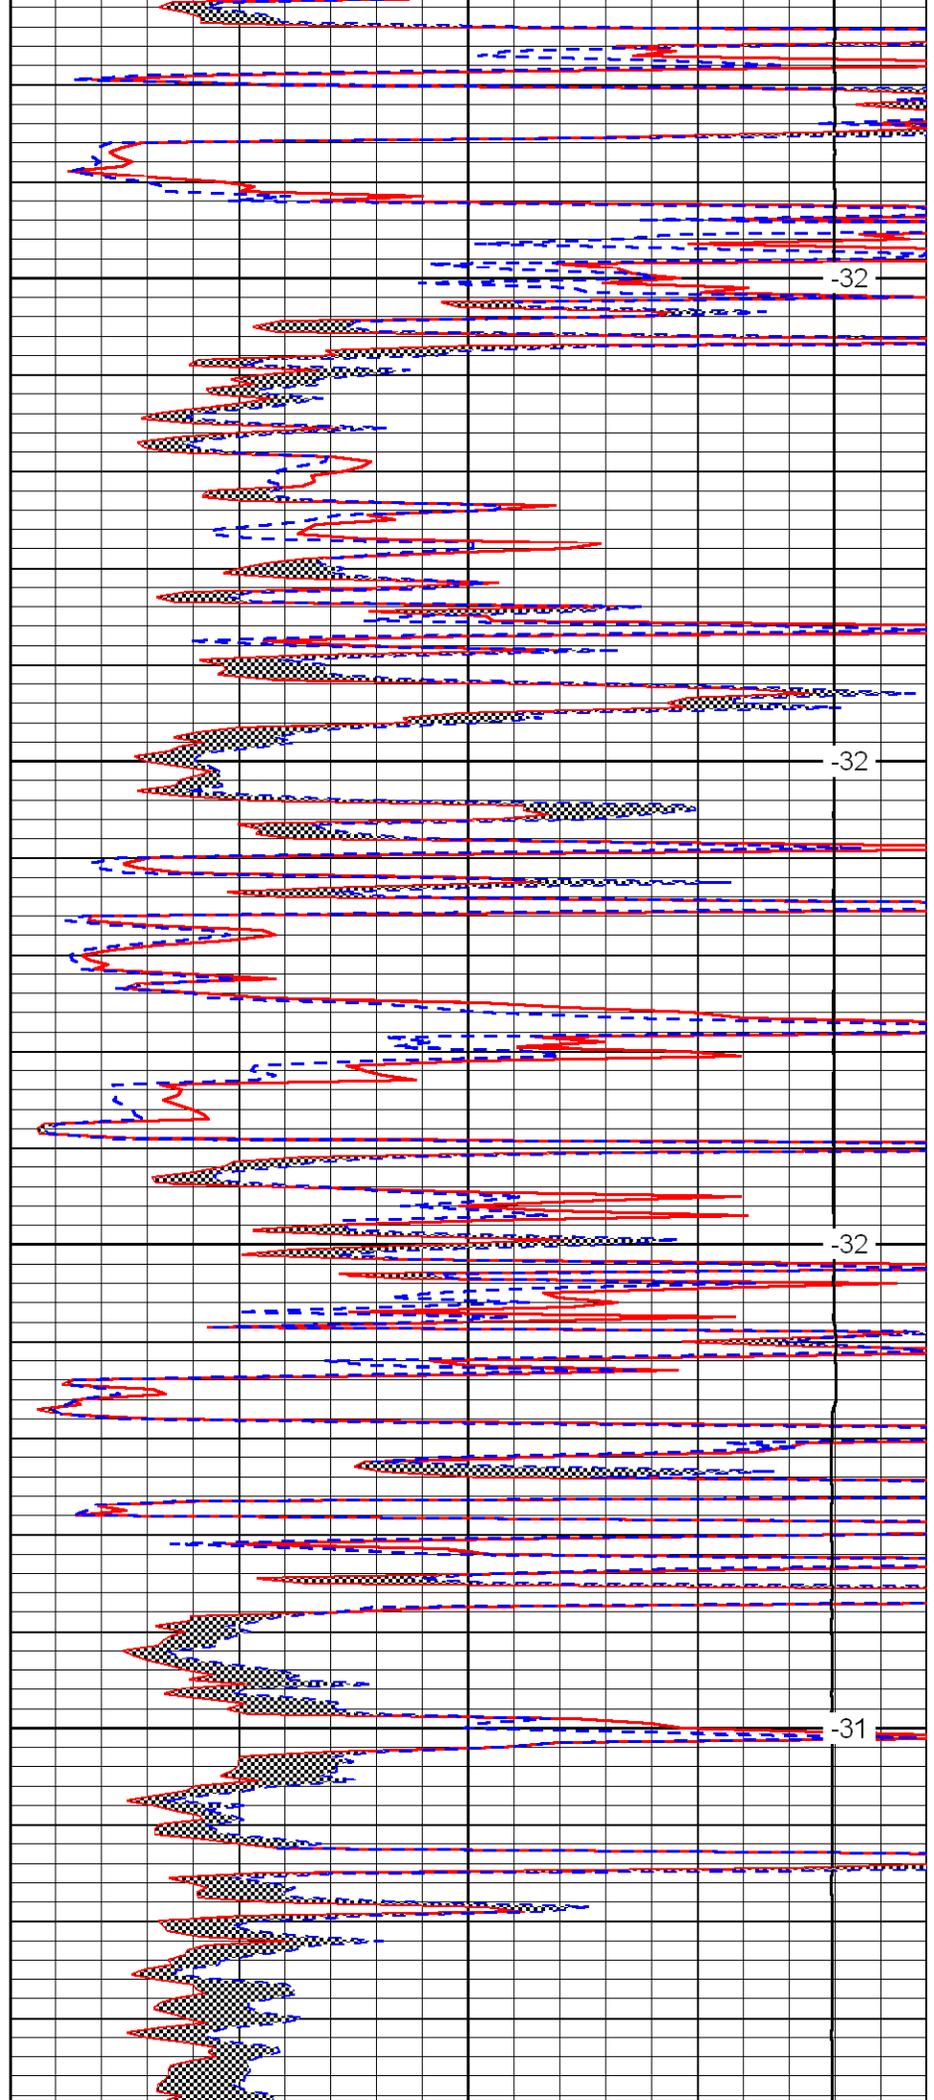


-32

-32

-32

-31

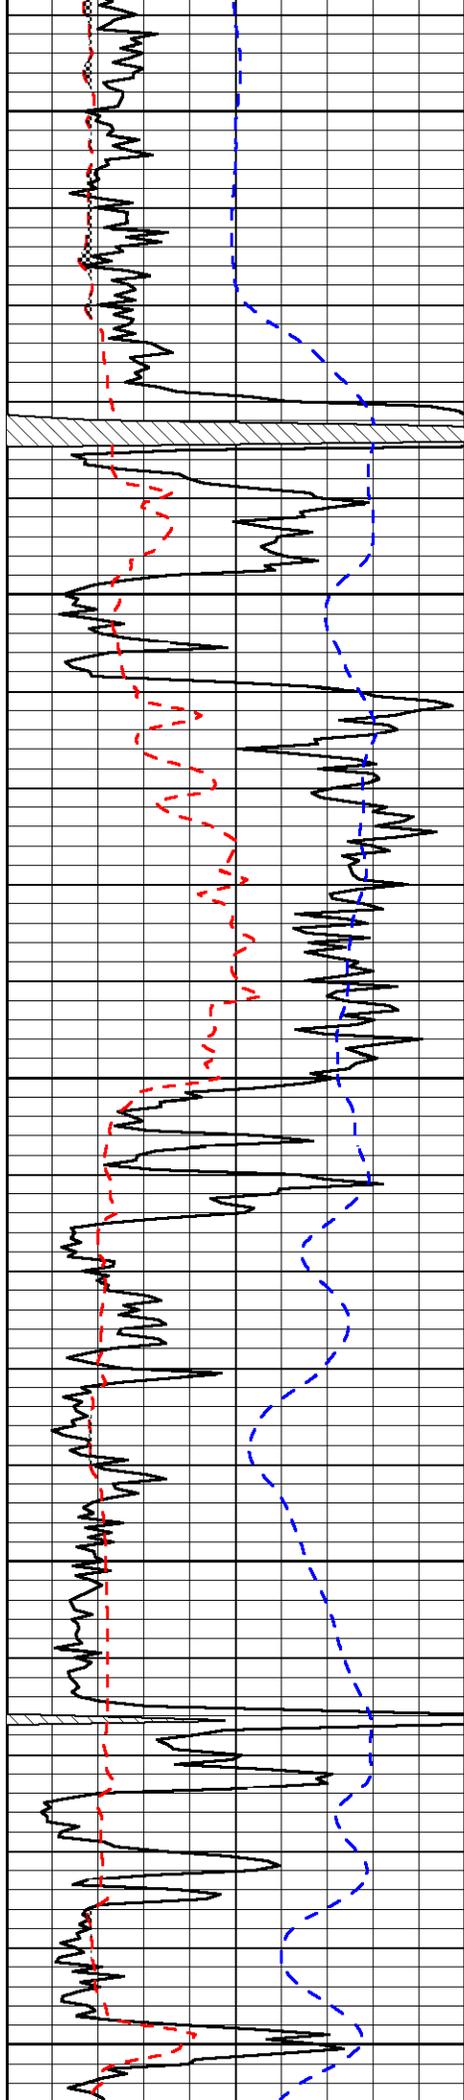


3350

3400

3450

3500

3550

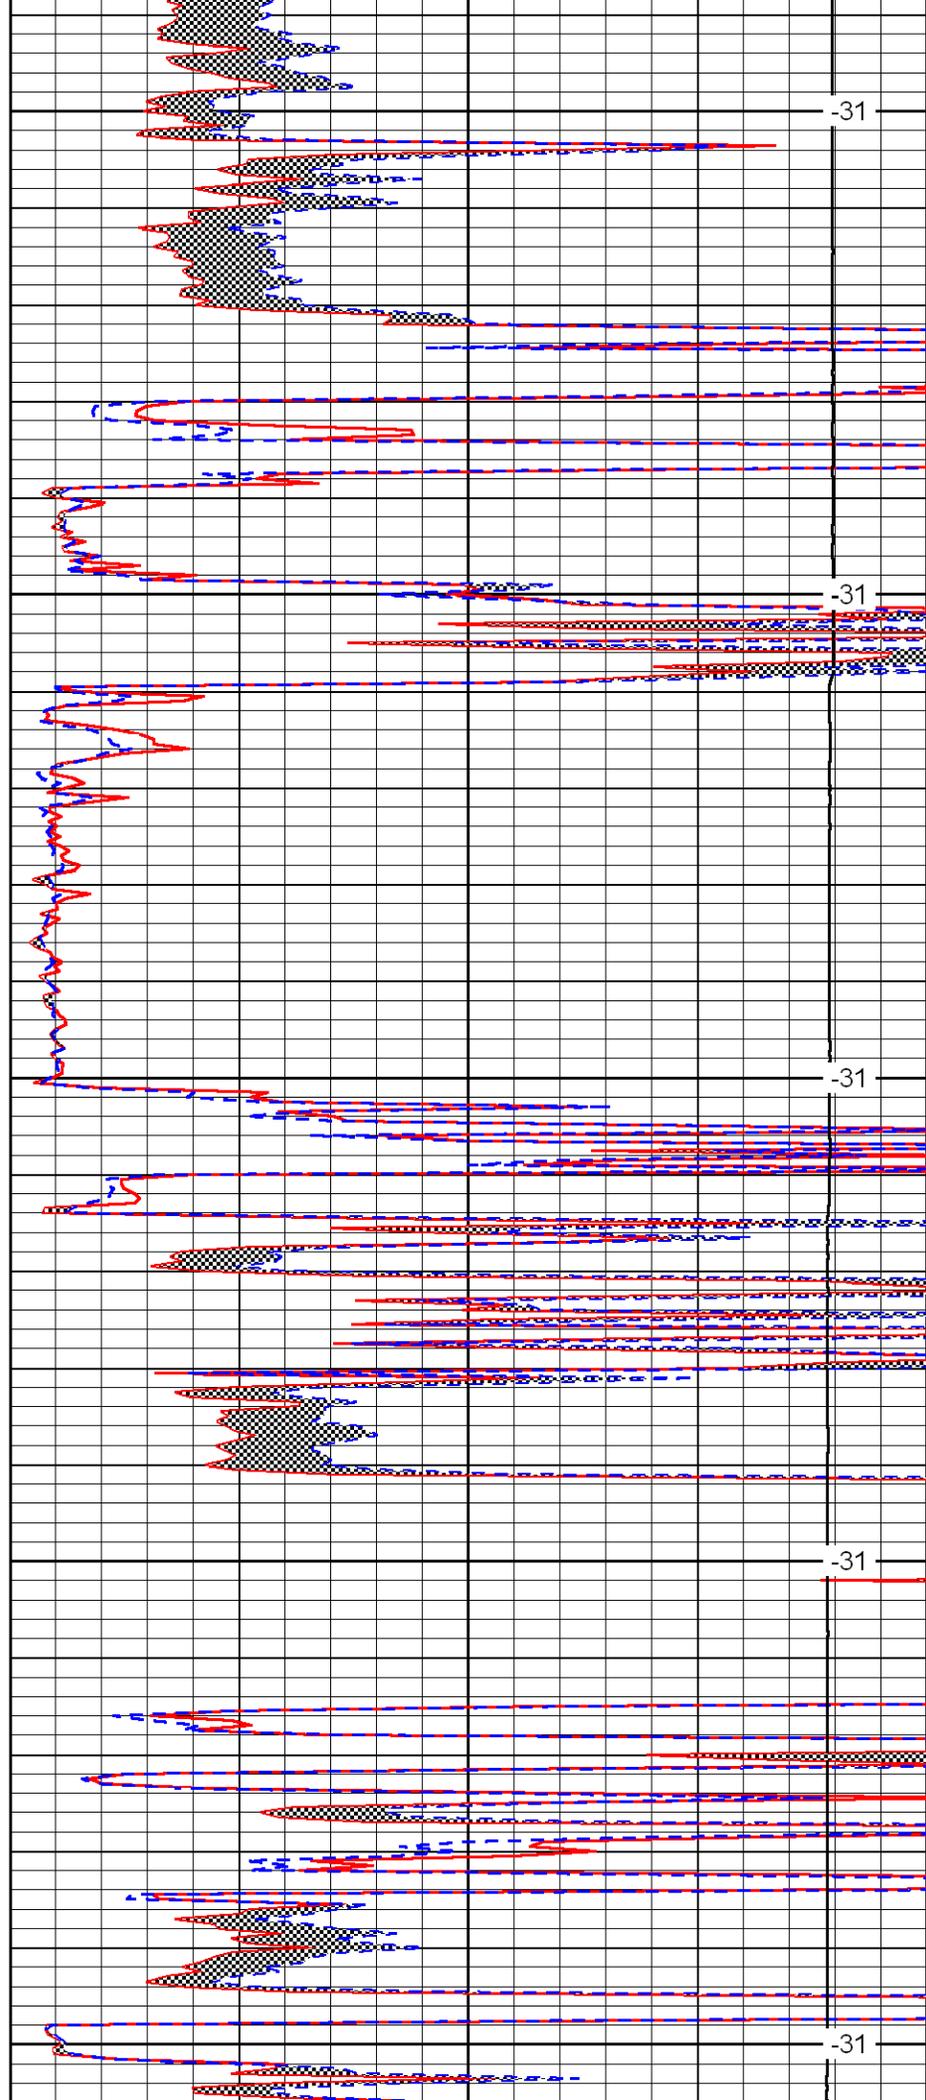


-31

-31

-31

-31

-31

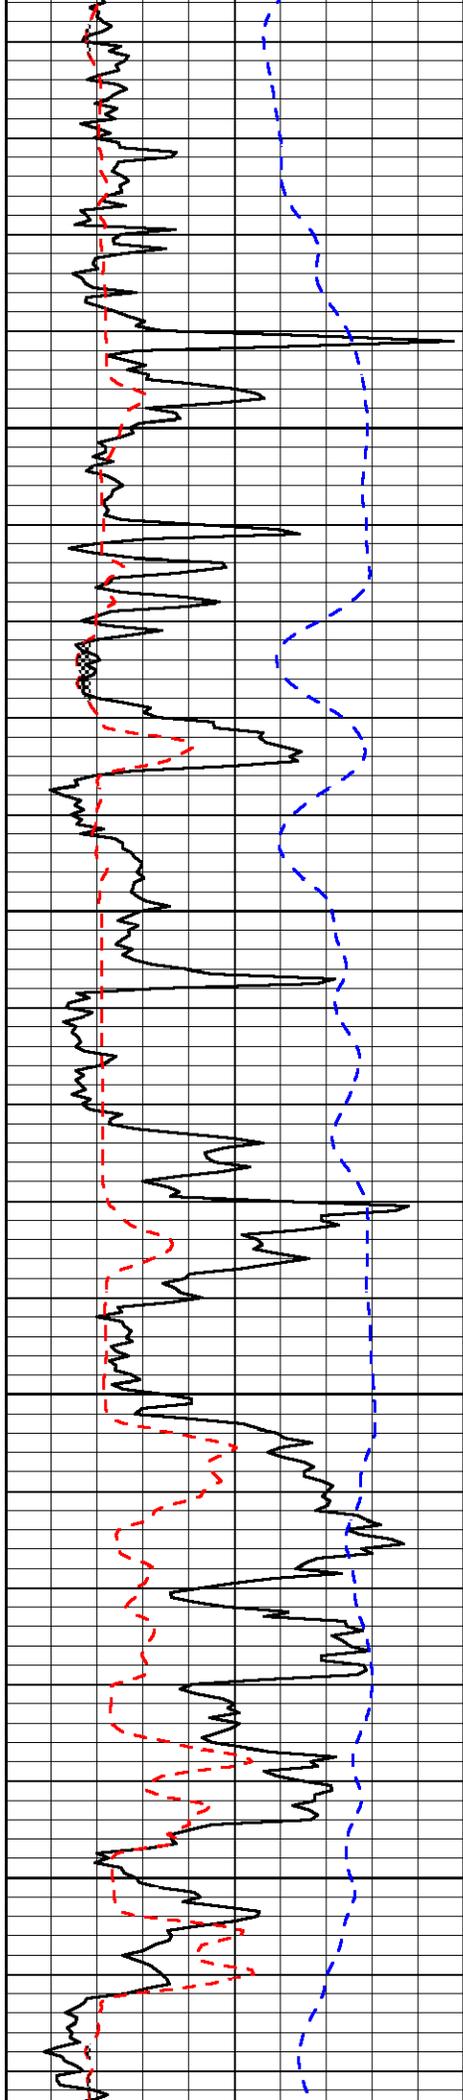


3600

3650

3700

3750

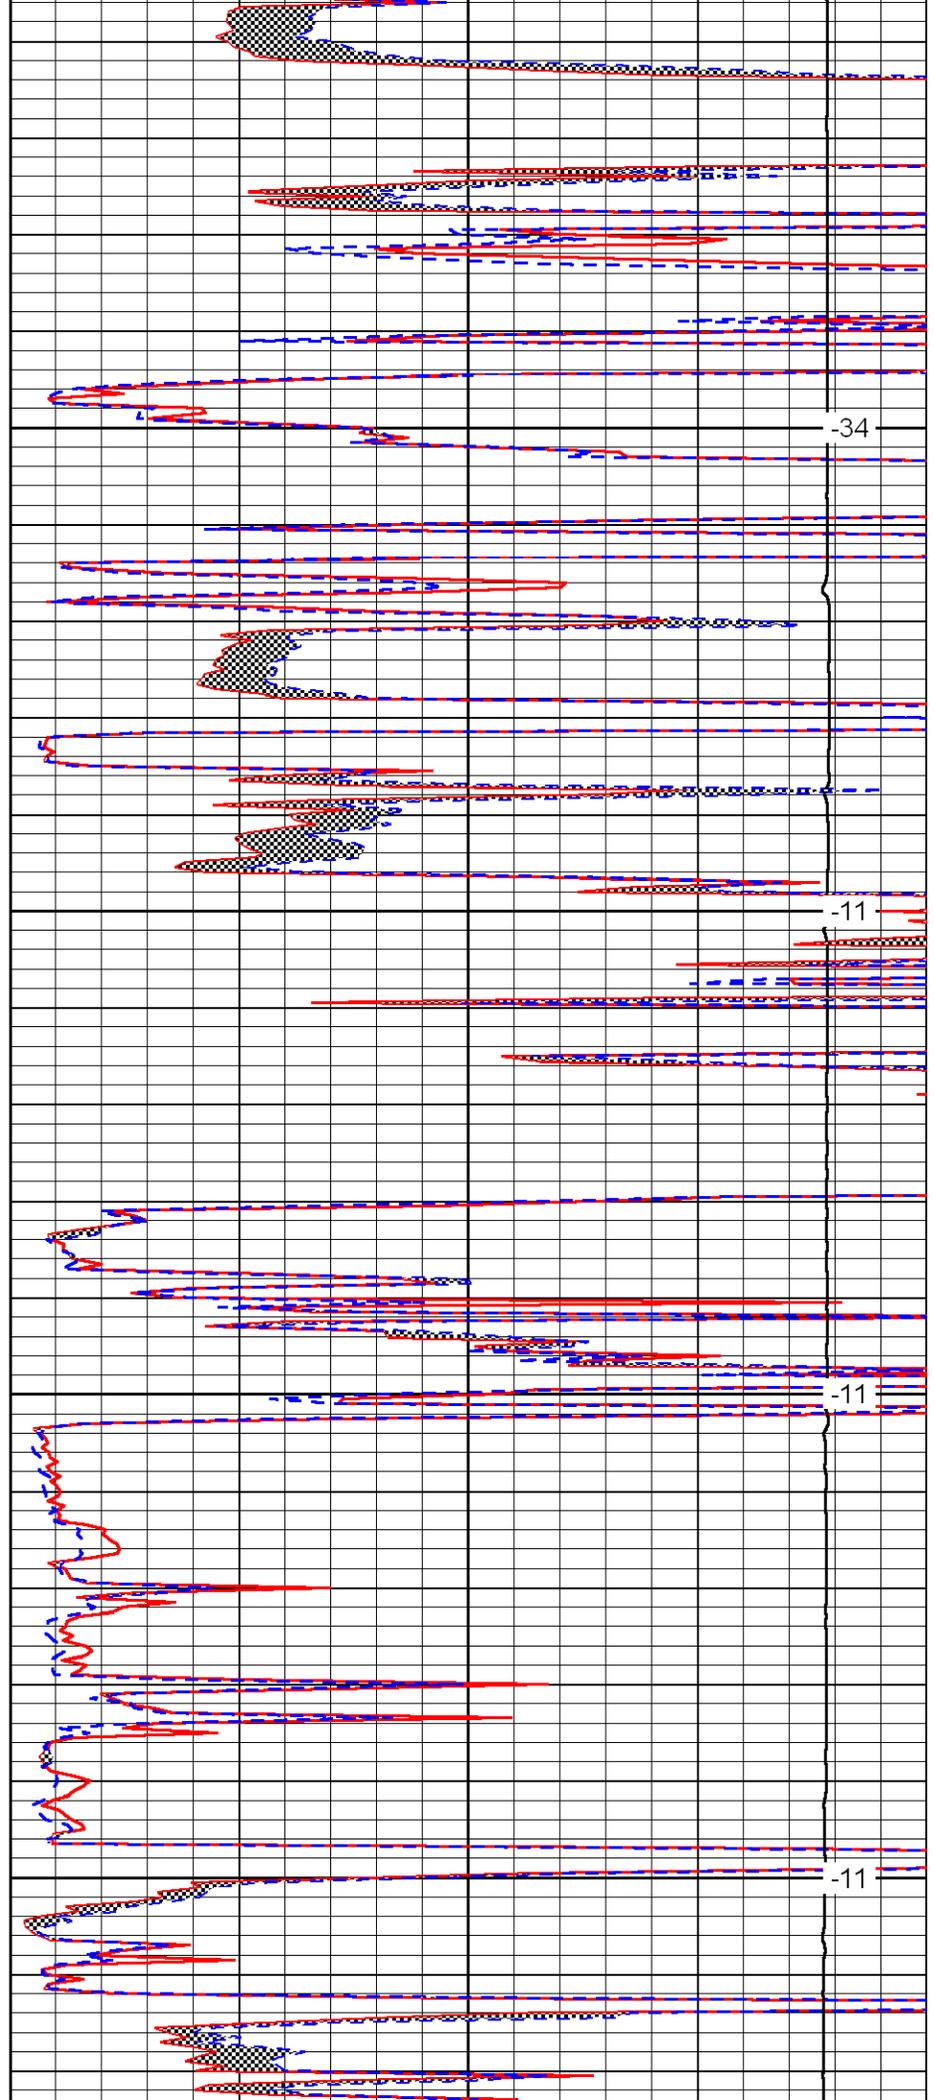


-34

-11

-11

-11

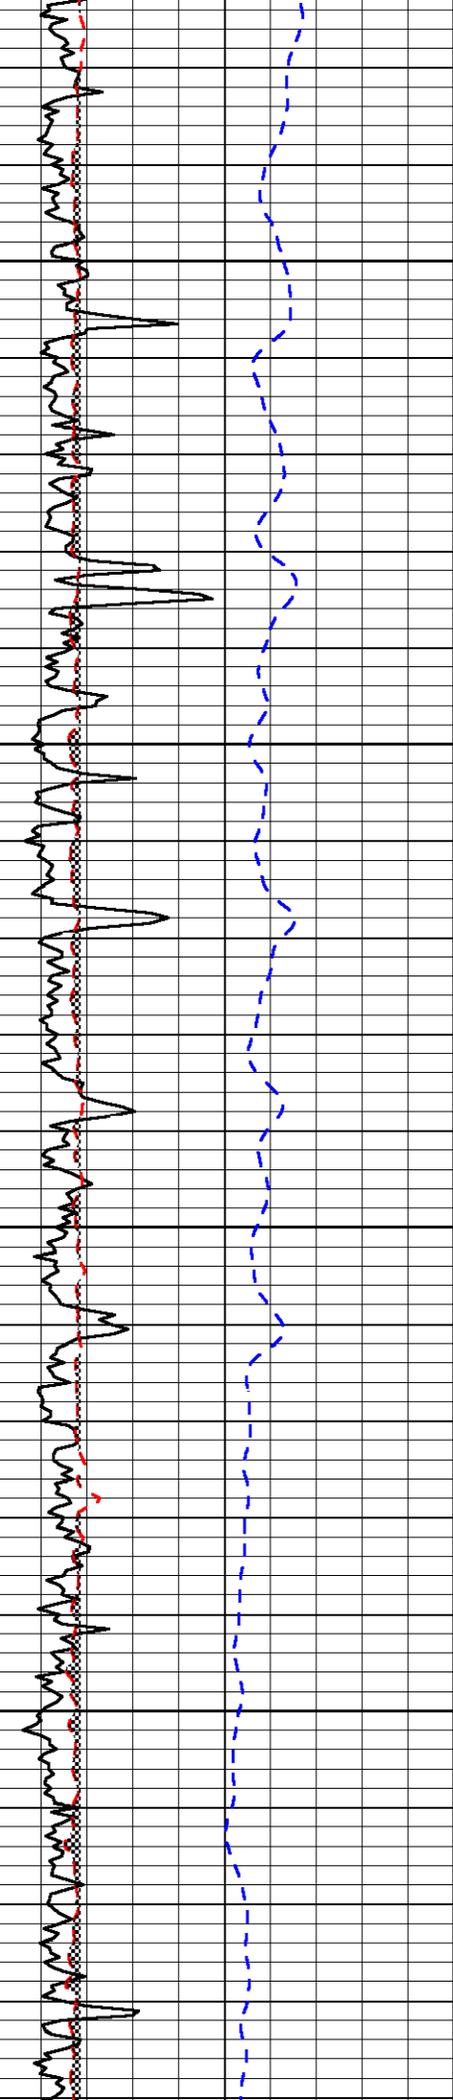


3800

3850

3900

3950

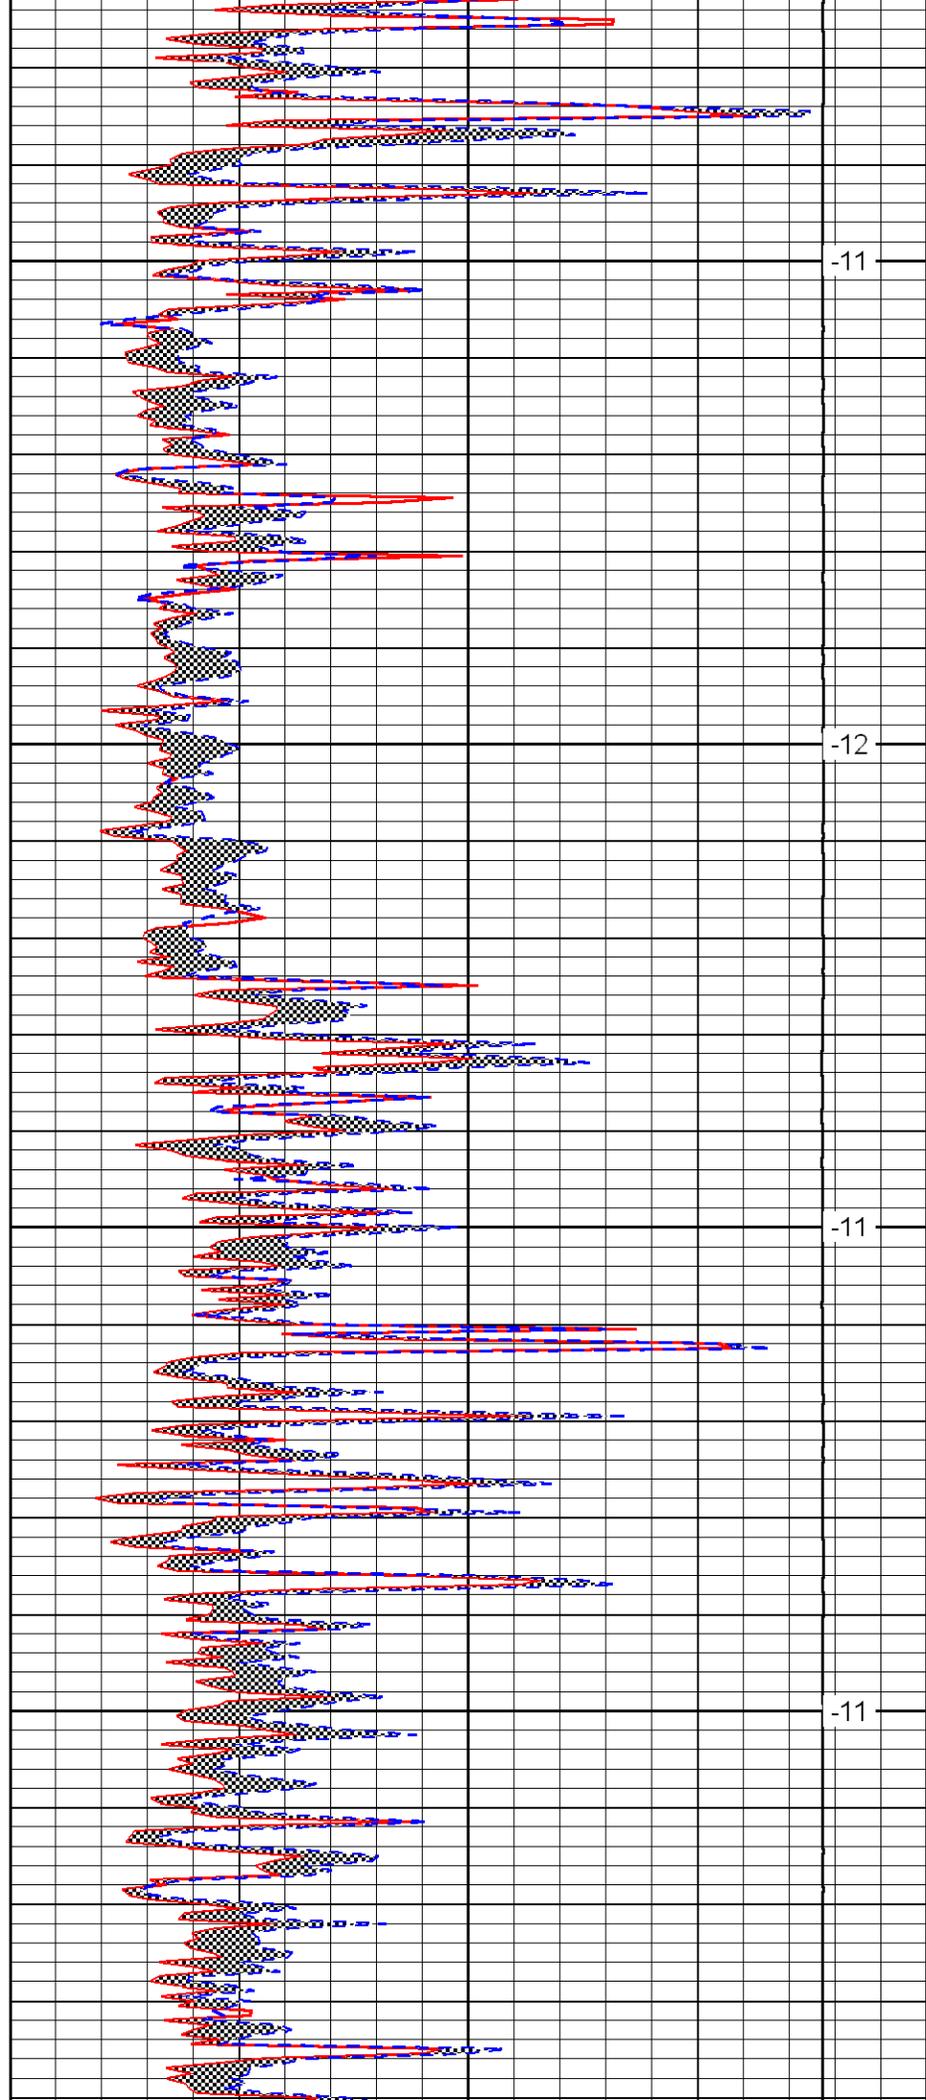


-11

-12

-11

-11

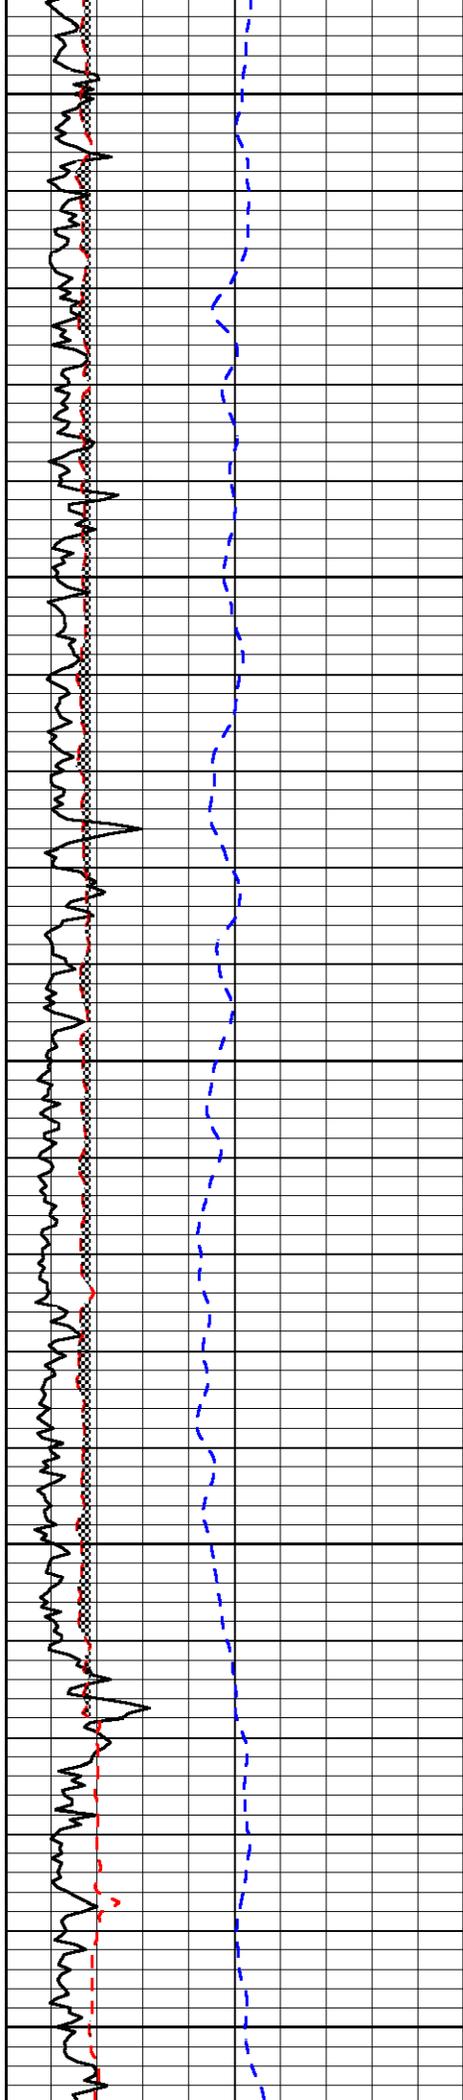


4000

4050

4100

4150

4200

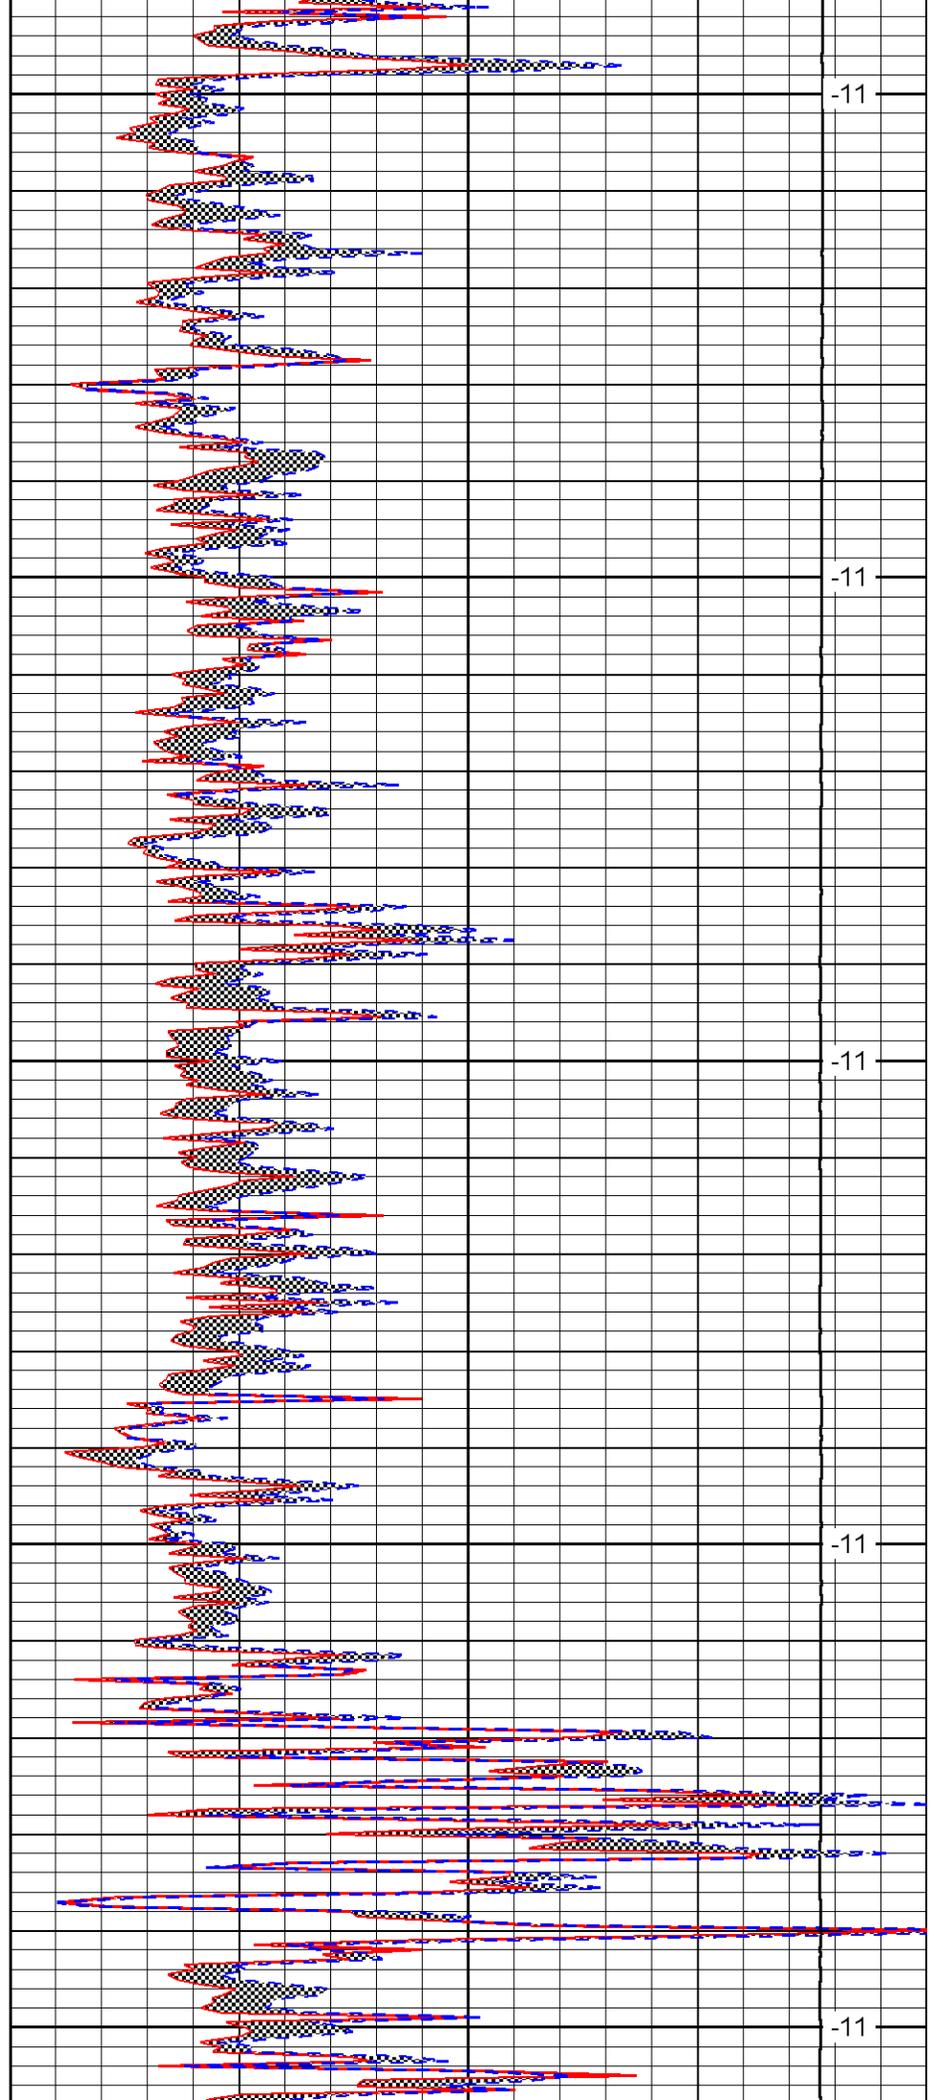


-11

-11

-11

-11

-11

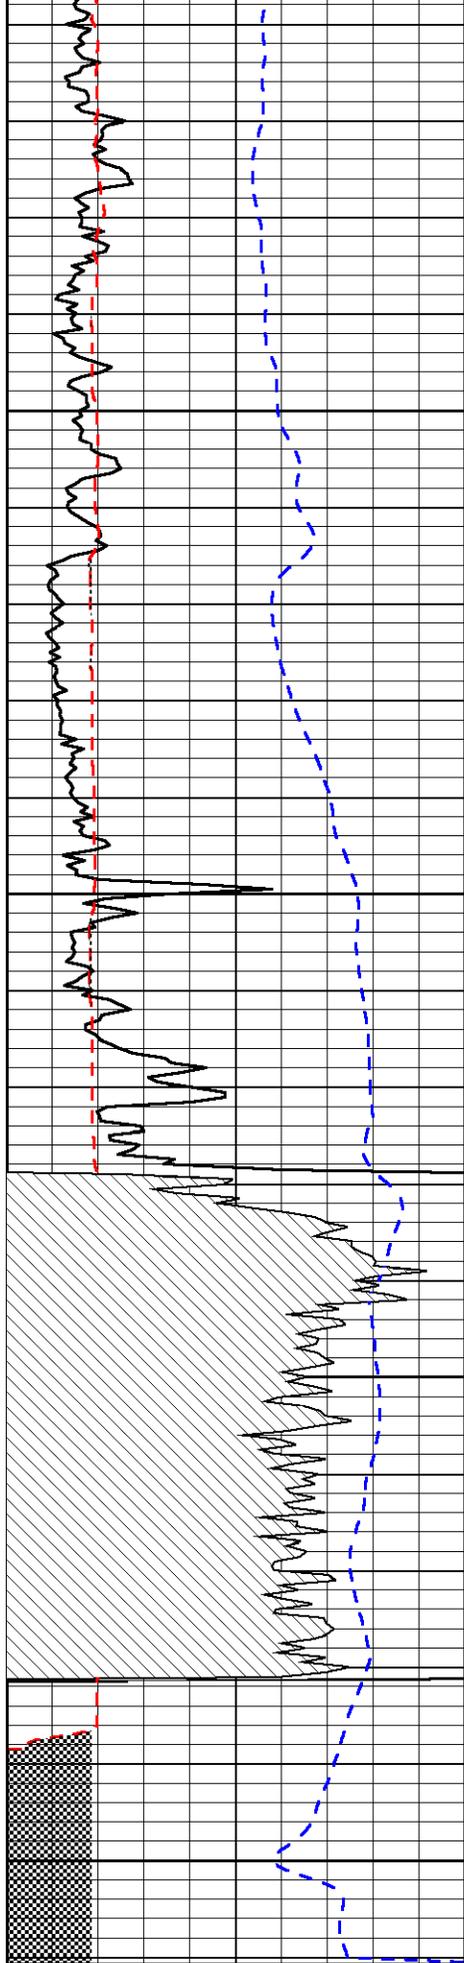


4250

4300

4350

4400

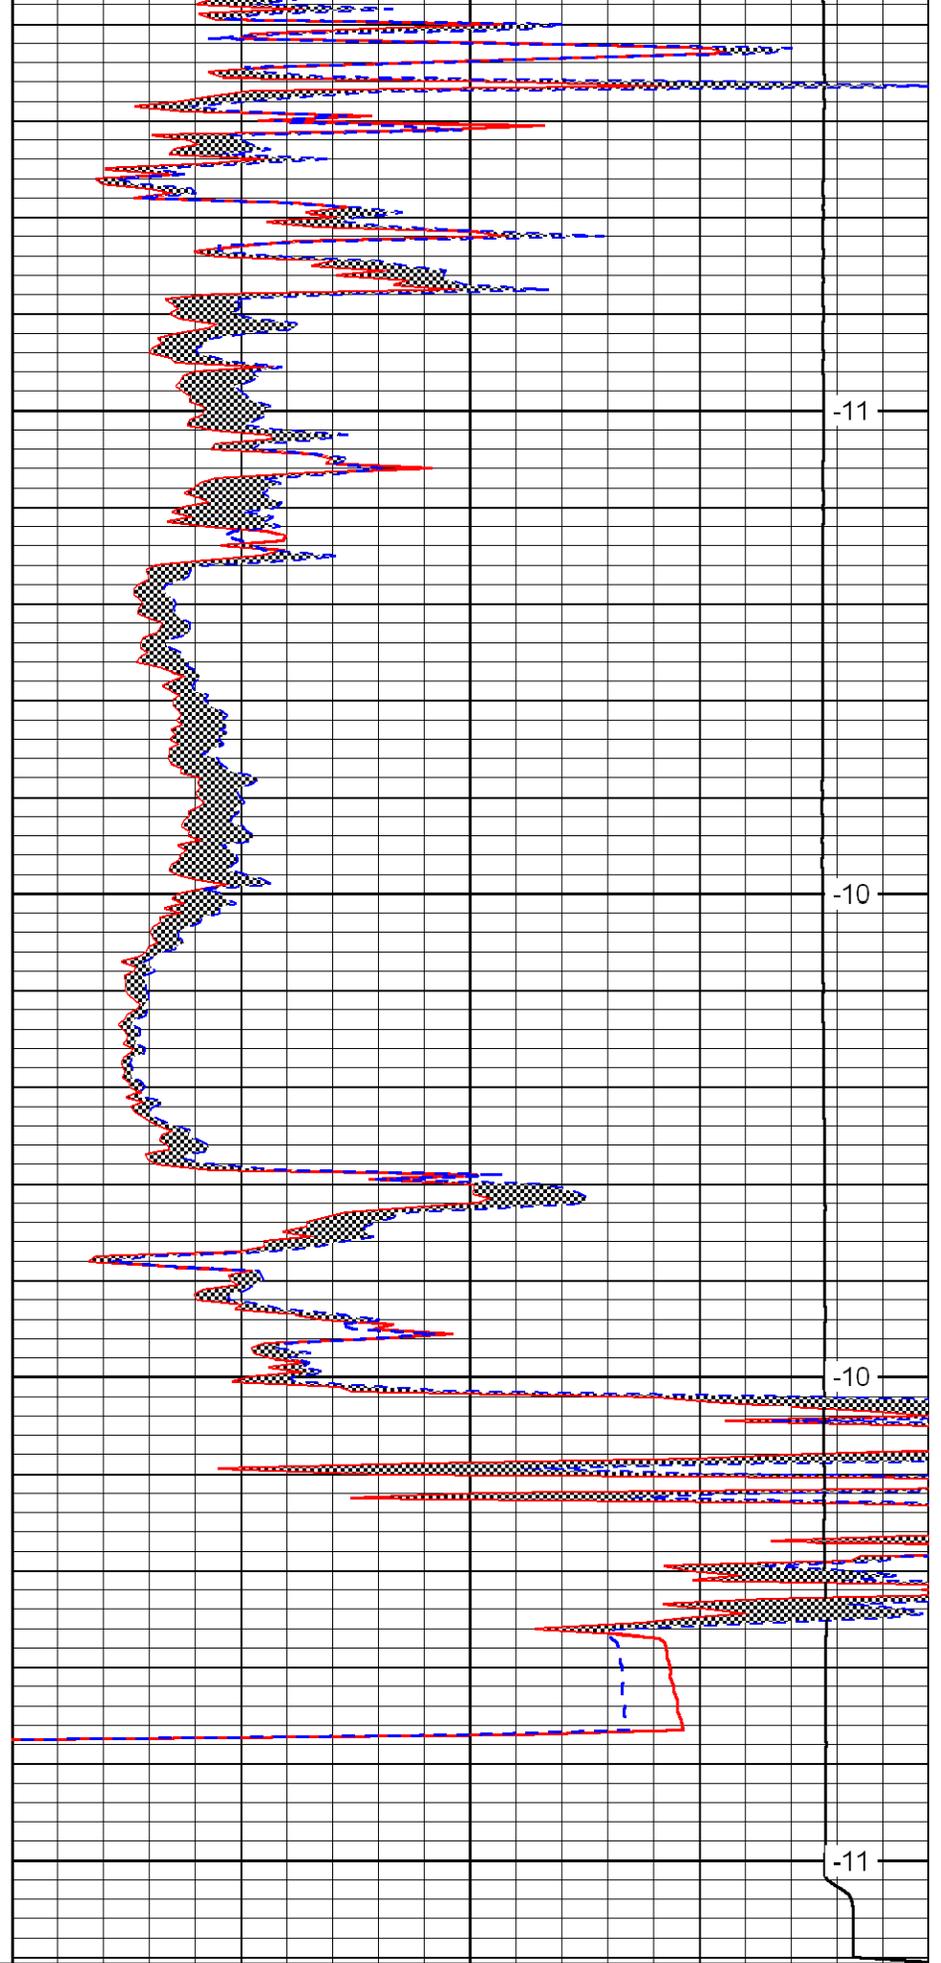

-11

-10

-10

-11

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2' (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD (ft/min)
