



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-025-21,485-00-00

Company Falcon Exploration, Inc.

Well YBC No. 1-28

Field Wildcat

County Clark

State

Kansas

Location

NE NE SE SW
1140' FSL & 2530' FWL

Sec: 28

Twp: 30S

Rge: 22W

Other Services
CNL/CDL
DIL/BHCS

Permanent Datum Ground Level

Elevation 2377

Log Measured From Kelly Bushing

10 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

K.B. 2387
D.F.
G.L. 2377

Date 09/29/2009

Run Number Two

Depth Driller 6415

Depth Logger 6421

Bottom Logged Interval 6420

Top Log Interval 3200

Casing Driller 8.625 @ 692

Casing Logger 692

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 6.500

Density / Viscosity 9.2 68

pH / Fluid Loss 10.5 8.8

Source of Sample Flowline

Rm @ Meas. Temp .45 @ 75

Rmf @ Meas. Temp .34 @ 75

Rmc @ Meas. Temp .61 @ 75

Source of Rmf / Rmc Charts

Rm @ BHT .24 @ 142

Operating Rig Time 6 Hours

Max Rec. Temp. F 142

Equipment Number 17

Location Hays

Recorded By Mike Garrison

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Kingsdown, 8 South to E Rd, 2 East, South Into

Database File: c:\warrior\data\falcon_ybc no. 1-28\falcon.db
Dataset Pathname: dil/falcstok
Presentation Format: micro
Dataset Creation: Tue Sep 29 14:12:38 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper	16
-200	SP (MV)	0

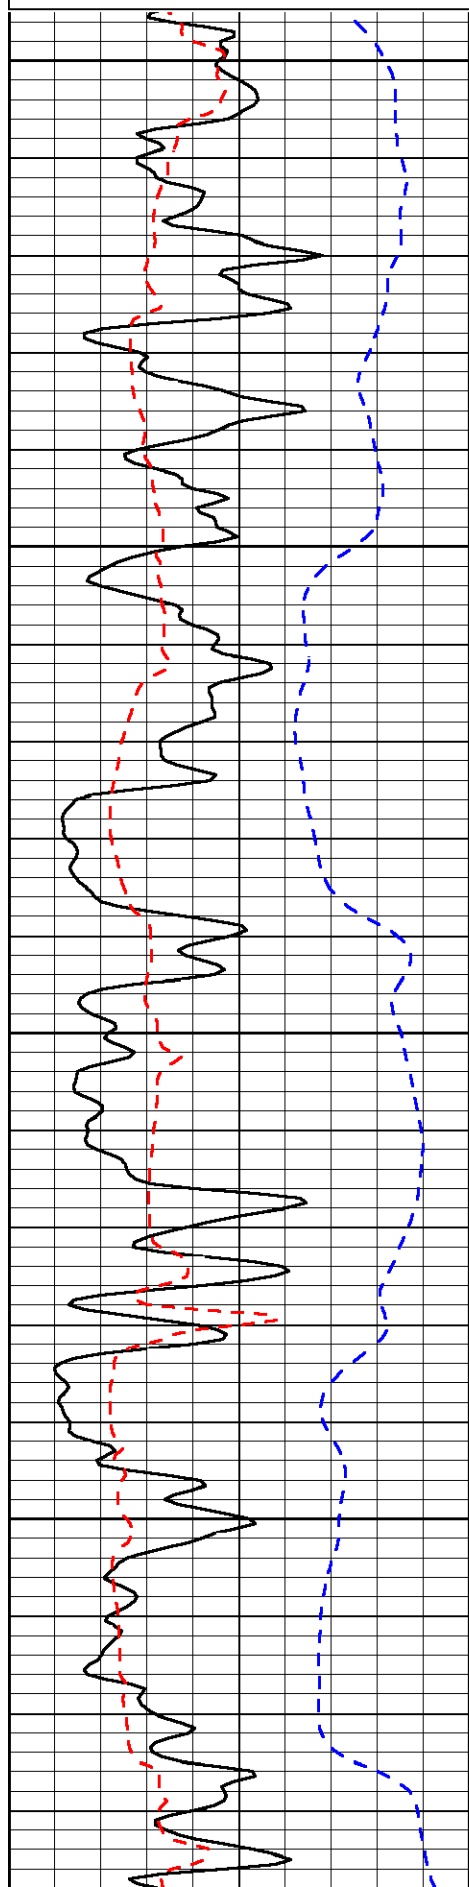

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight (lb)	0

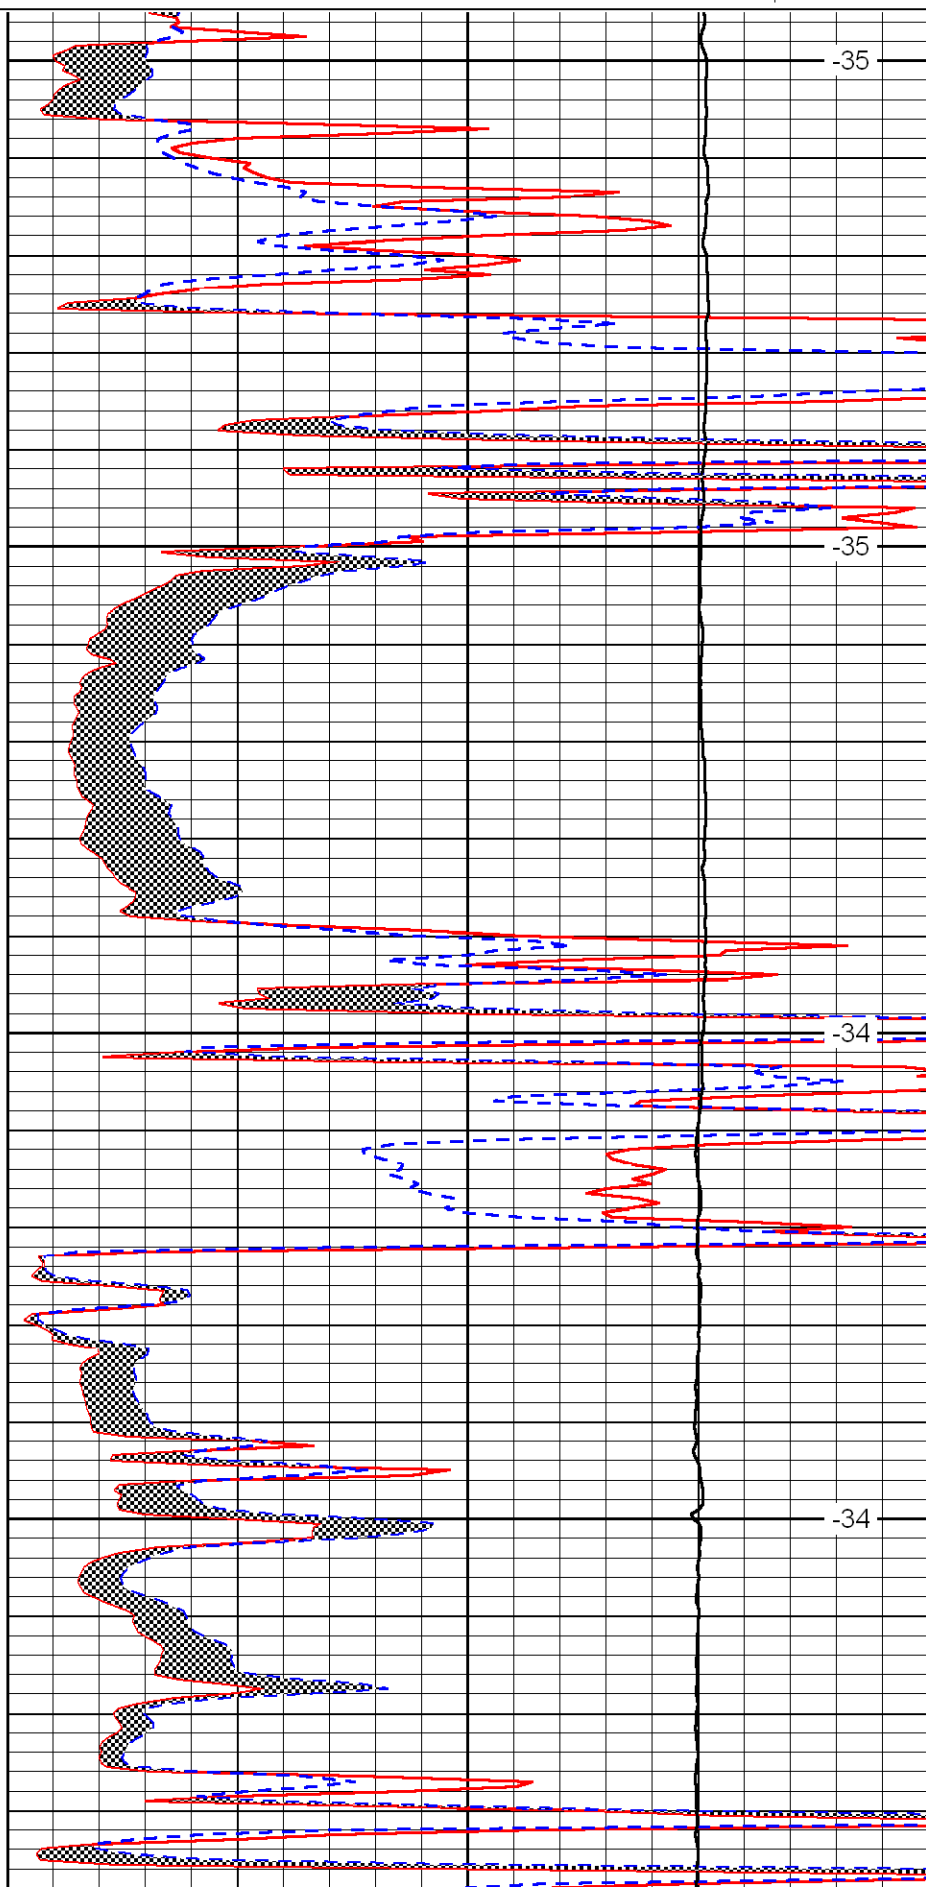

3200

3250

3300

3350


LSPD
(ft/min)

-35

-35

-34

-34

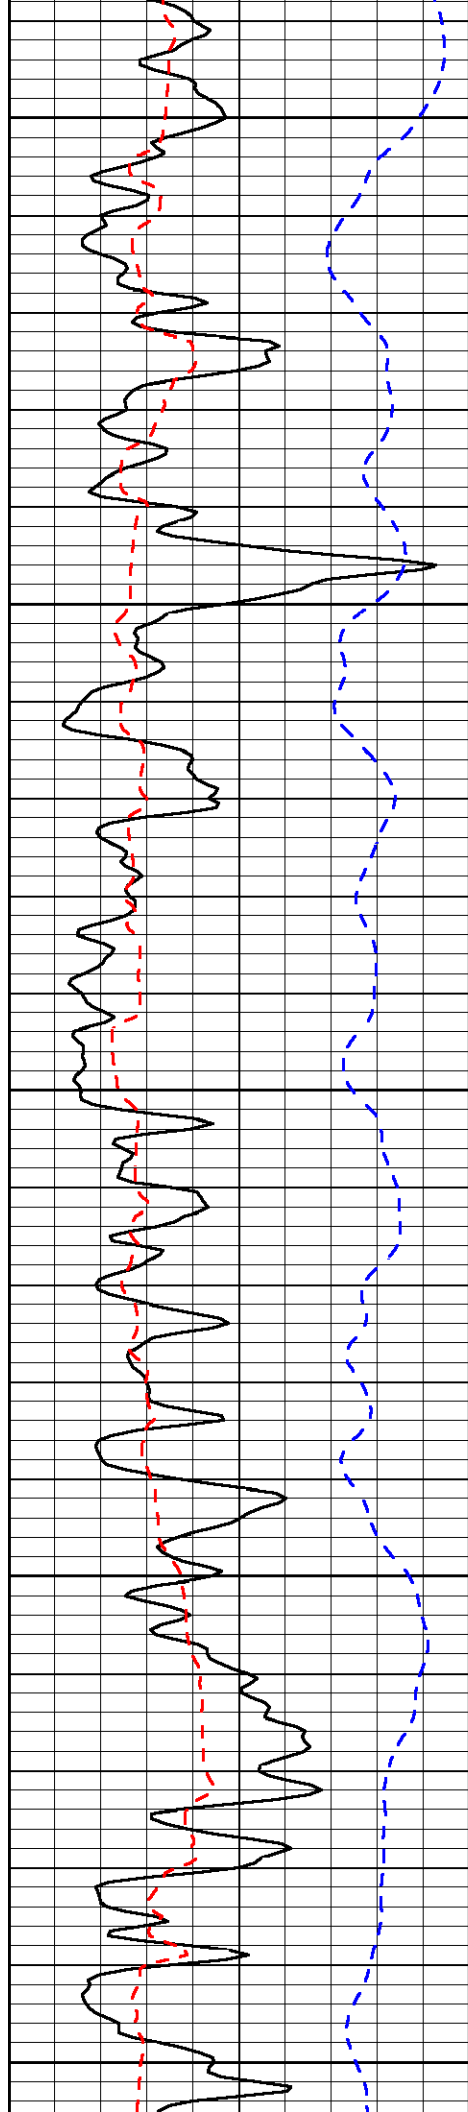


3400

3450

3500

3550

3600

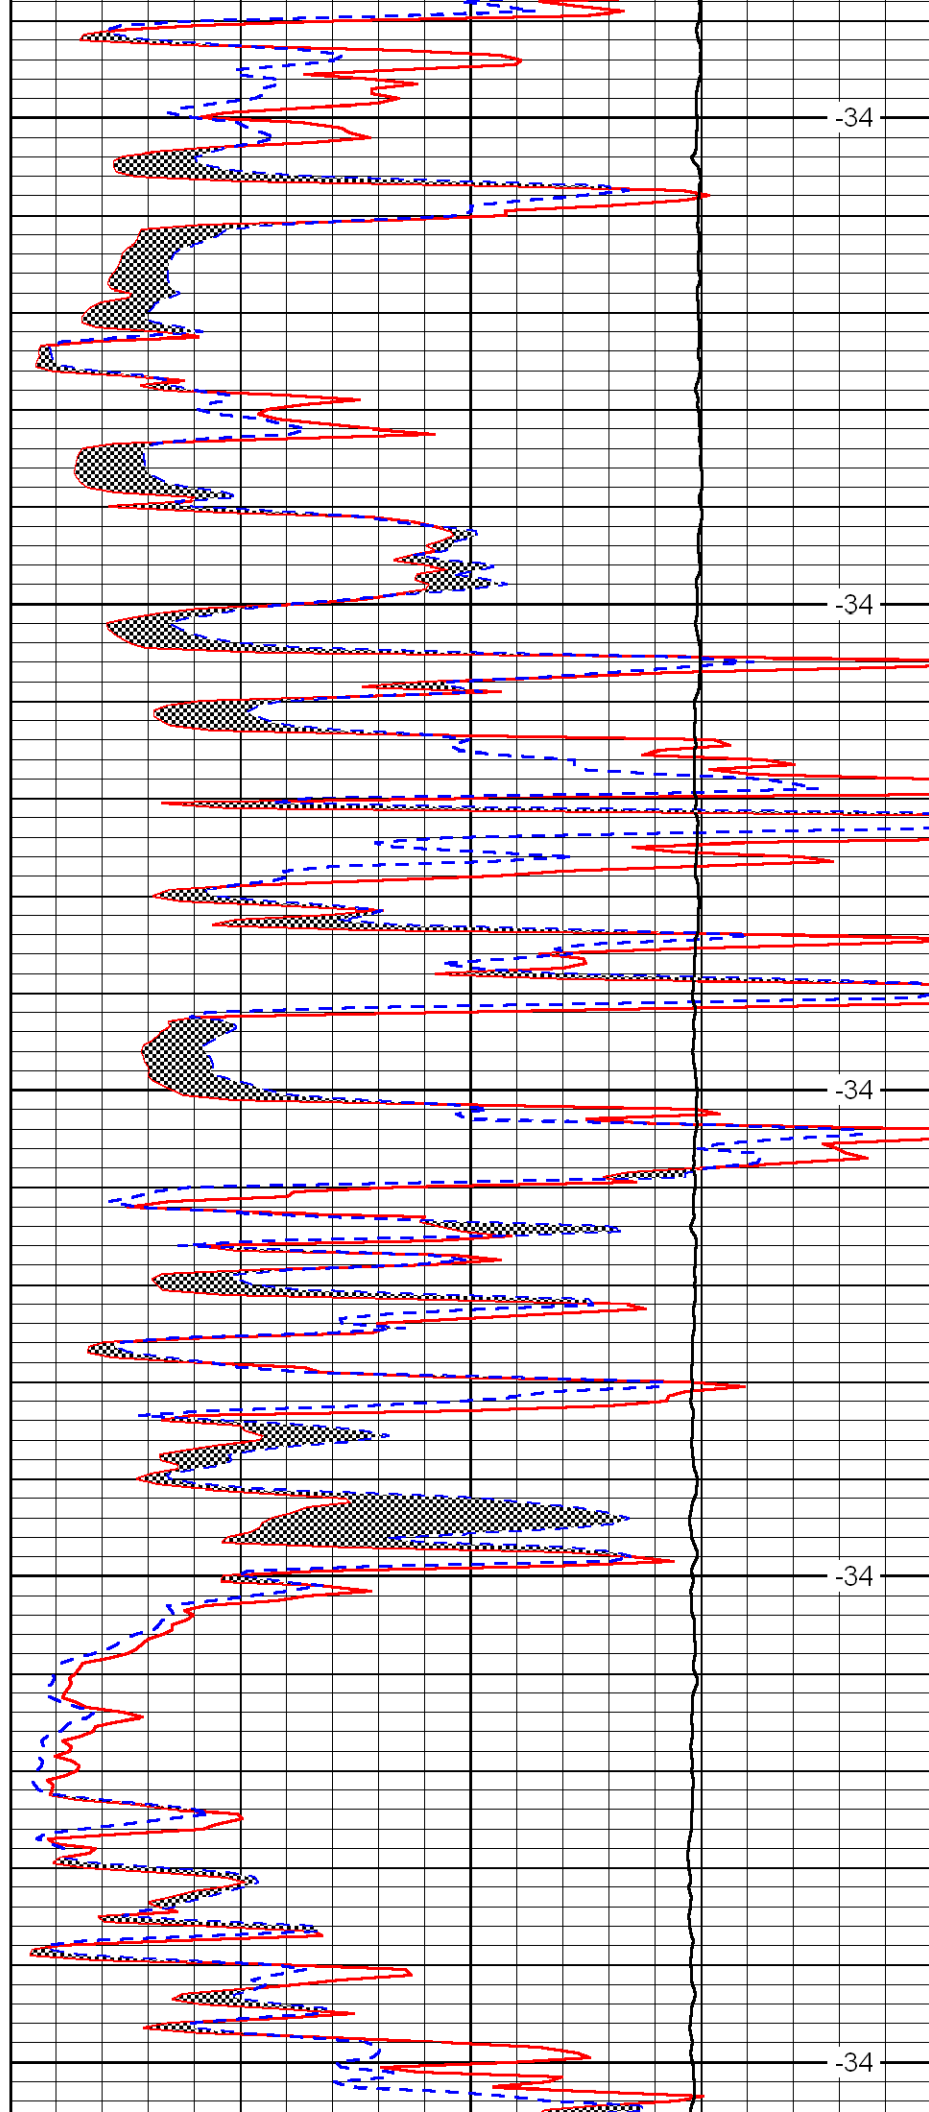


-34

-34

-34

-34

-34

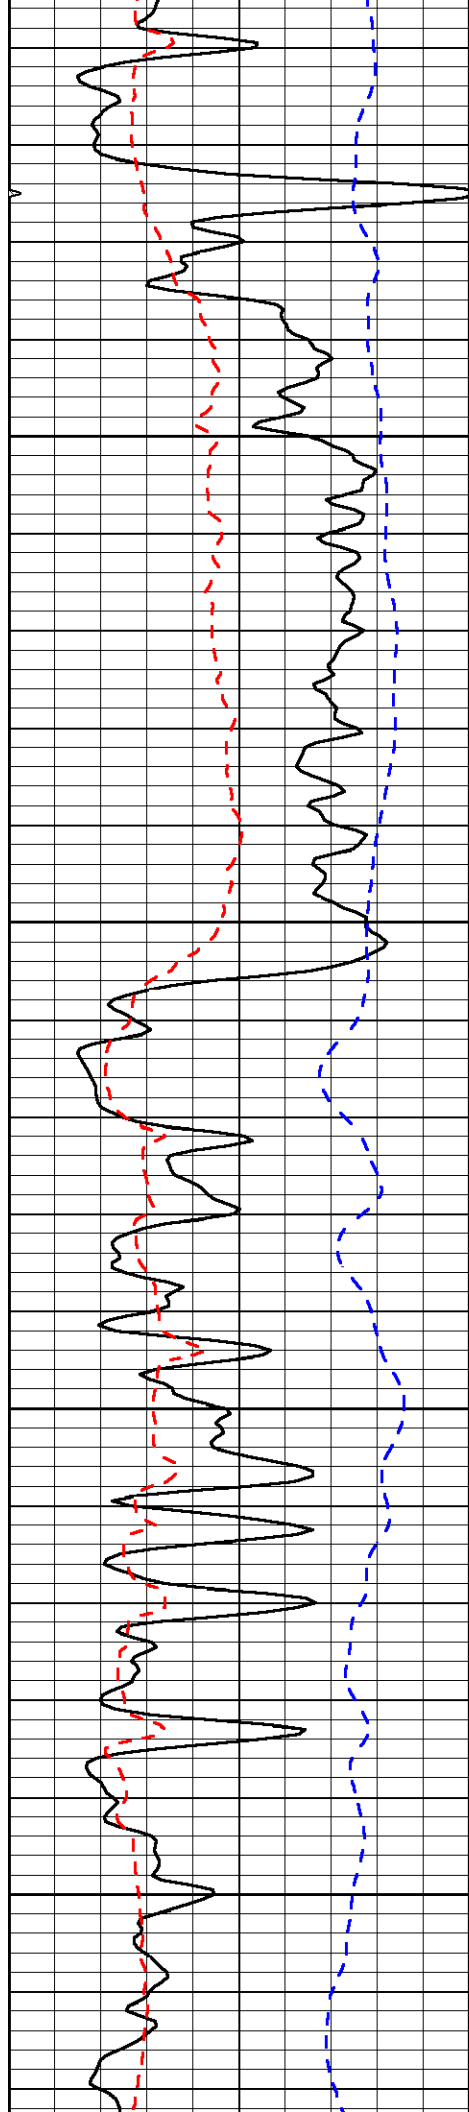


3650

3700

3750

3800

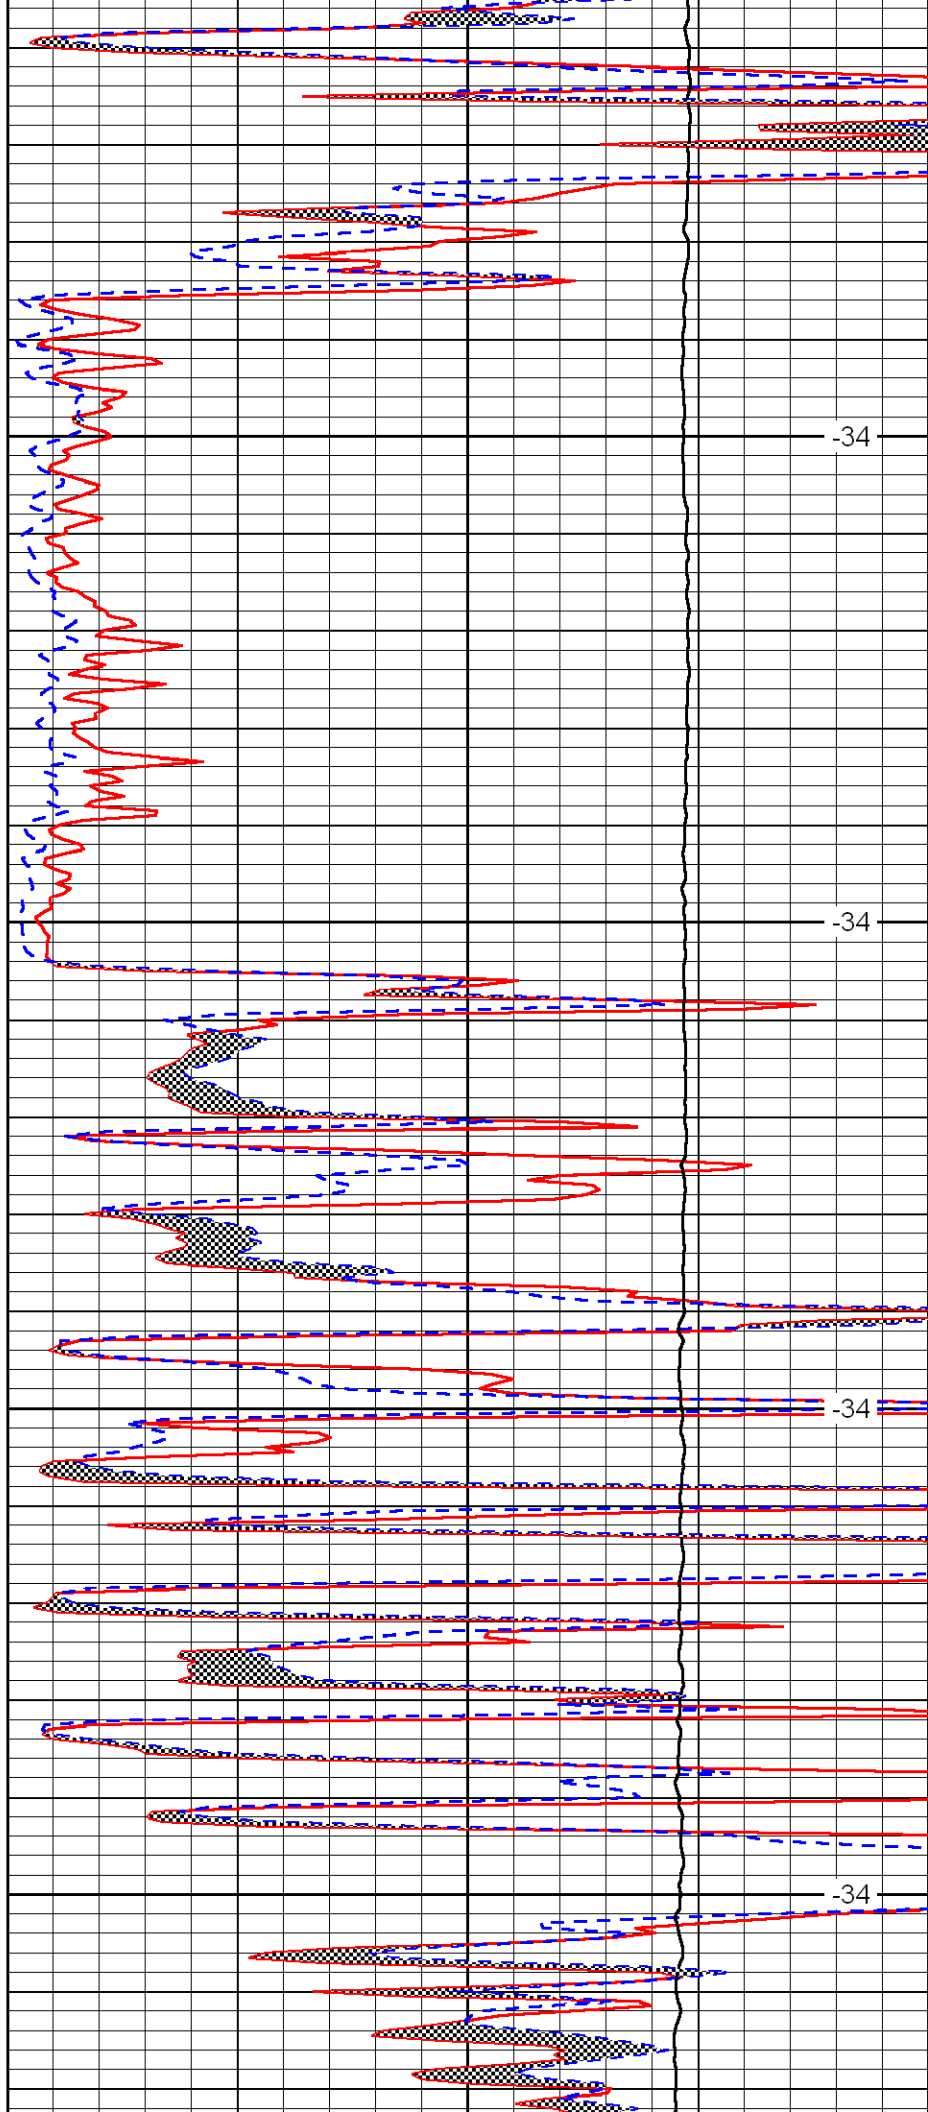


-34

-34

-34

-34

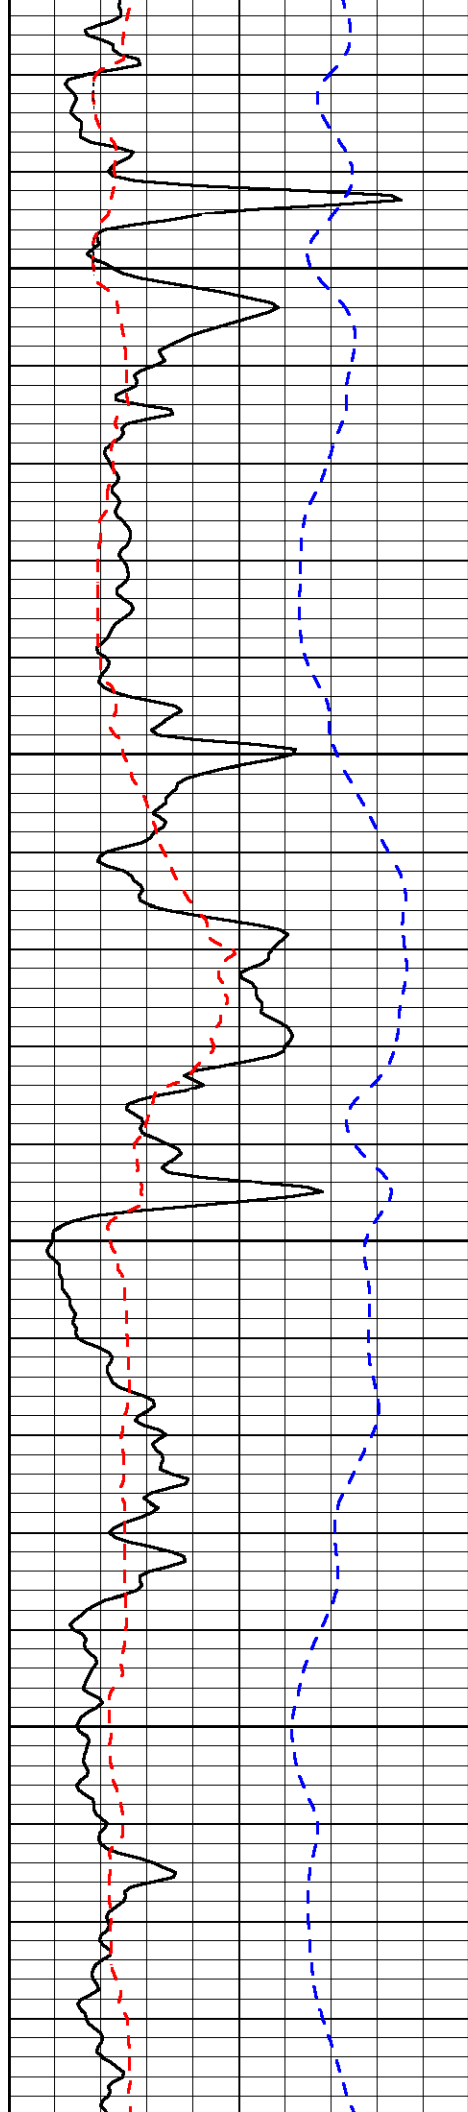



3850

3900

3950

4000

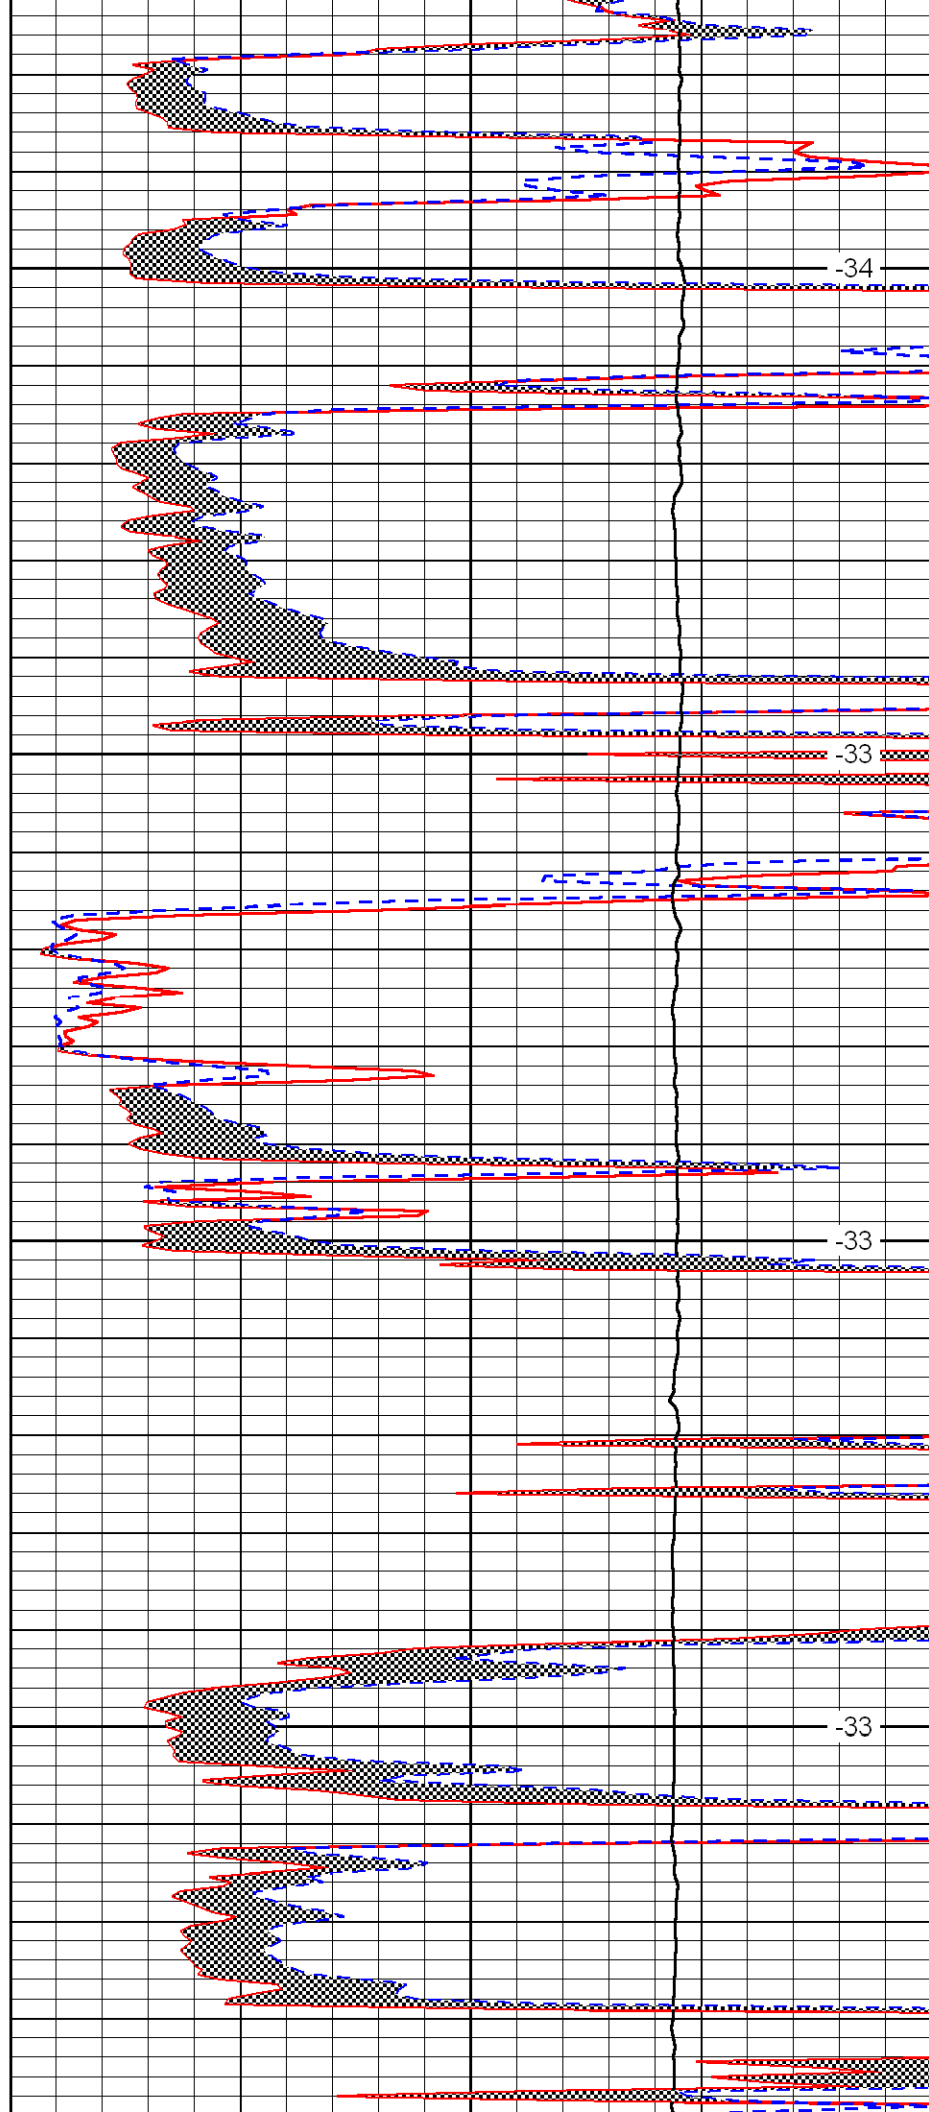

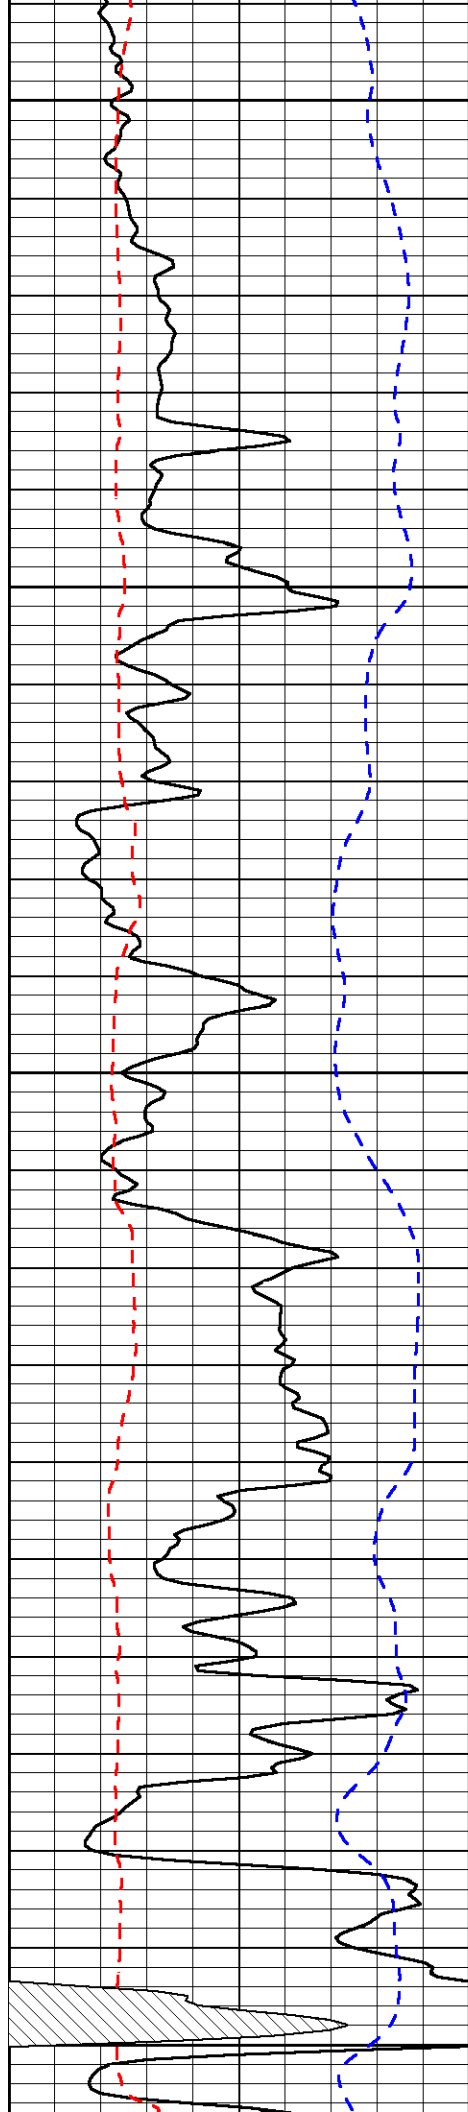


4050

4100

4150

4200

4250

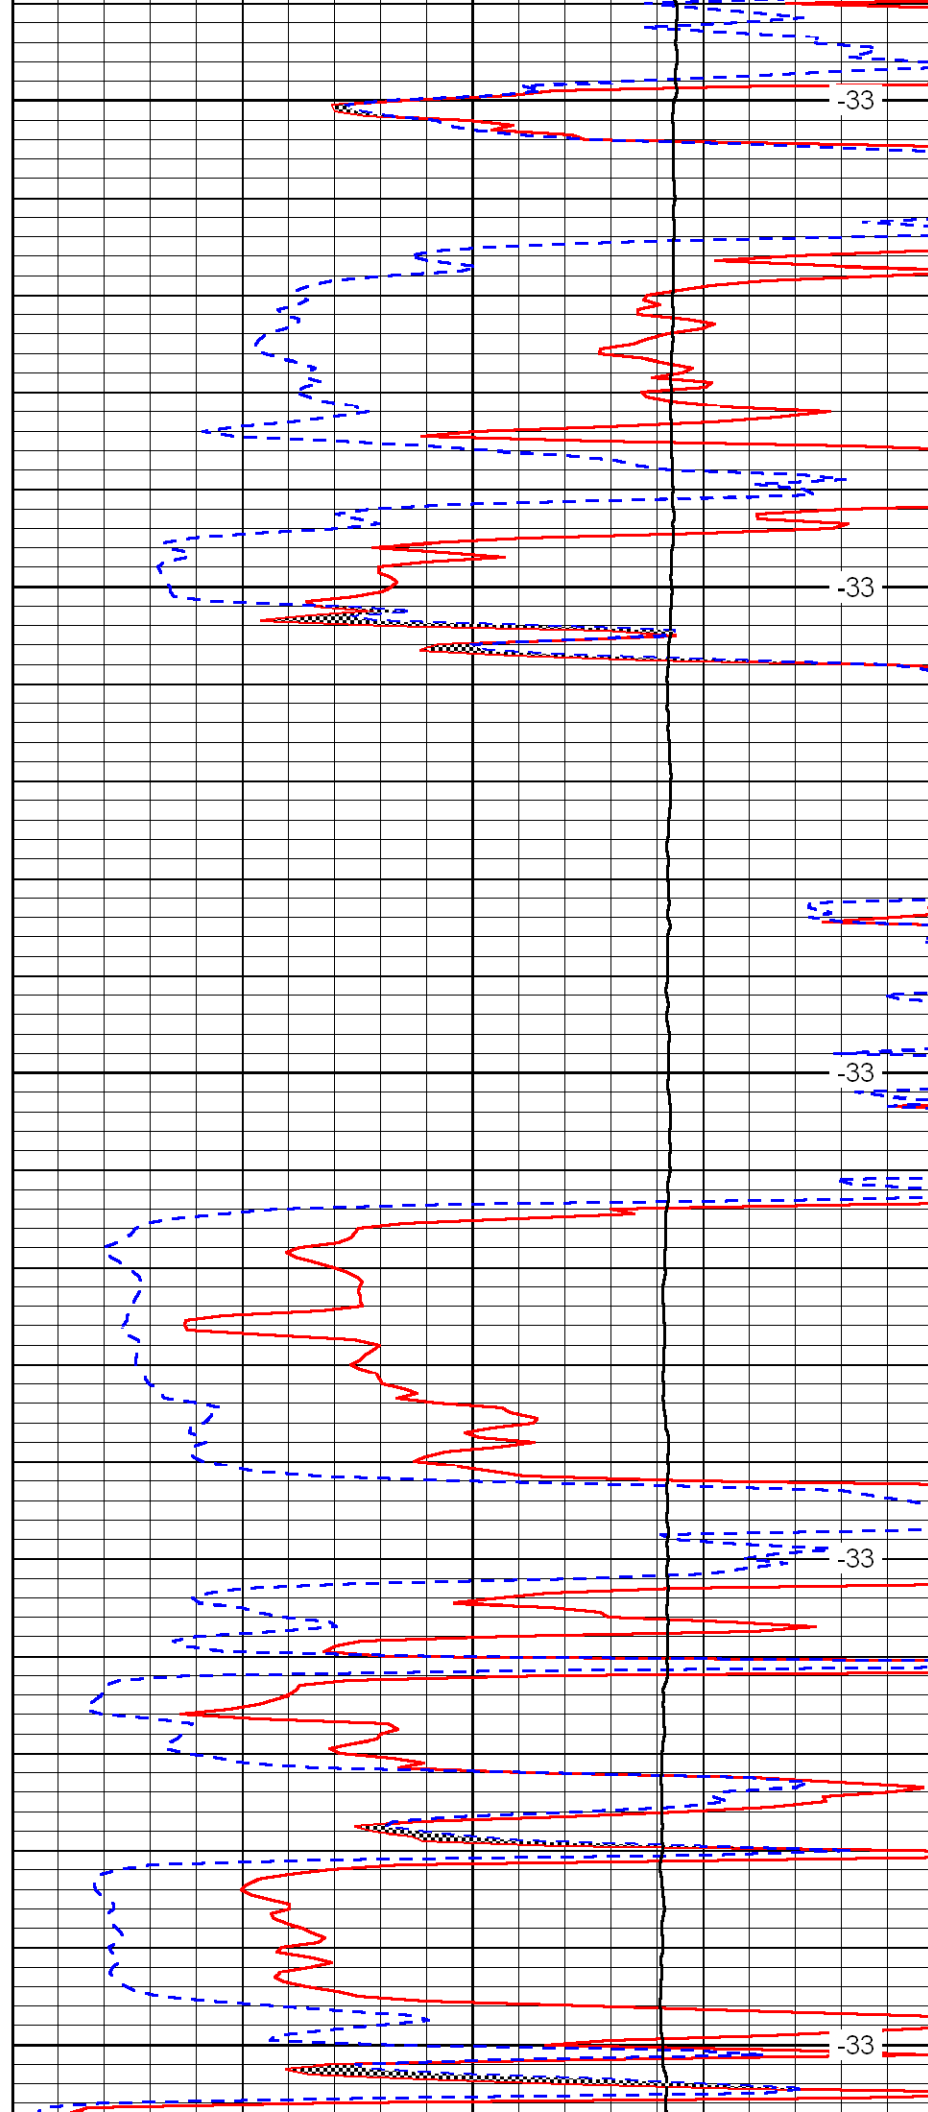


-33

-33

-33

-33

-33

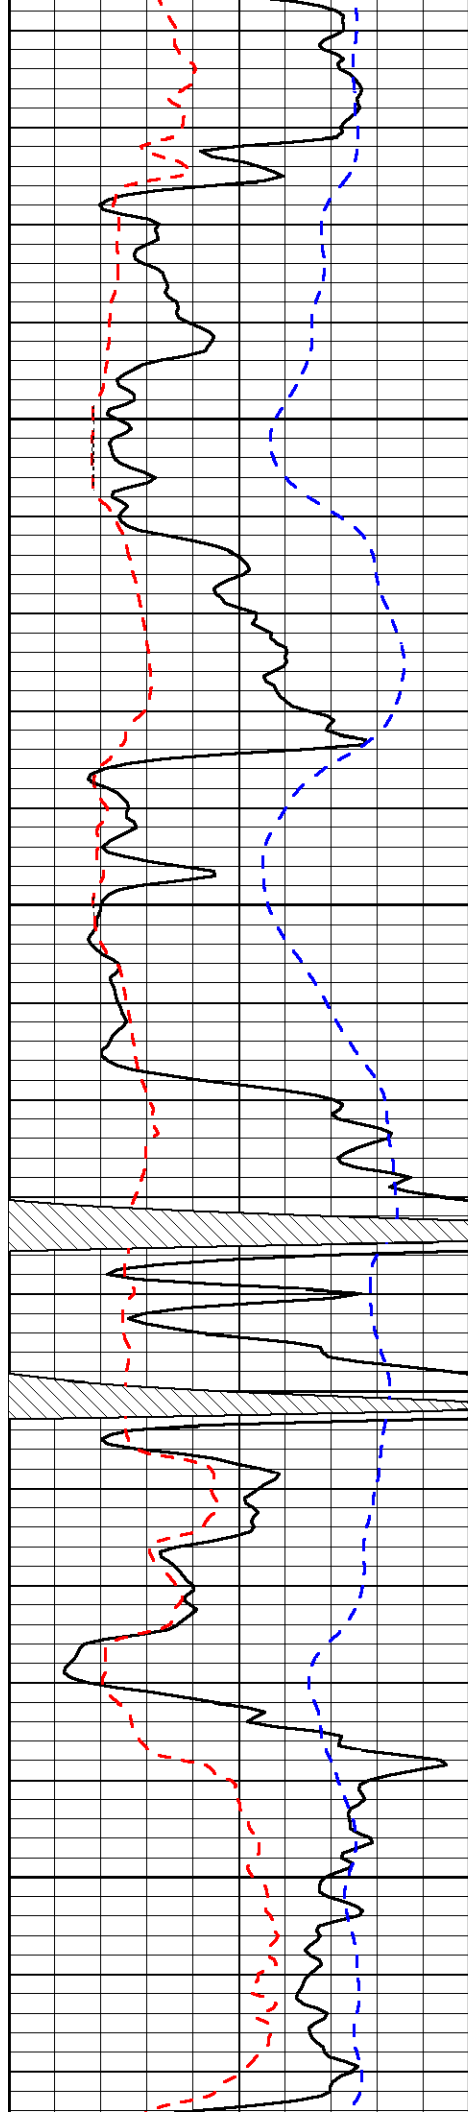


4300

4350

4400

4450

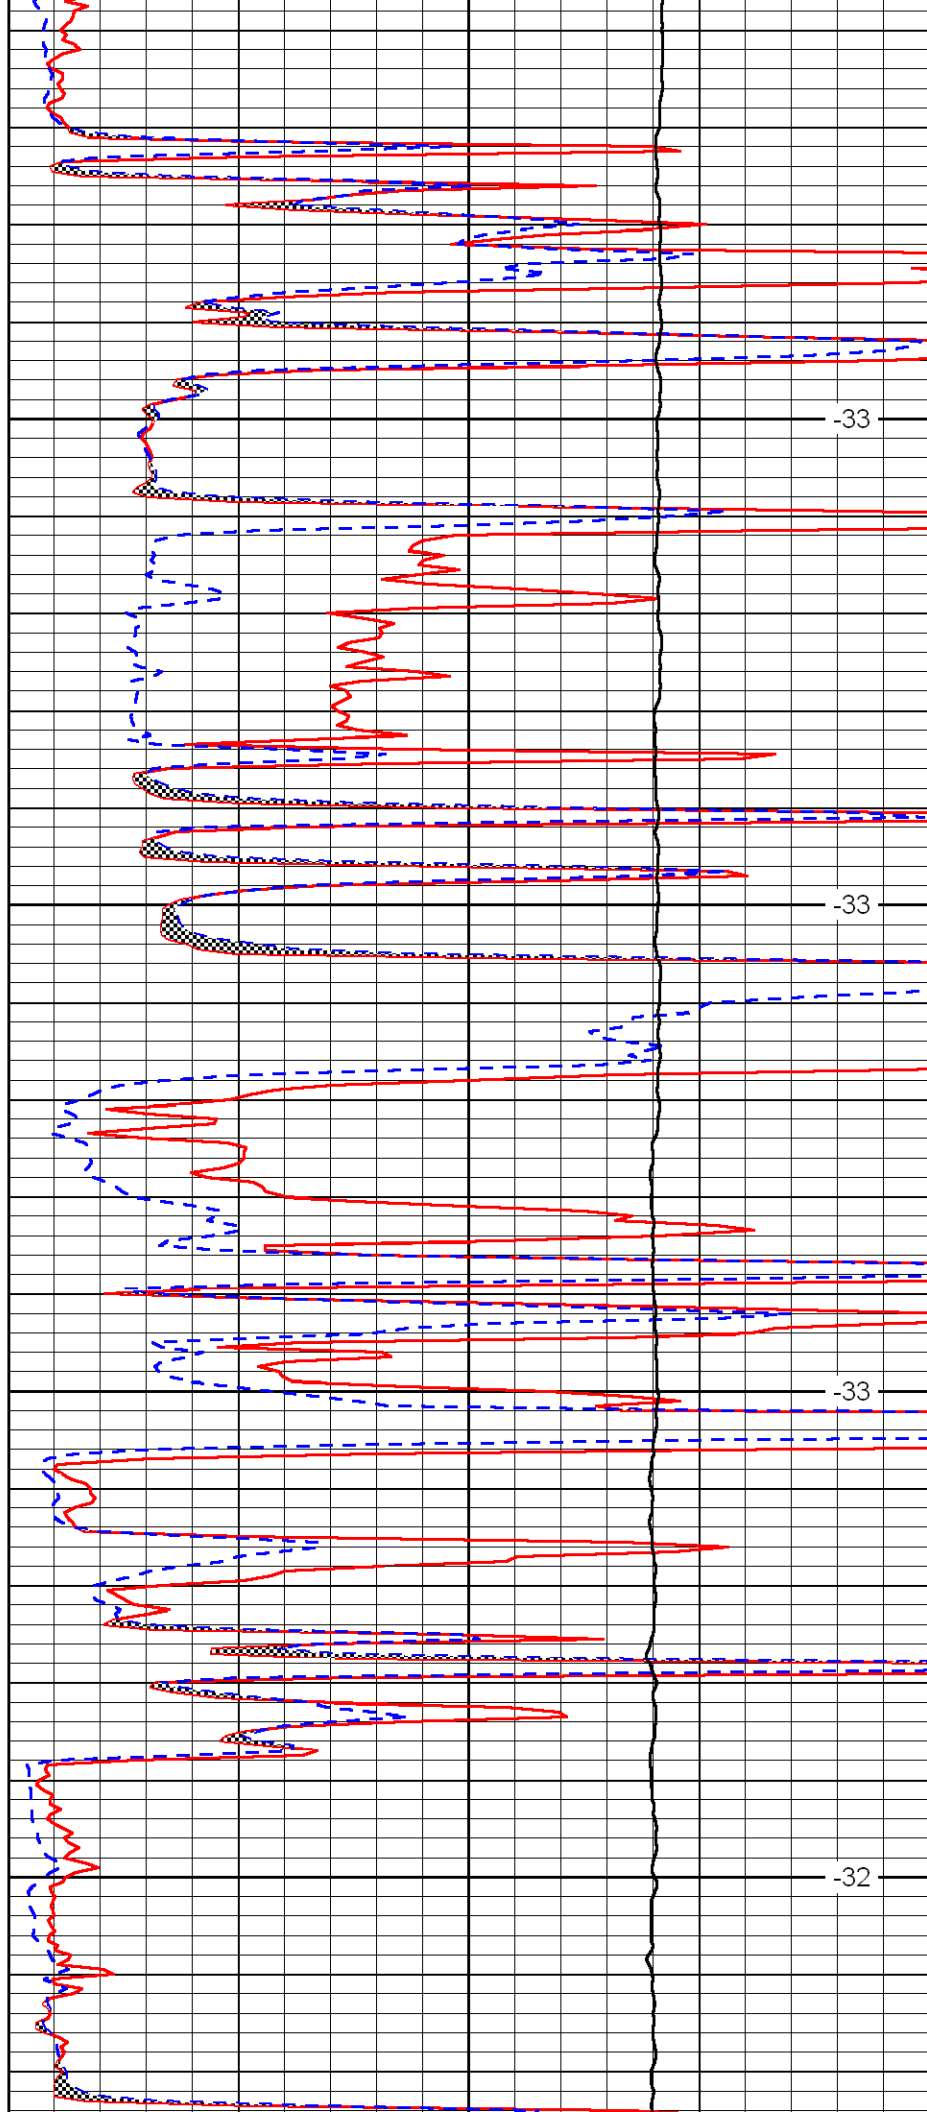


-33

-33

-33

-32

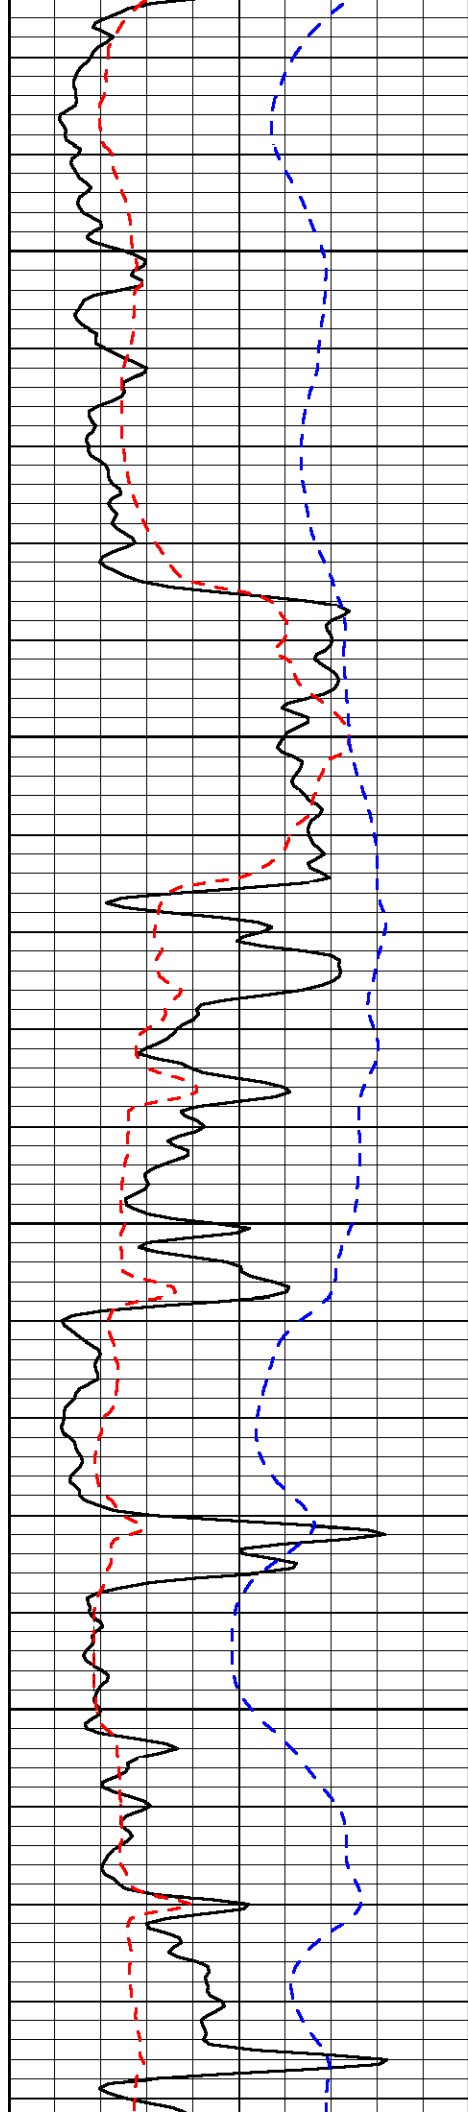



4500

4550

4600

4650

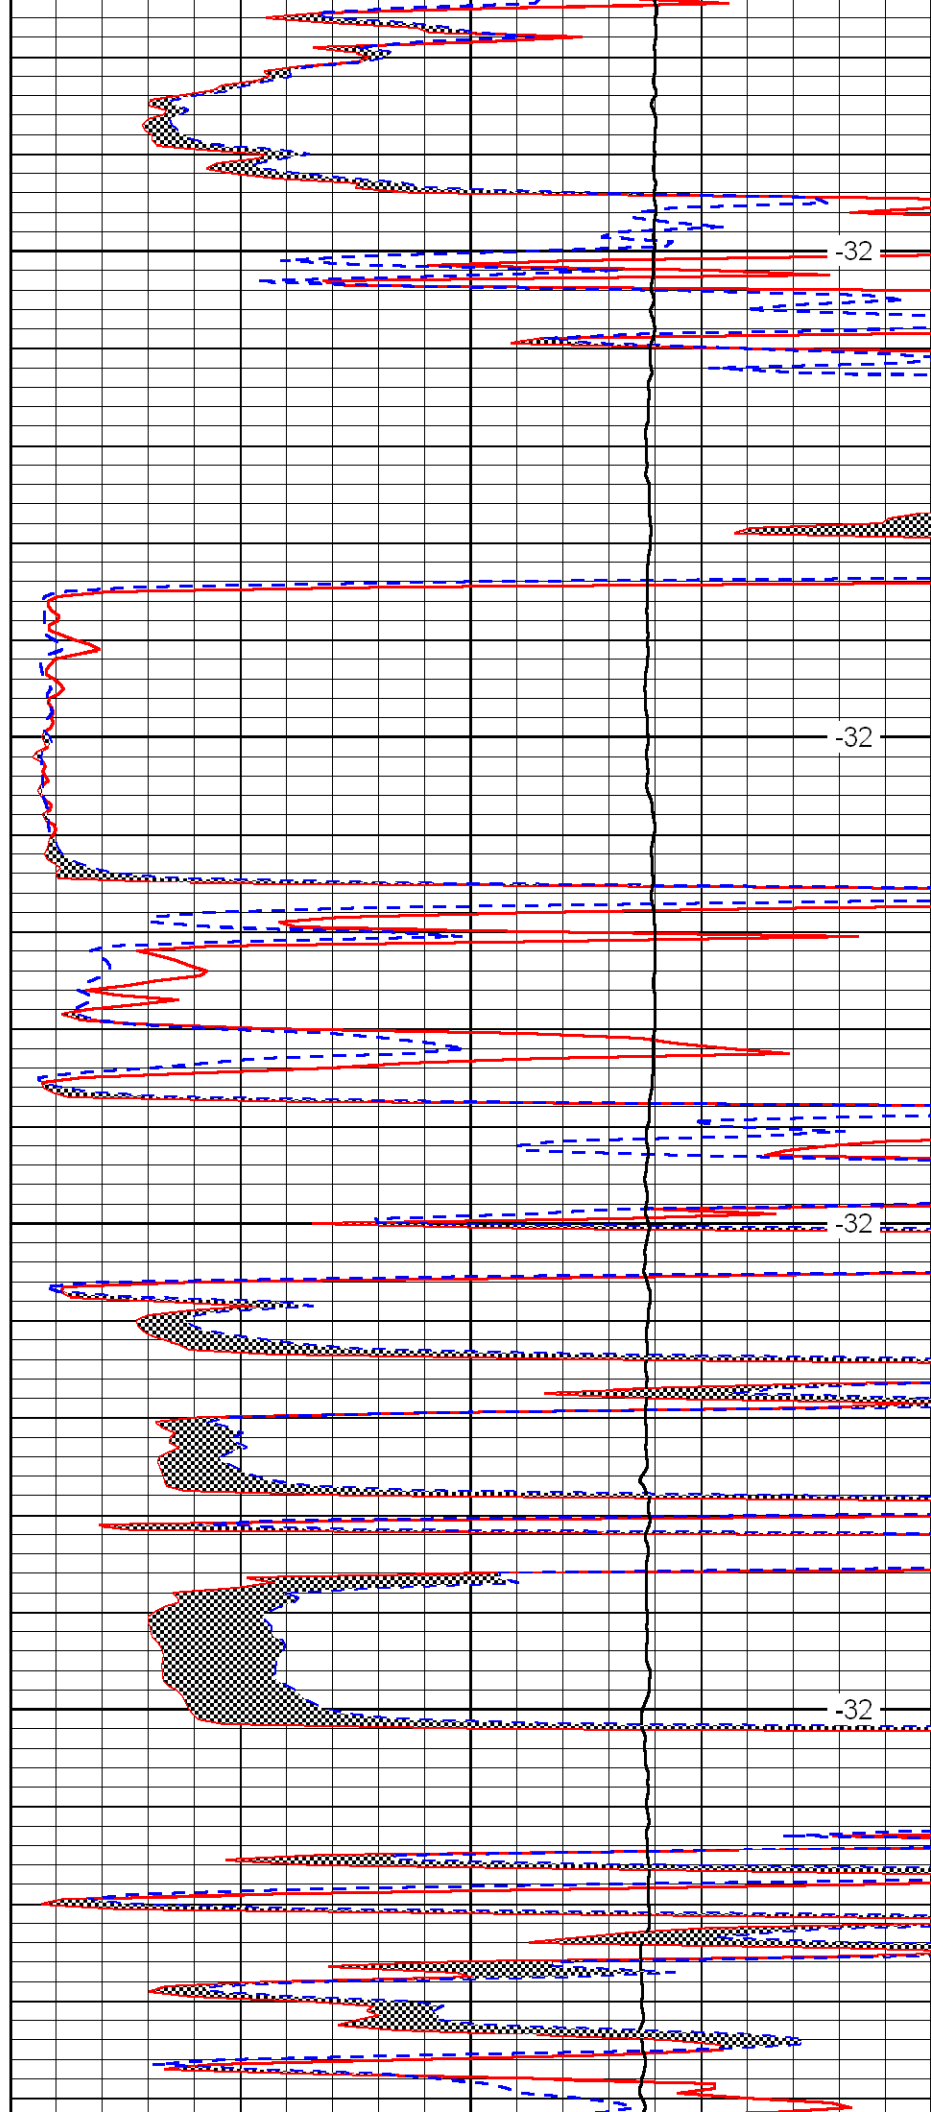

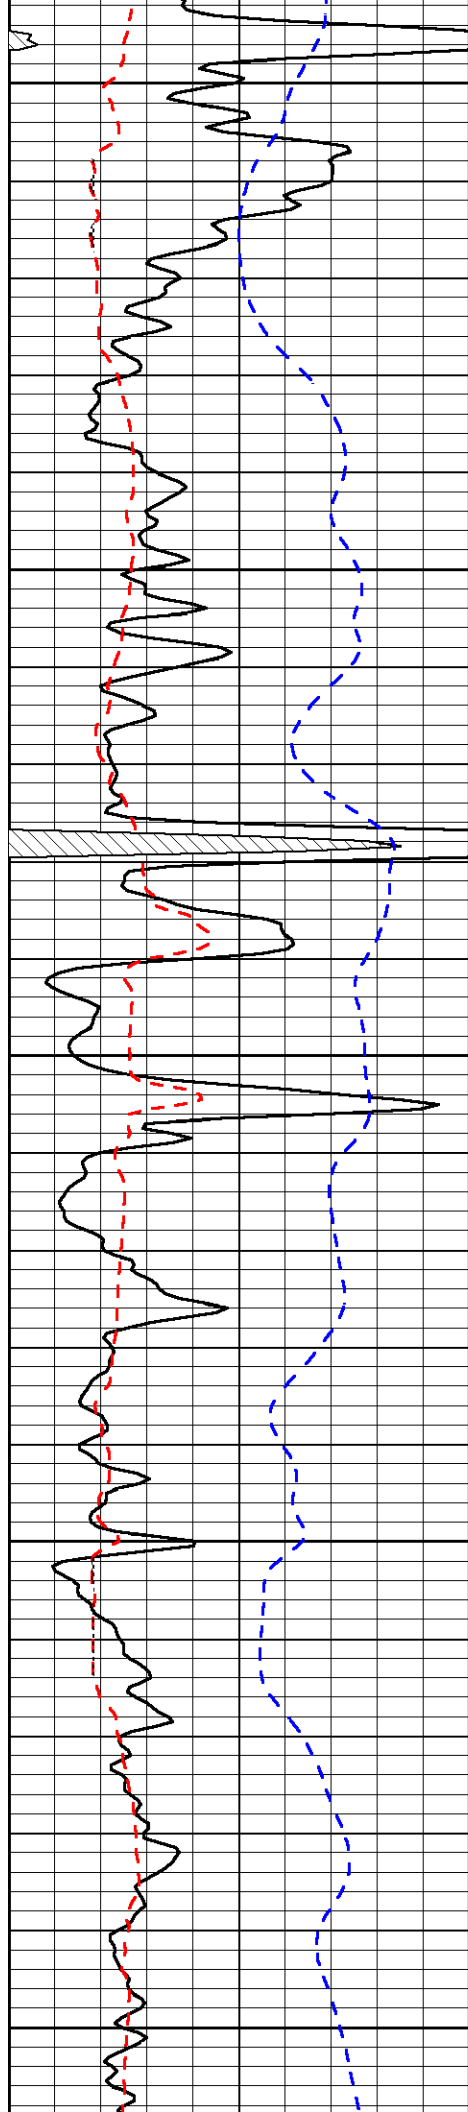


4700

4750

4800

4850

4900

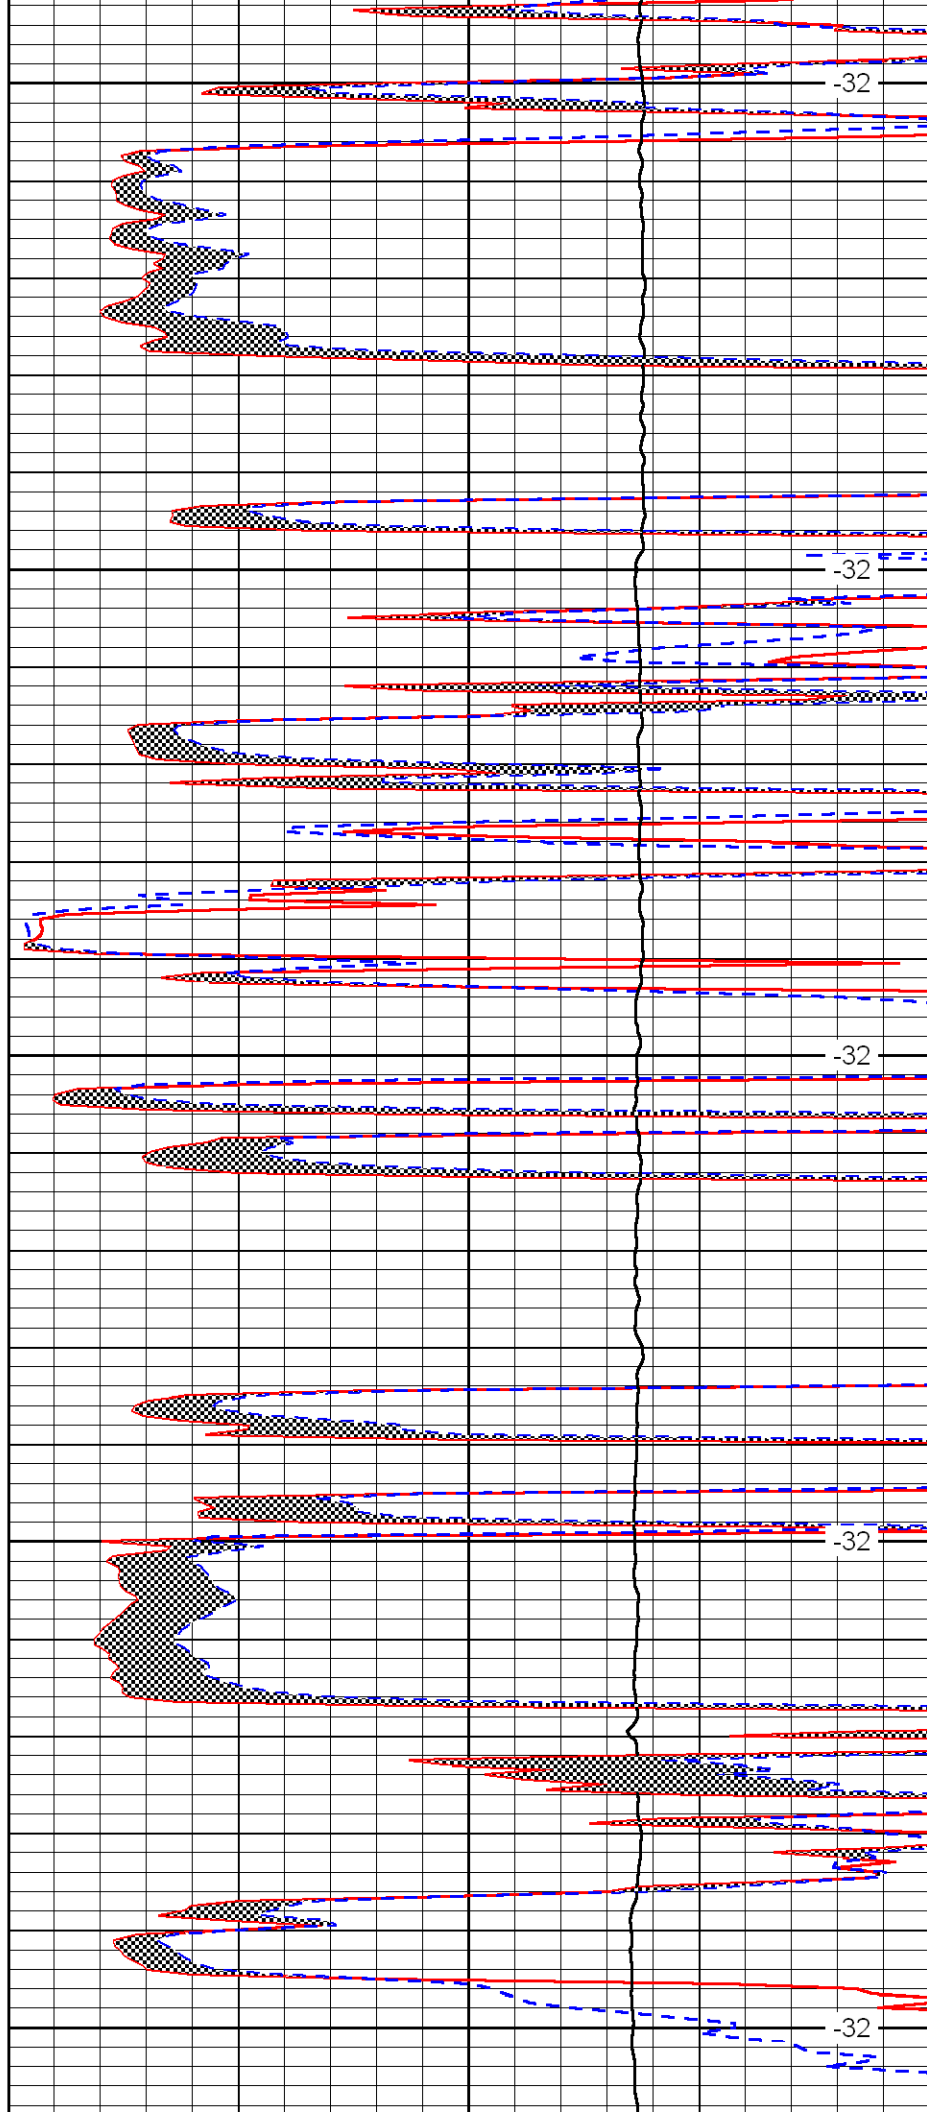


-32

-32

-32

-32

-32

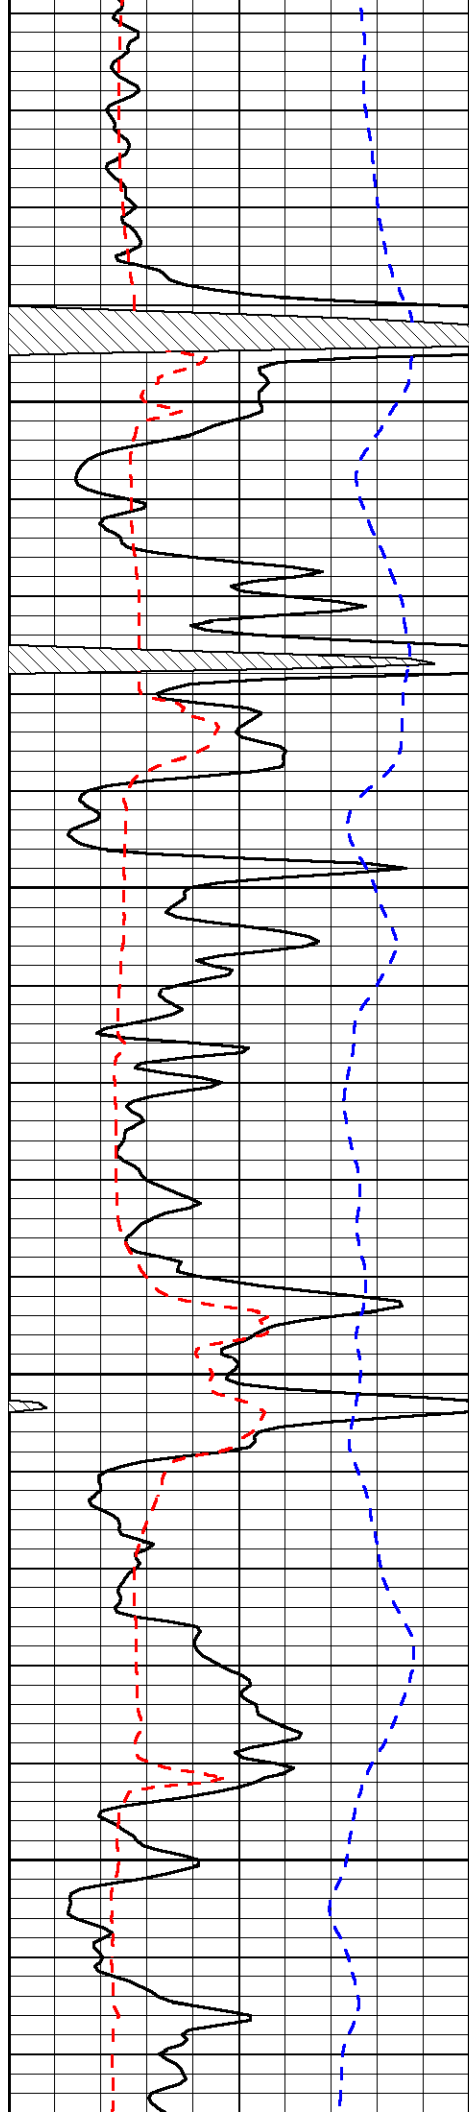


4950

5000

5050

5100

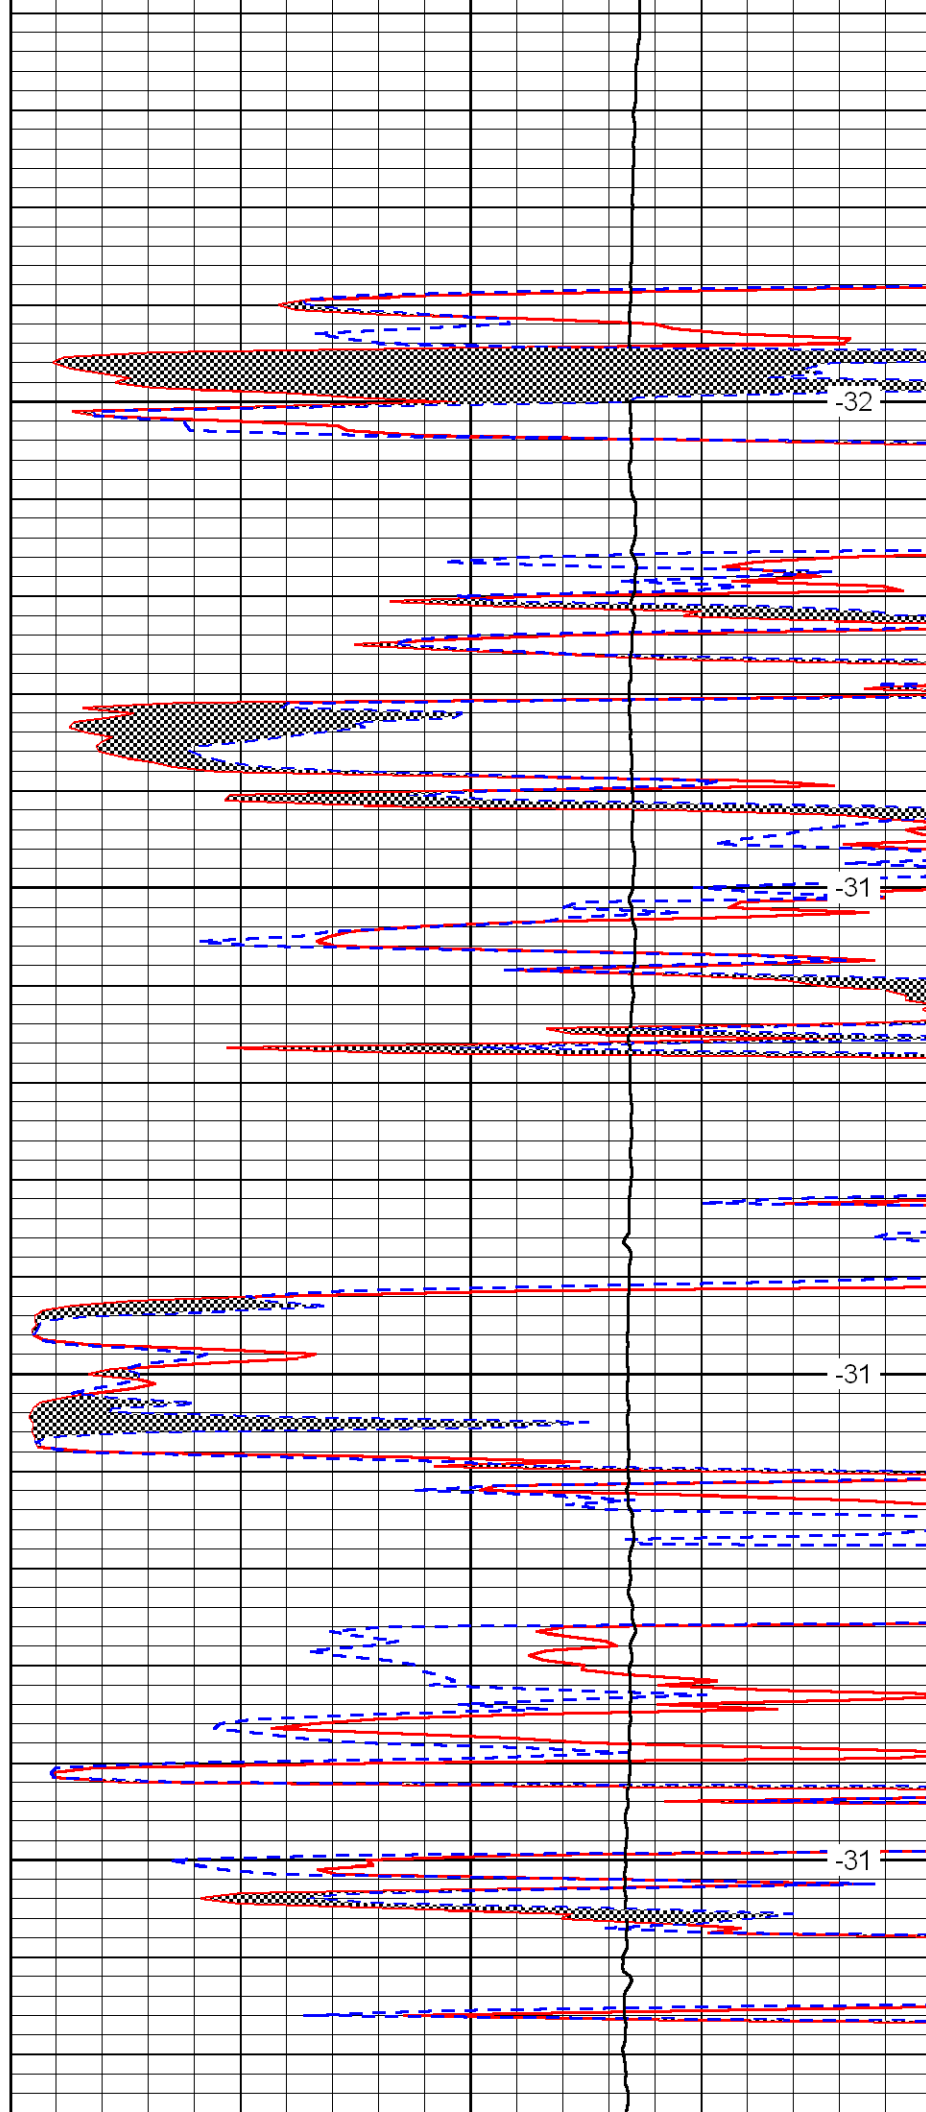


-32

-31

-31

-31

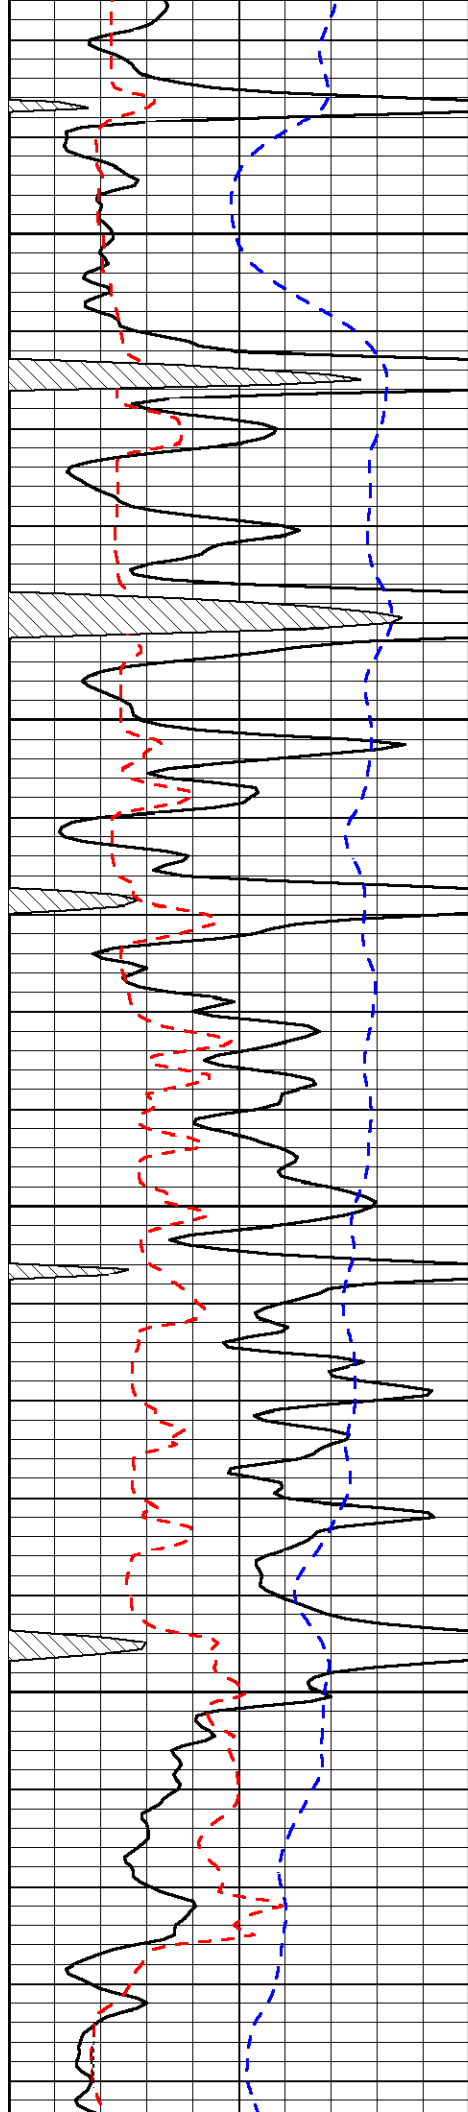



5150

5200

5250

5300

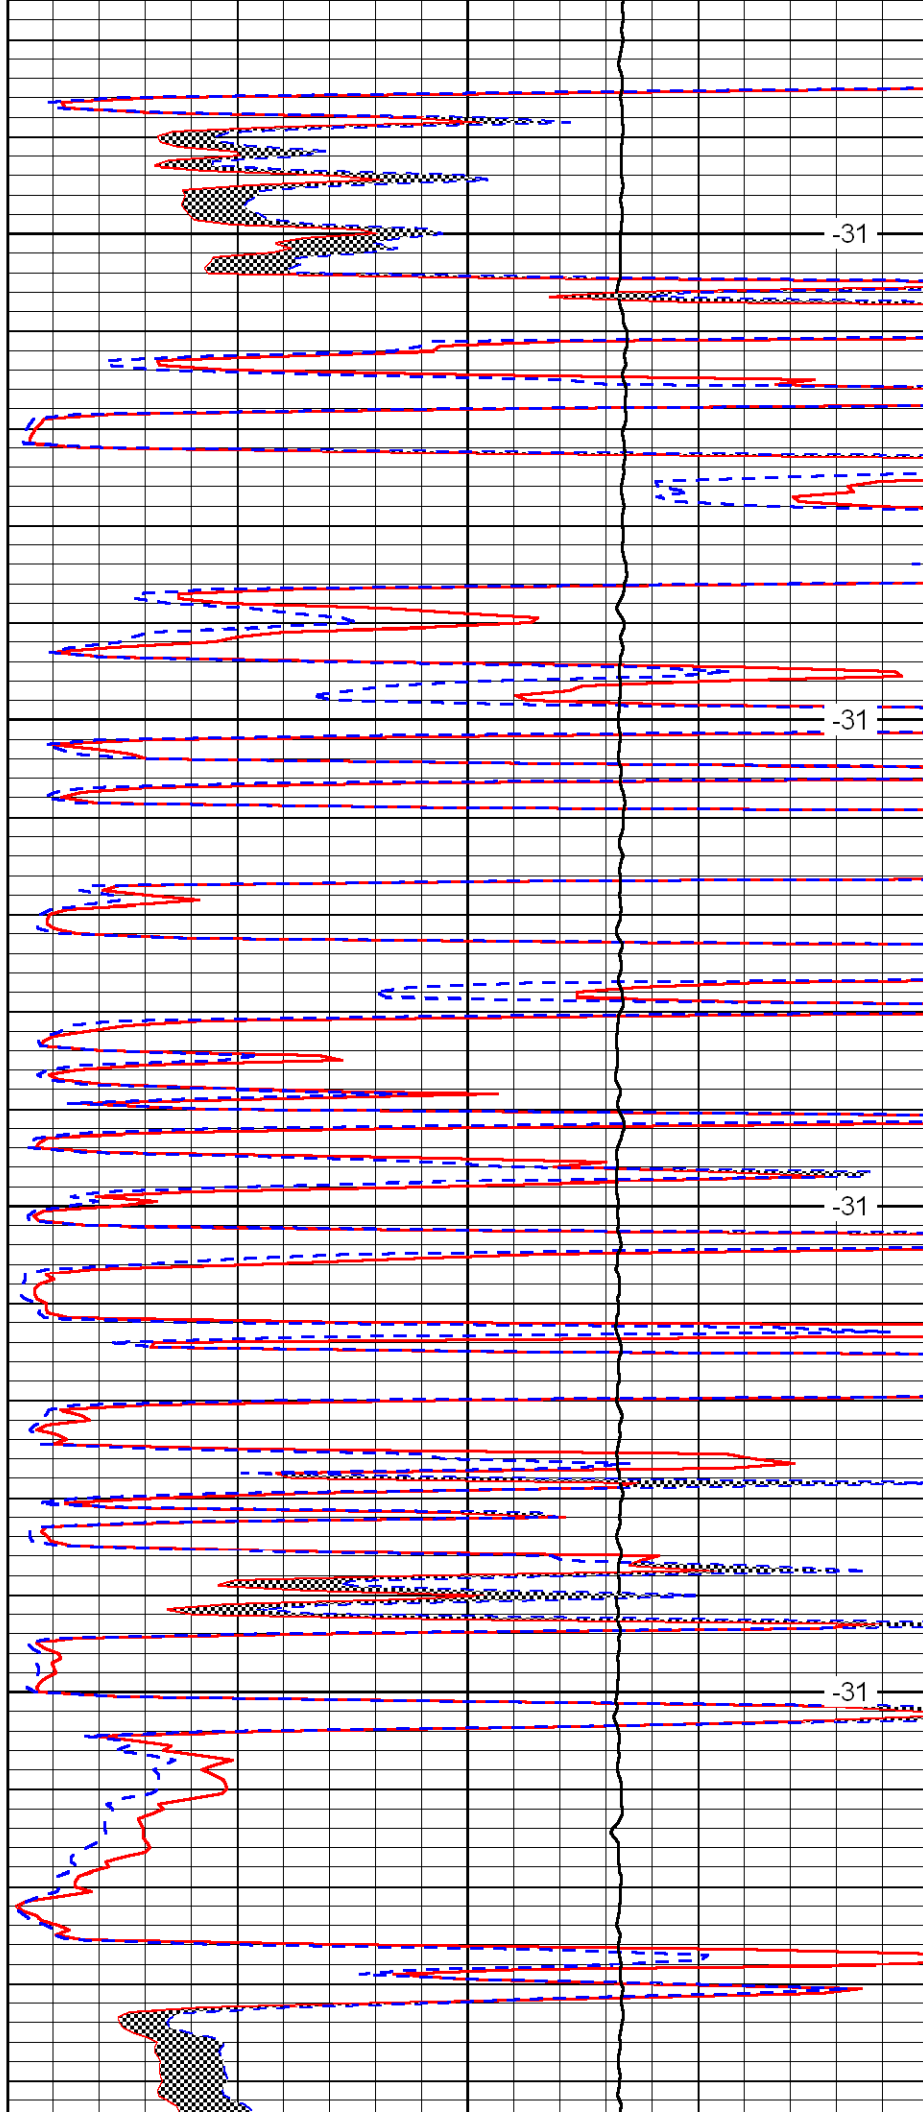

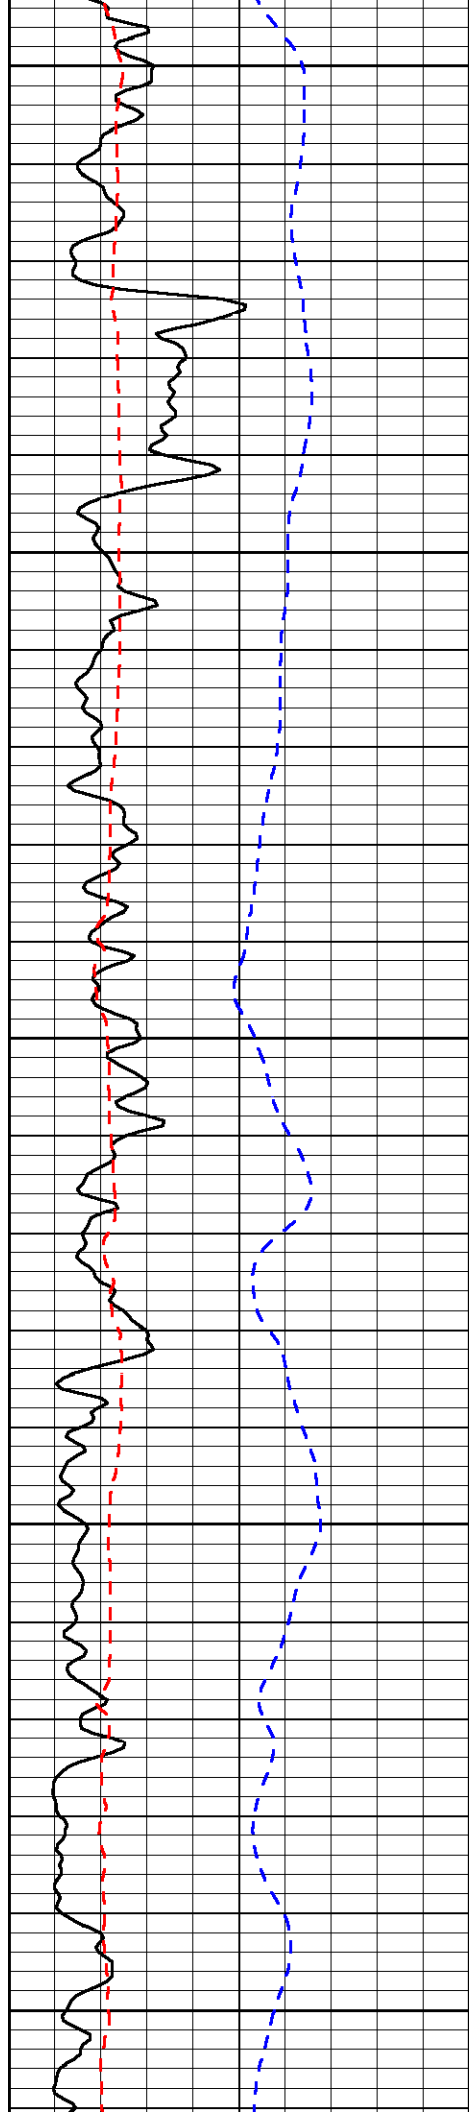


5350


5400

5450

5500

5550

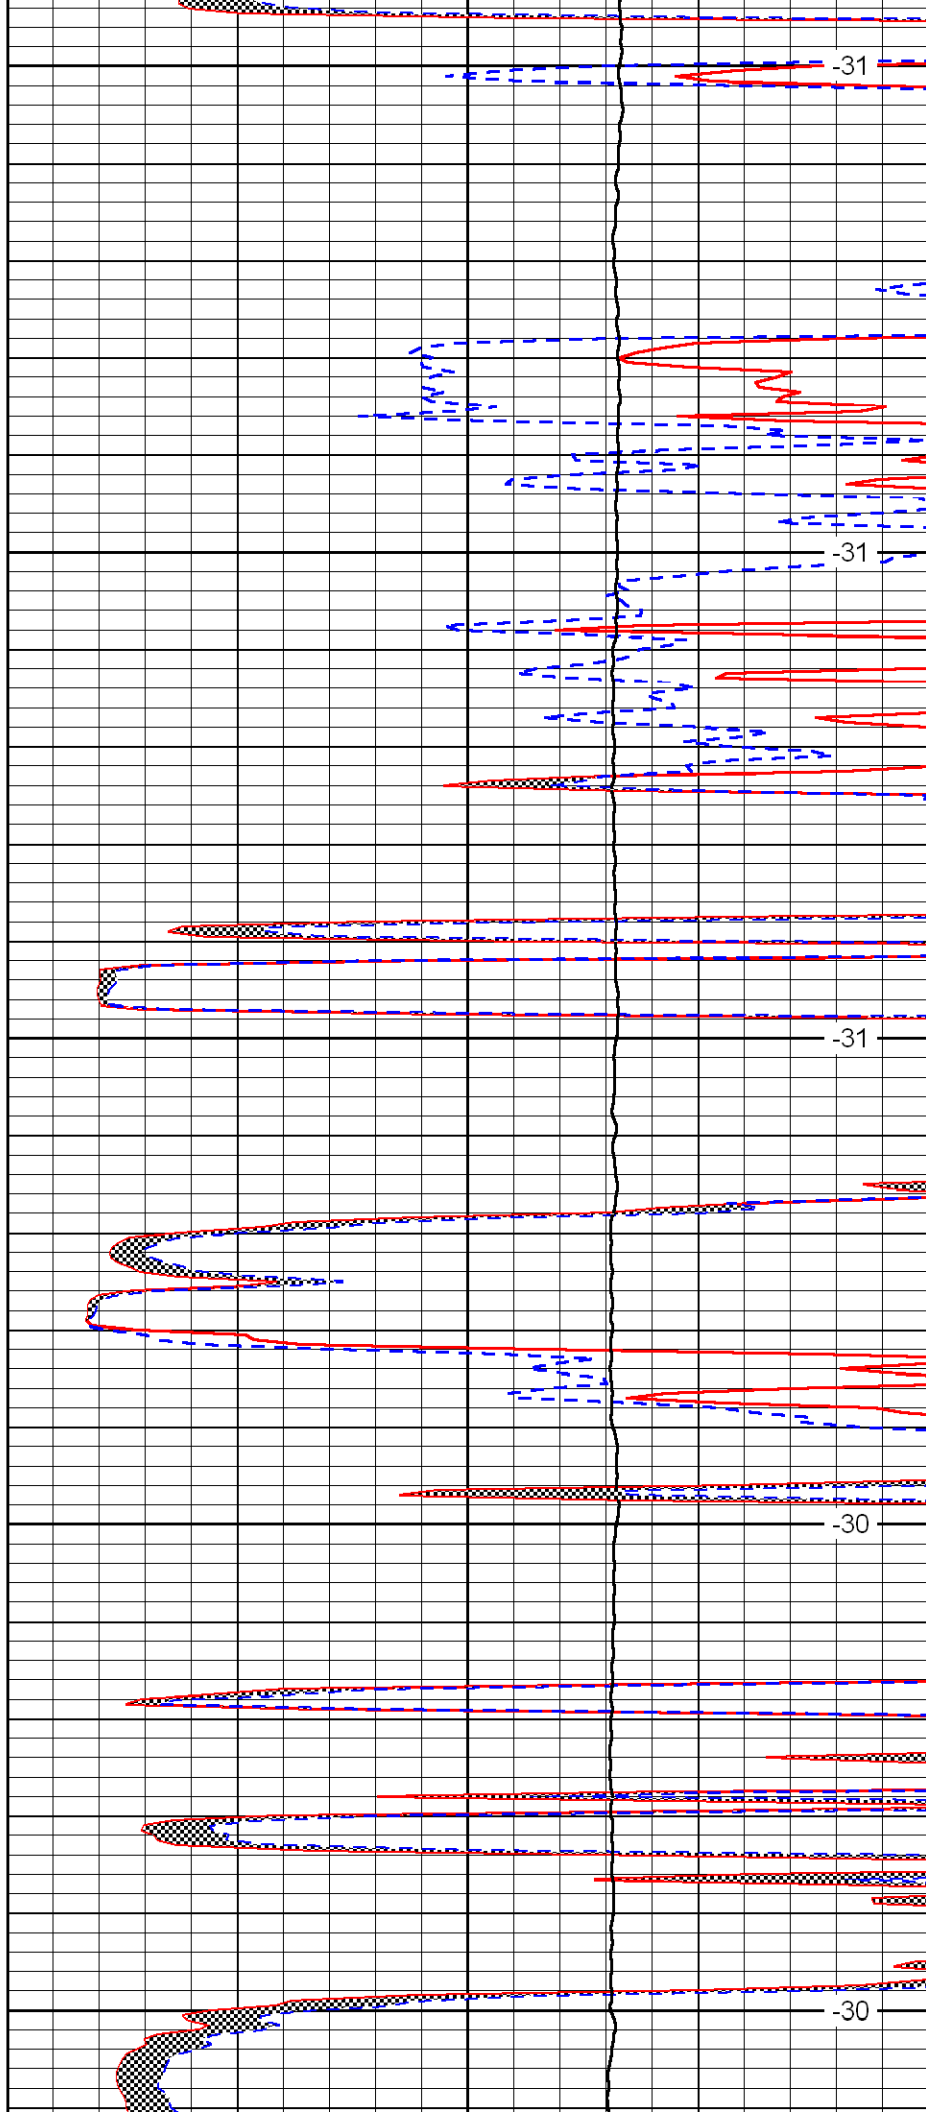

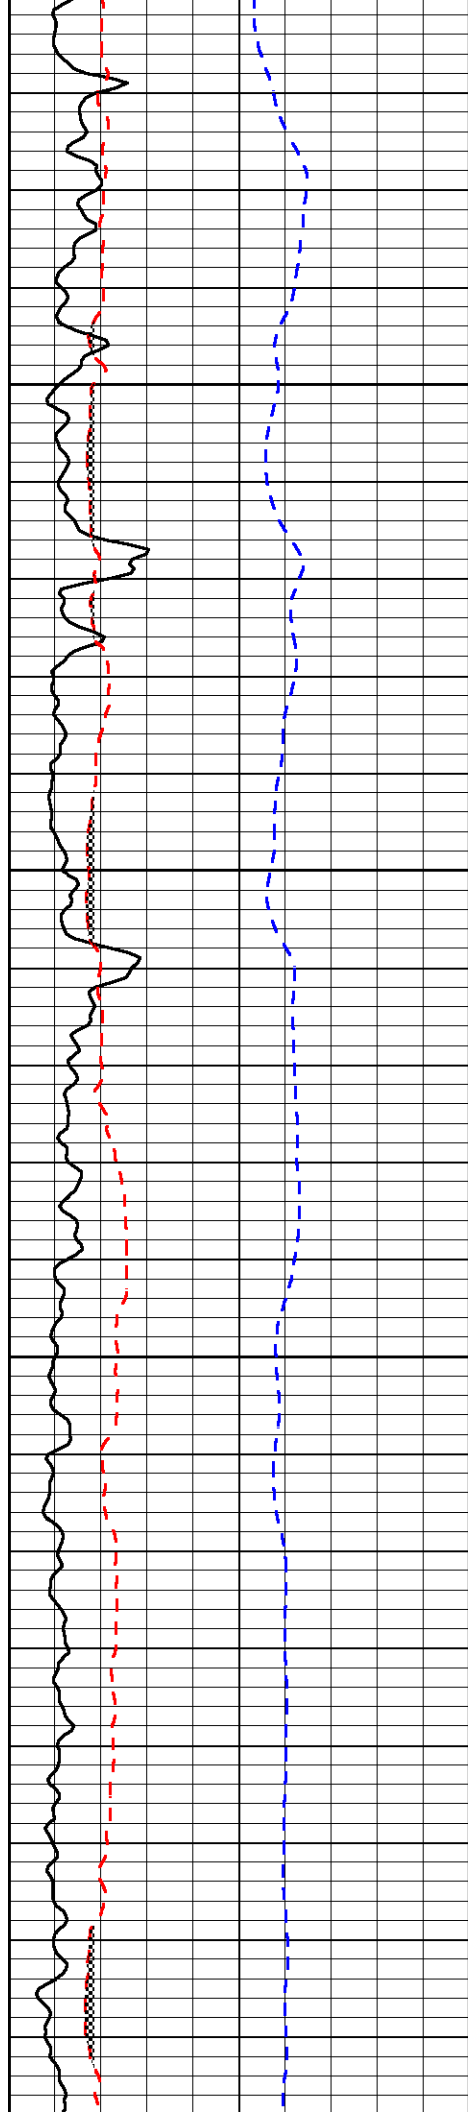




5600


5650

5700

5750

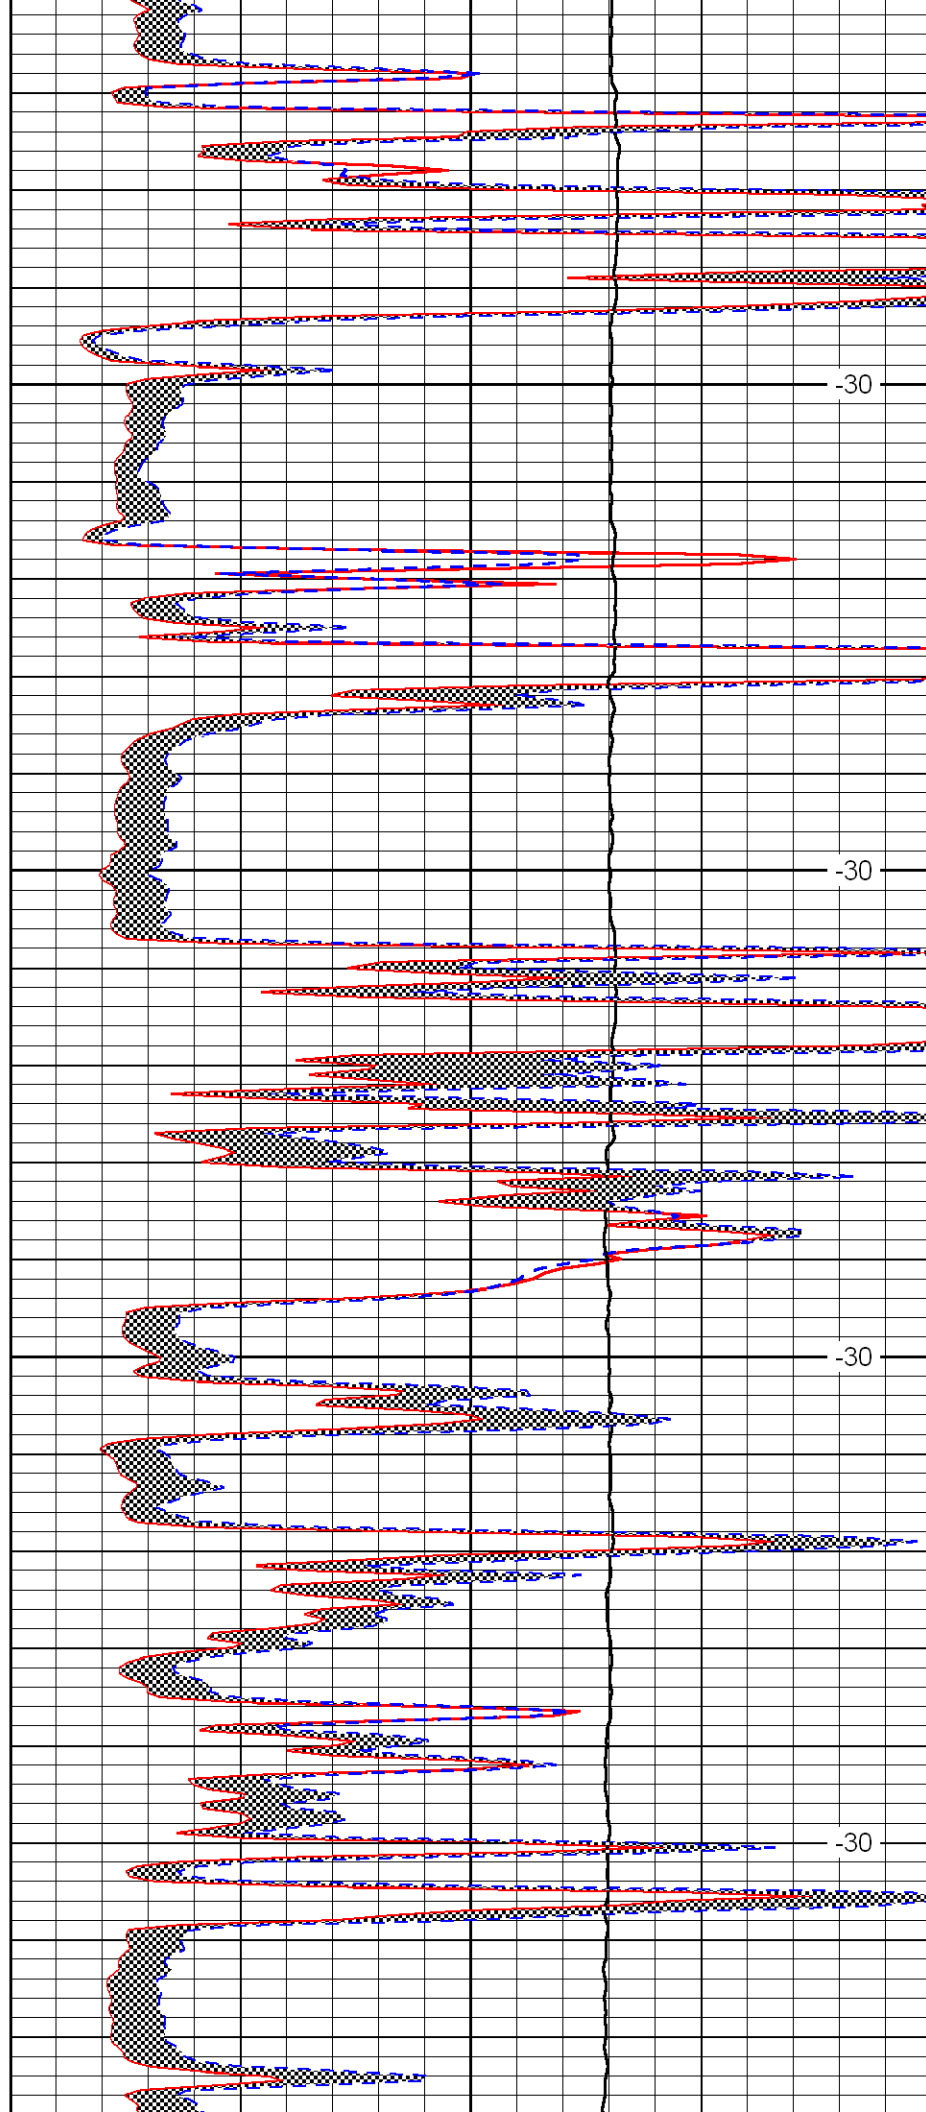

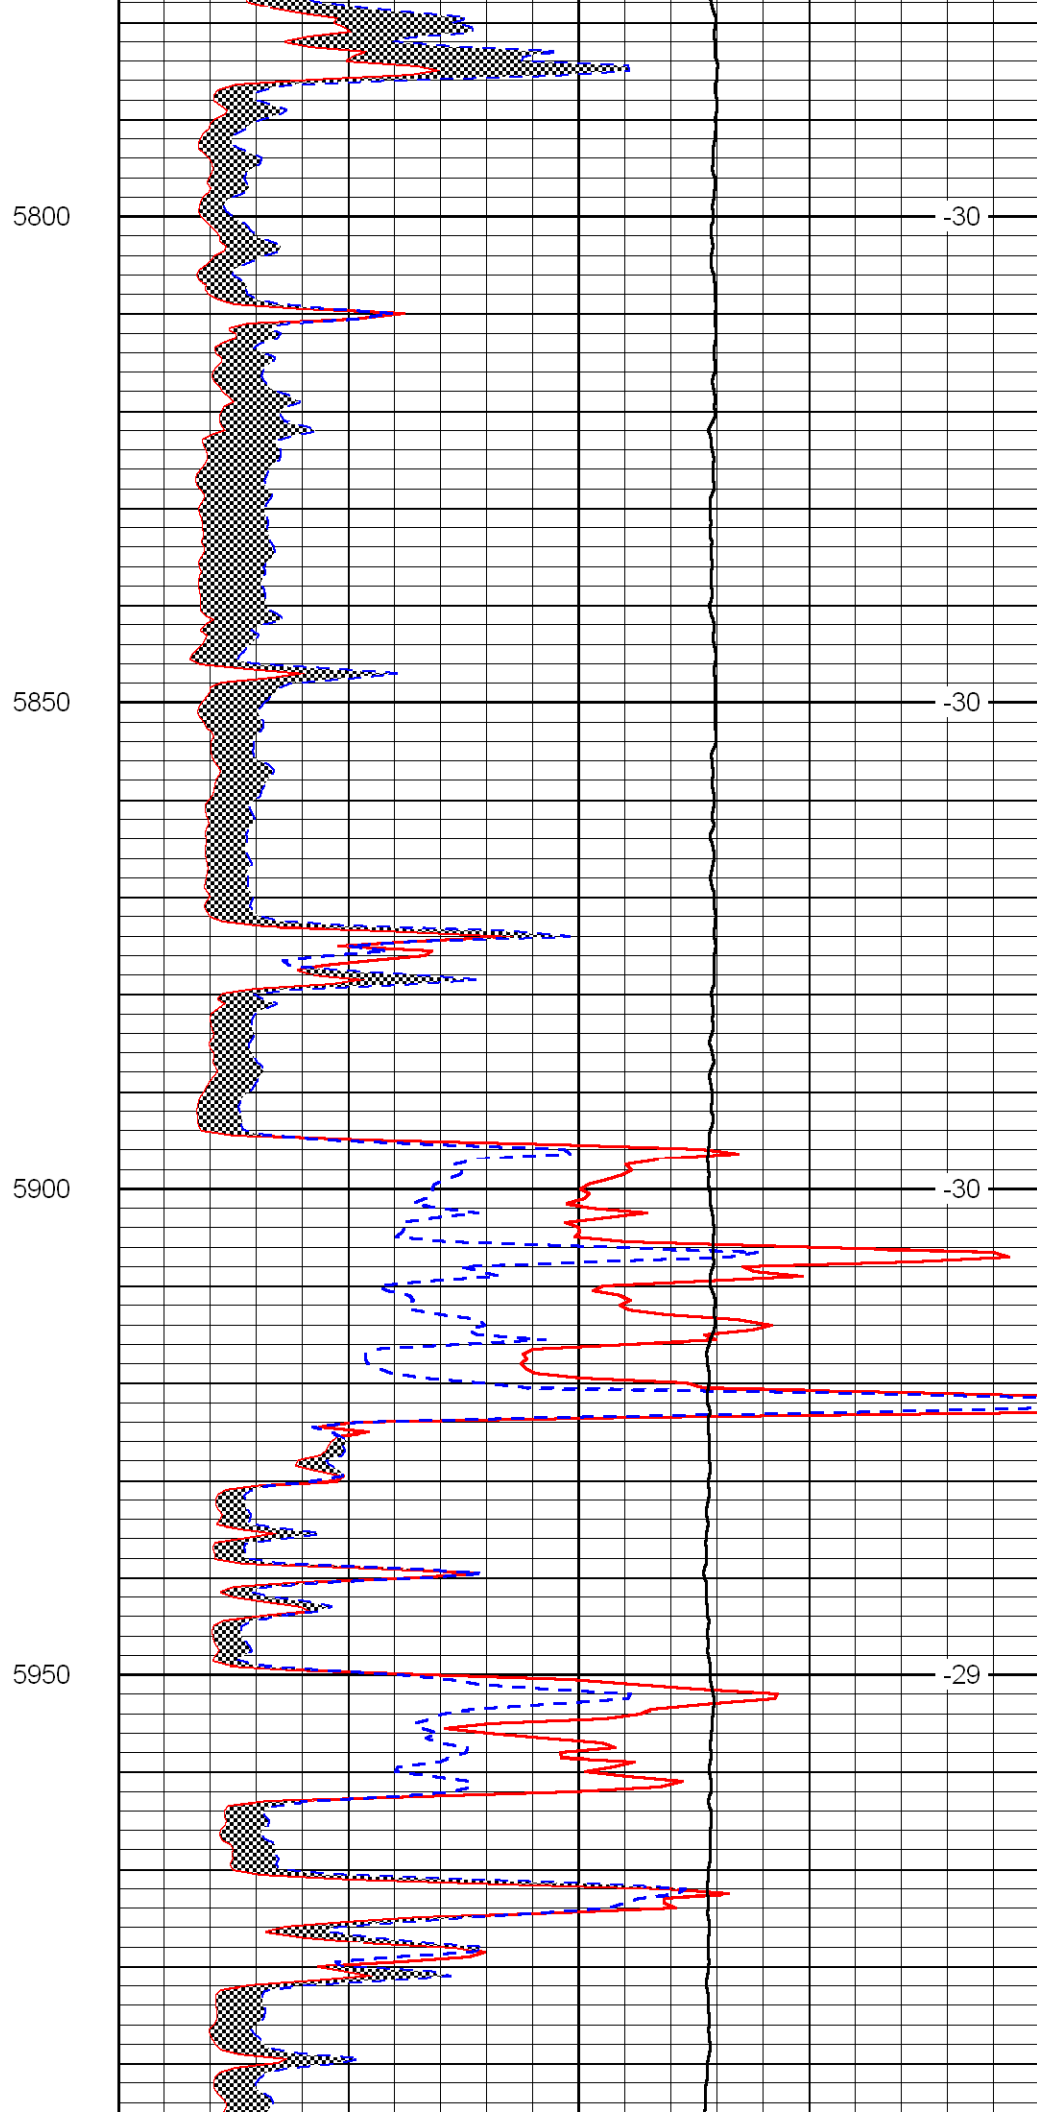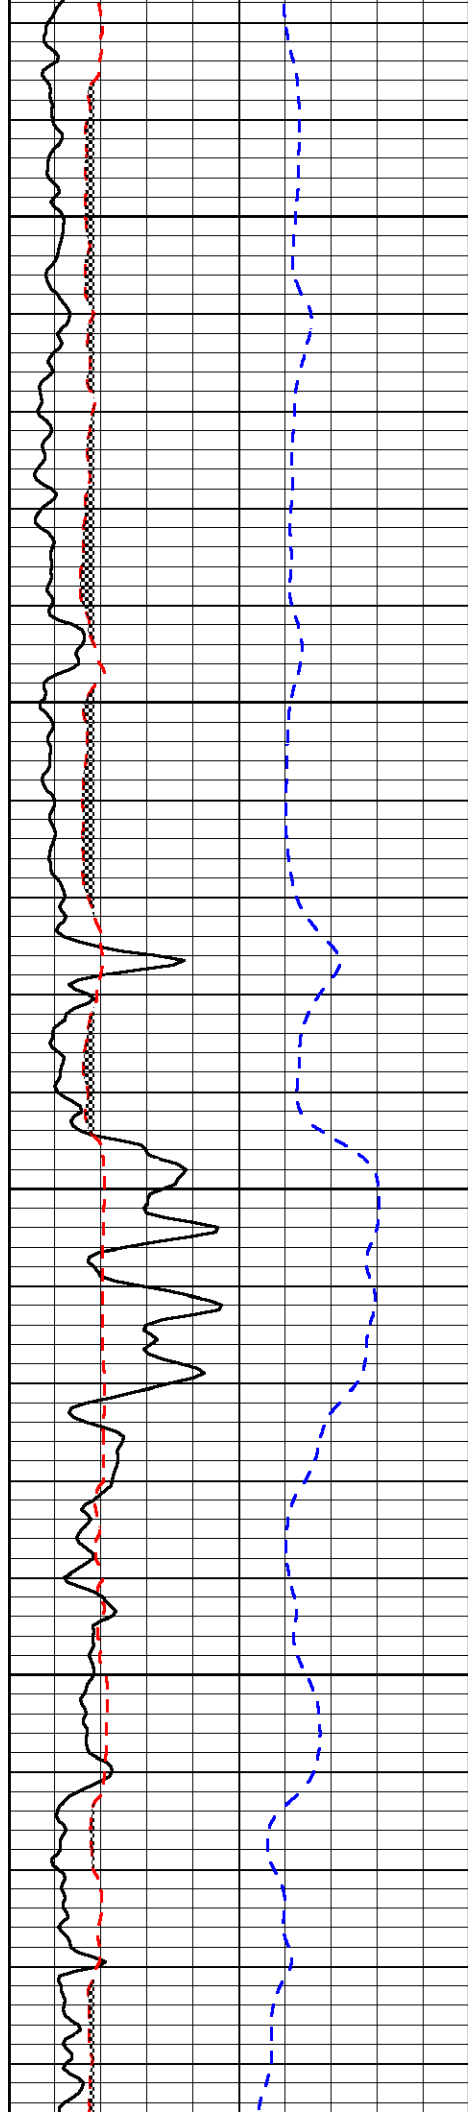

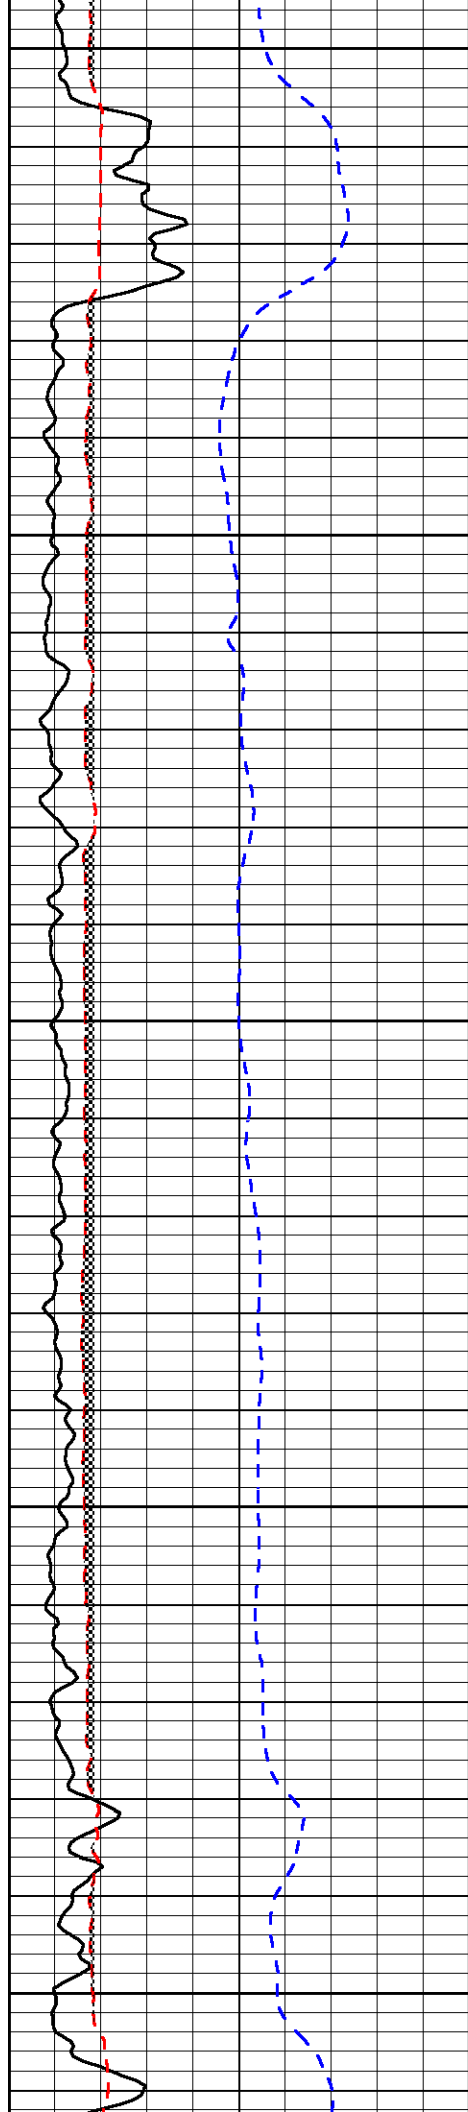


6000

6050

6100

6150

6200

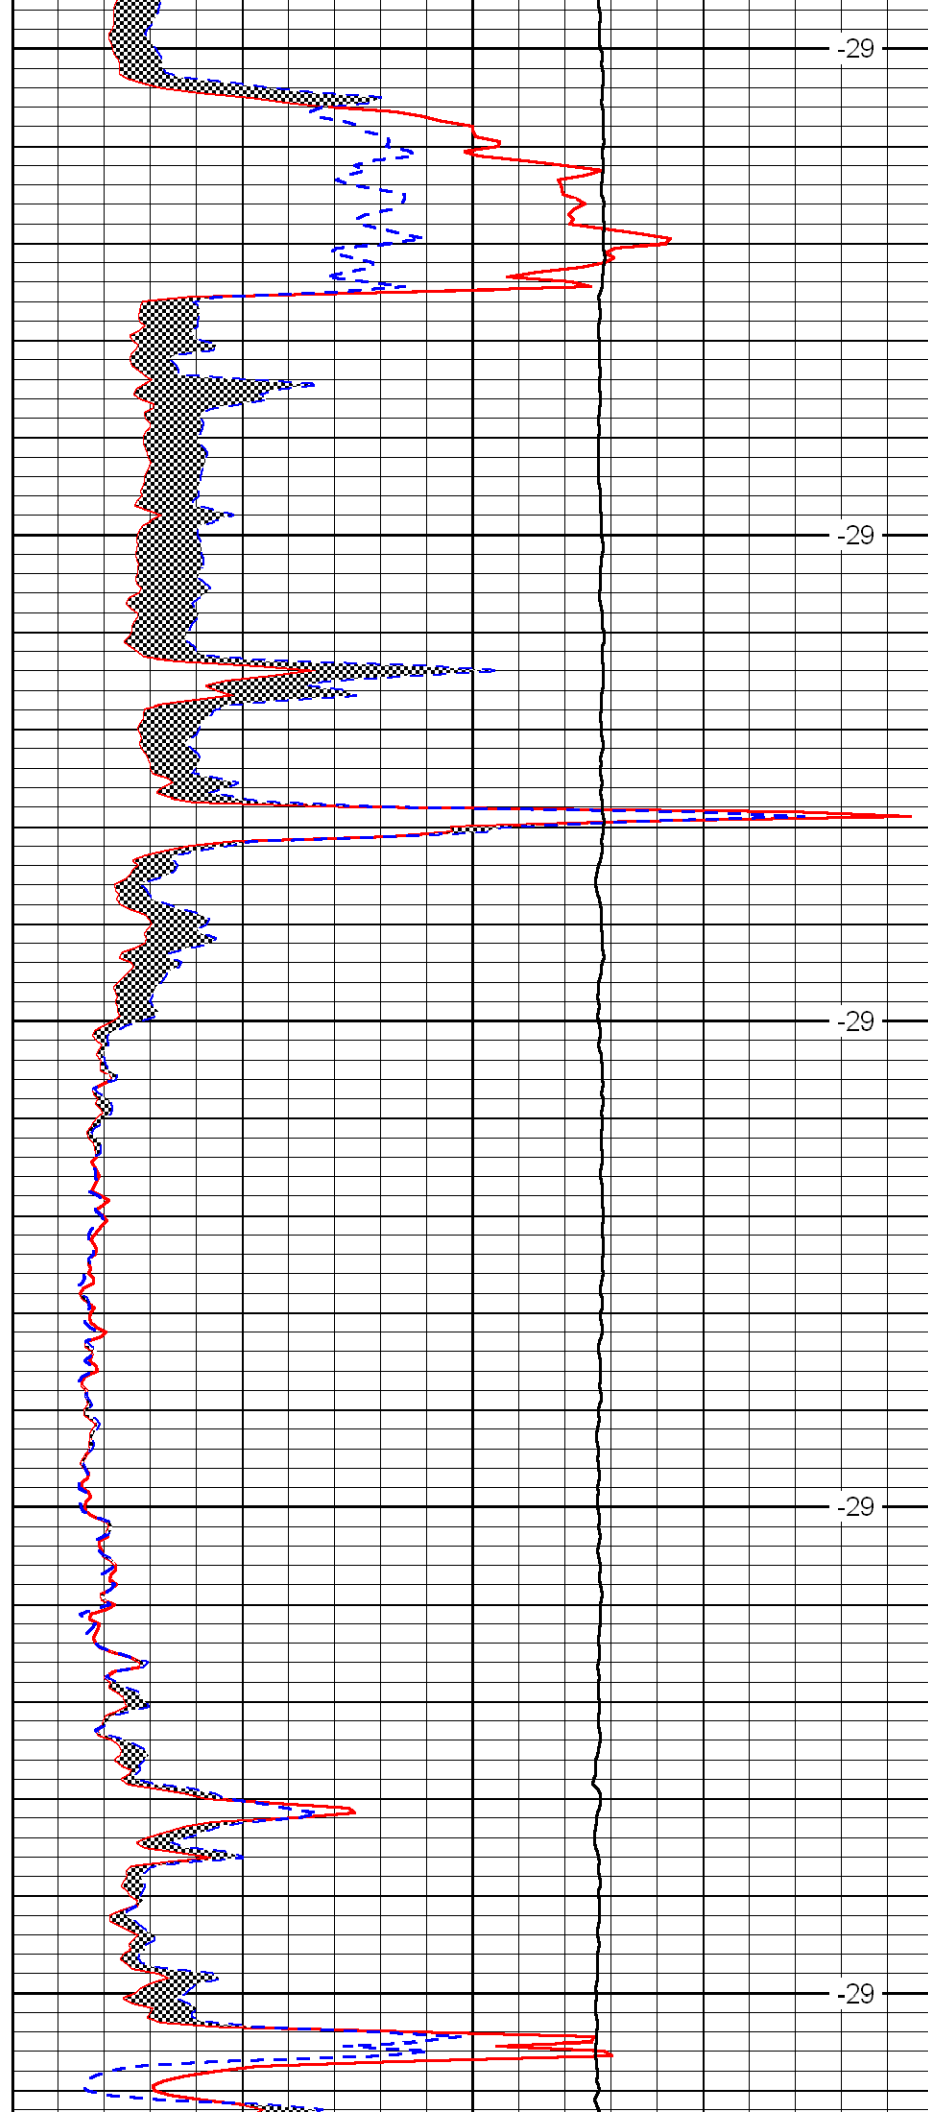



-29

-29

-29

-29

-29

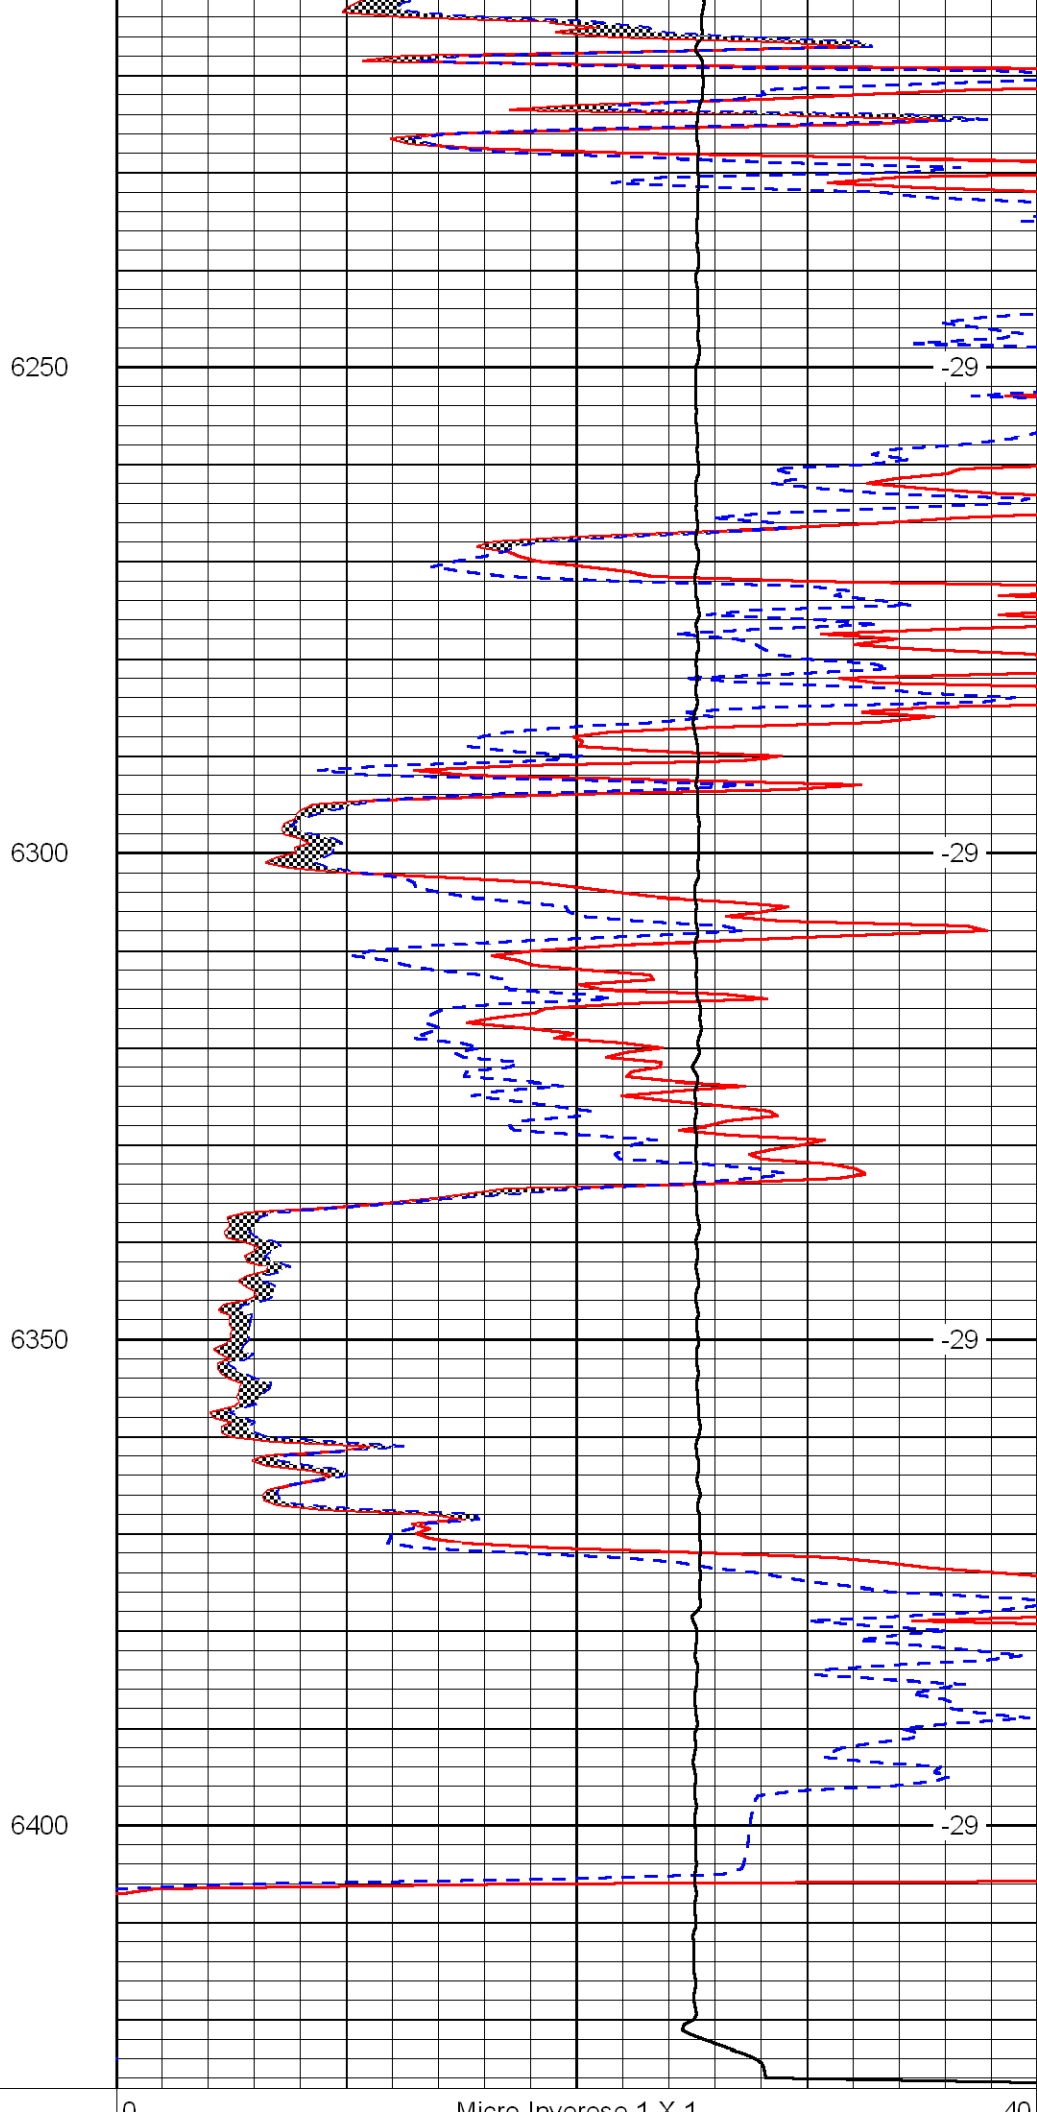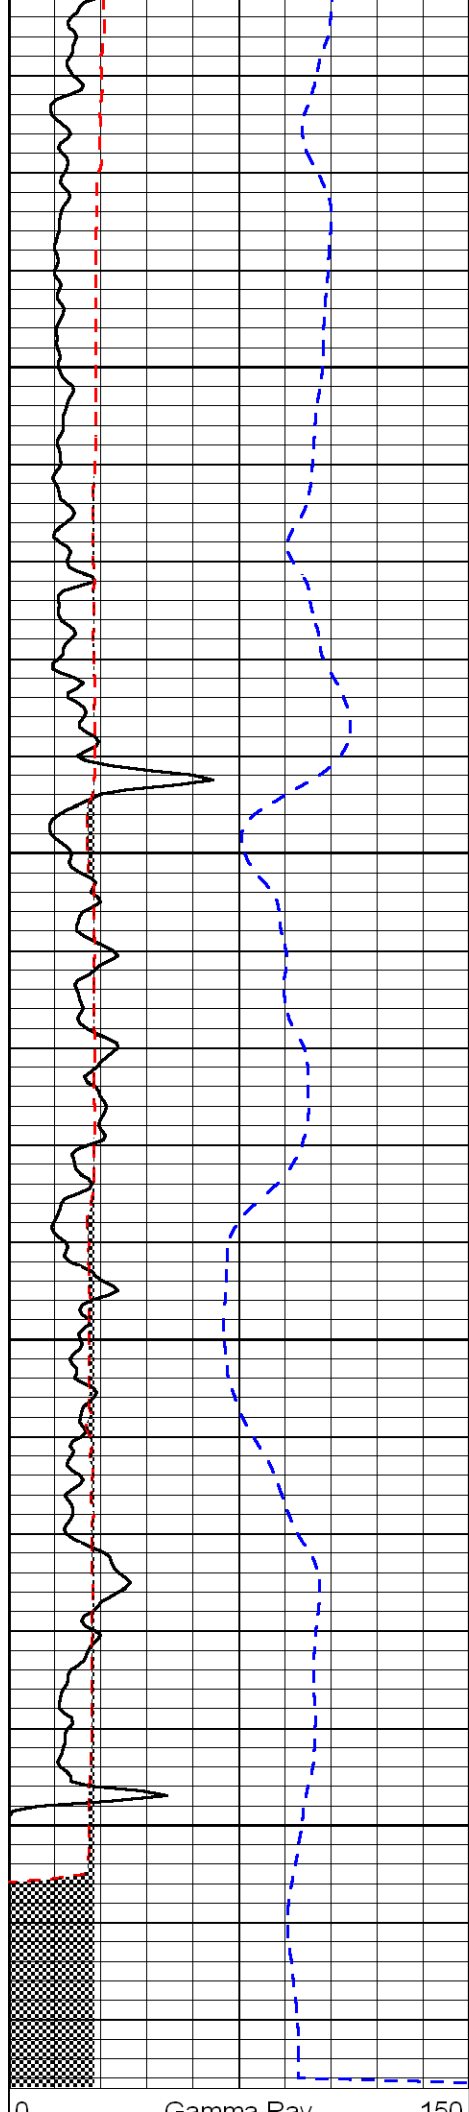

0	Gamma Ray	150
6	Micro Log Caliper	16
-200	SP (MV)	0

0	Micro Inverse T X T	40
0	Micro Normal 2"	40
10000	Line Weight (lb)	0
		LSPD (ft/min)