

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-025-21,485-00-00

Company Falcon Exploration, Inc.

Well YBC No. 1-28

Field Wildcat

County Clark State

Kansas

Location

NE NE SE SW
1140' FSL & 2530' FWL

Other Services
CNL/CDL
MEL/BHCS

Sec: 28

Twp: 30S

Rge: 22W

Elevation

Permanent Datum Ground Level Elevation 2377
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2387
D.F.
G.L. 2377

Date 09/29/2009

Run Number One

Depth Driller 6415

Depth Logger 6421

Bottom Logged Interval 6420

Top Log Interval 650

Casing Driller 8.625 @ 692

Casing Logger 692

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 6.500

Density / Viscosity 9.2 68

pH / Fluid Loss 10.5 8.8

Source of Sample Flowline

Rm @ Meas. Temp .45 @ 75

Rmf @ Meas. Temp .34 @ 75

Rmc @ Meas. Temp .61 @ 75

Source of Rmf / Rmc Charts

Rm @ BHT .24 @ 142

Operating Rig Time 6 Hours

Max Rec. Temp. F 142

Equipment Number 17

Location Hays

Recorded By Mike Garrison

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858



Kingsdown, 8 South to E Rd, 2 East, South Into



Database File: c:\warrior\data\falcon_ybc no. 1-28\falcon.db
Dataset Pathname: dil/falcstck
Presentation Format: dil2in
Dataset Creation: Tue Sep 29 14:12:38 2009
Charted by: Depth in Feet scaled 1:600




0	Gamma Ray	150
-200	SP (MV)	0



0	Shallow Resistivity (Ohm-m)	50
0	Deep Resistivity (Ohm-m)	50
1000	Conductivity (mmho/m)	0
15000	Line Tension (lb)	0



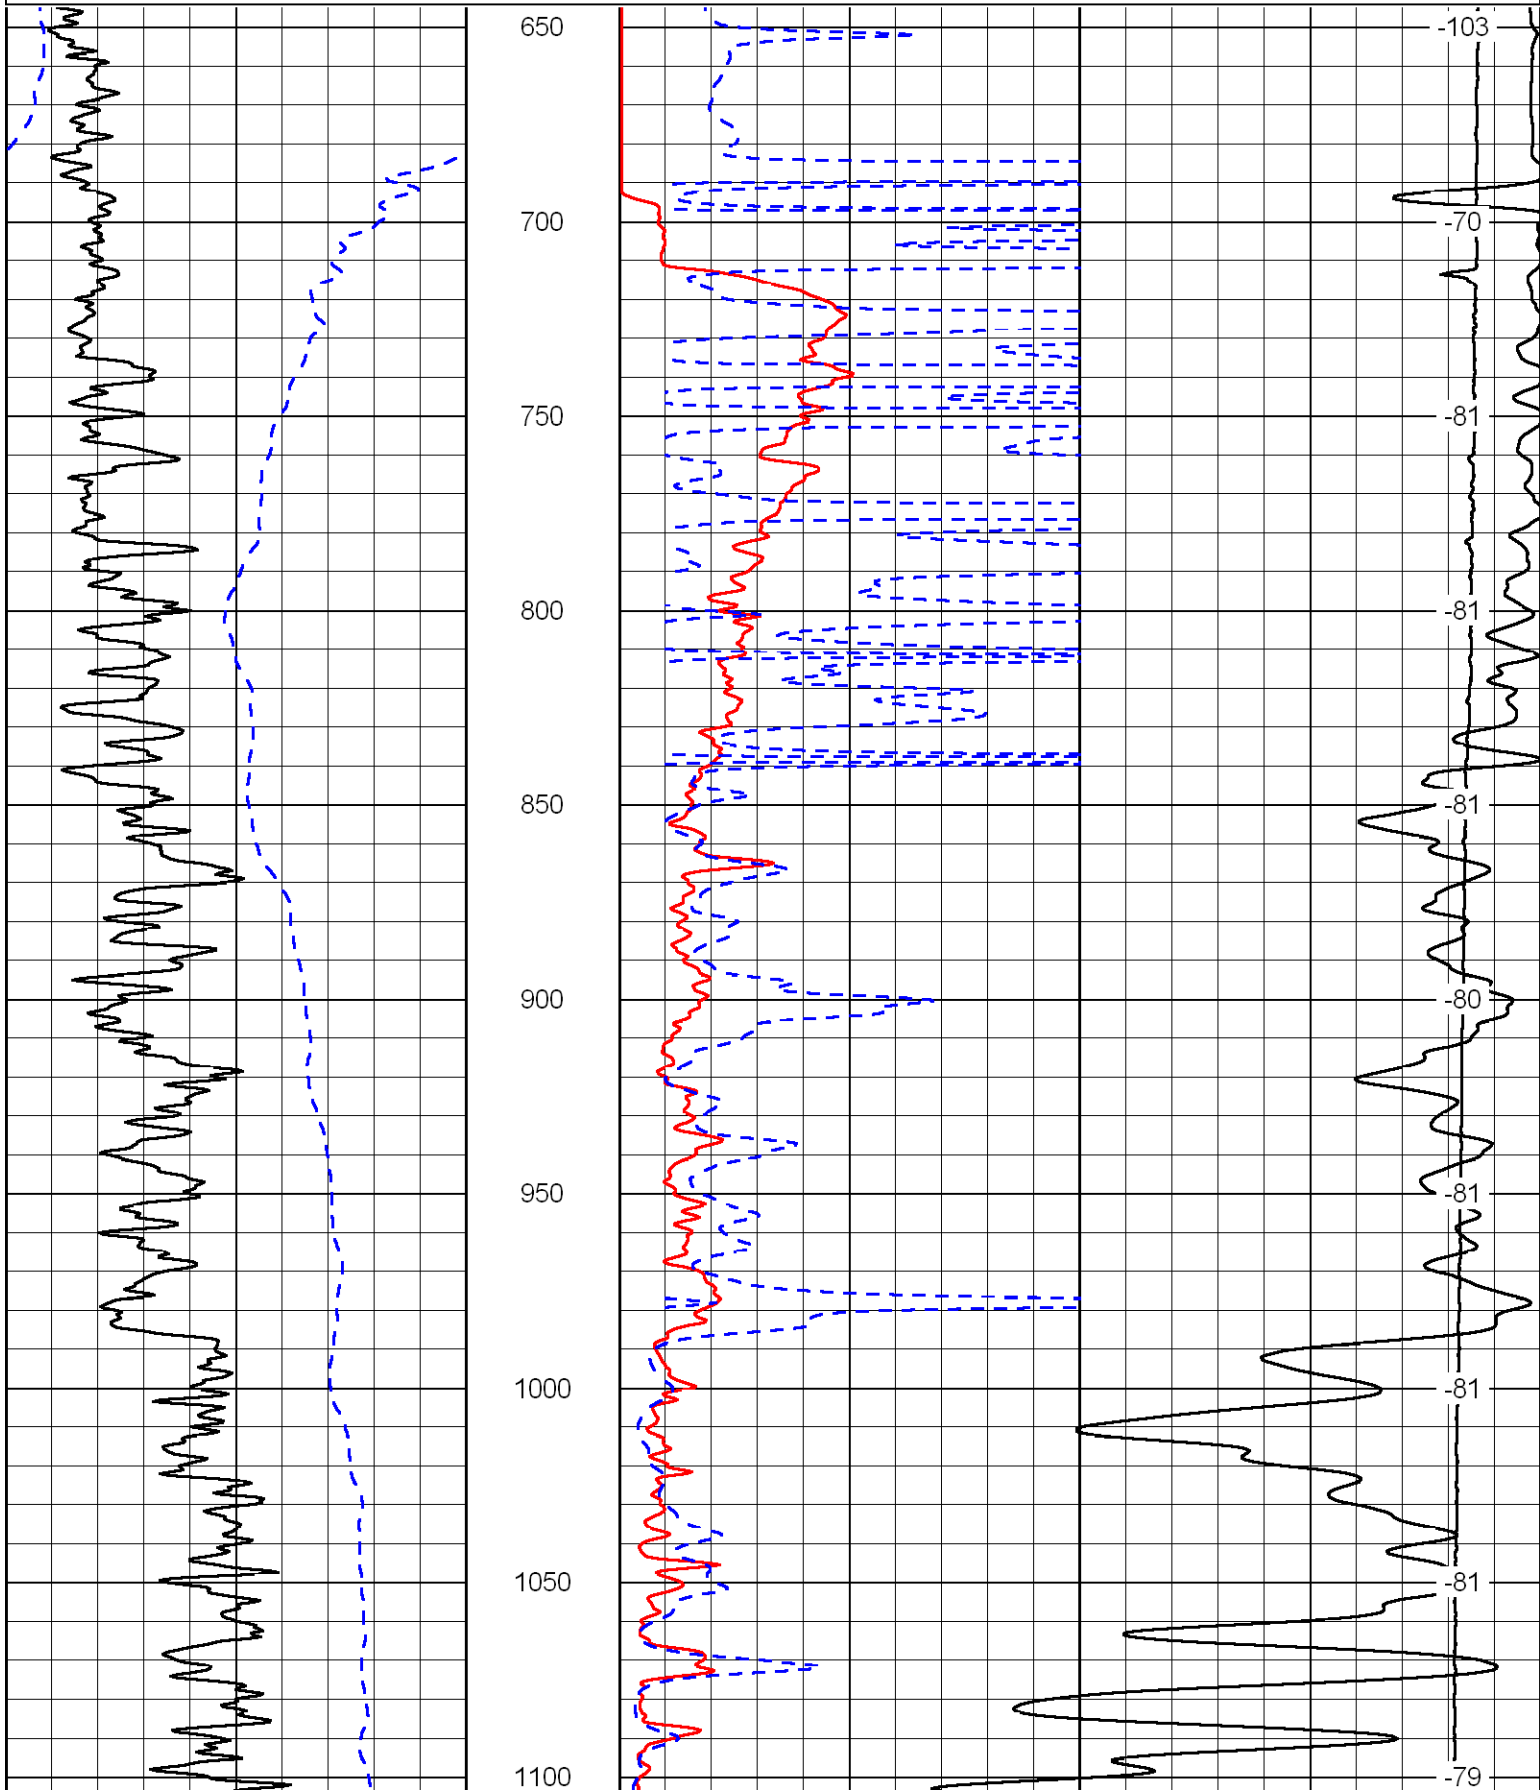


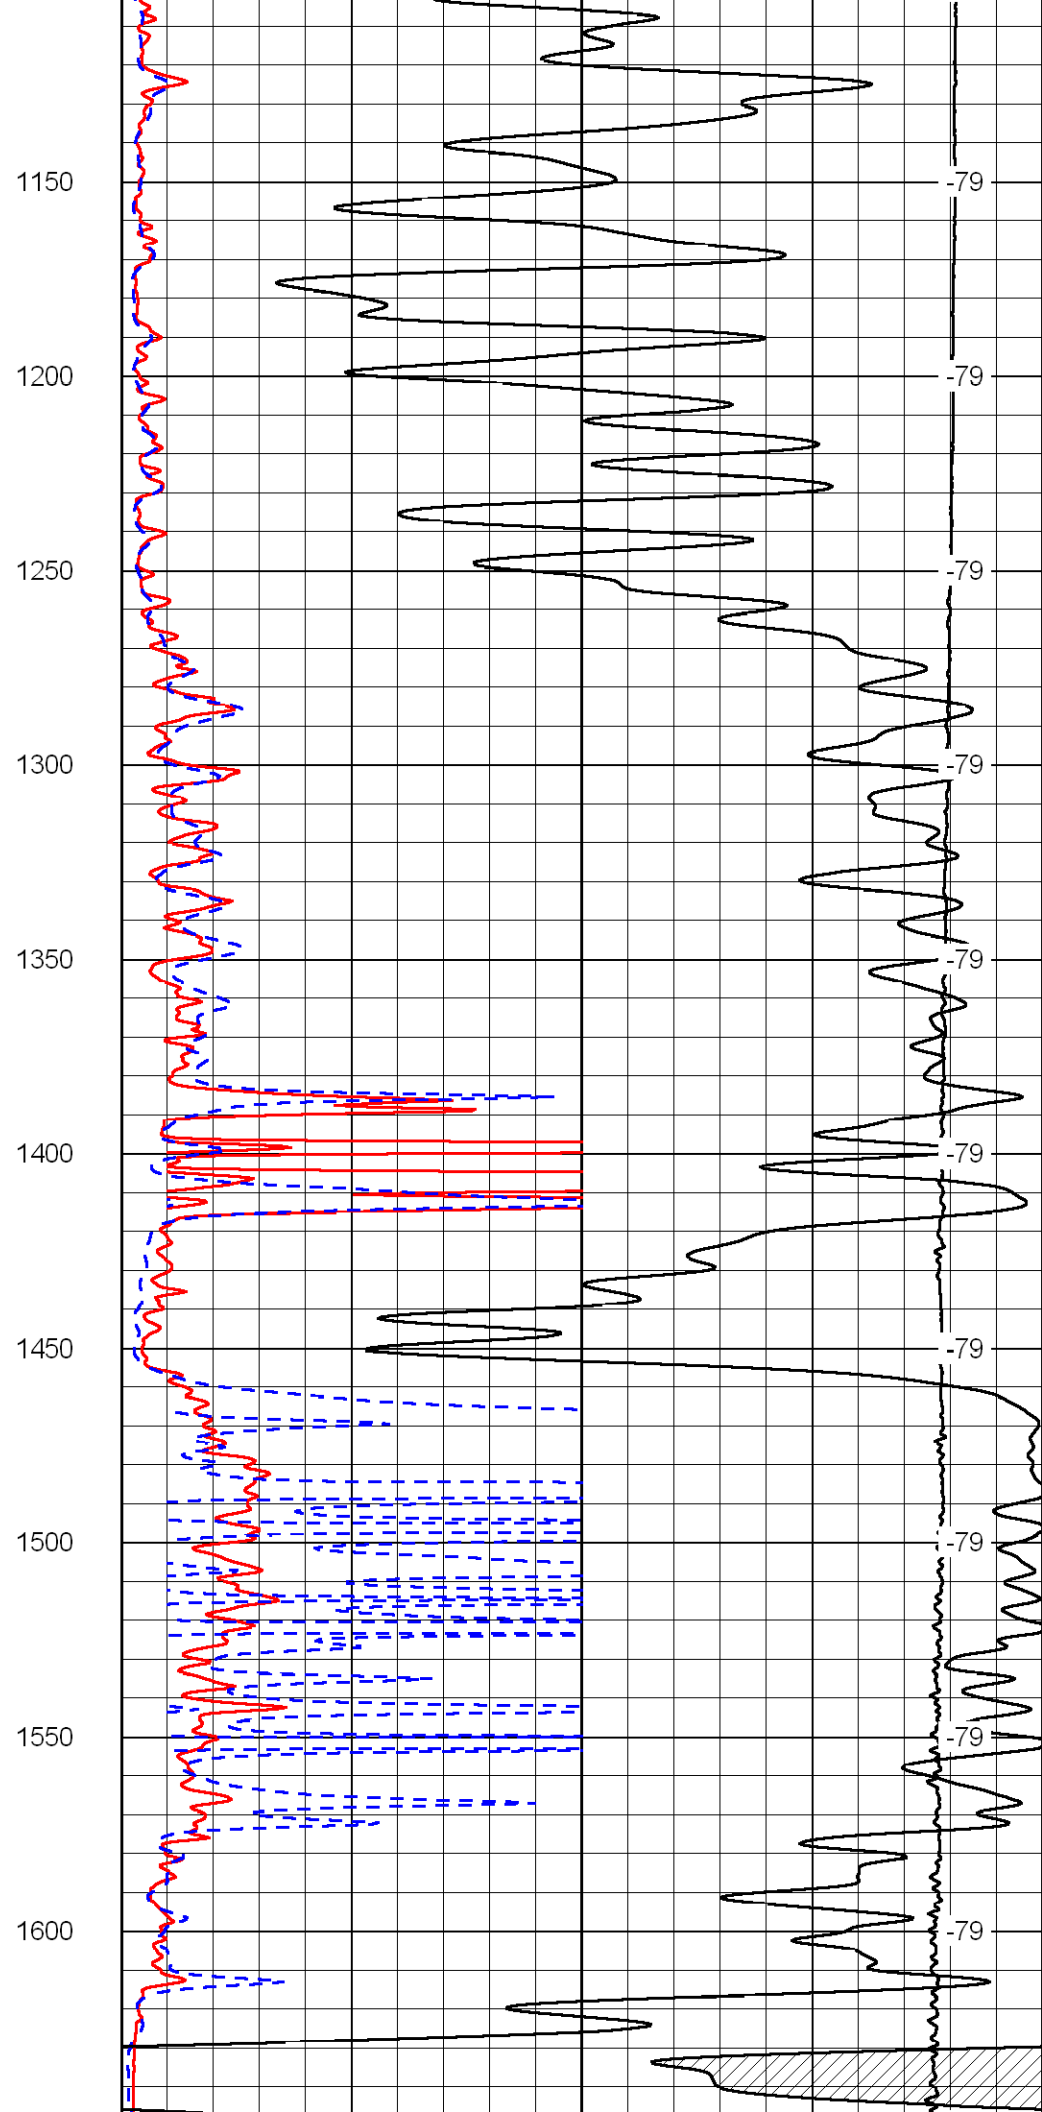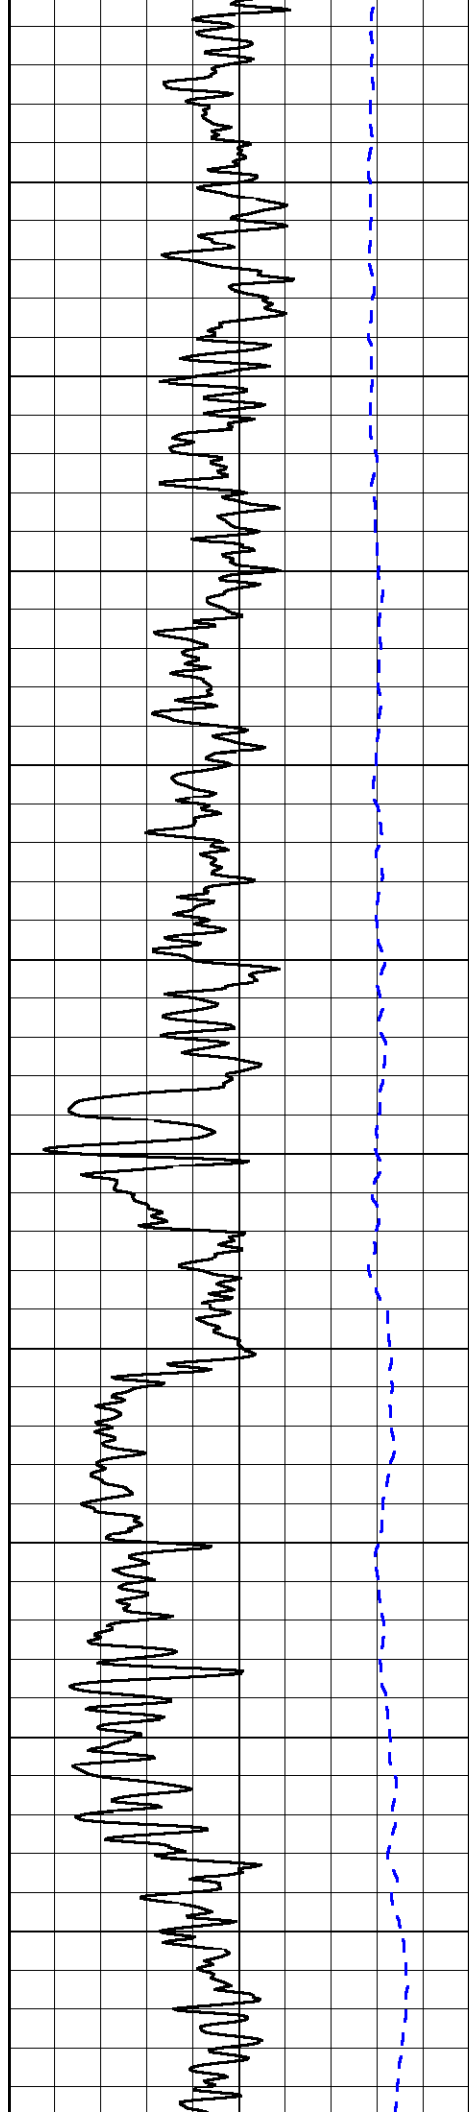


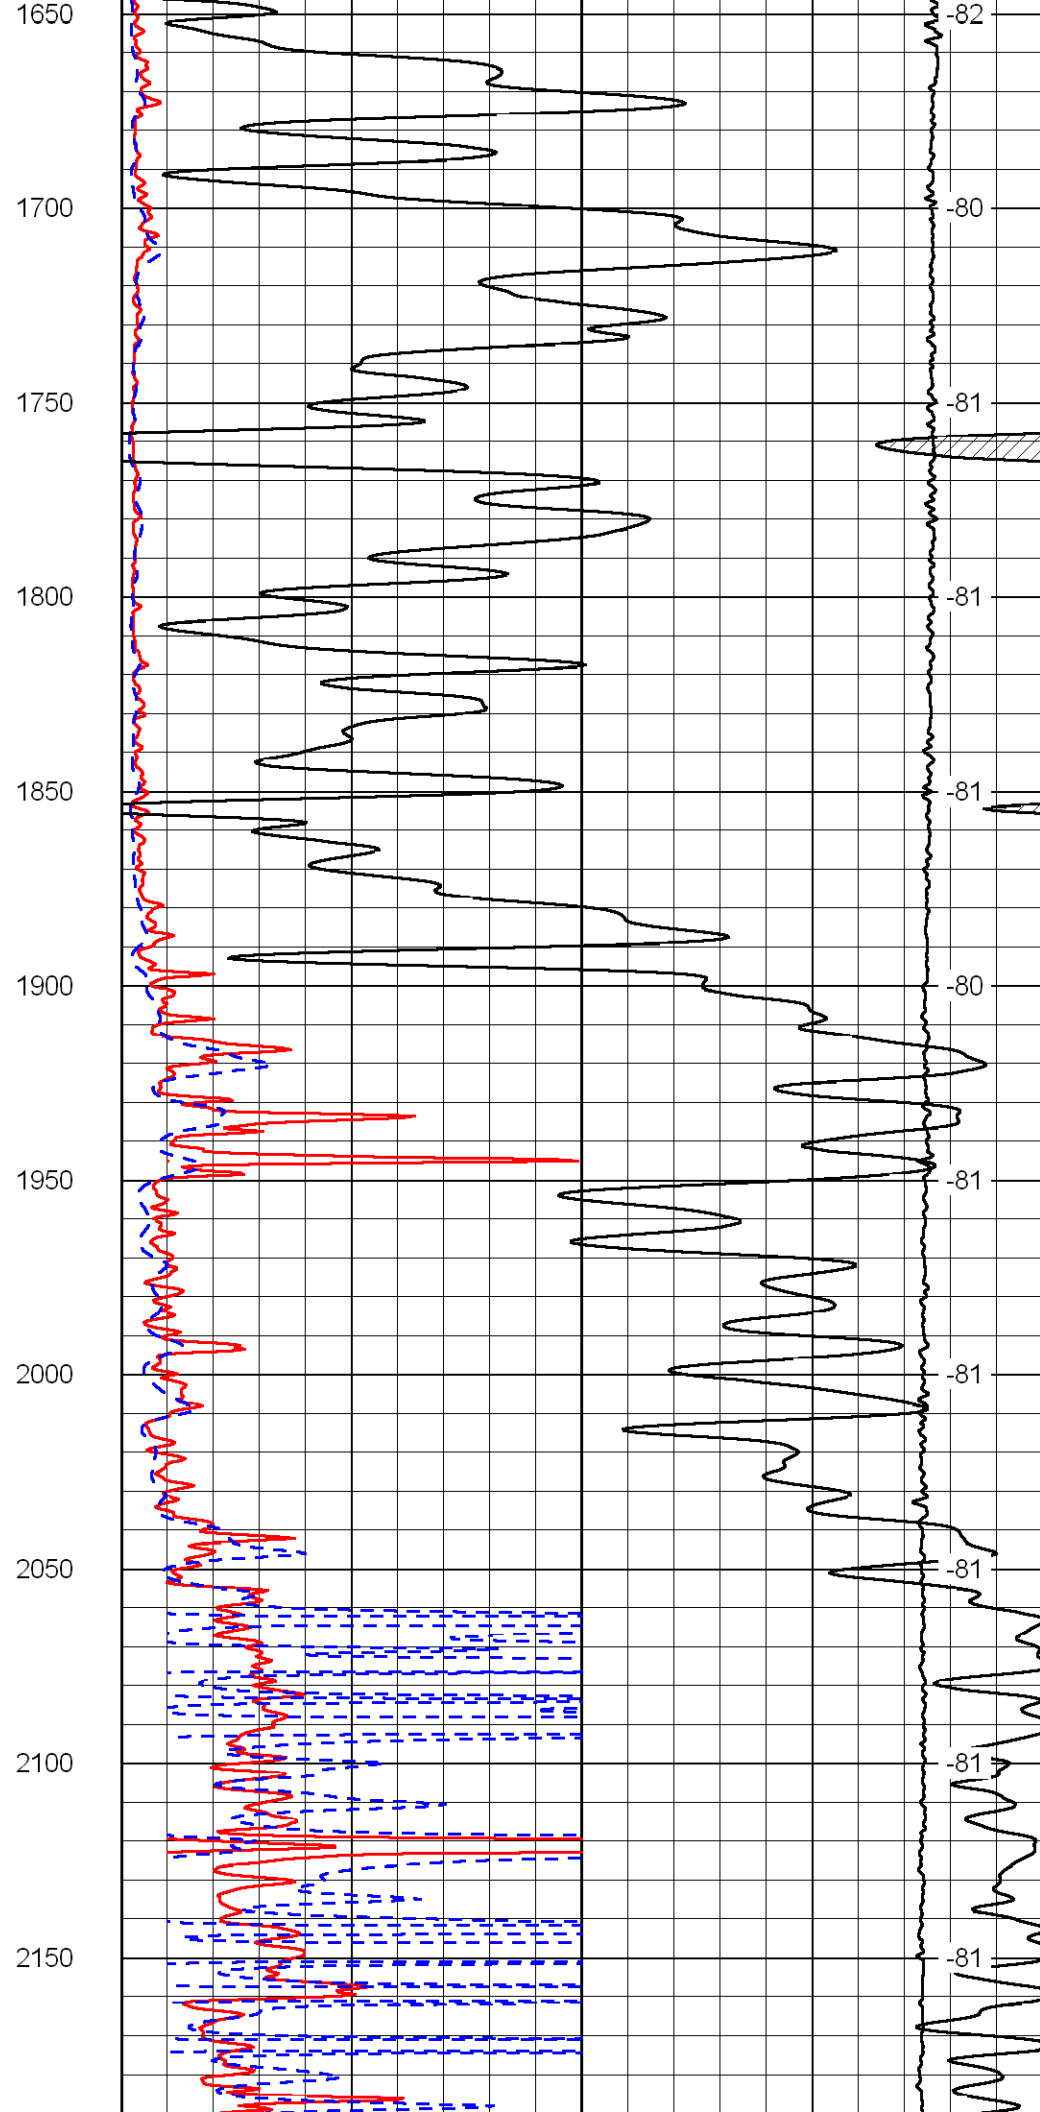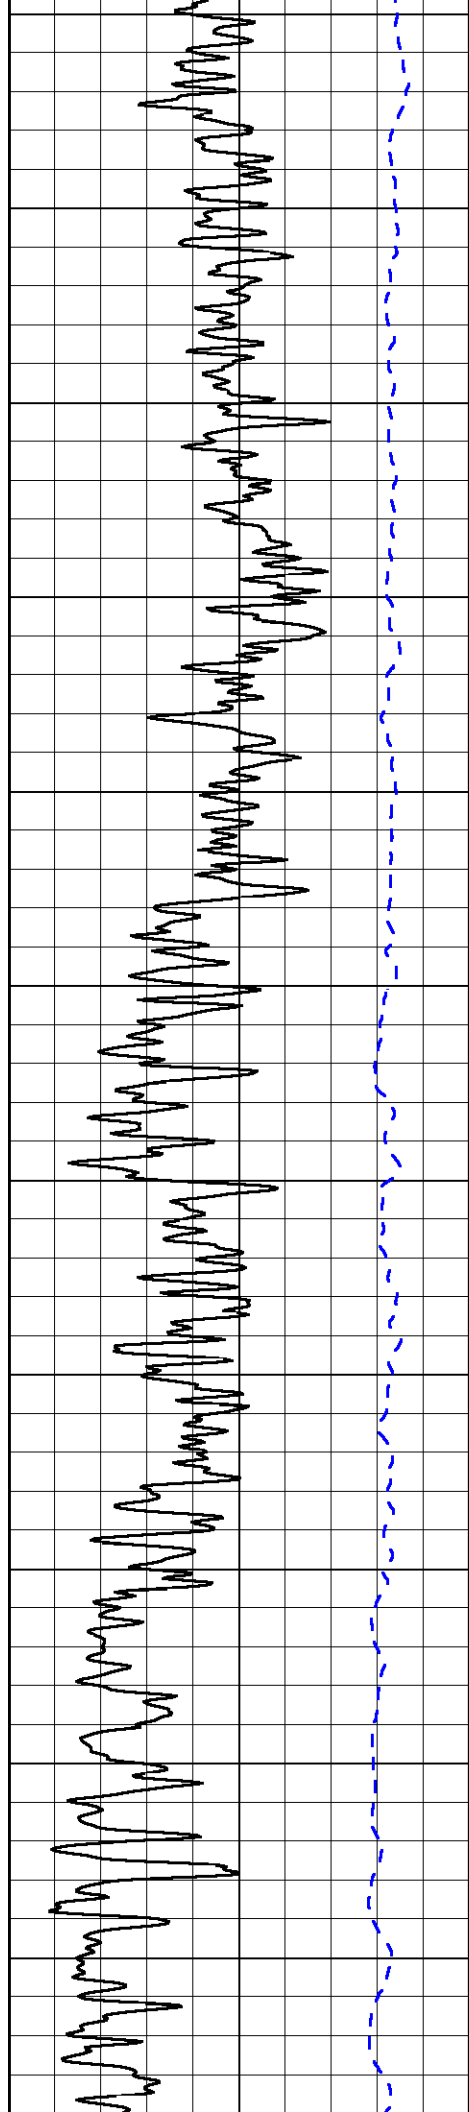

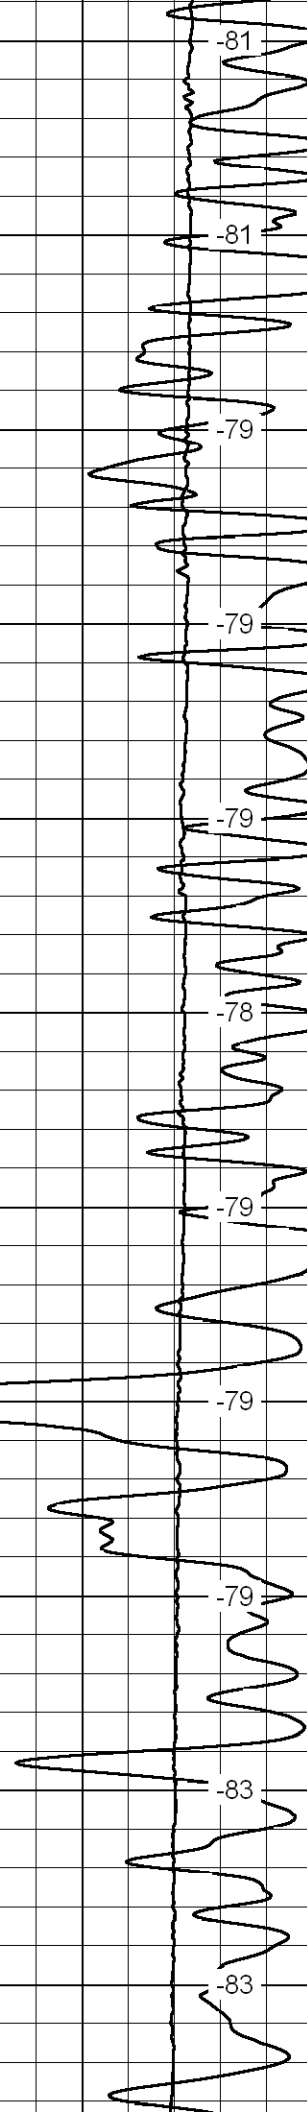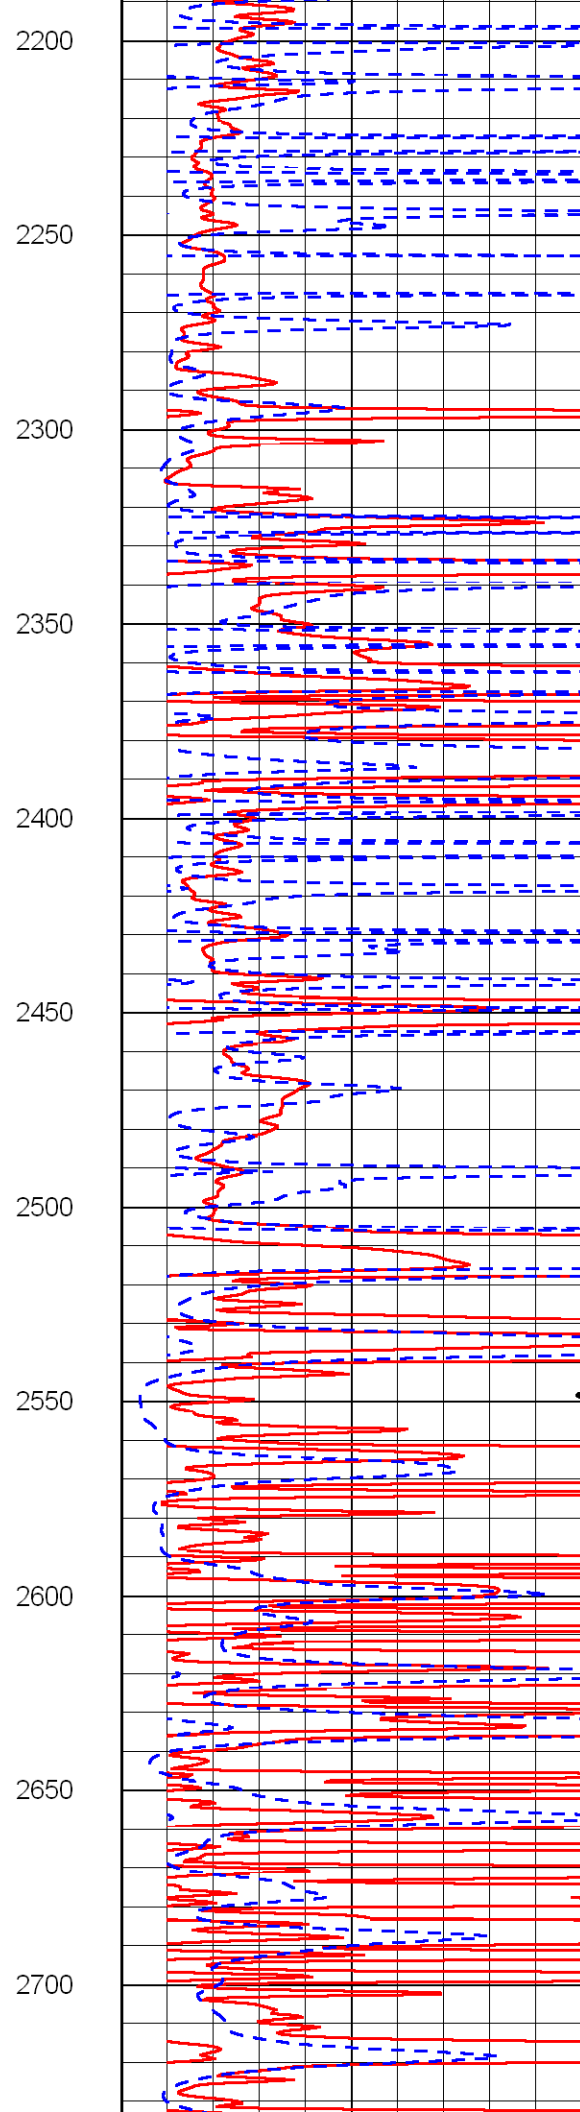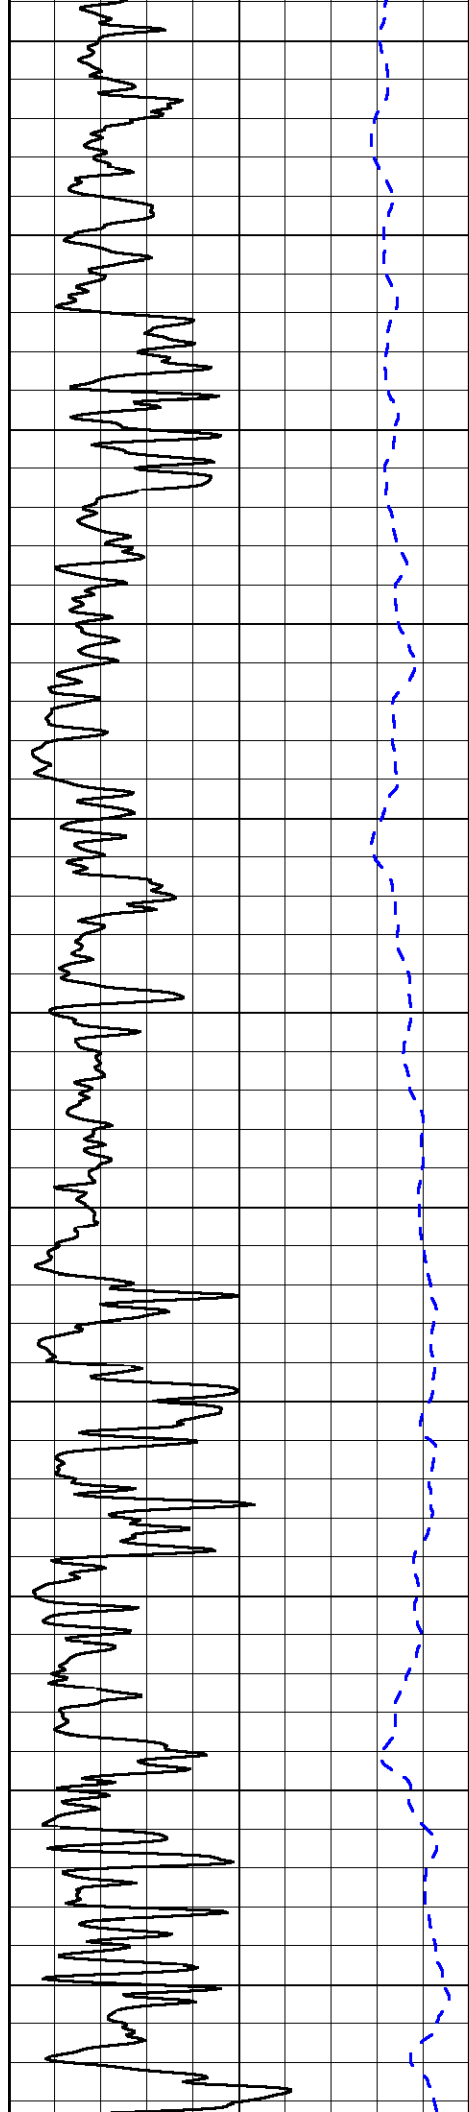

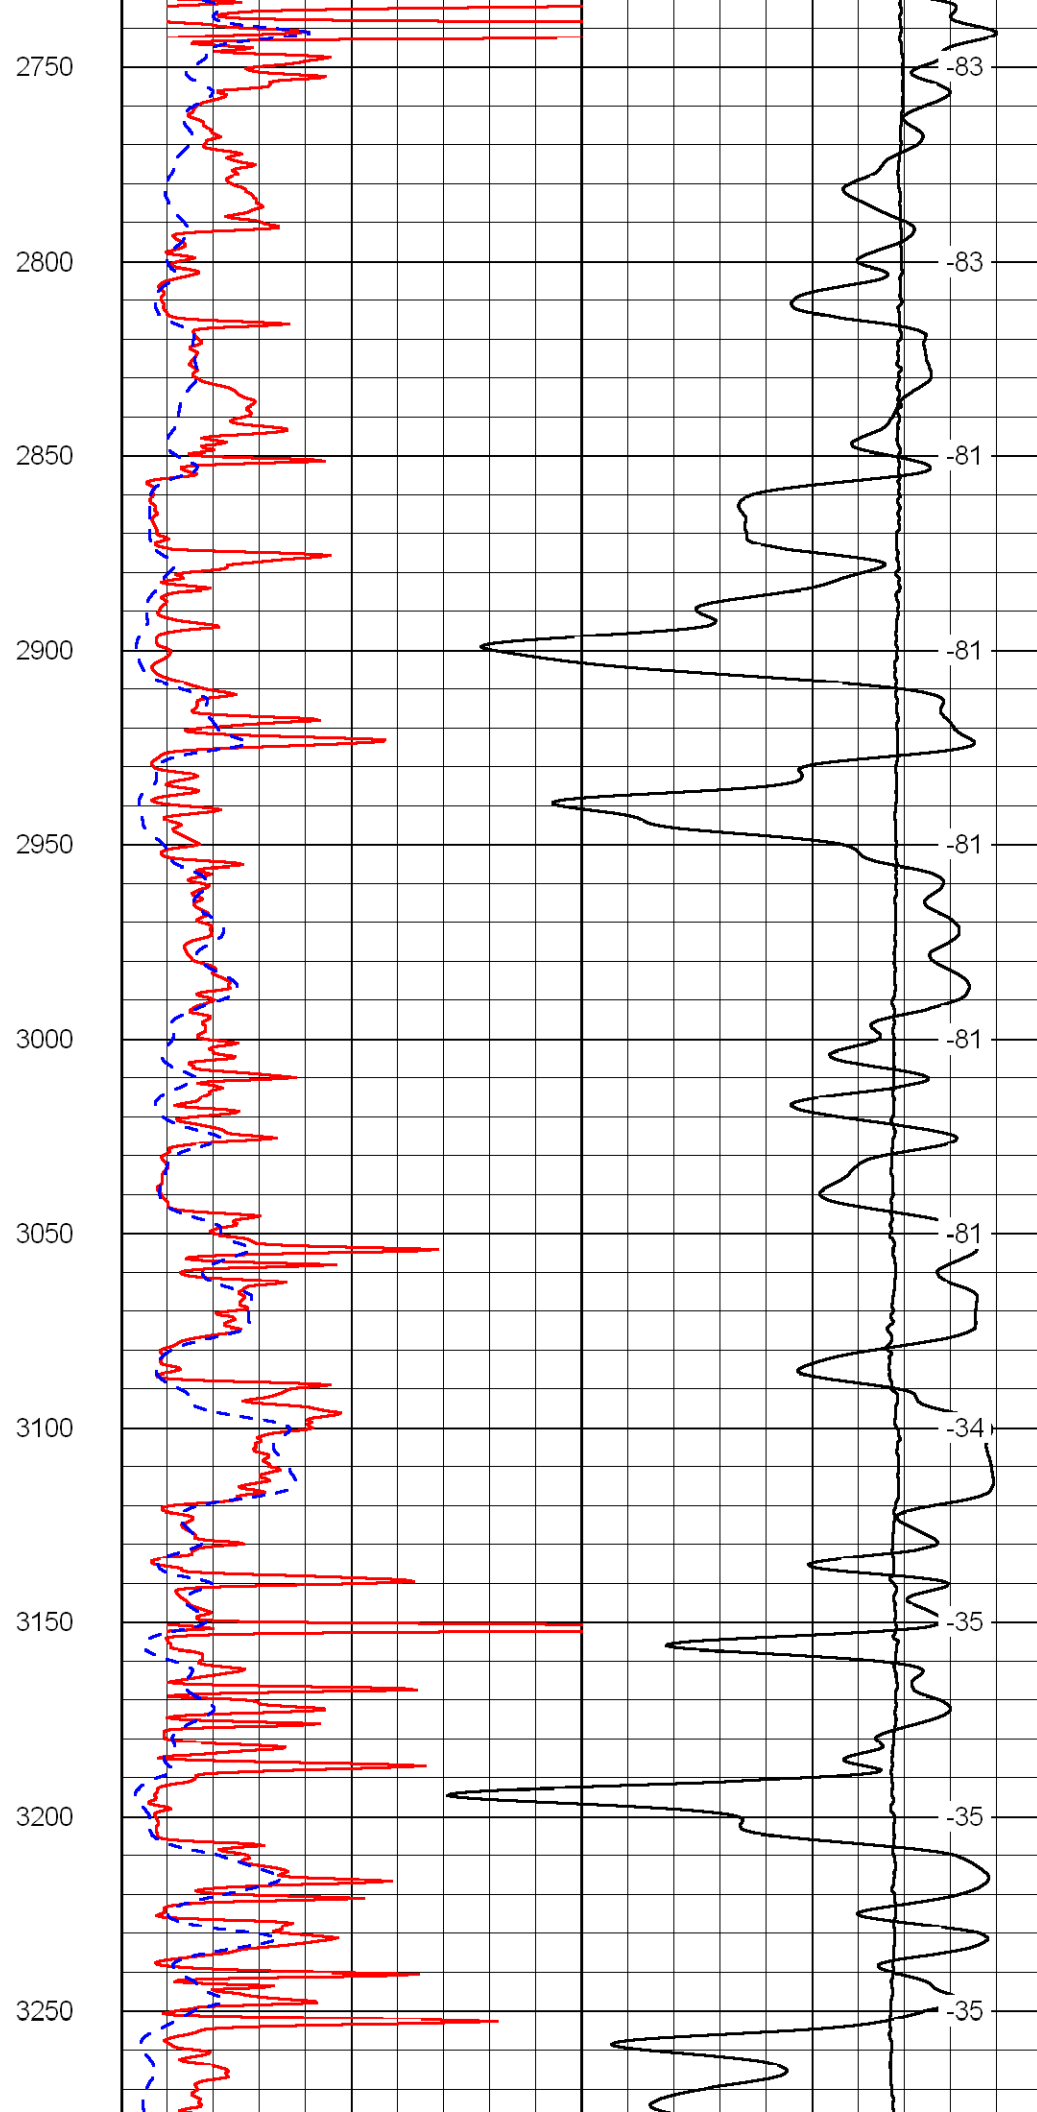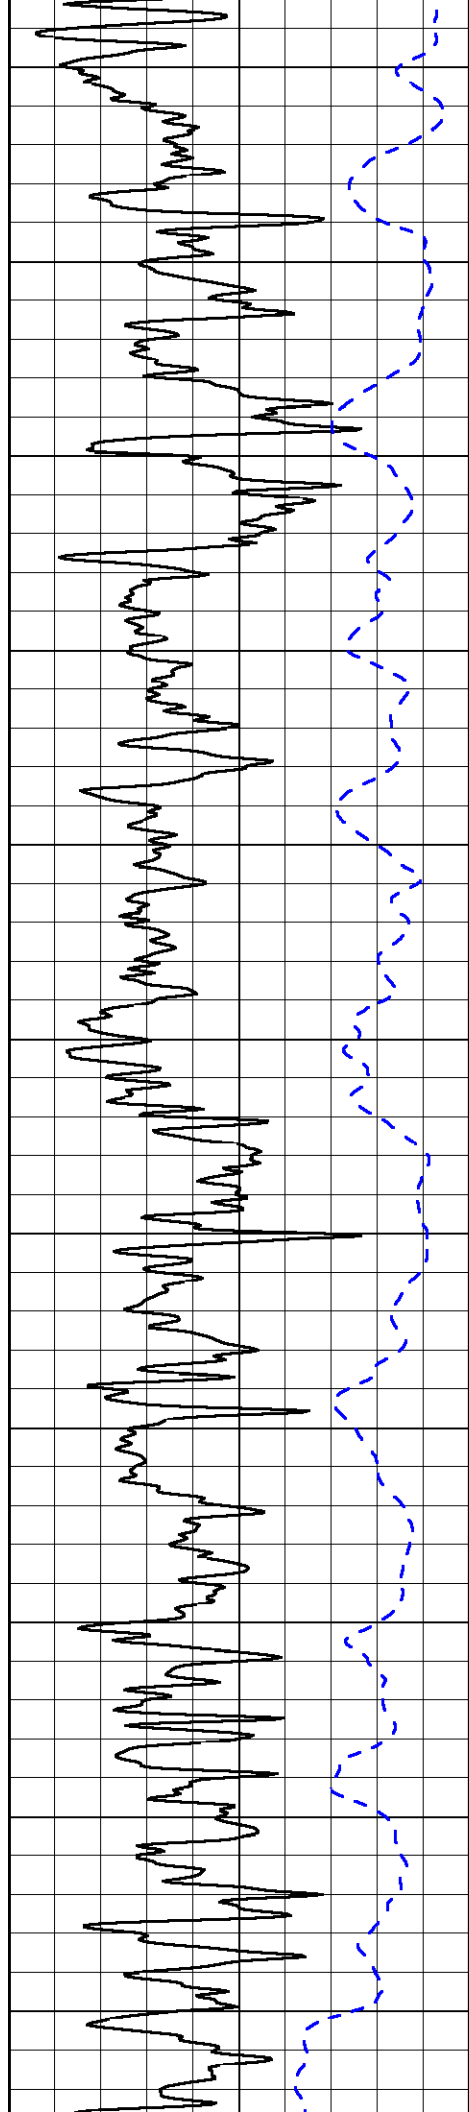

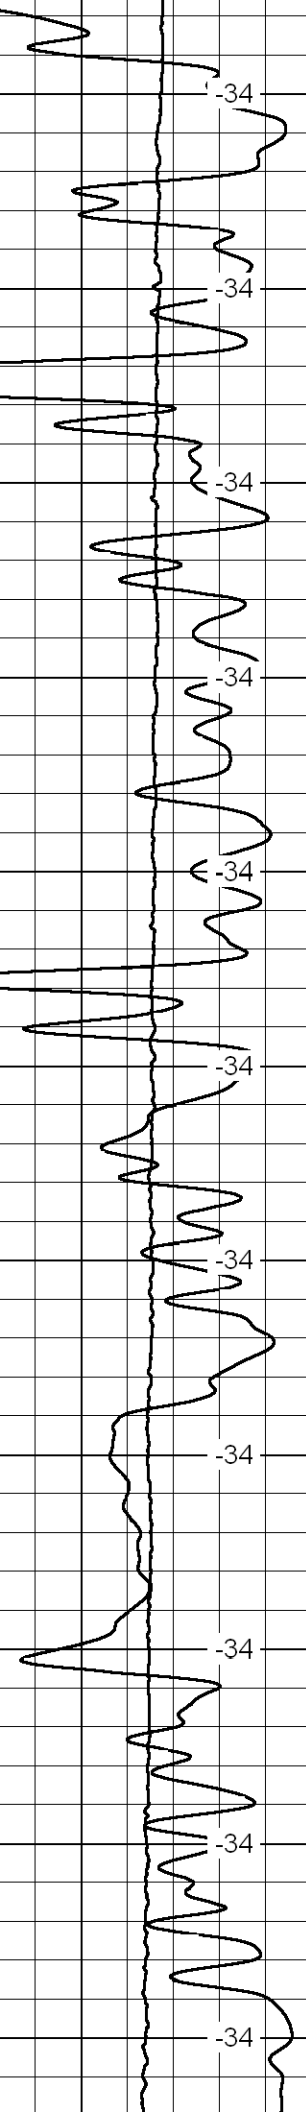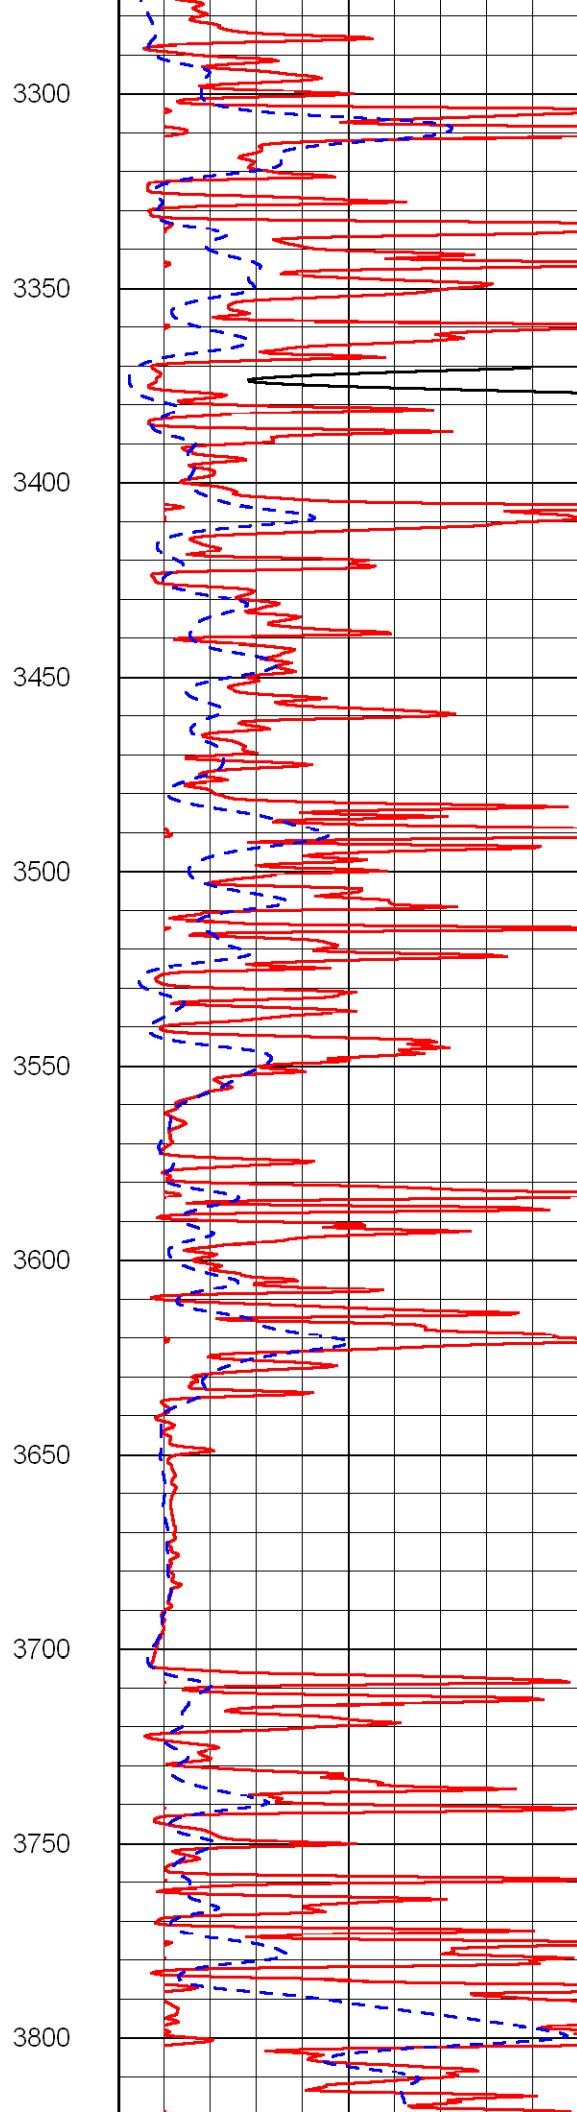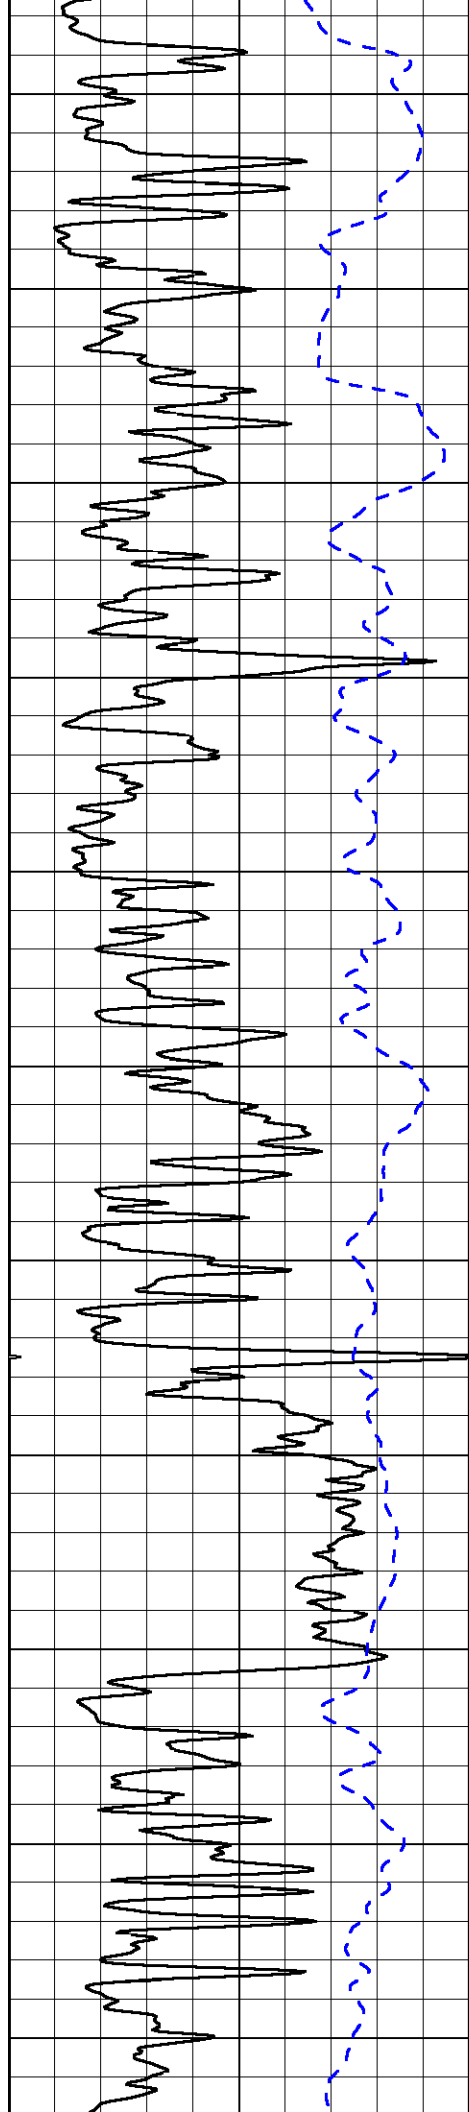

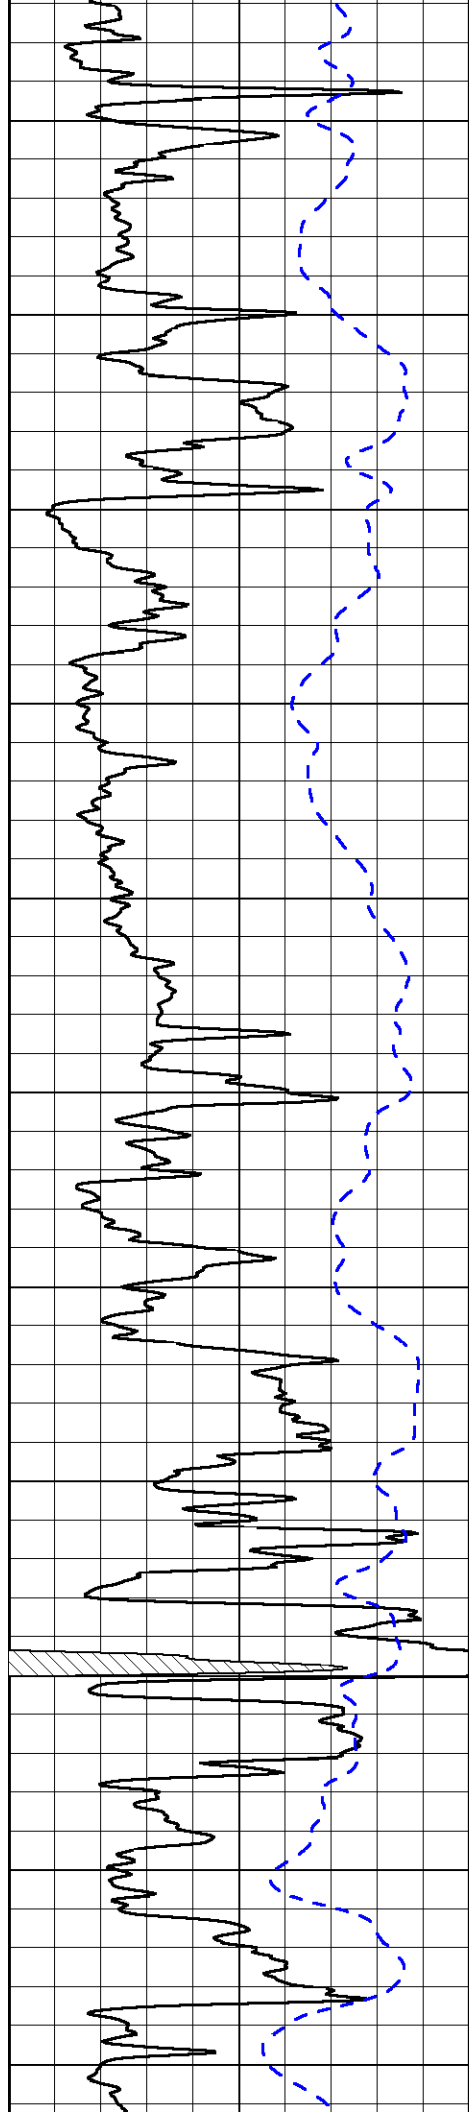

3850

3900

3950

4000

4050

4100


4150

4200

4250

4300

4350

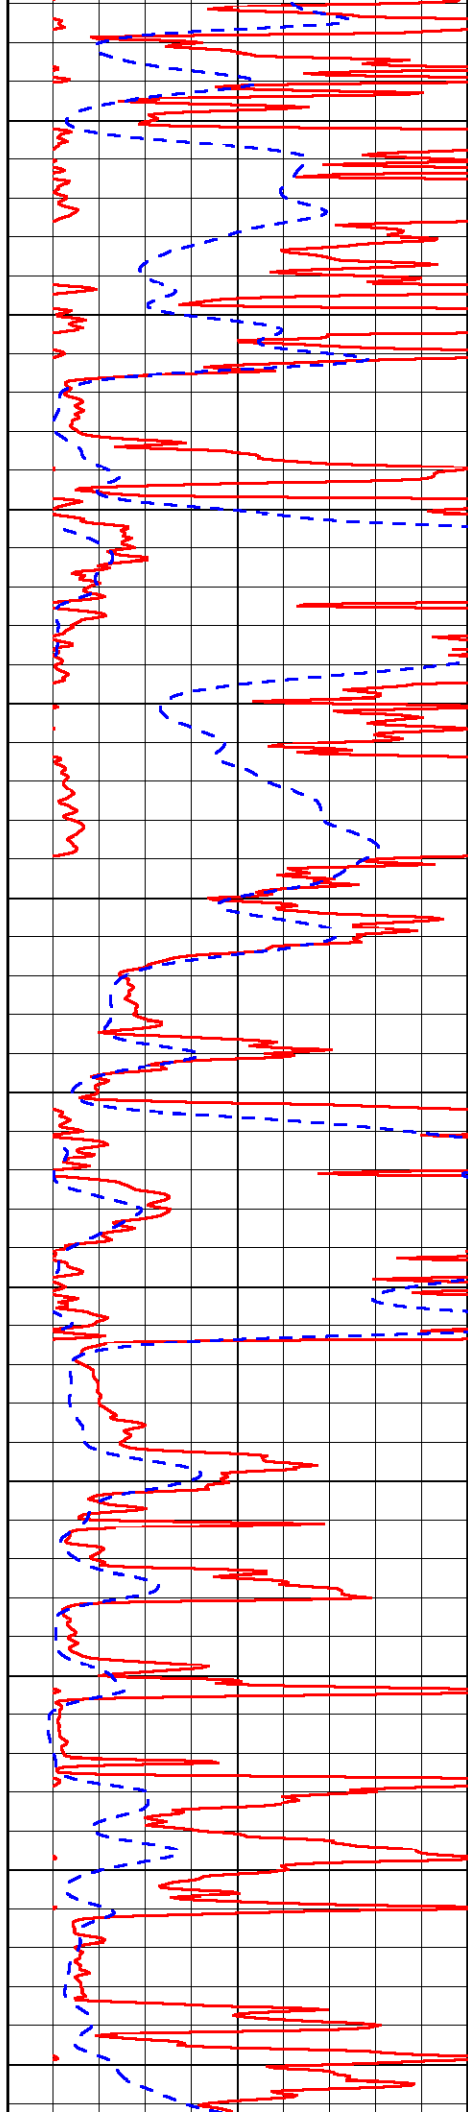

-34

-33

-33

-33

-33

-33


-33




-33


-33



-33


-33

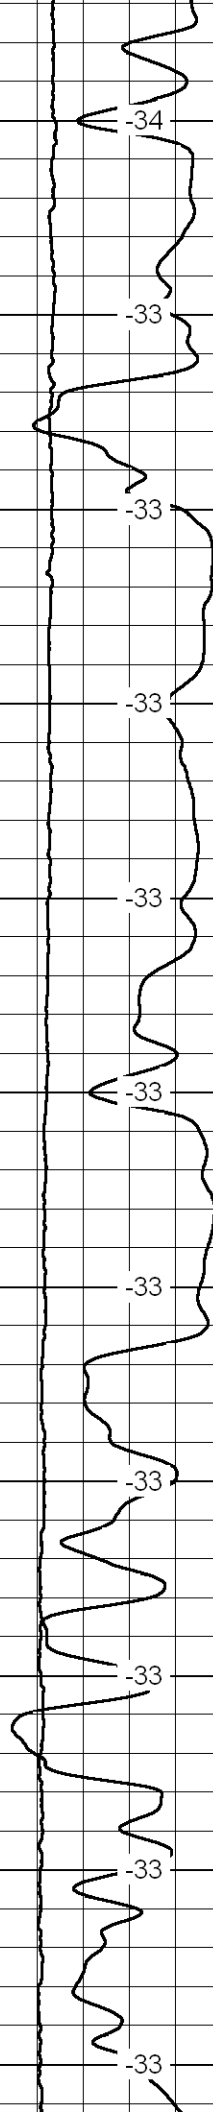

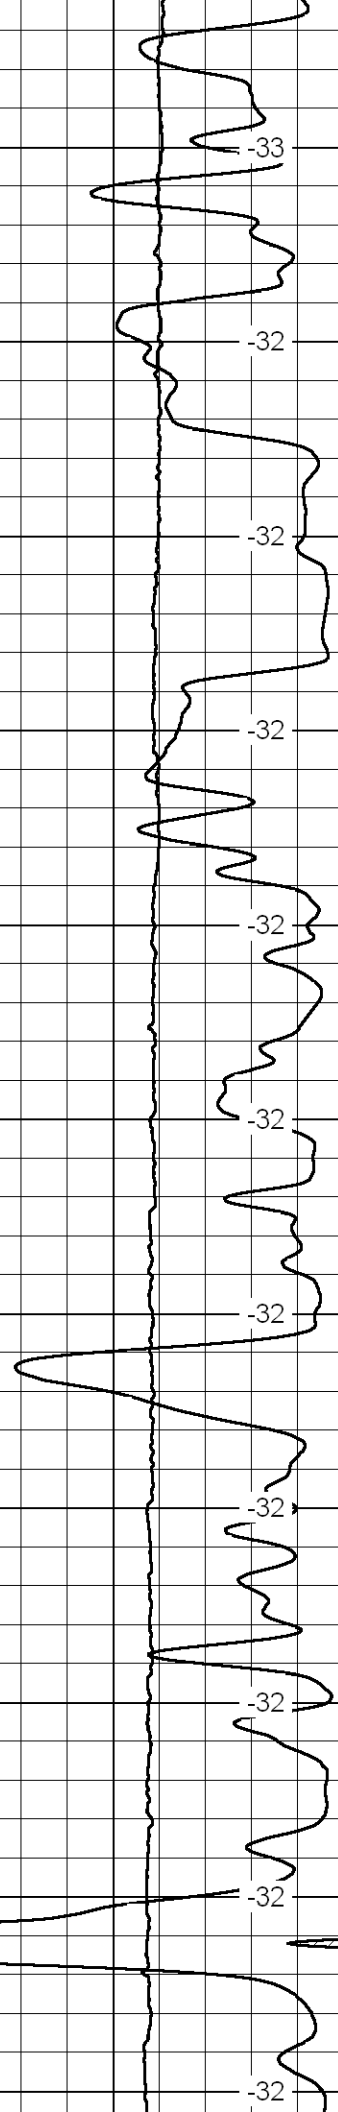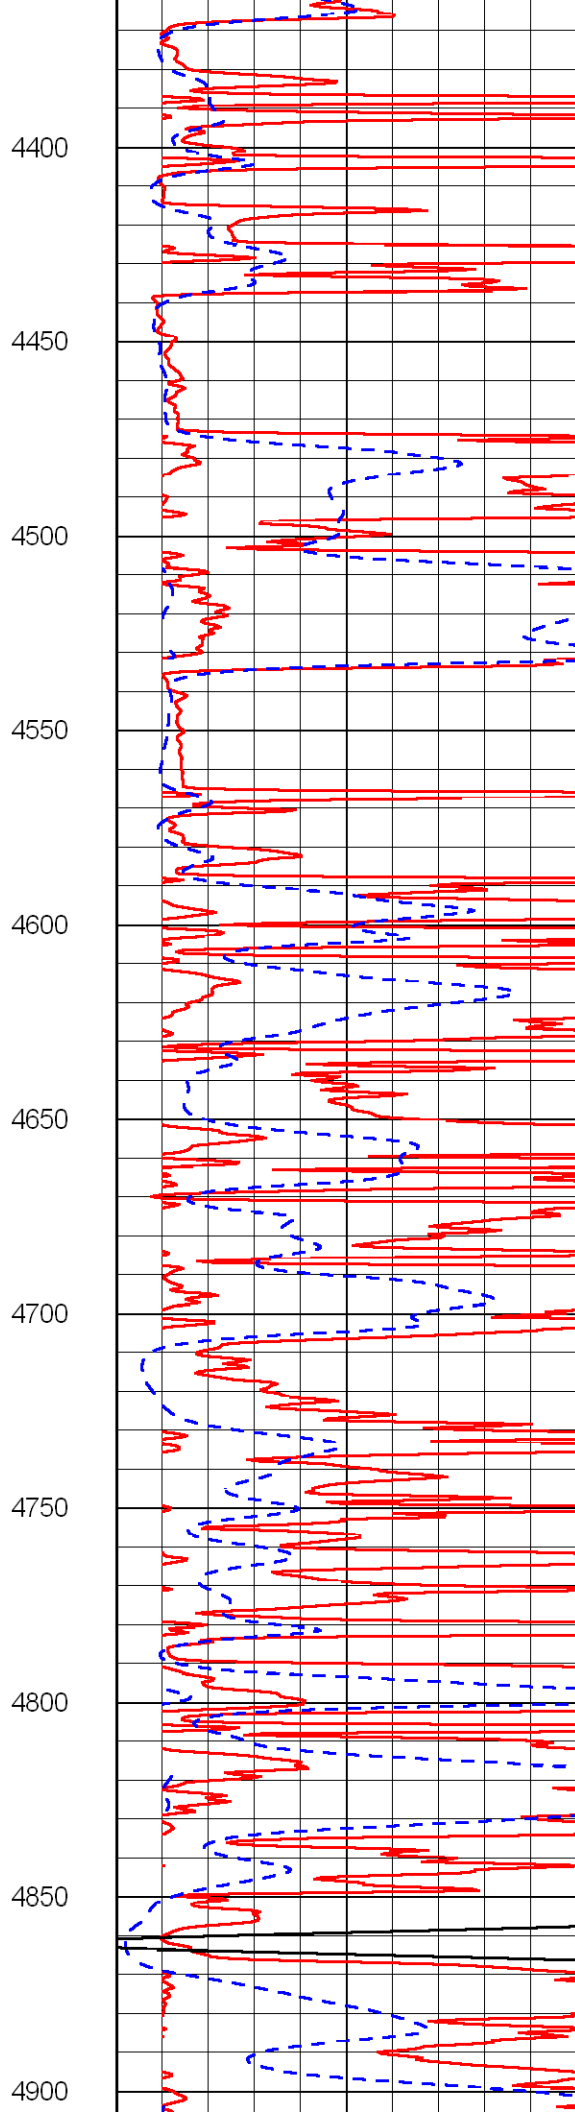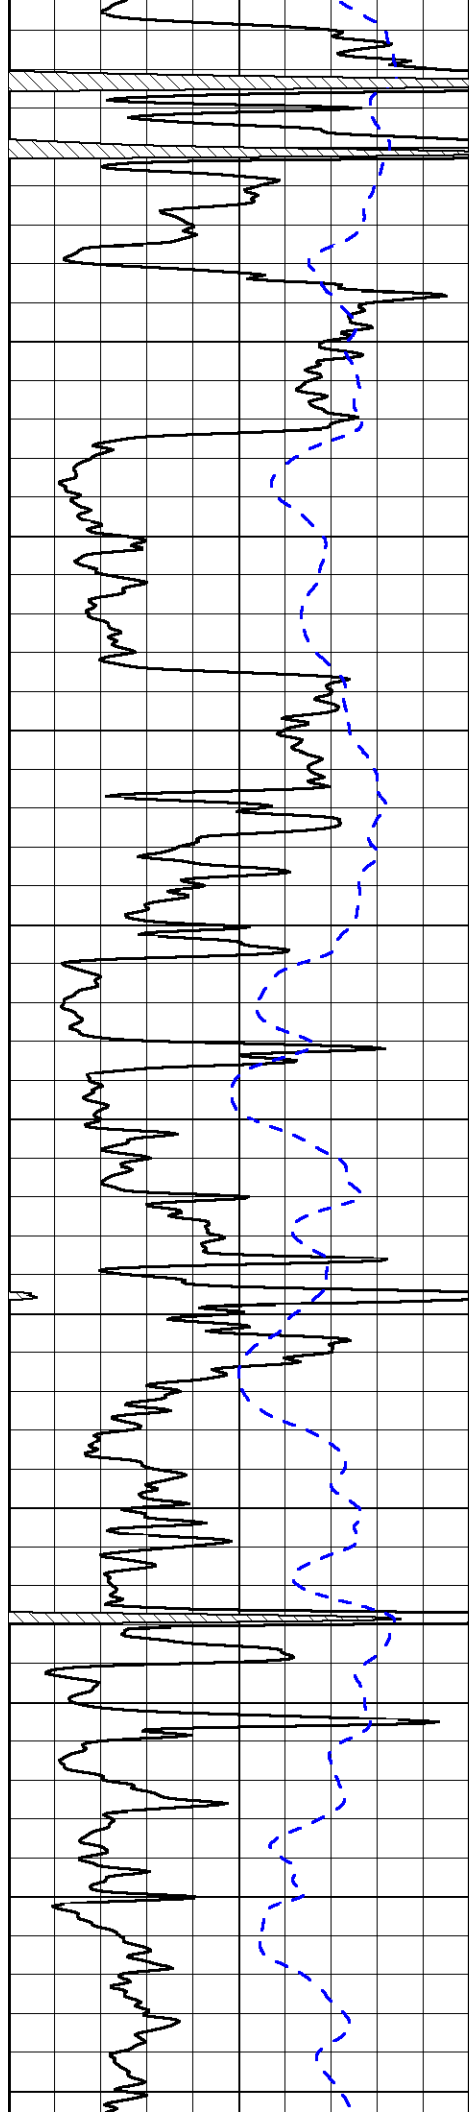

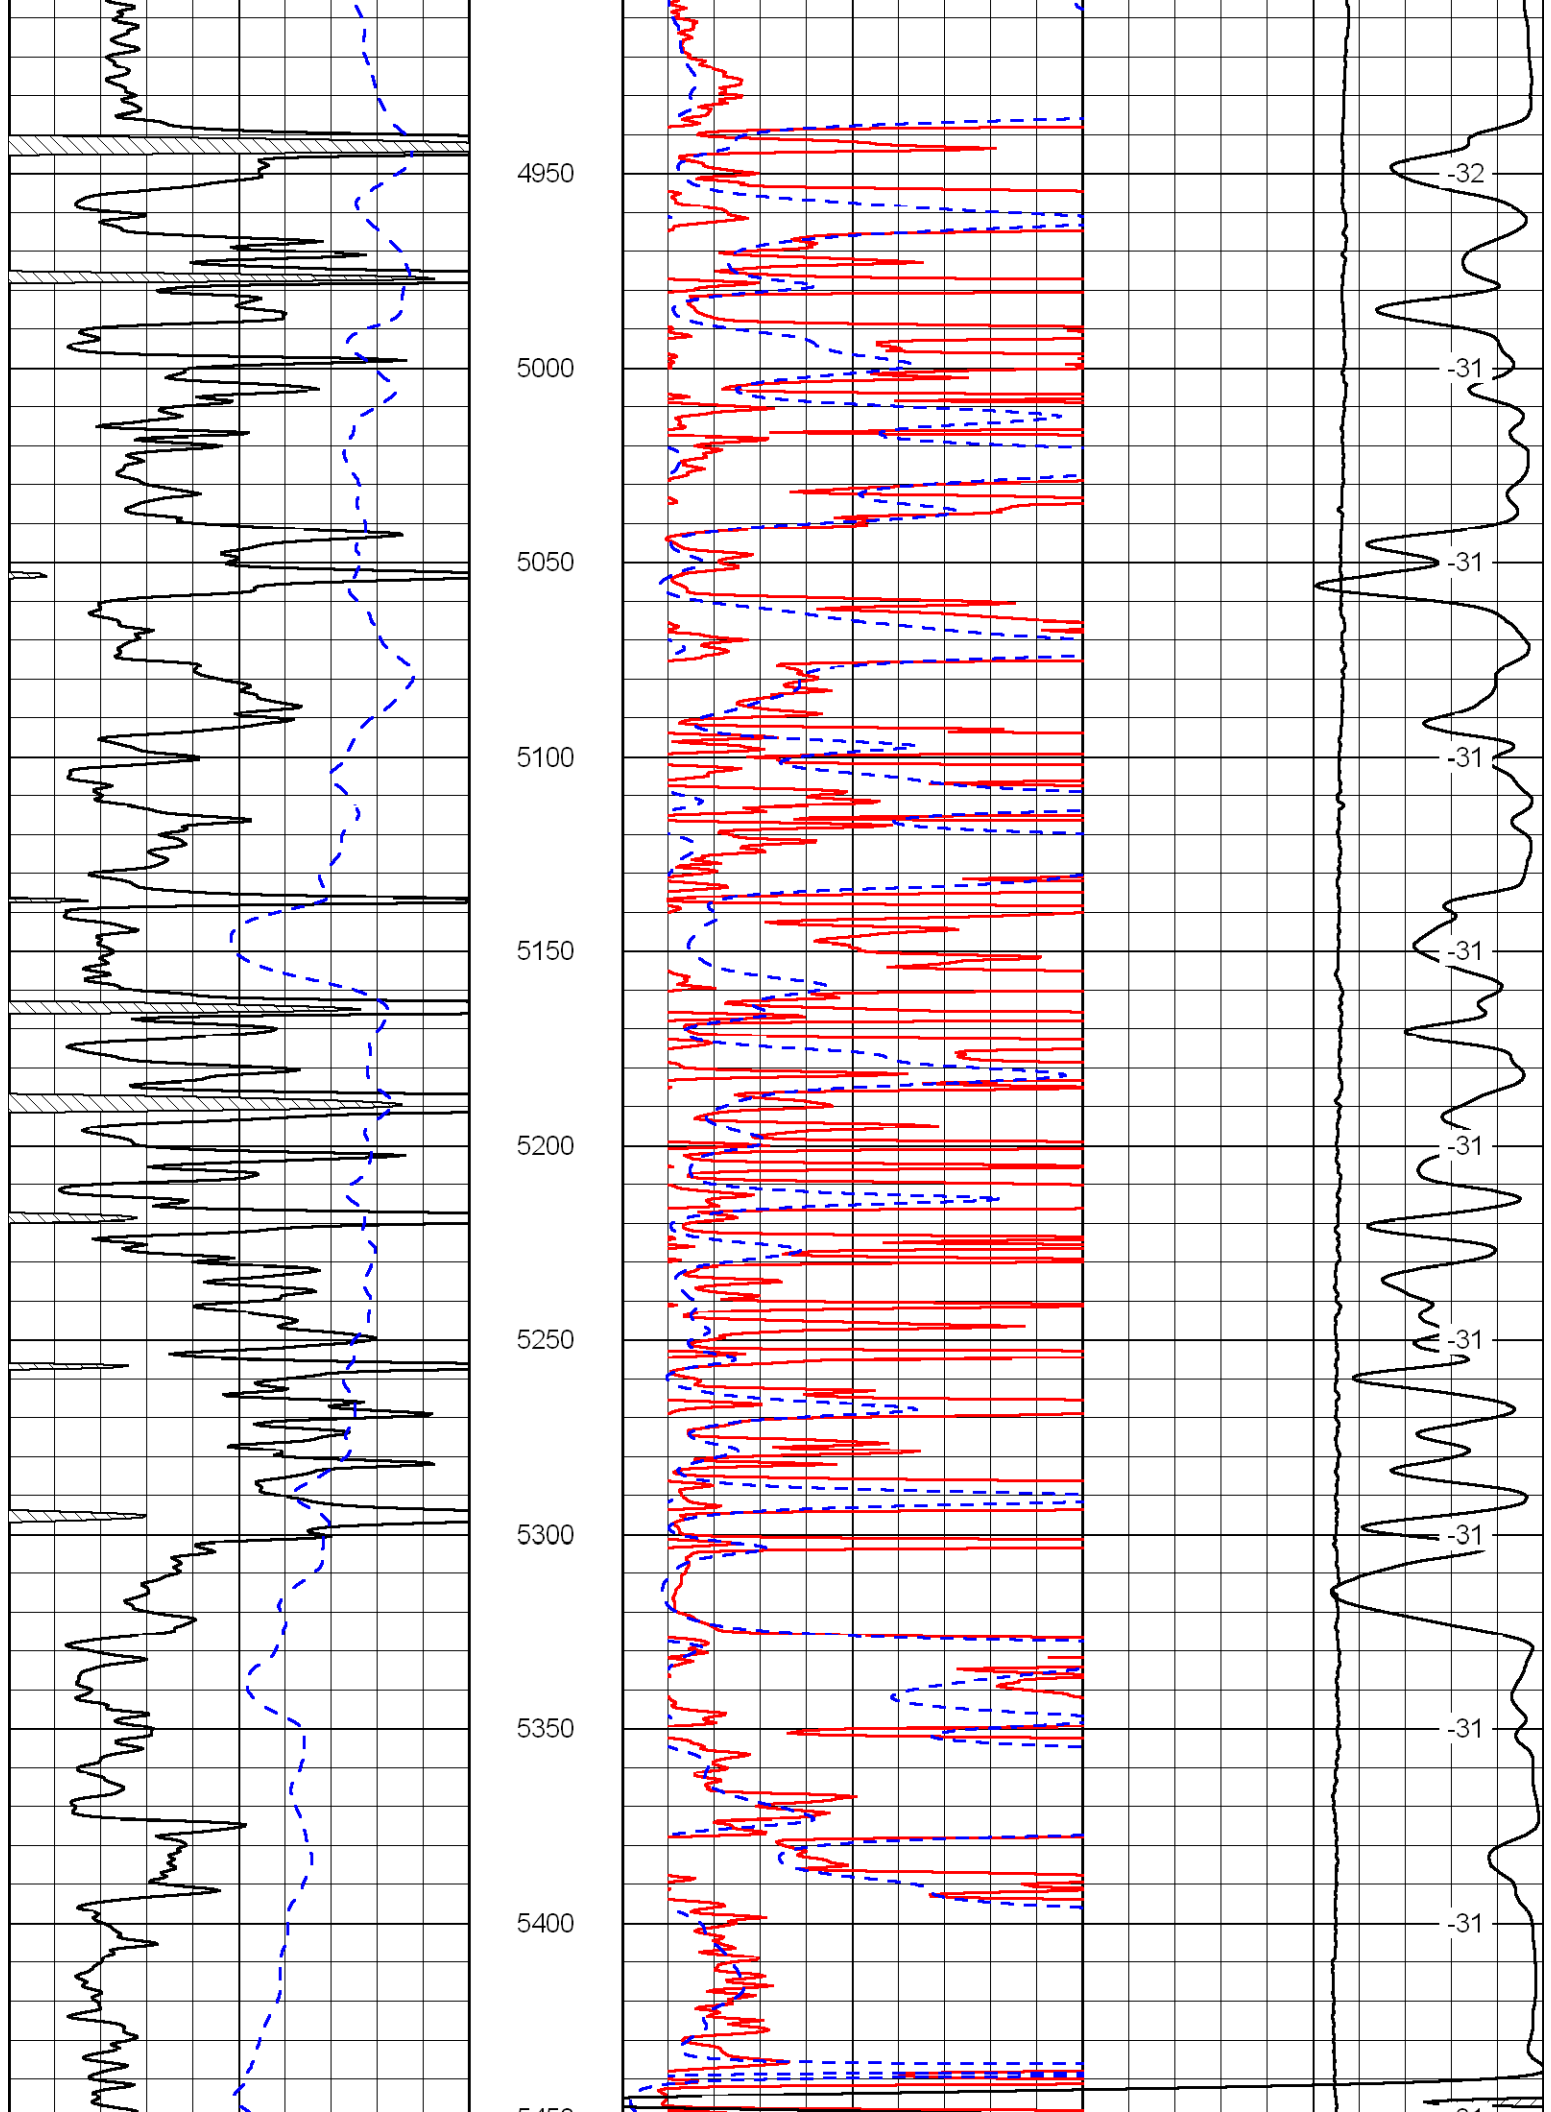

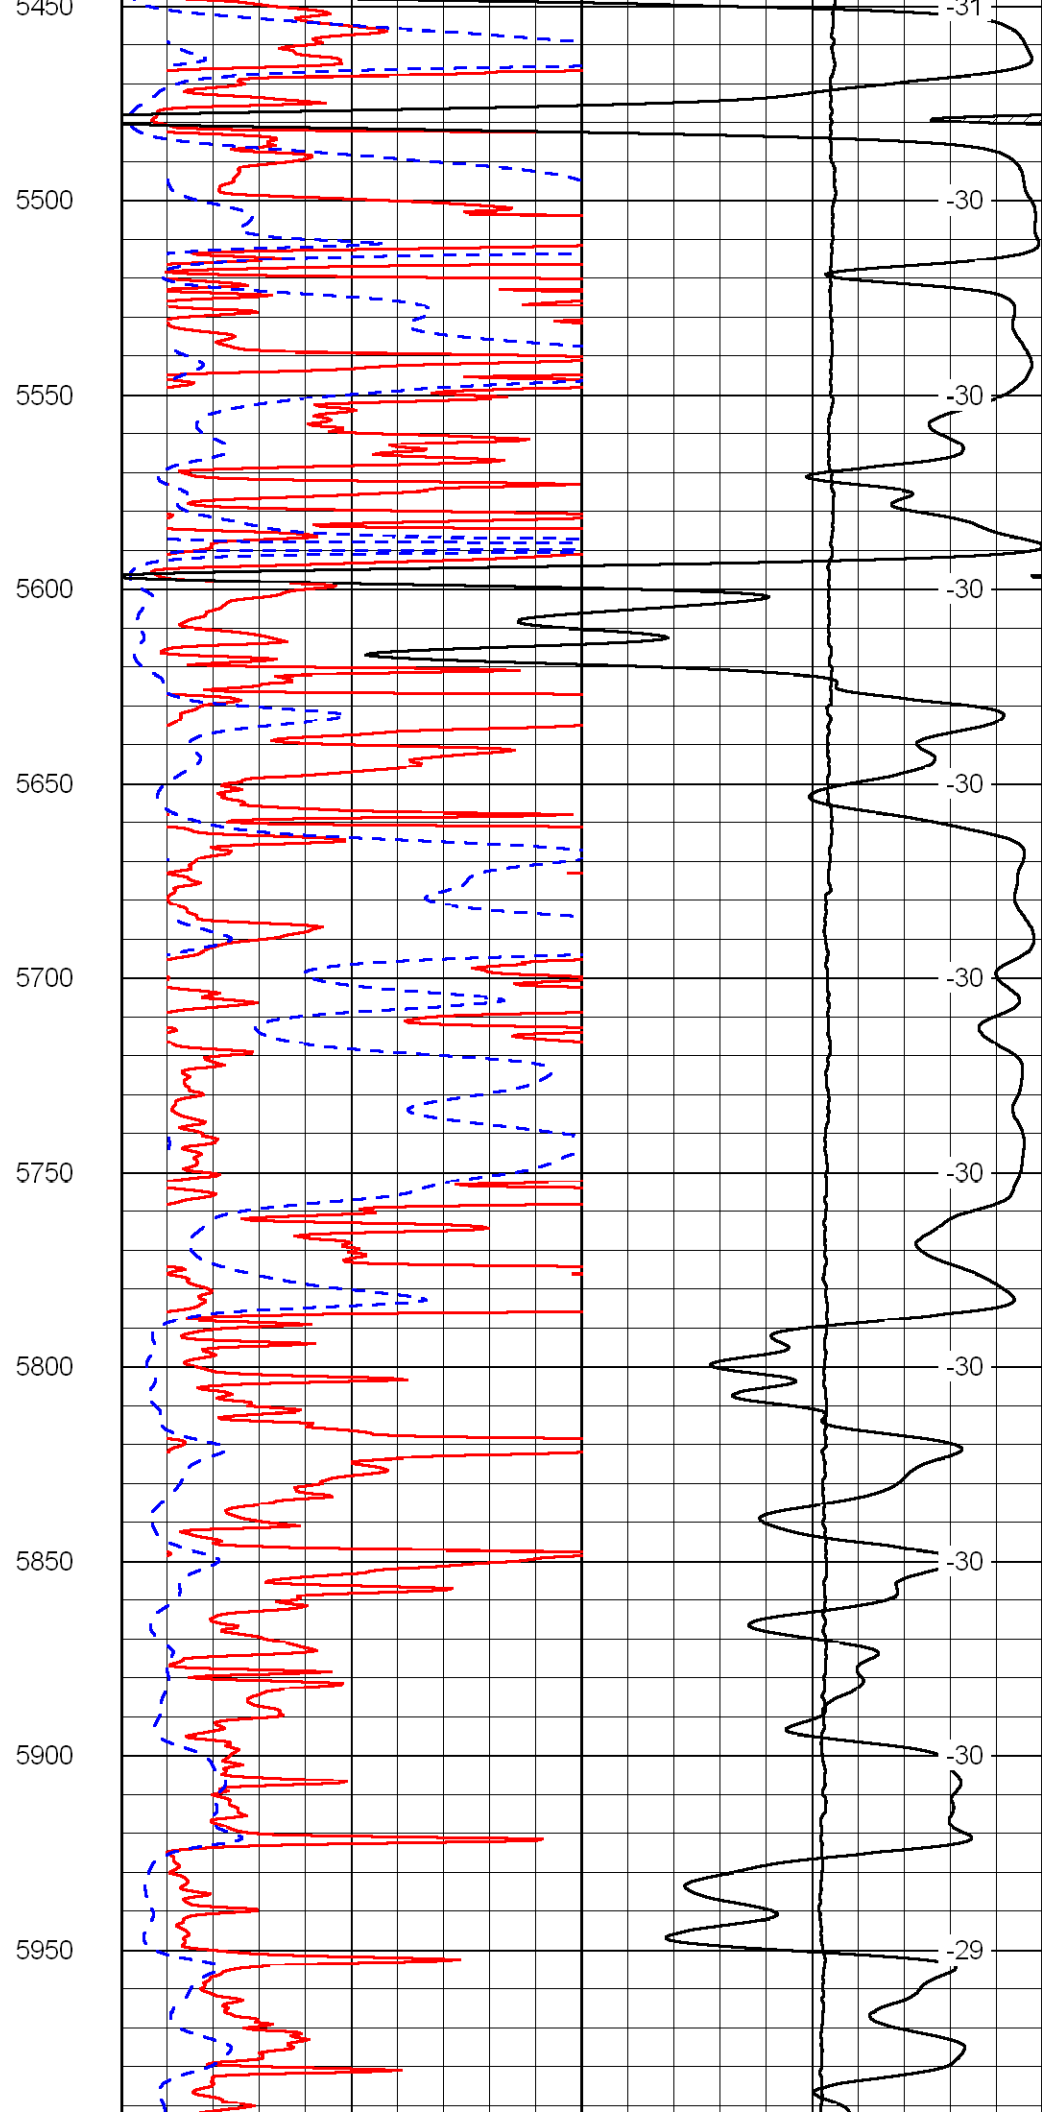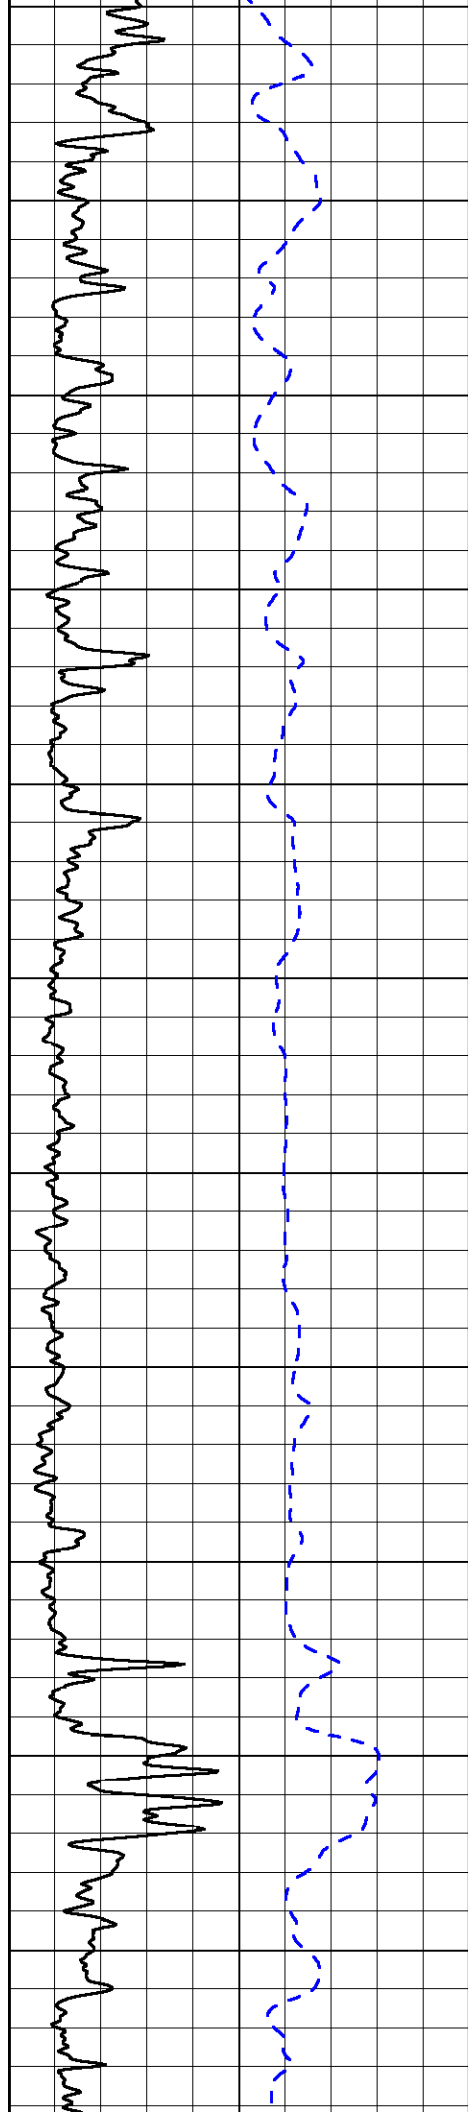

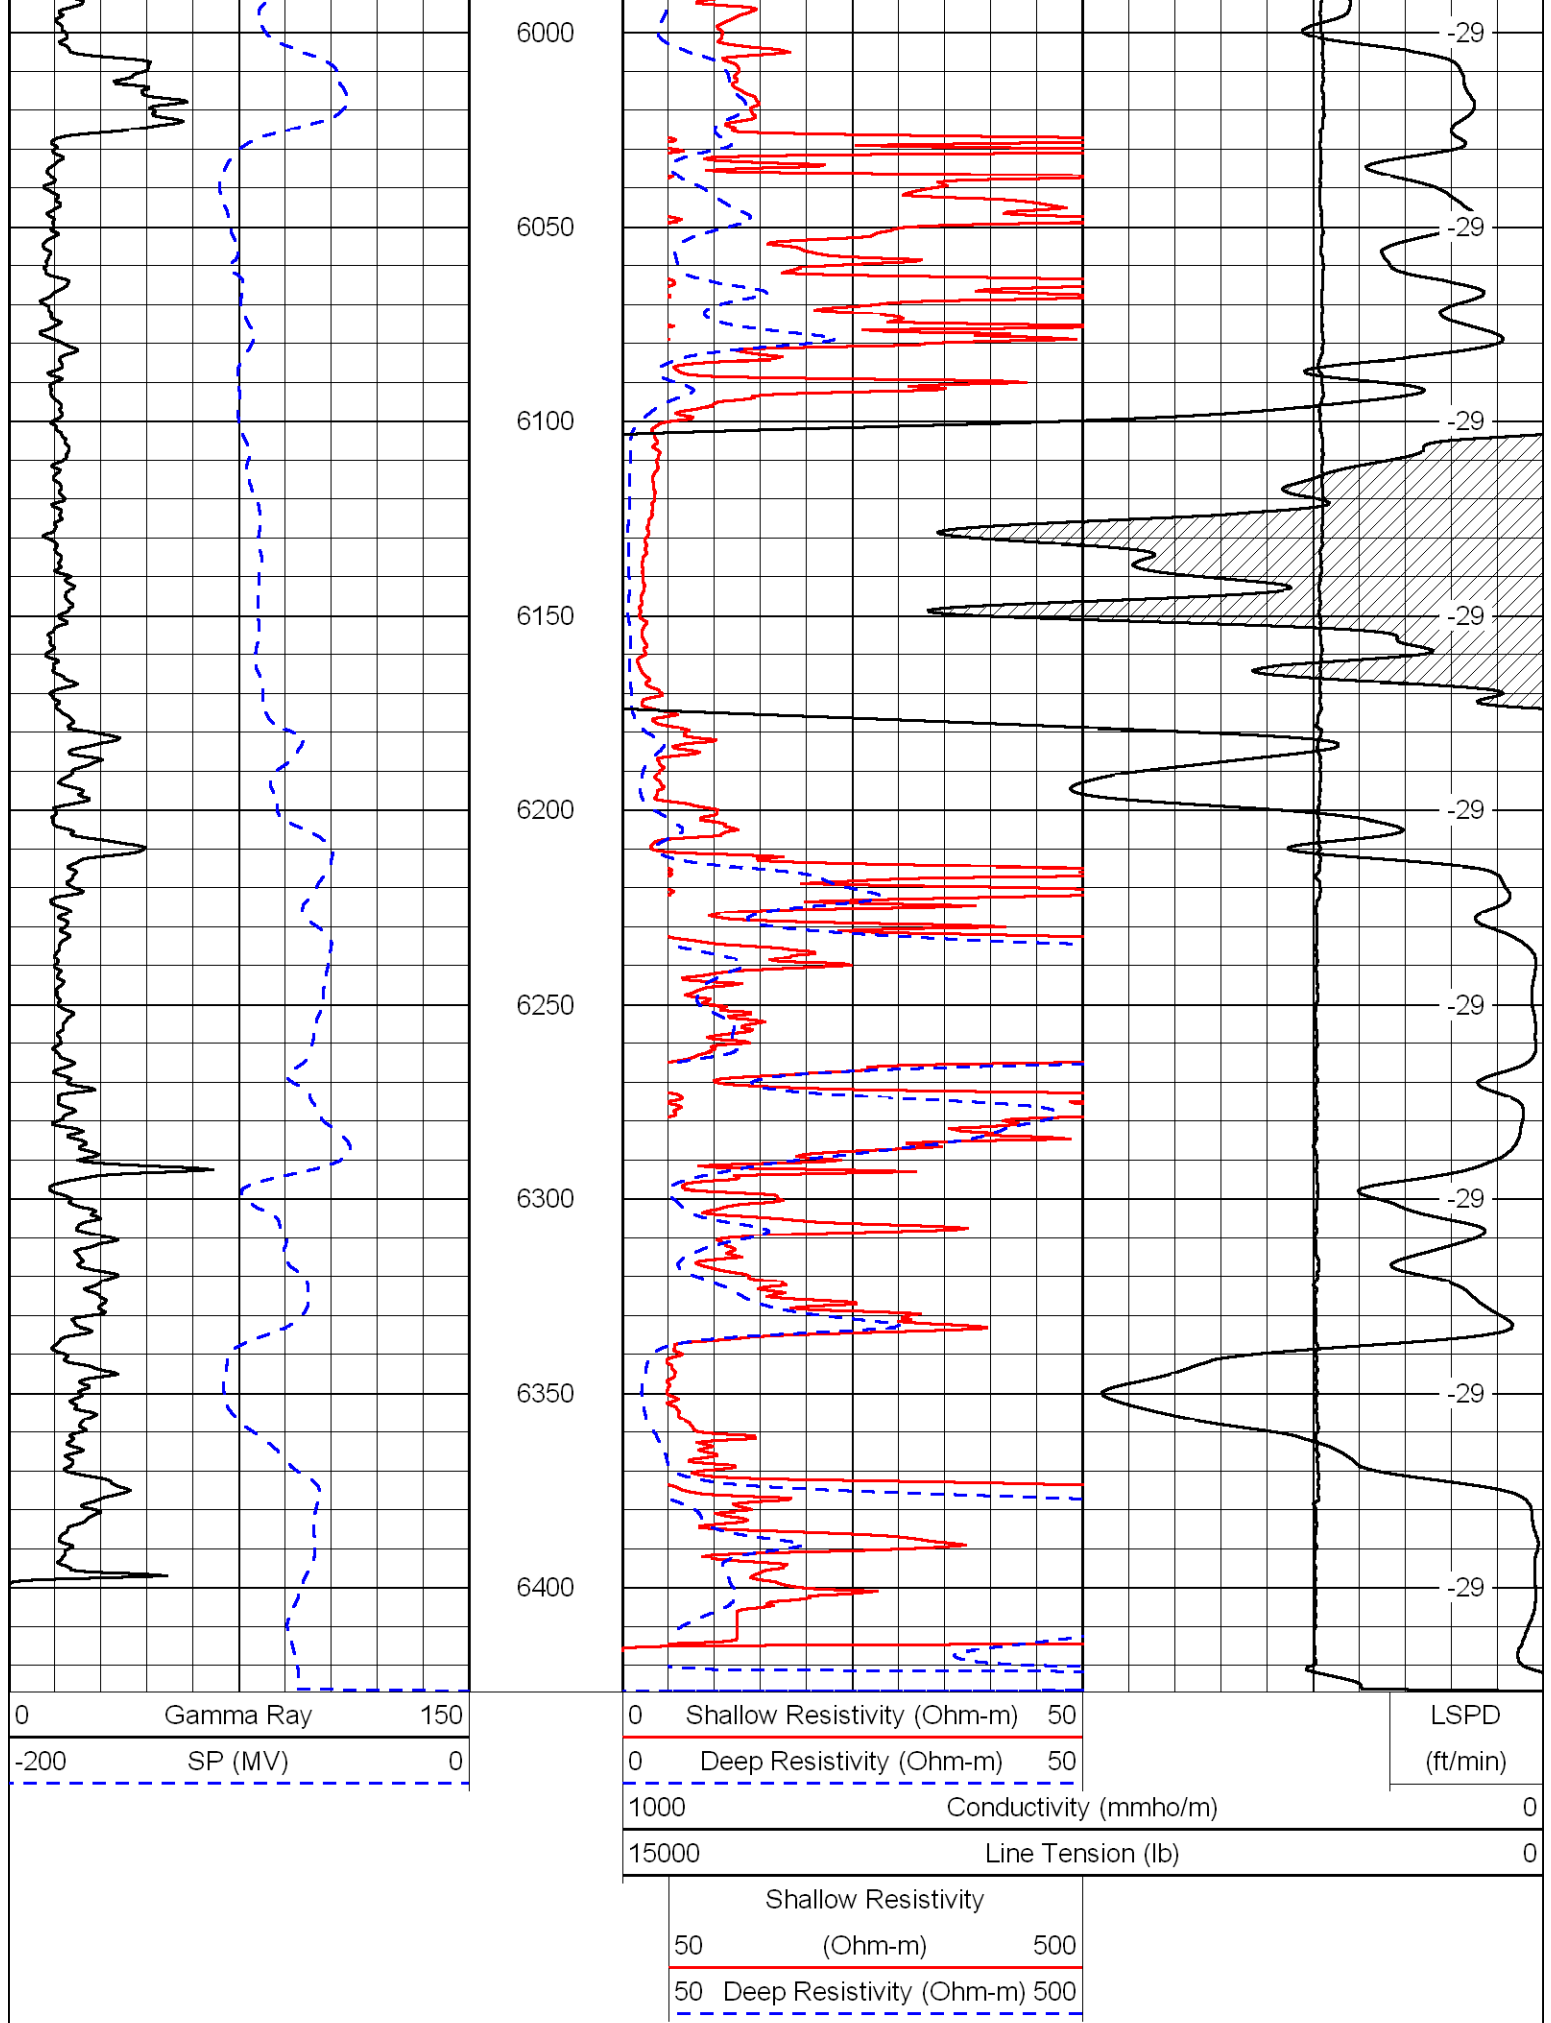


Database File: c:\wam\mdata\alcom_ylbc no. 1-20\alcom.d
Dataset Pathname: dil/falcstok
Presentation Format: dil
Dataset Creation: Tue Sep 29 14:12:38 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (MV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
15000	Line Tension (lb)	0

LSPD
(ft/min)

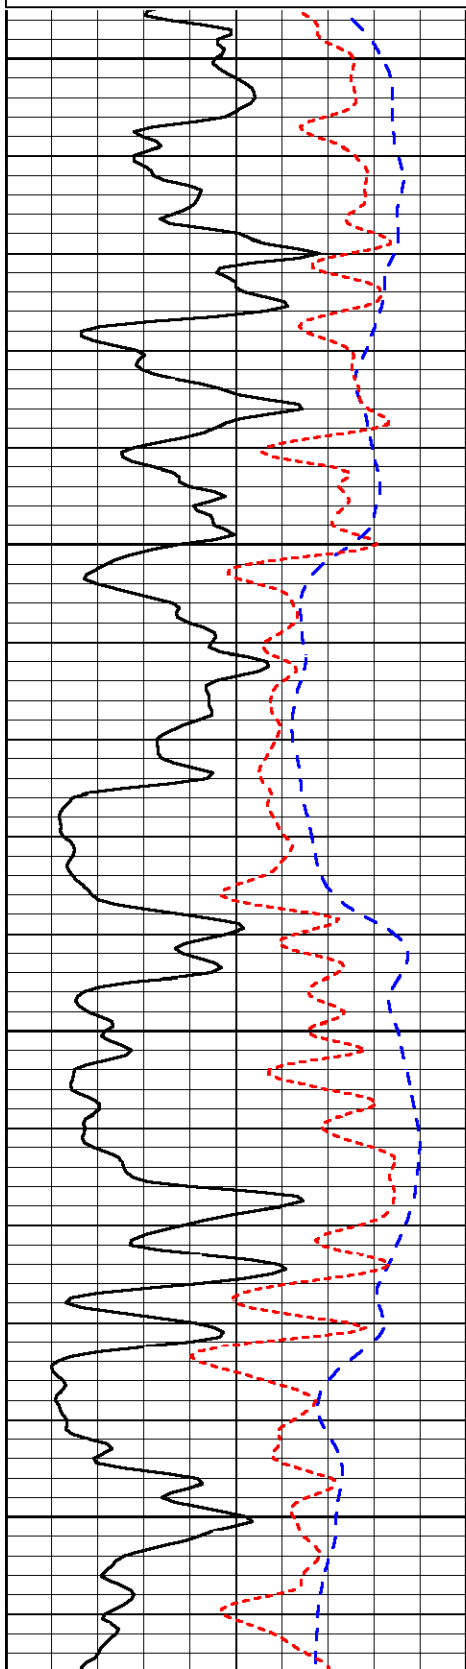


3200

3250

3300

3350

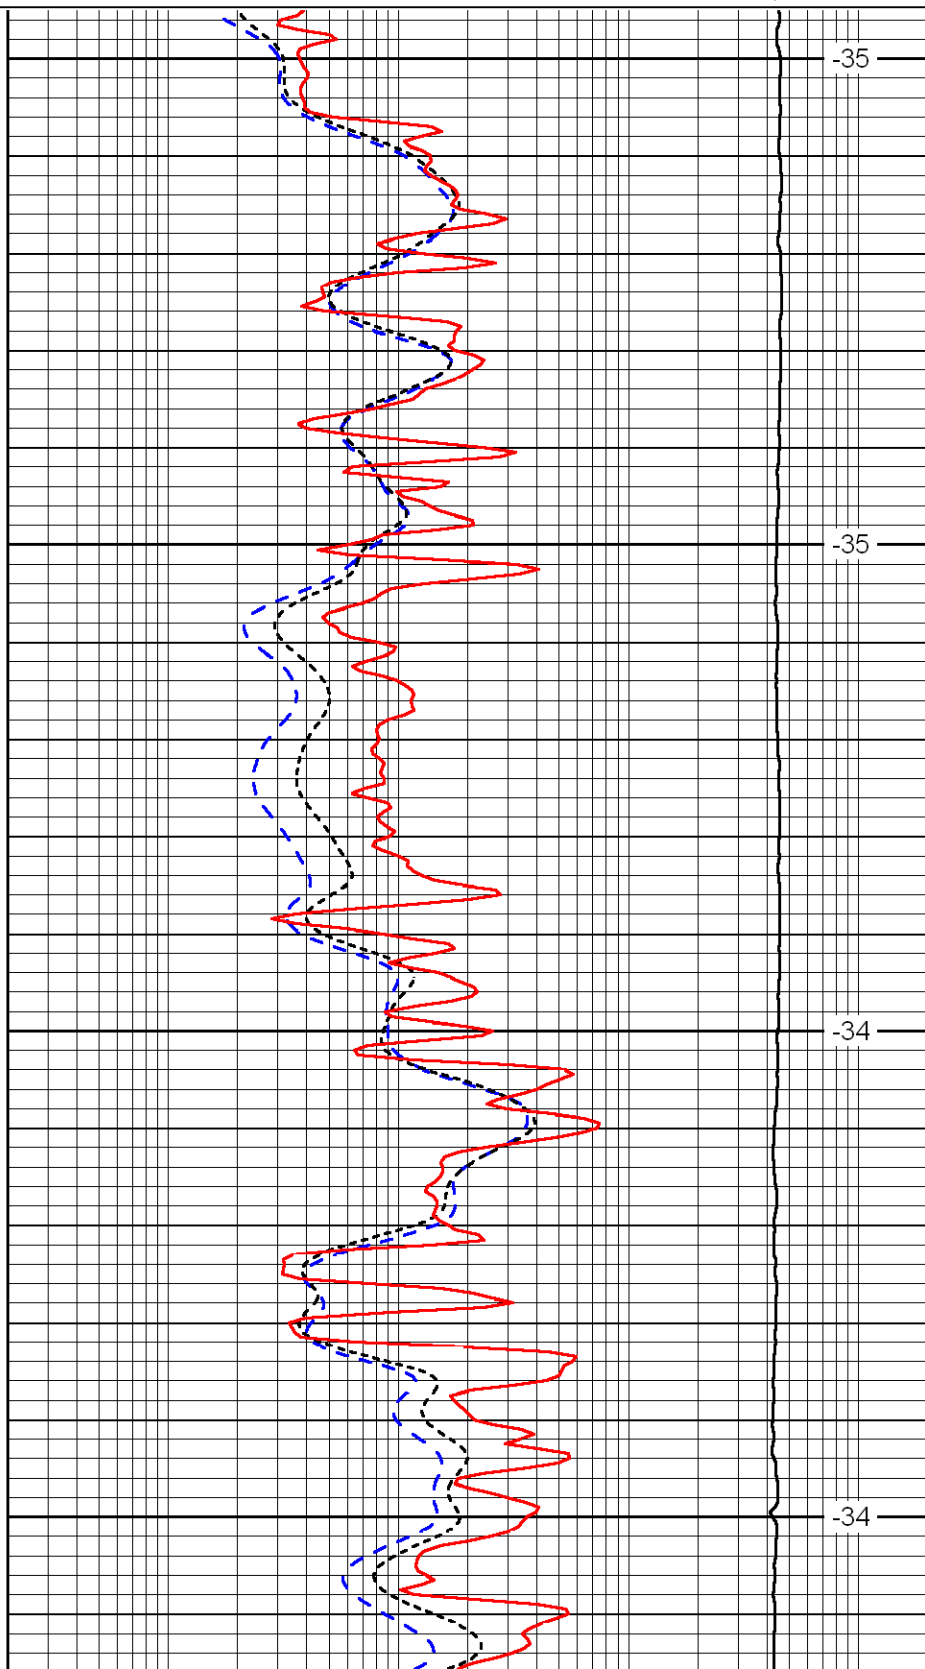


-35

-35

-34

-34

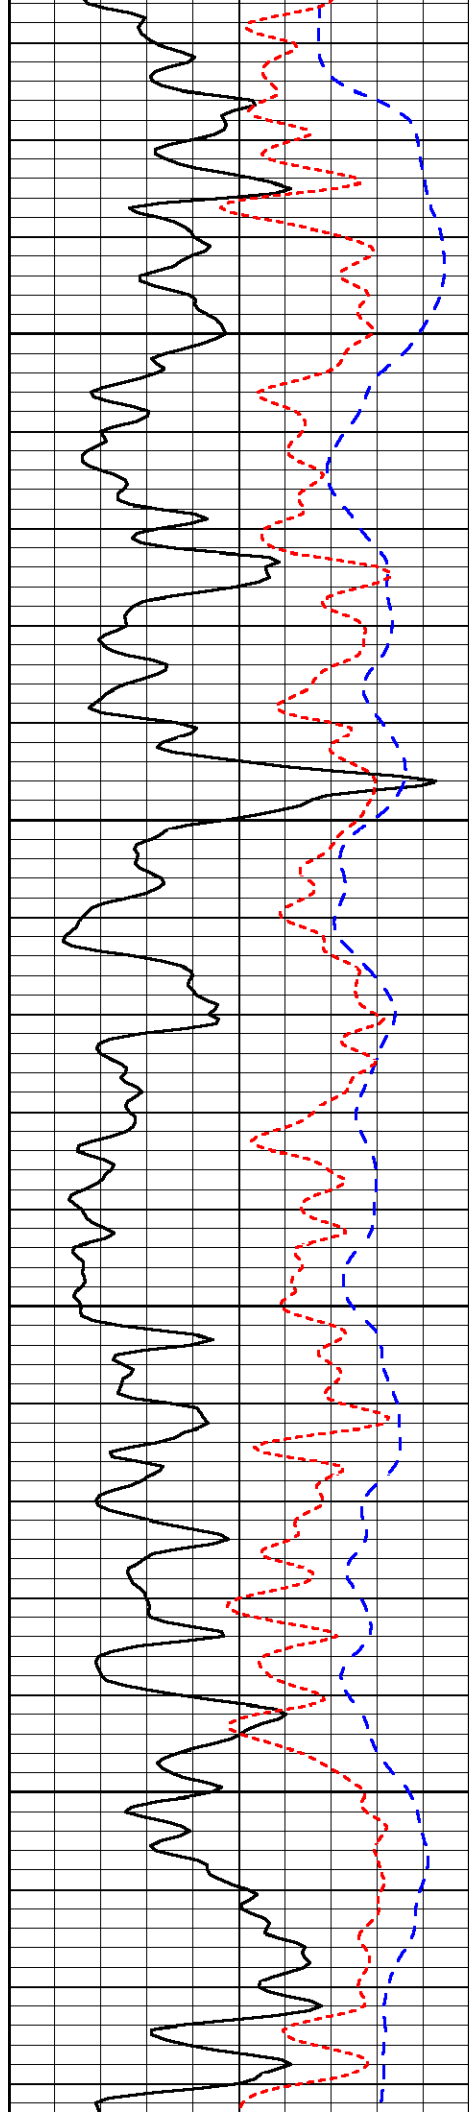


3400

3450

3500

3550

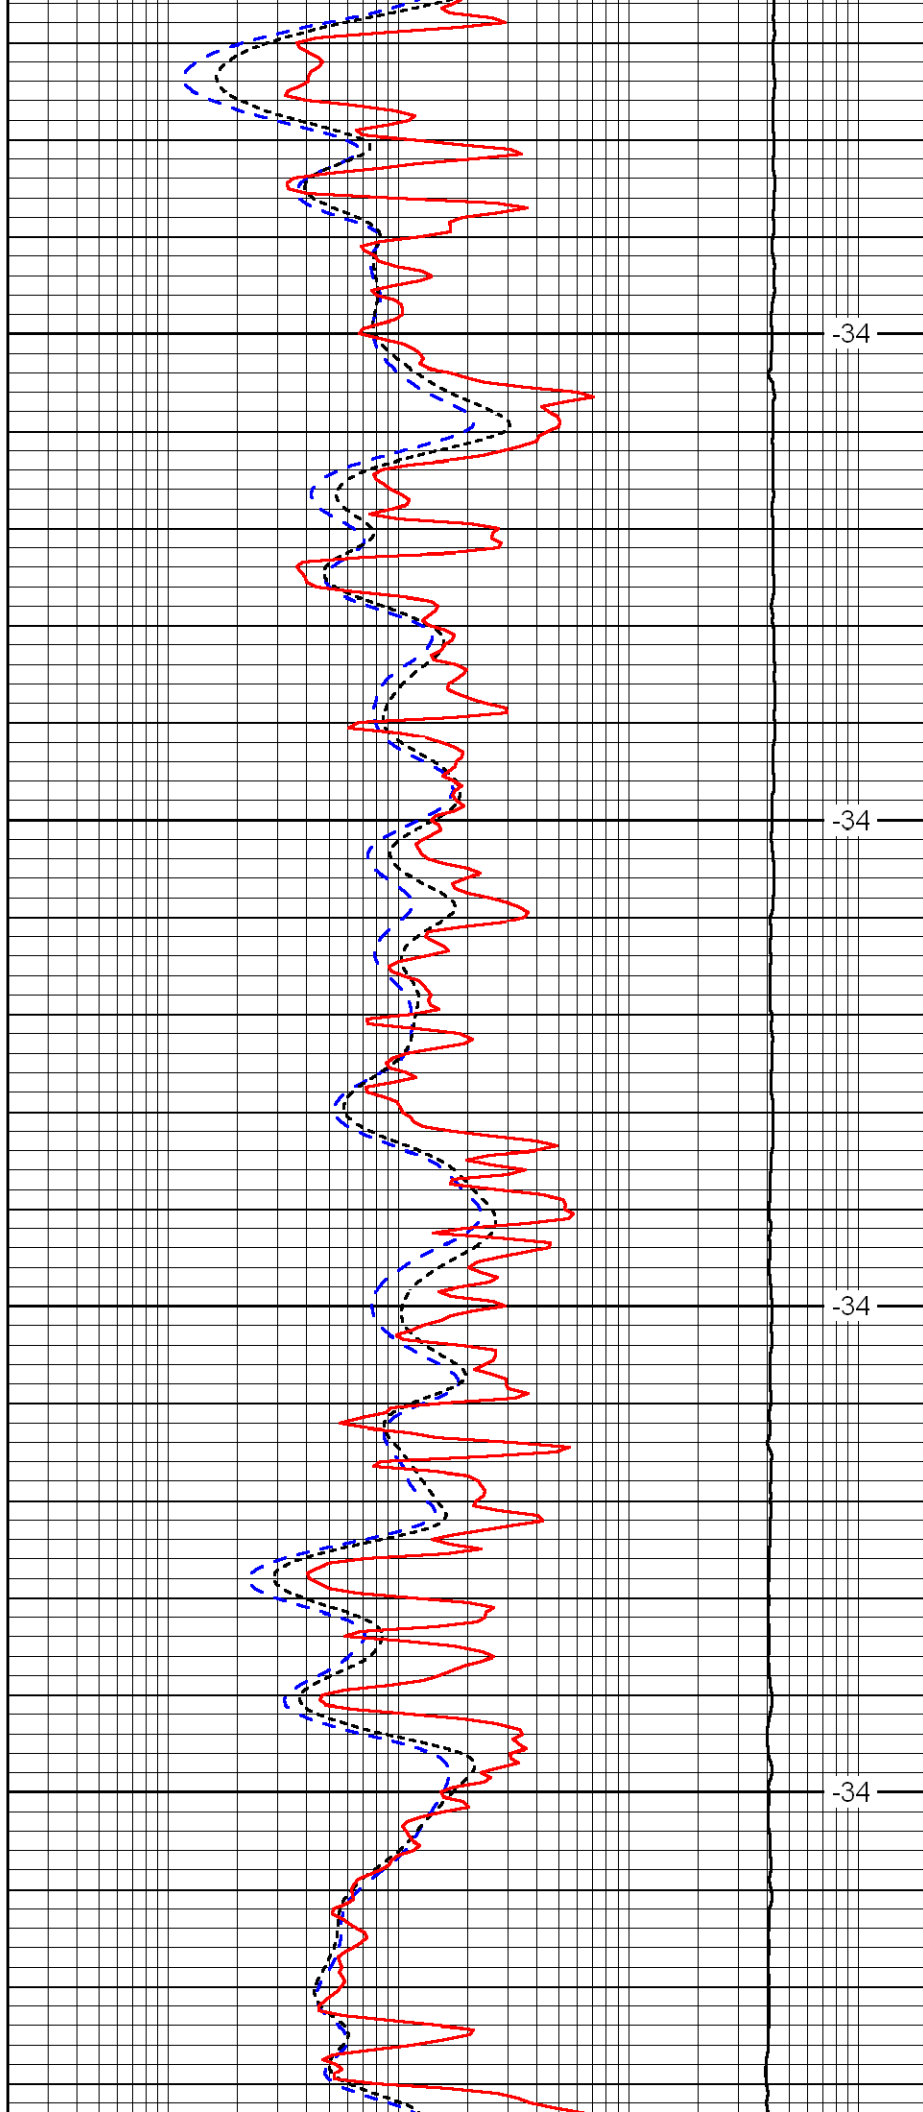


-34

-34

-34

-34

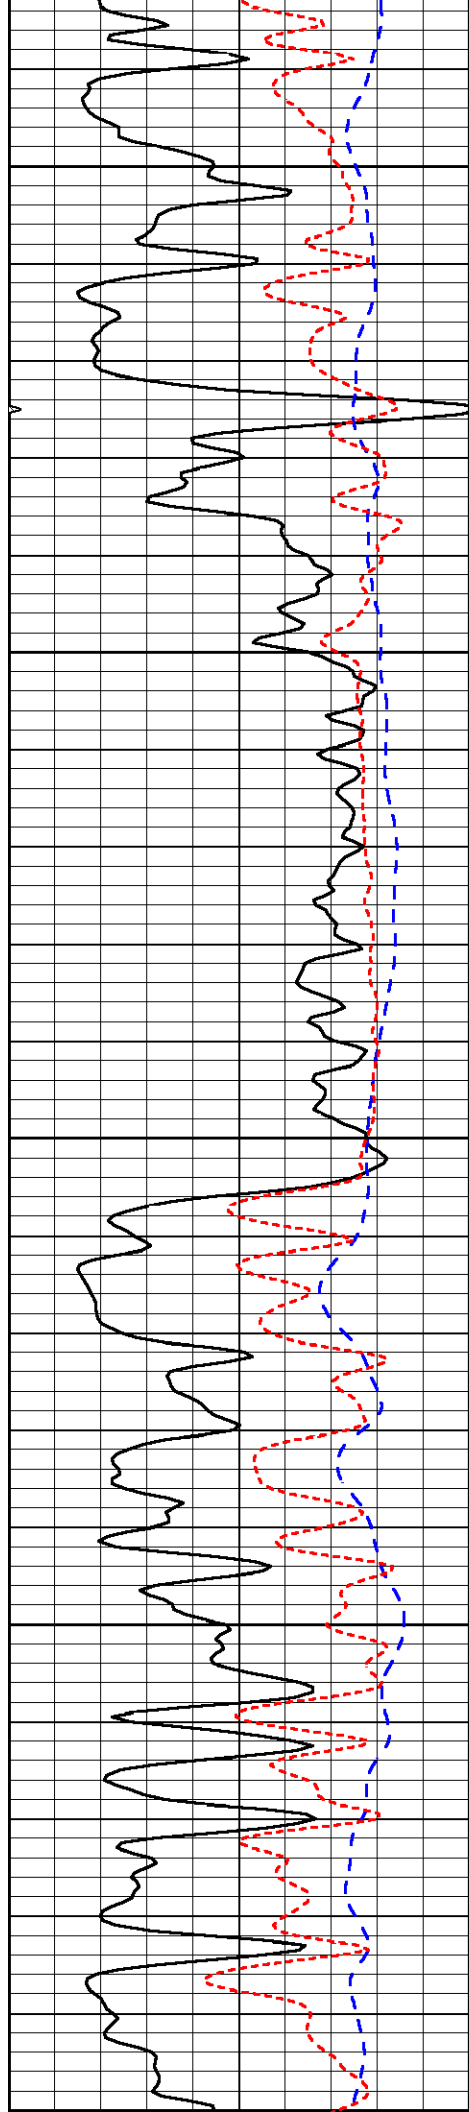


3600

3650

3700

3750

3800

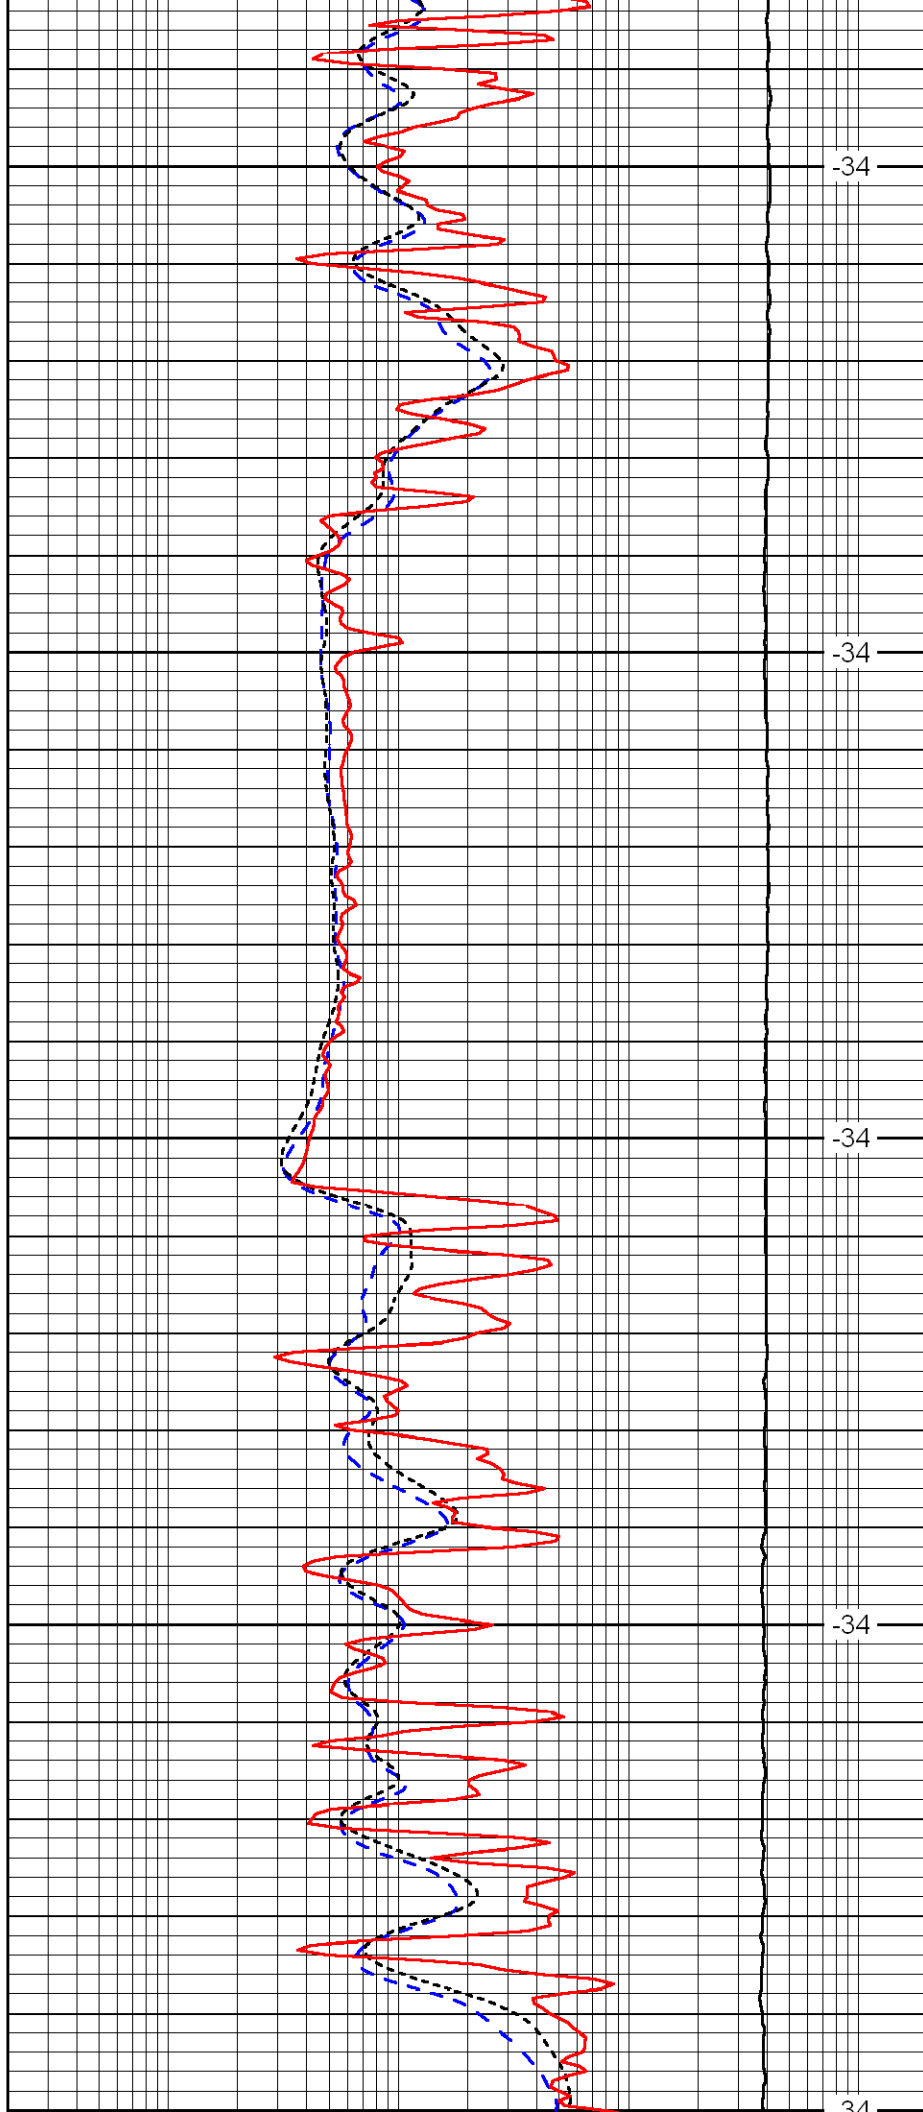


-34

-34


-34

-34


-34

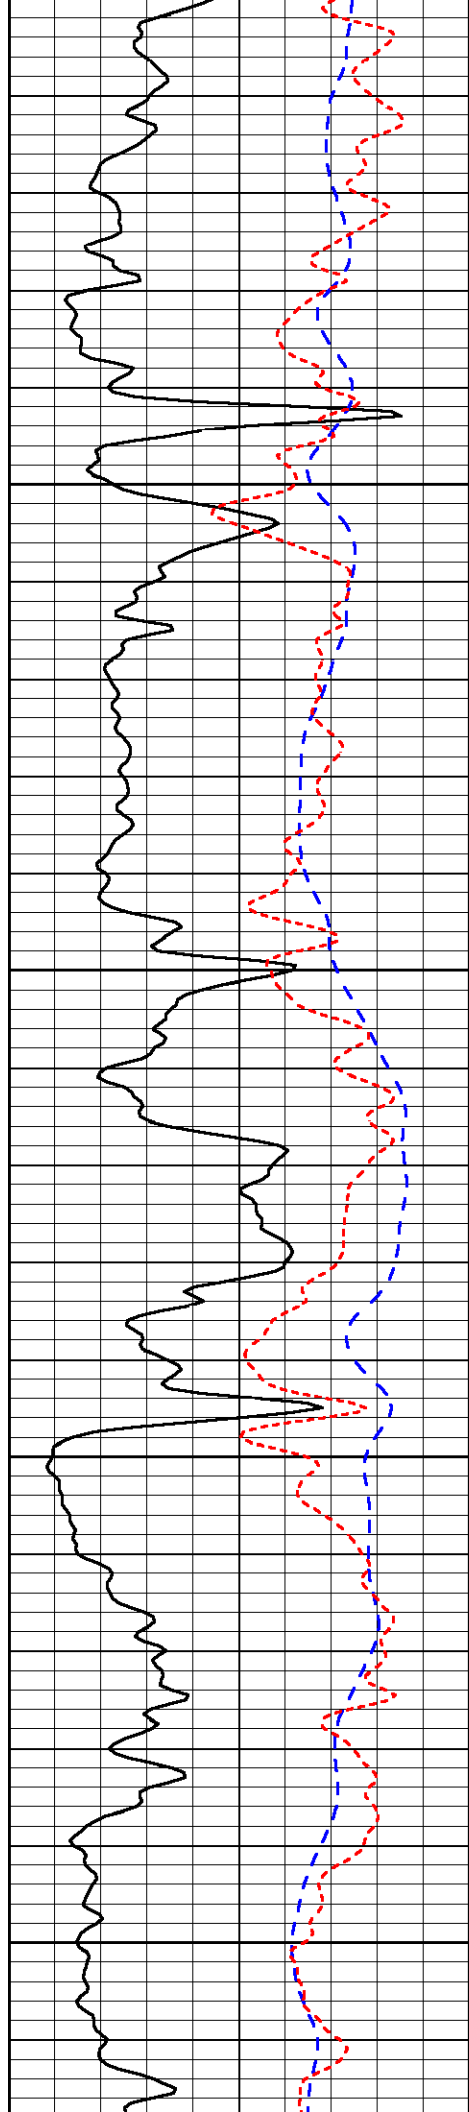

3850
3900
3950
4000

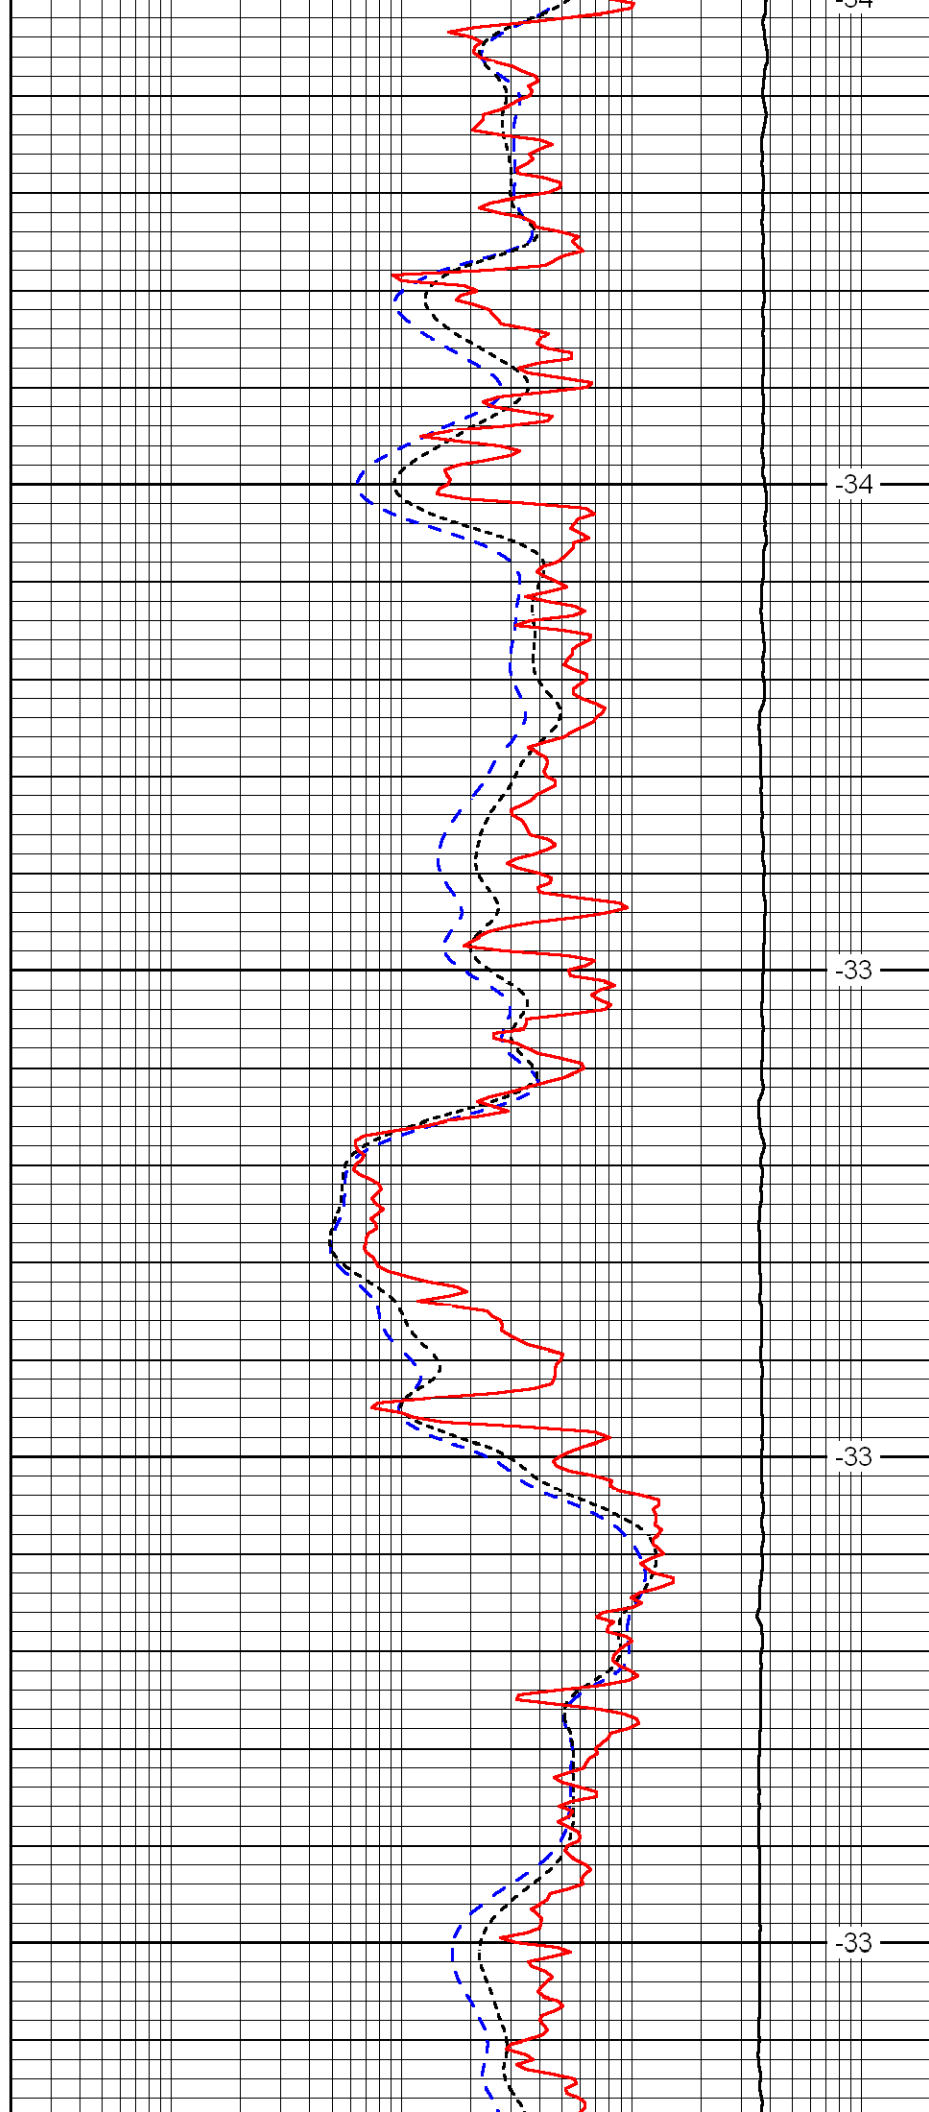

-34
-34
-33
-33
-33

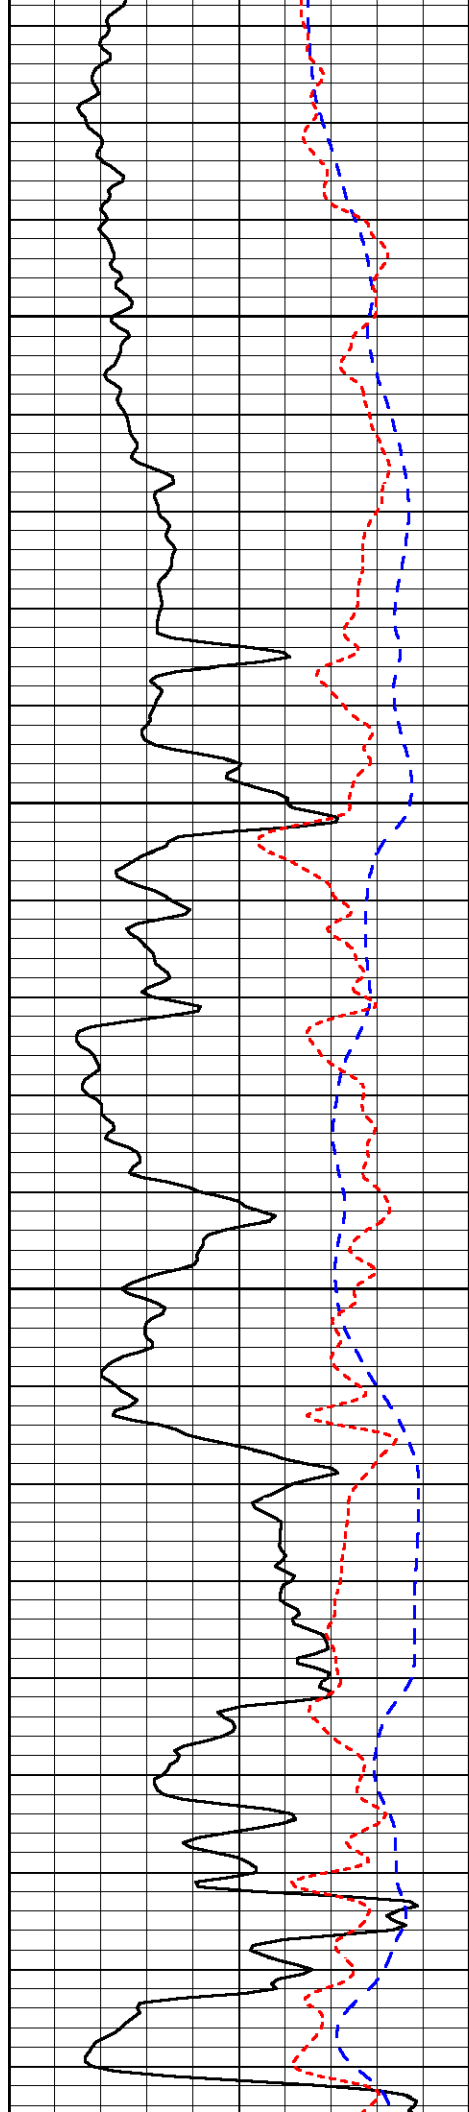


4050

4100

4150

4200

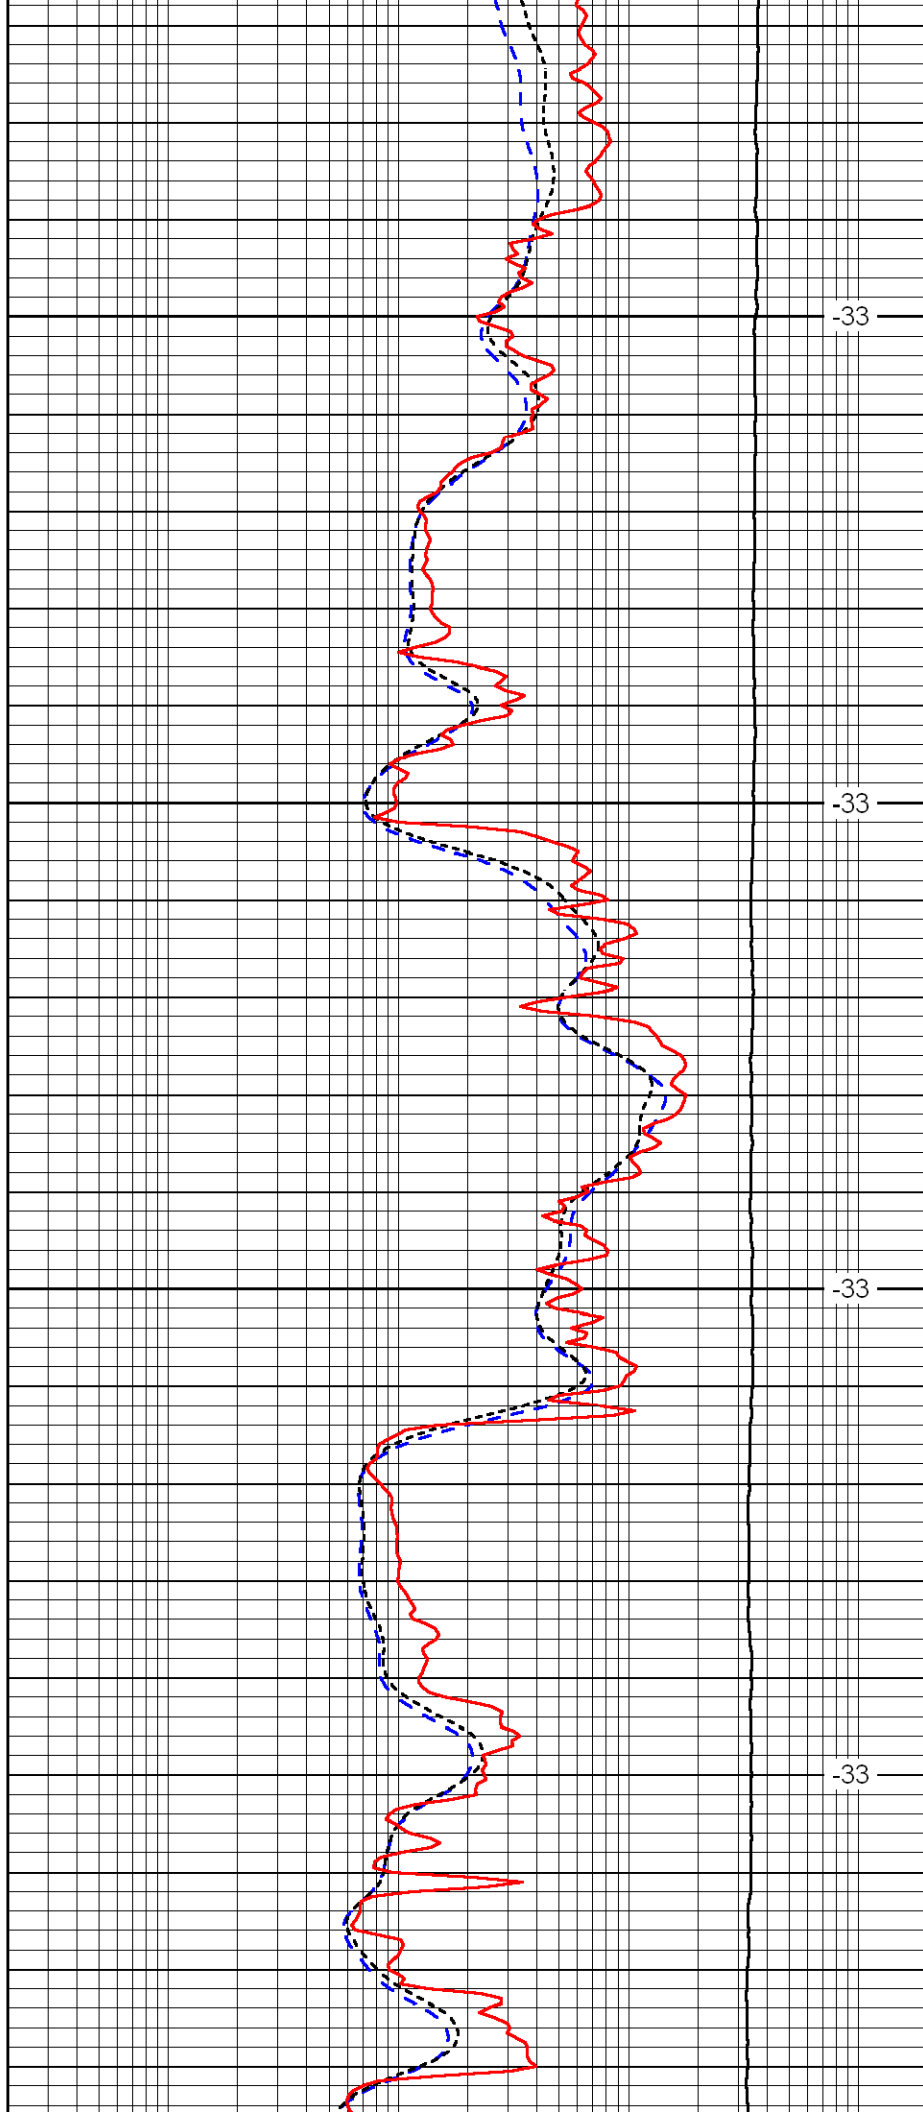


-33

-33

-33

-33

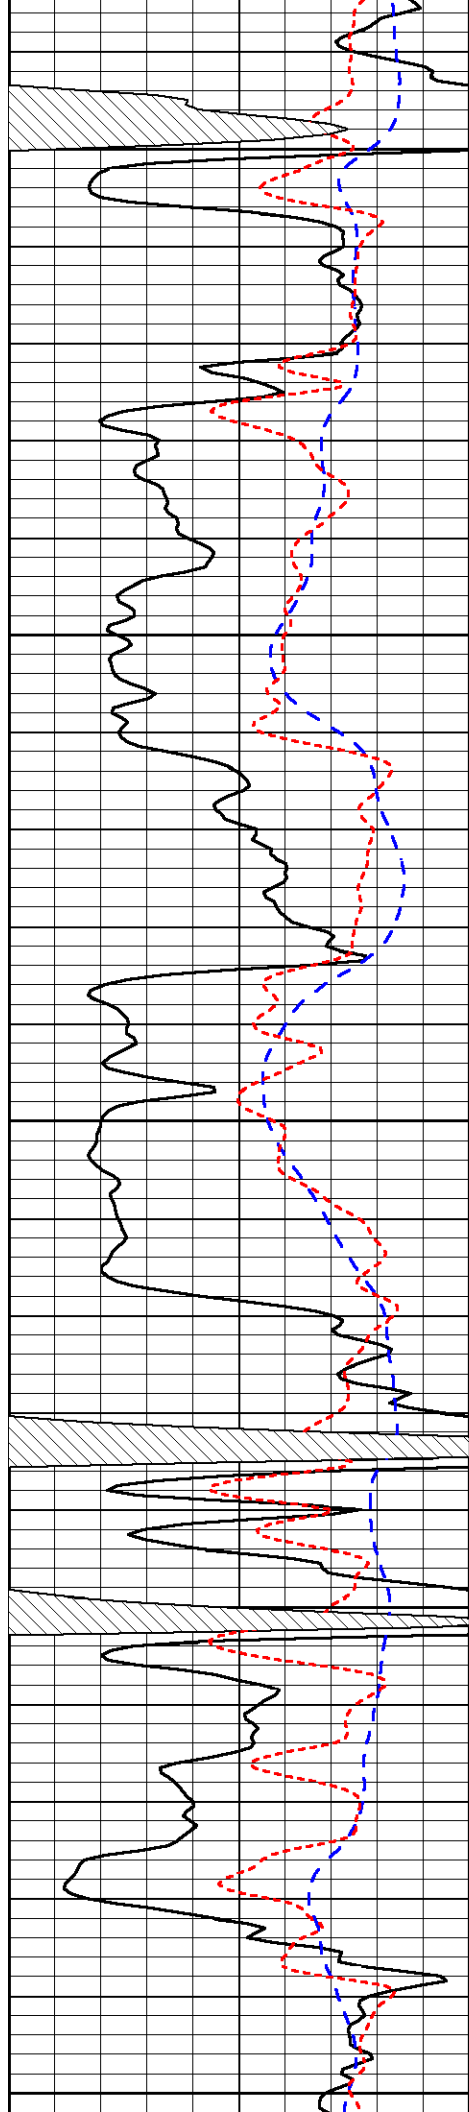


4250

4300

4350

4400

4450

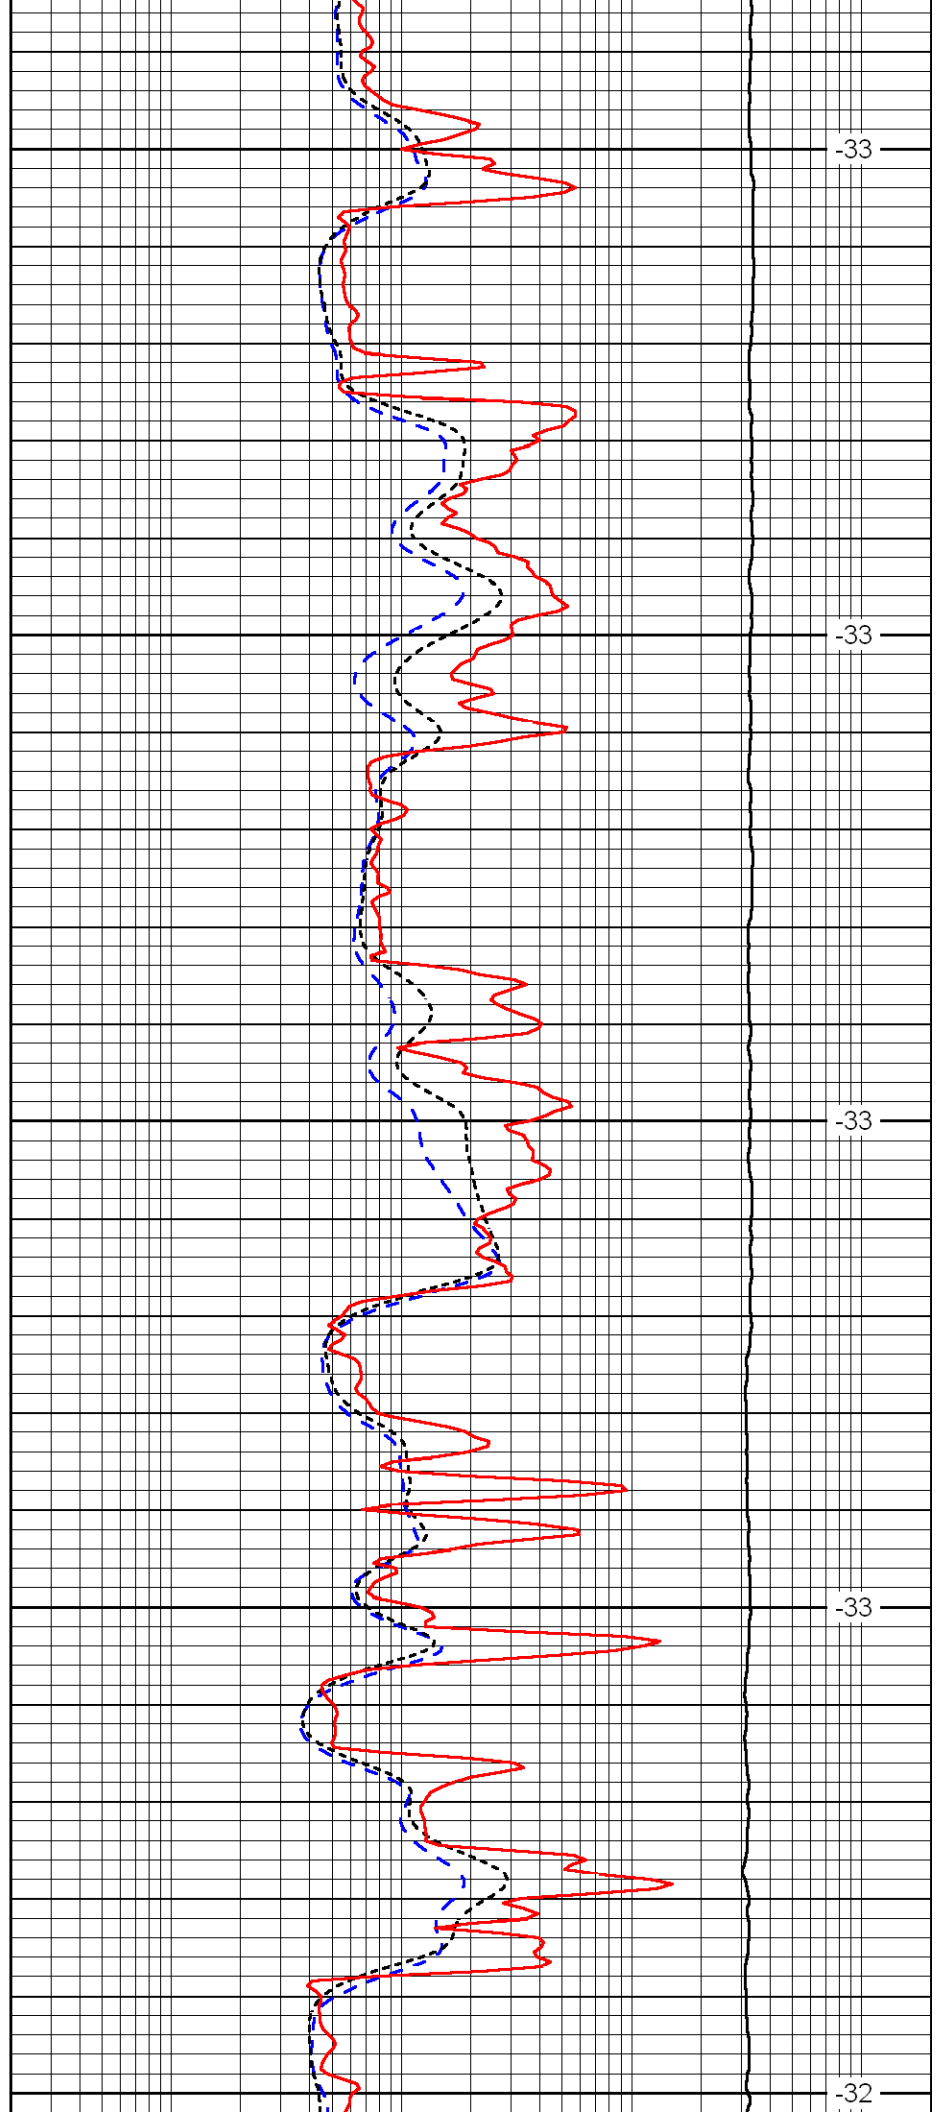


-33

-33

-33

-33

-32

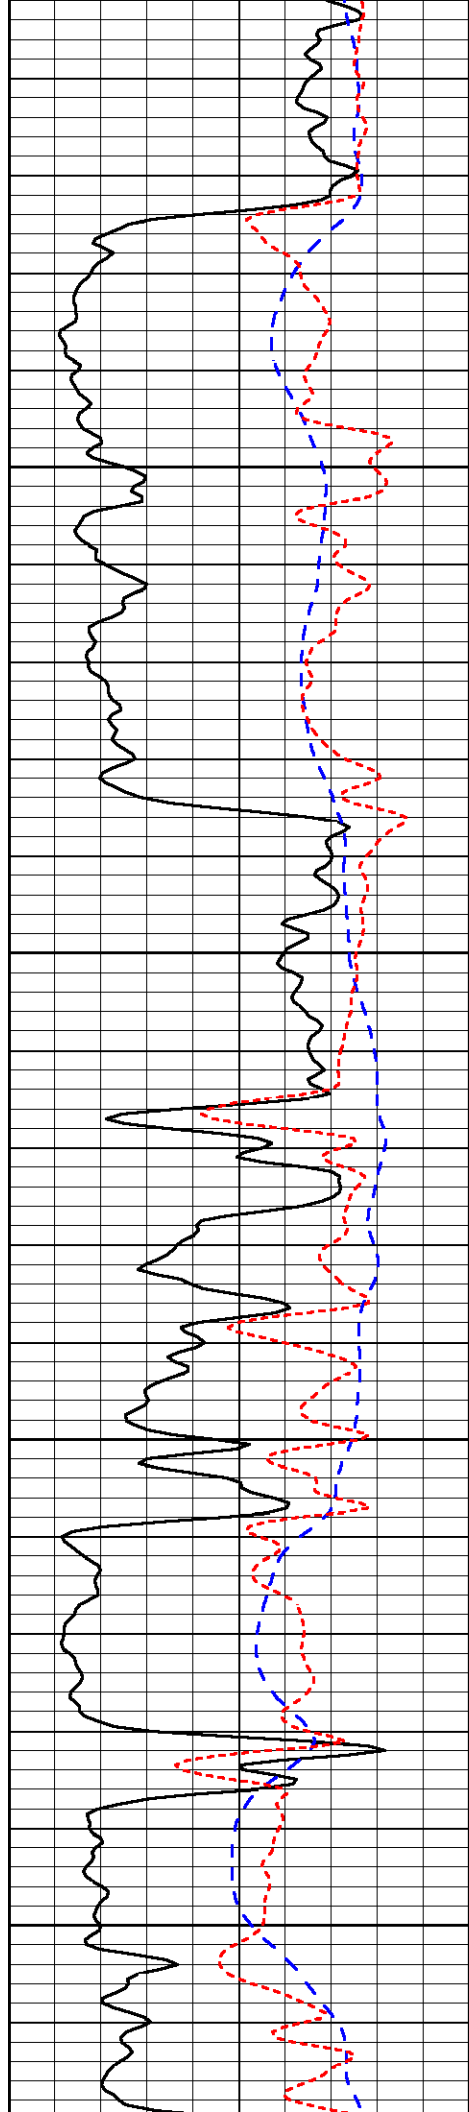


4500

4550

4600

4650

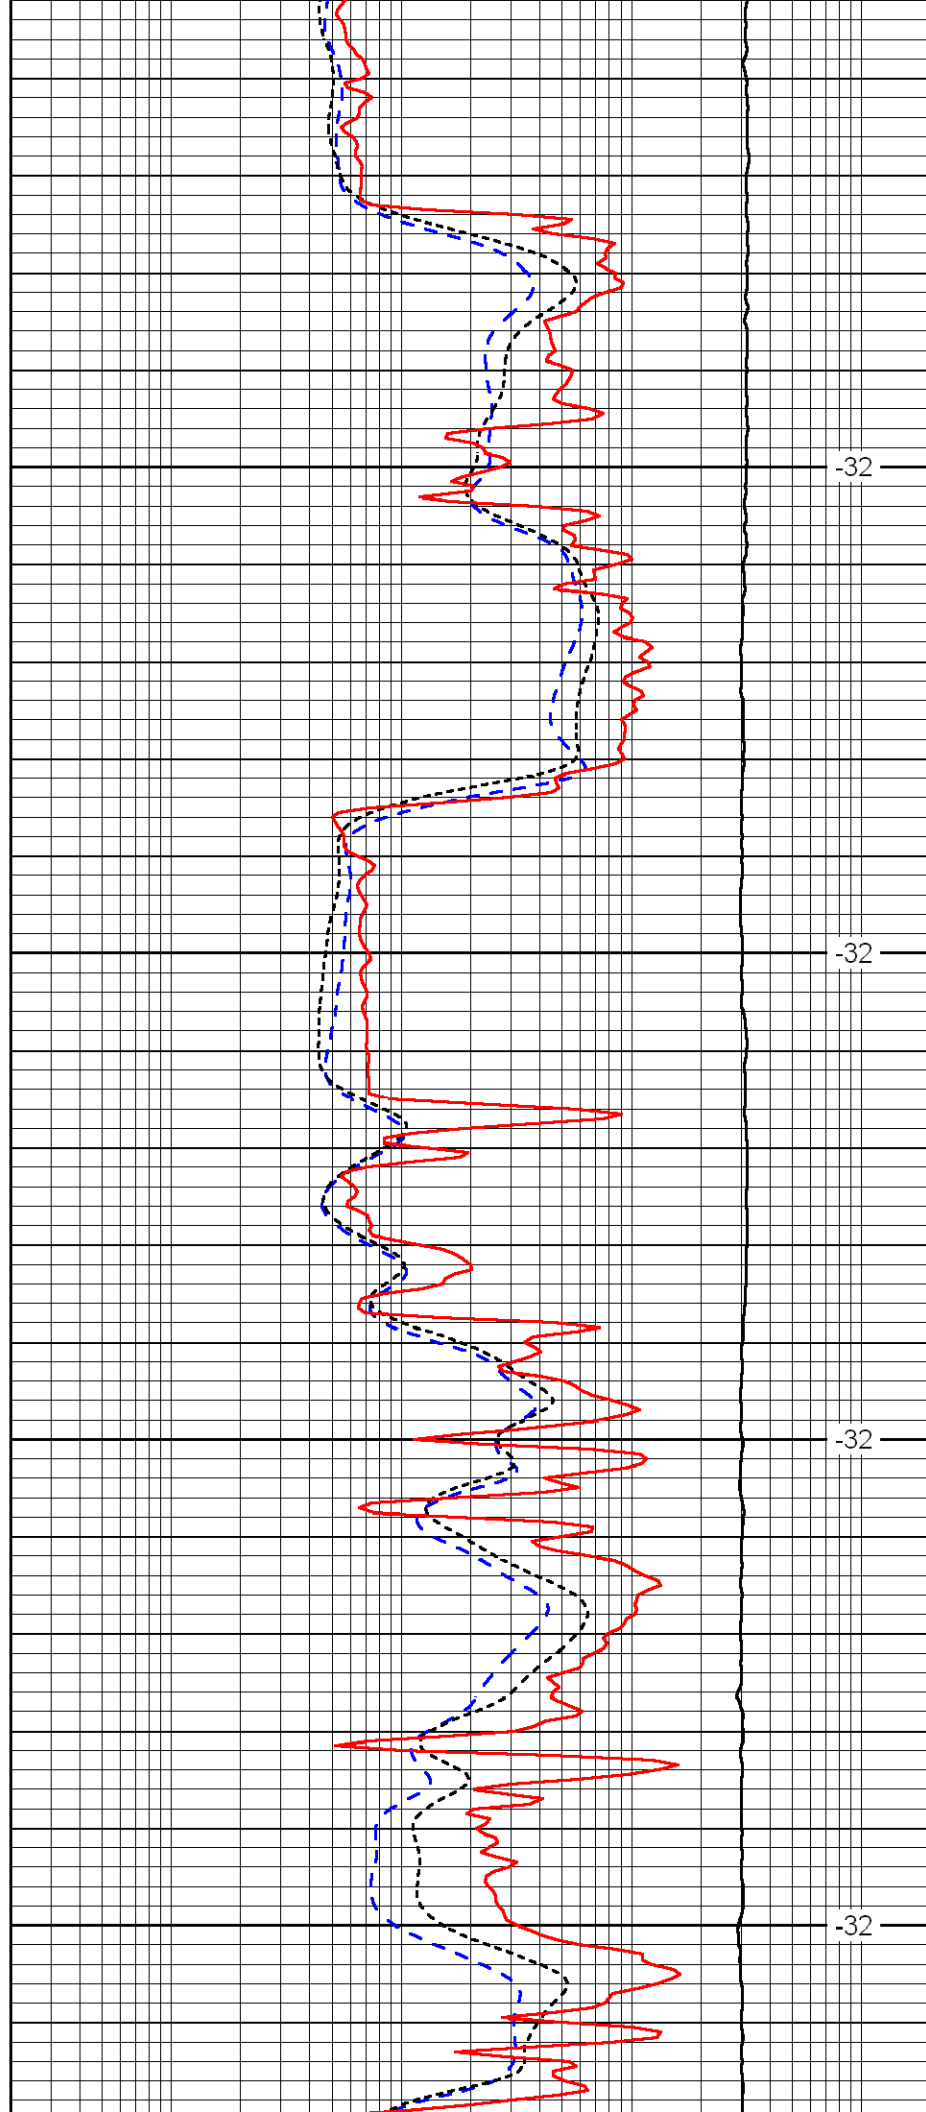


-32

-32

-32

-32

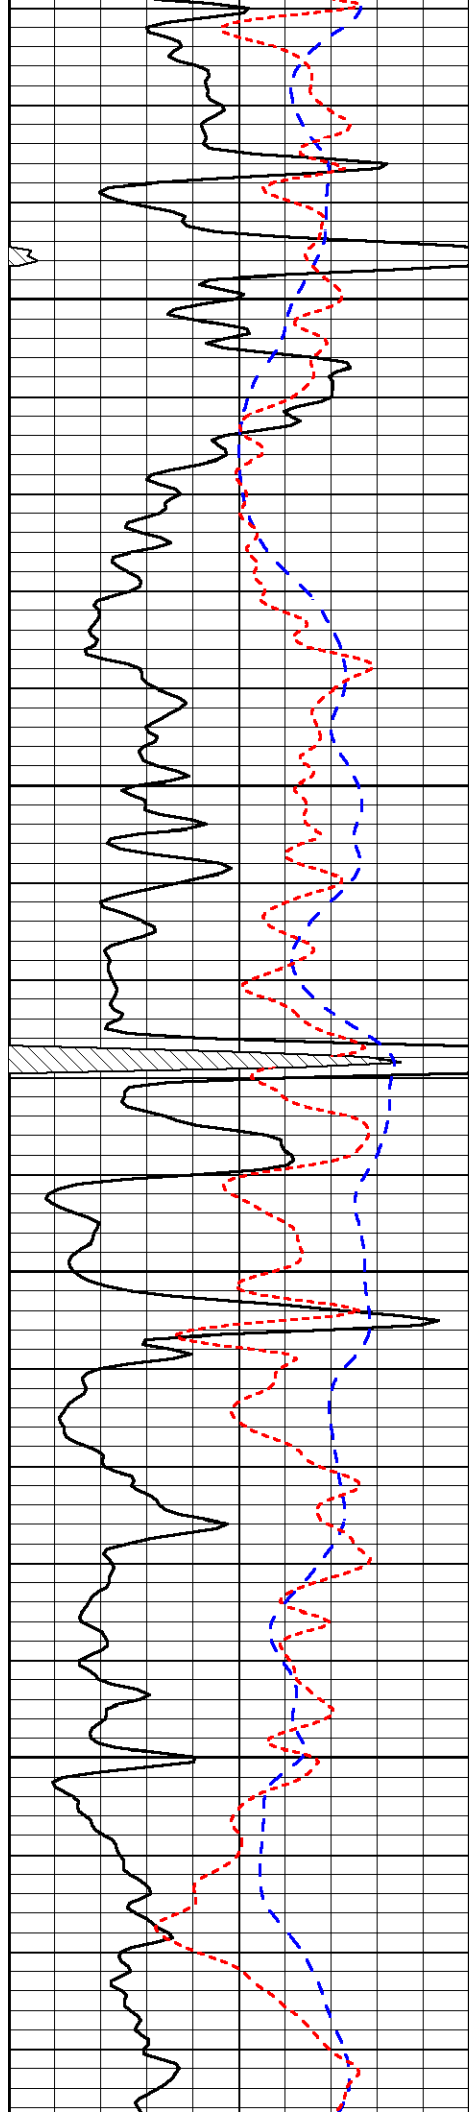


4700

4750

4800

4850

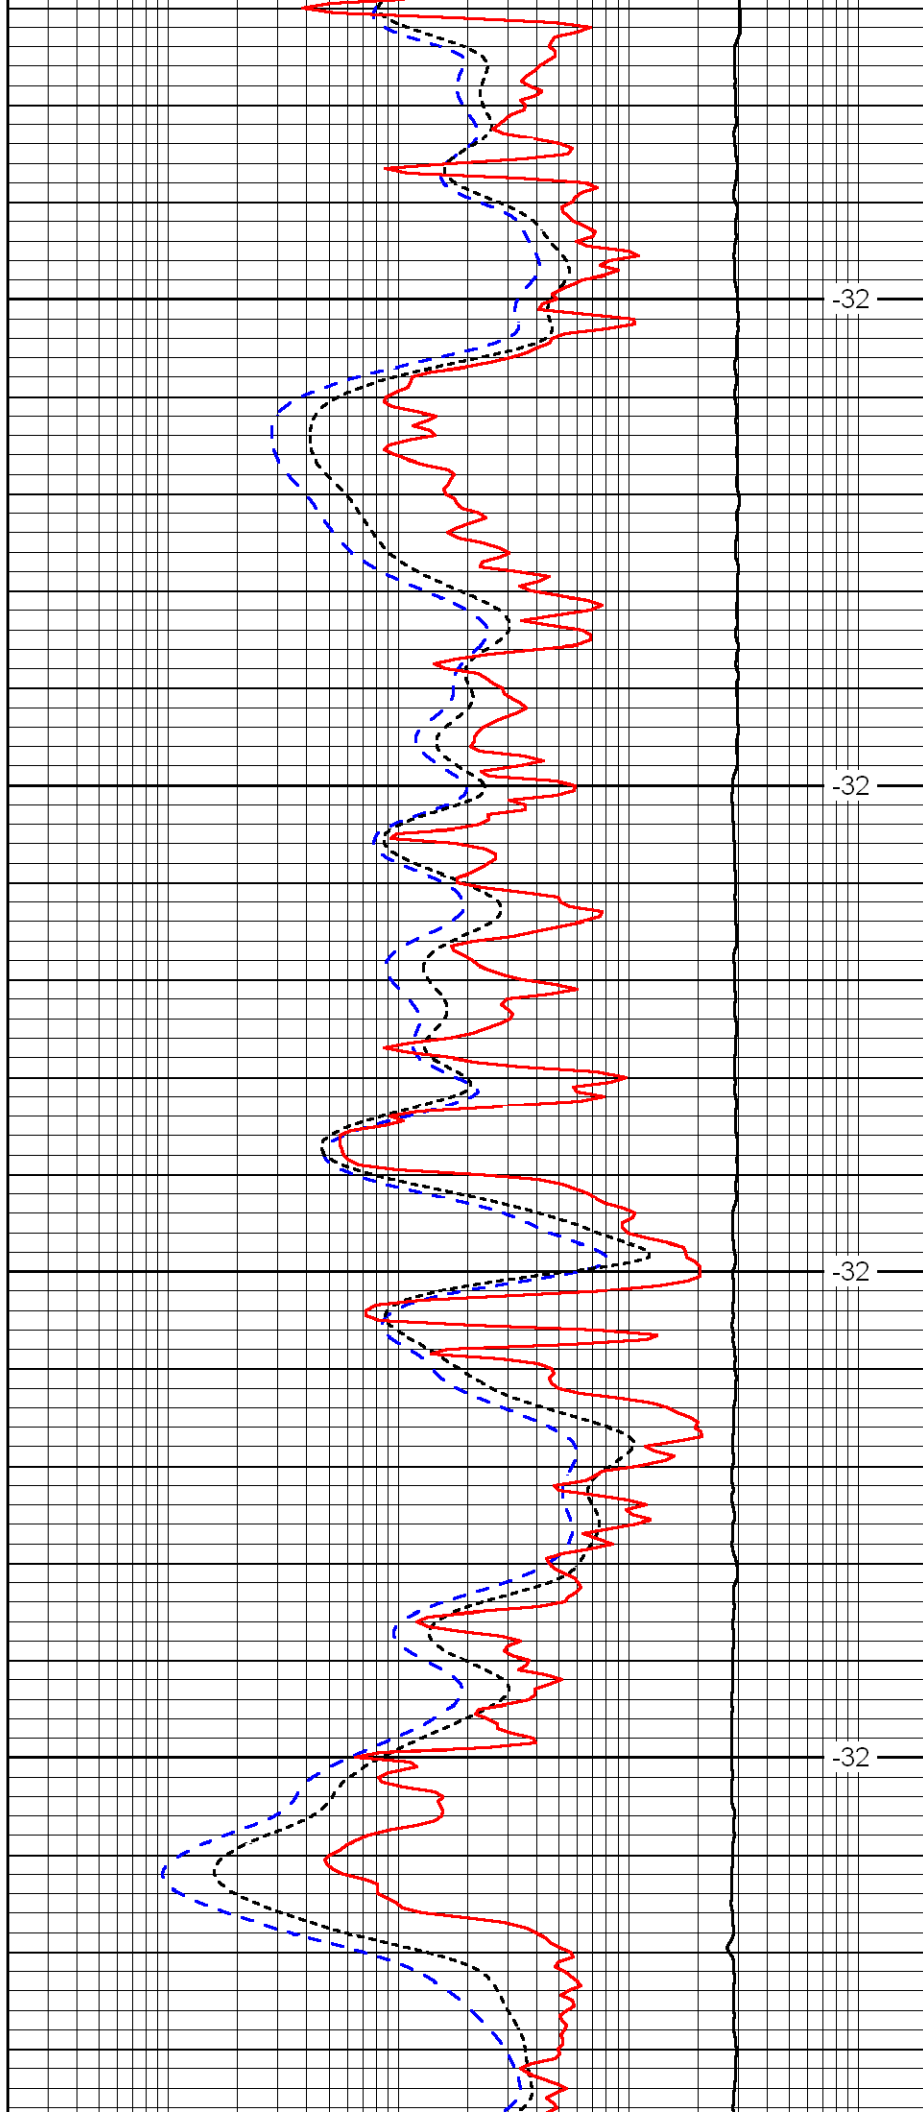


-32

-32

-32

-32

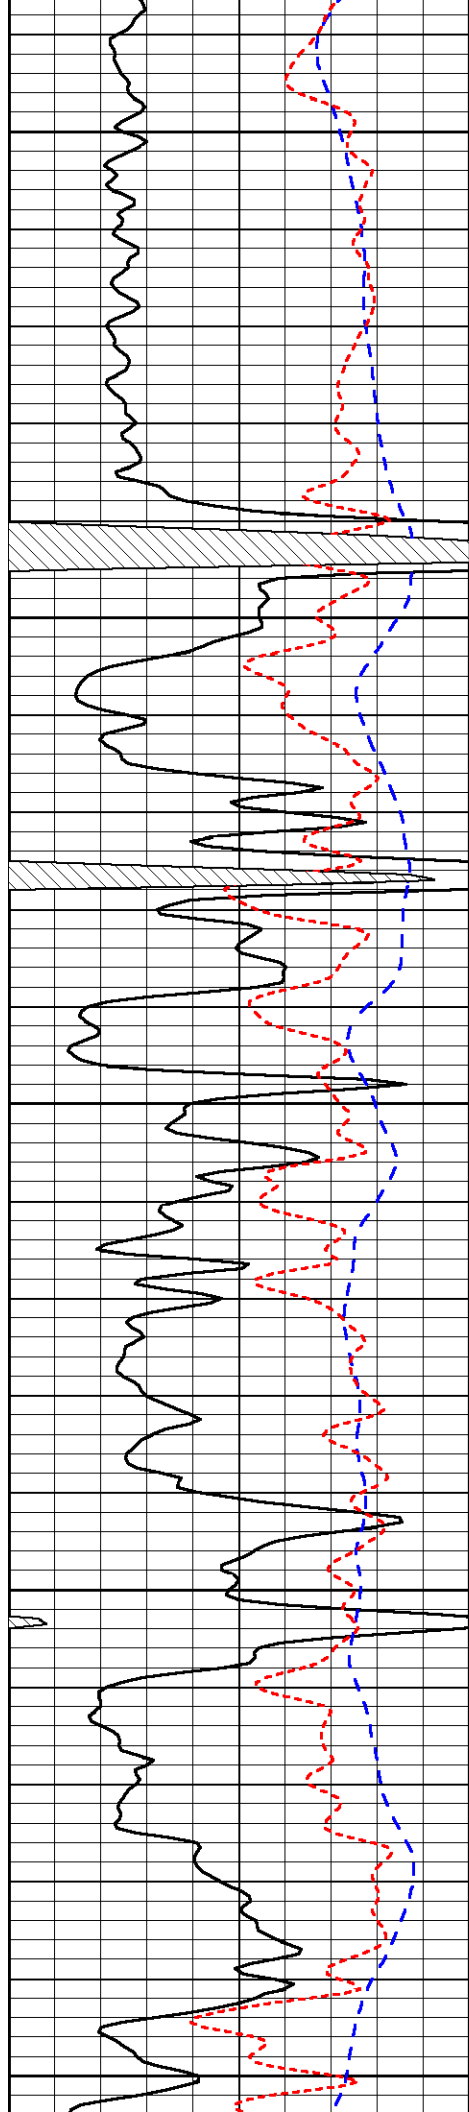


4900

4950

5000

5050

5100

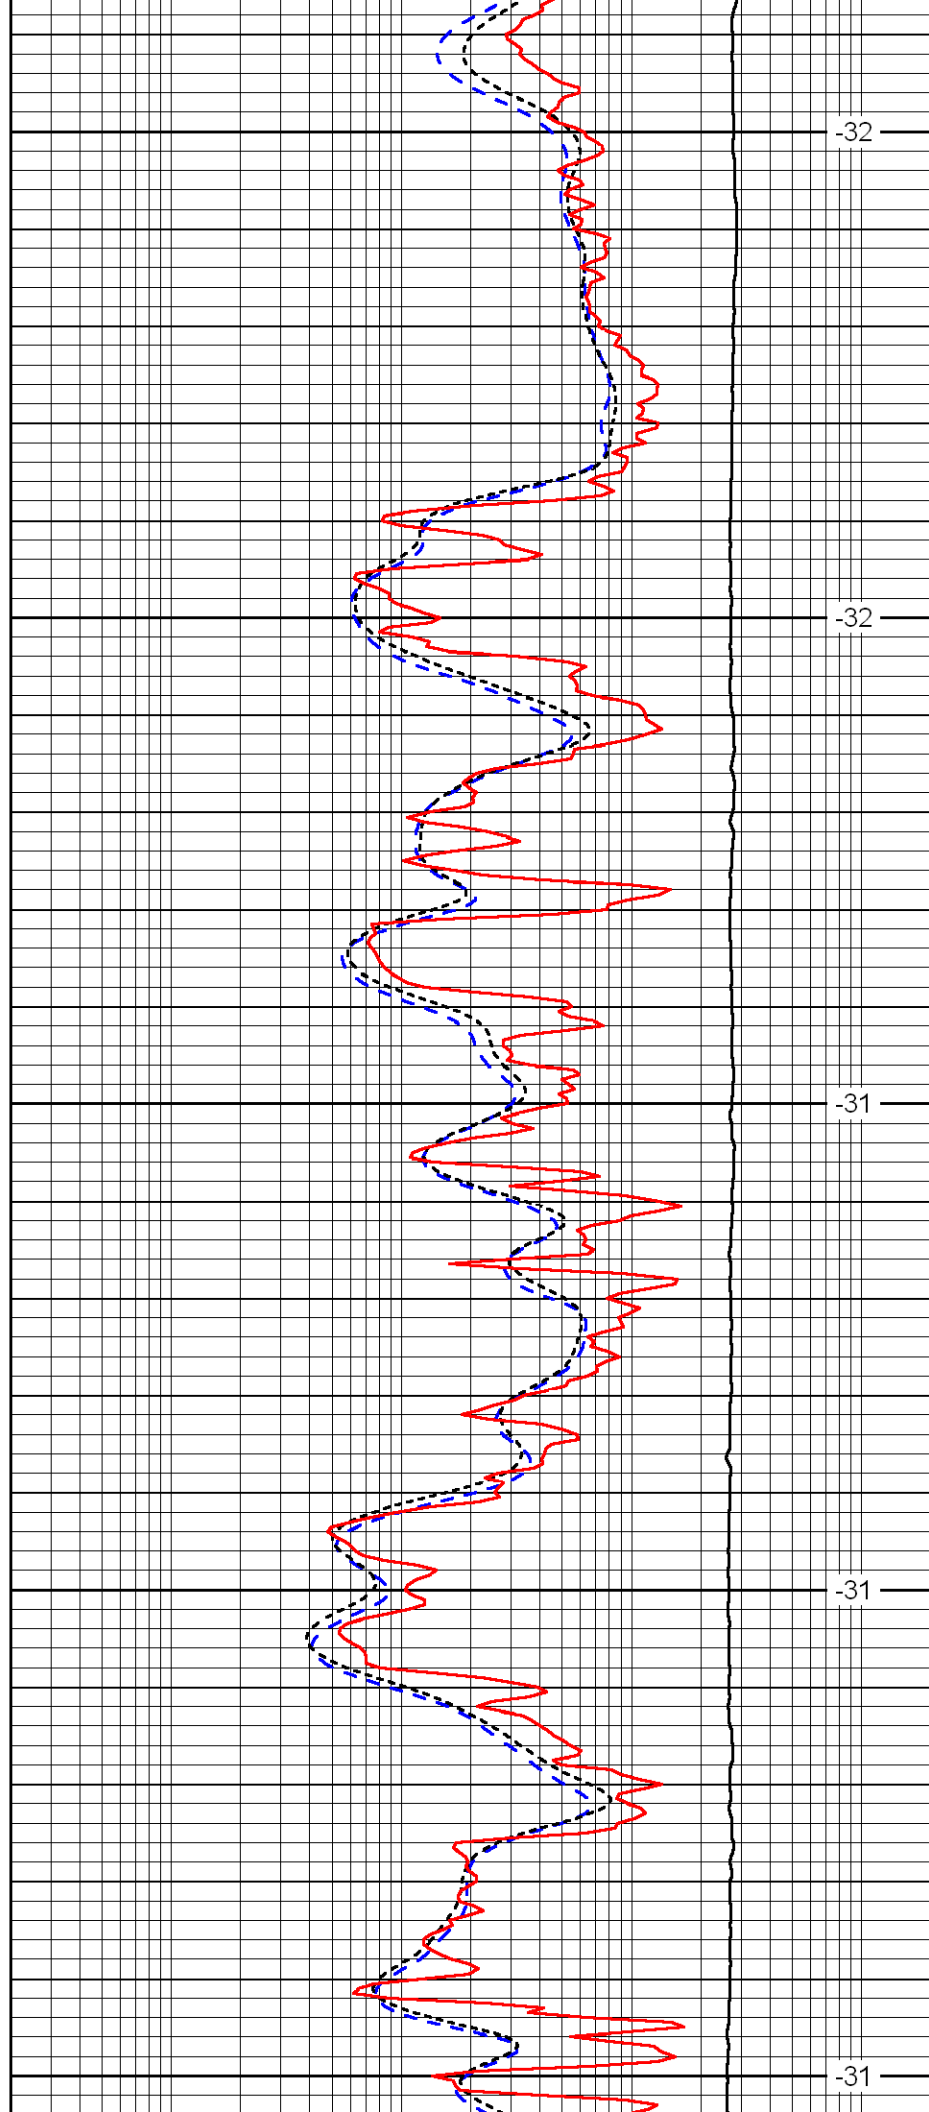


-32

-32

-31

-31

-31

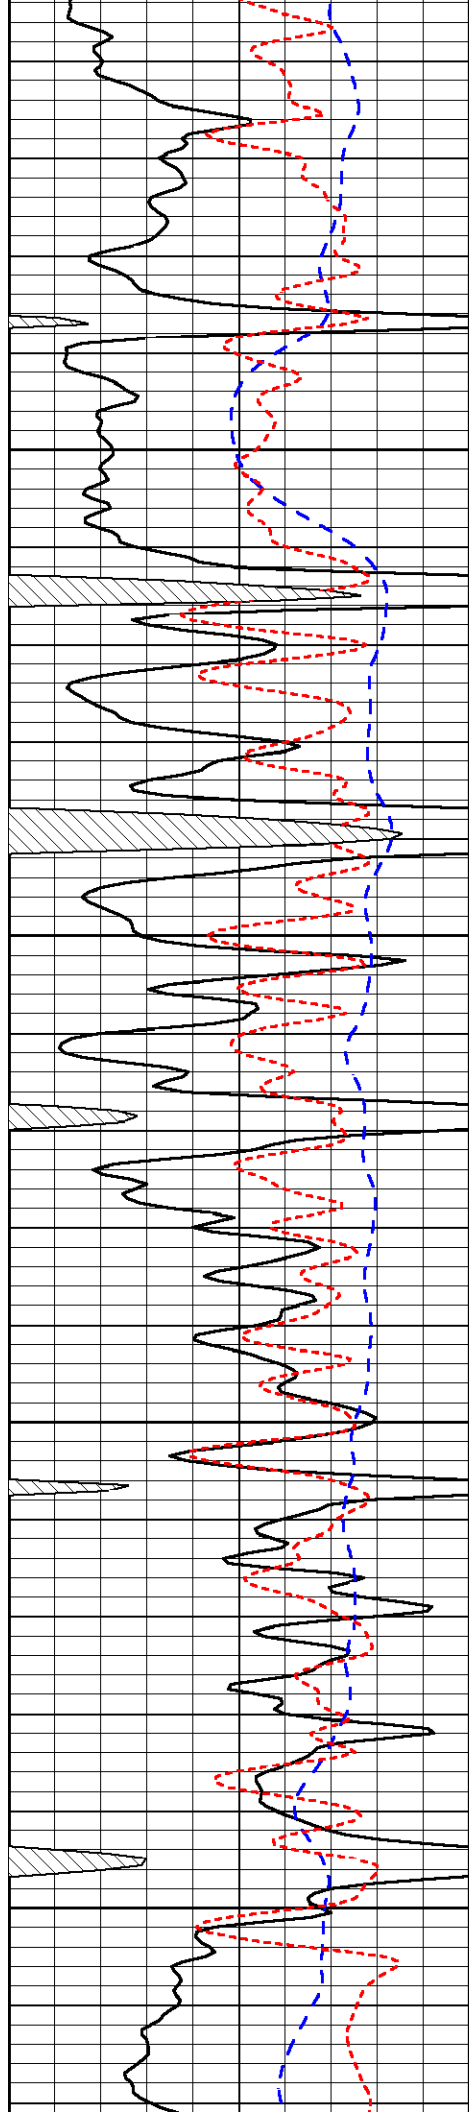


5150

5200

5250

5300

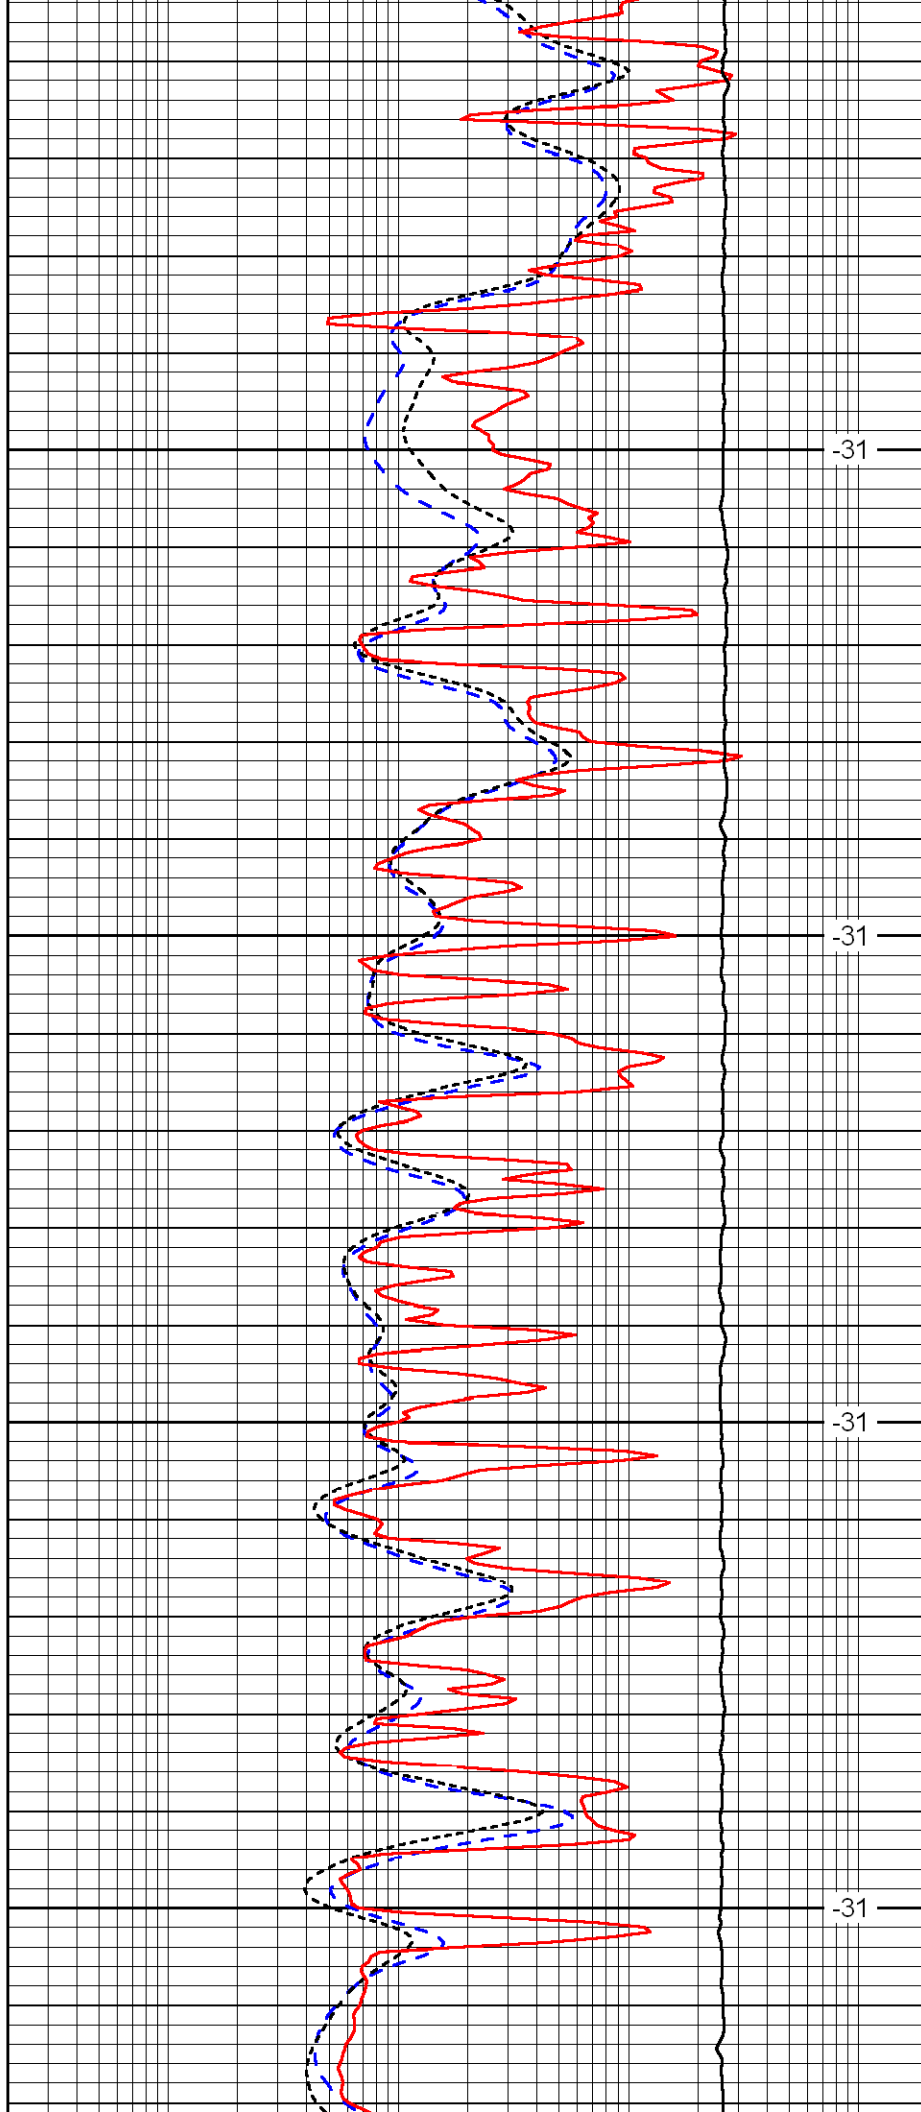


-31

-31

-31

-31

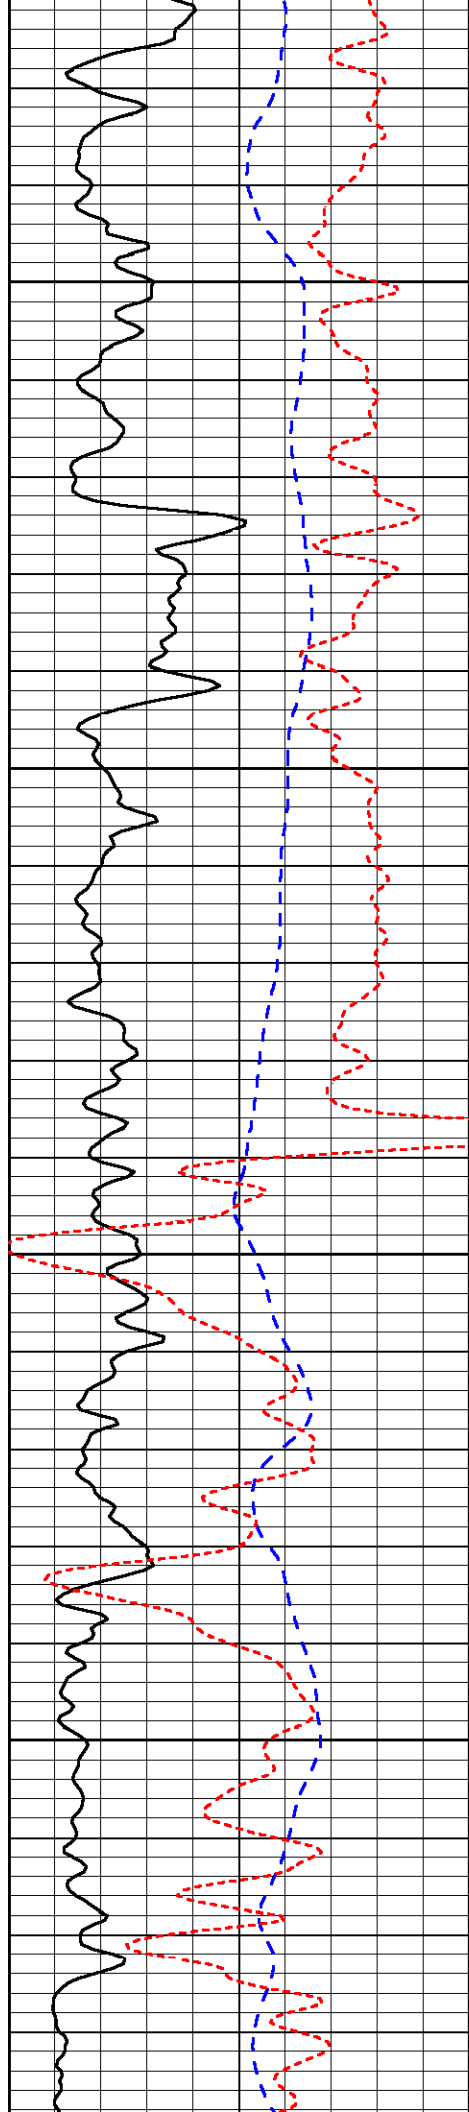


5350

5400

5450

5500

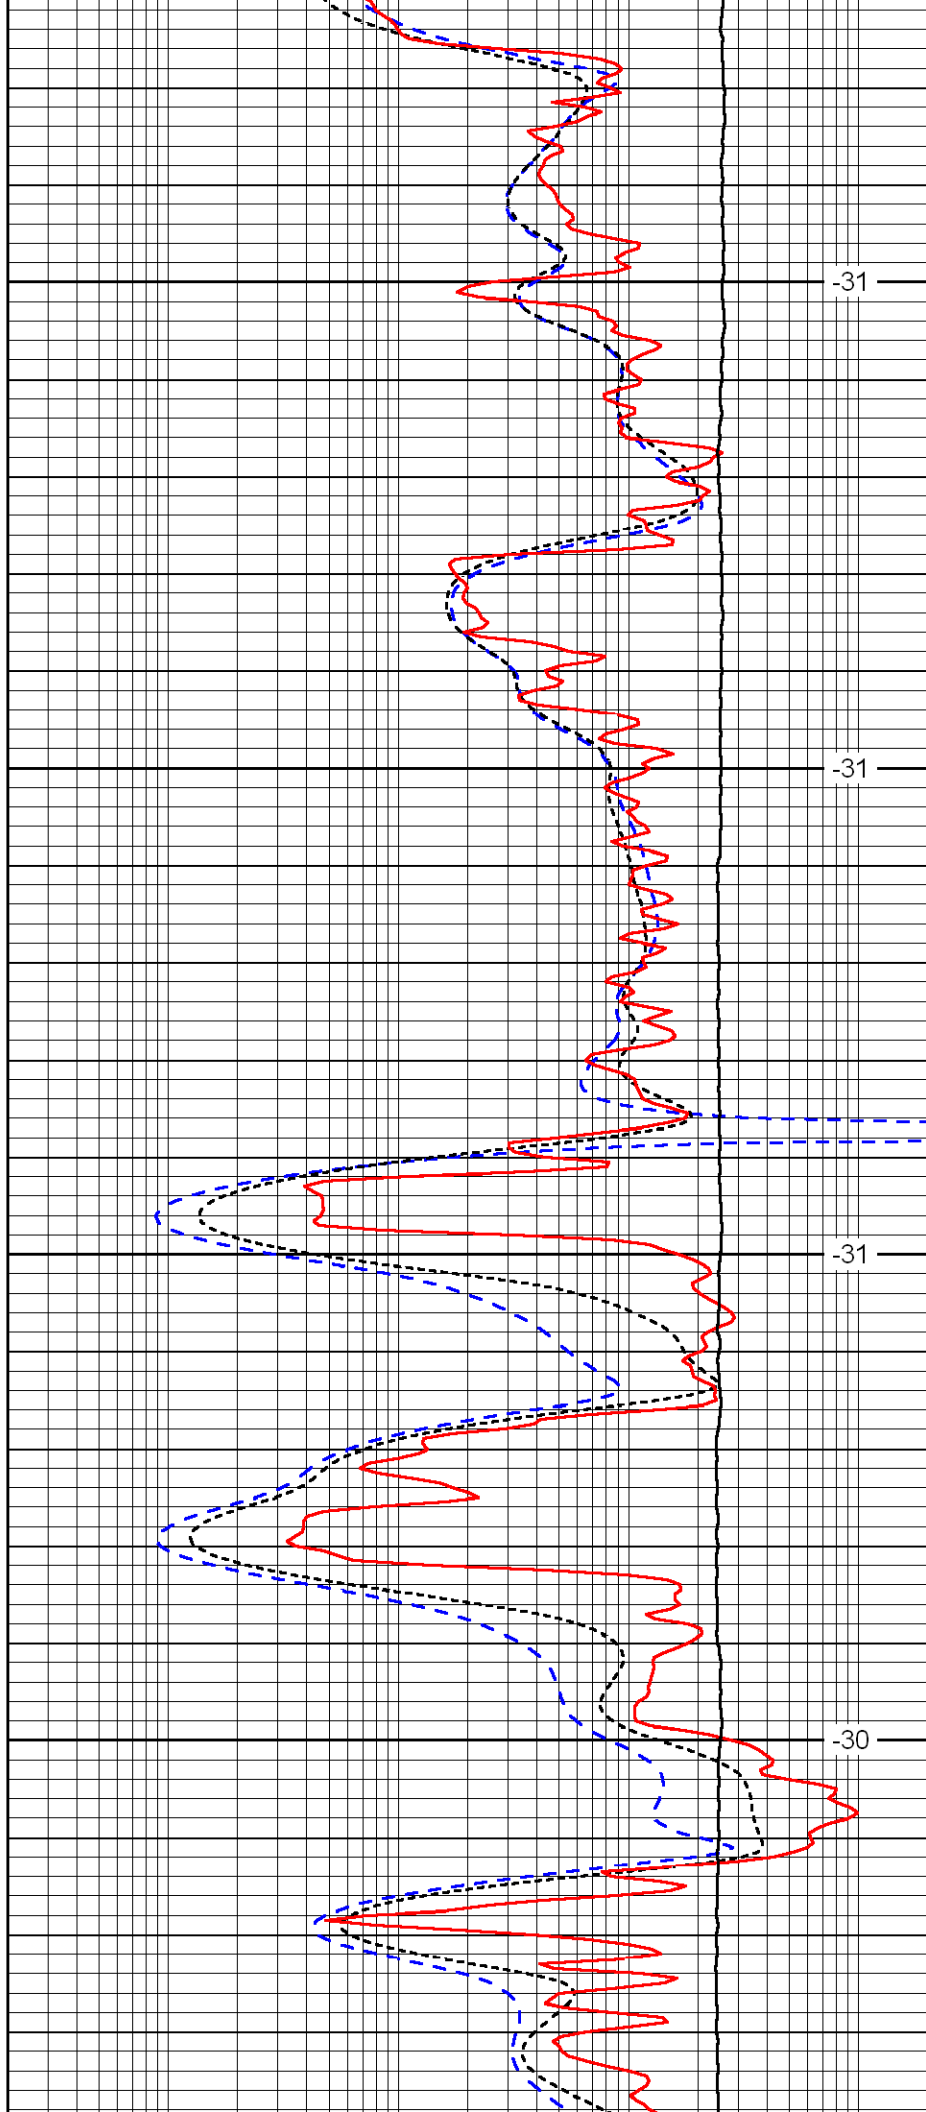


-31

-31

-31

-30

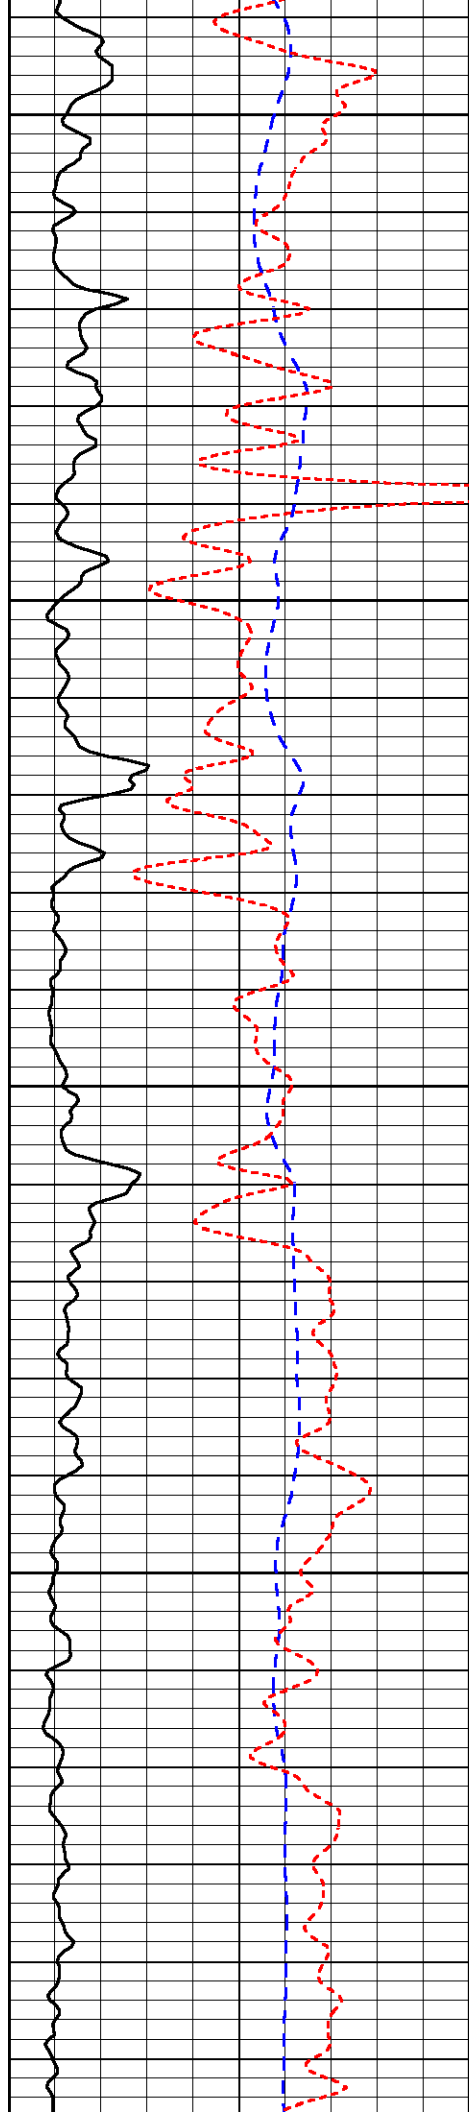


5550

5600

5650

5700

5750

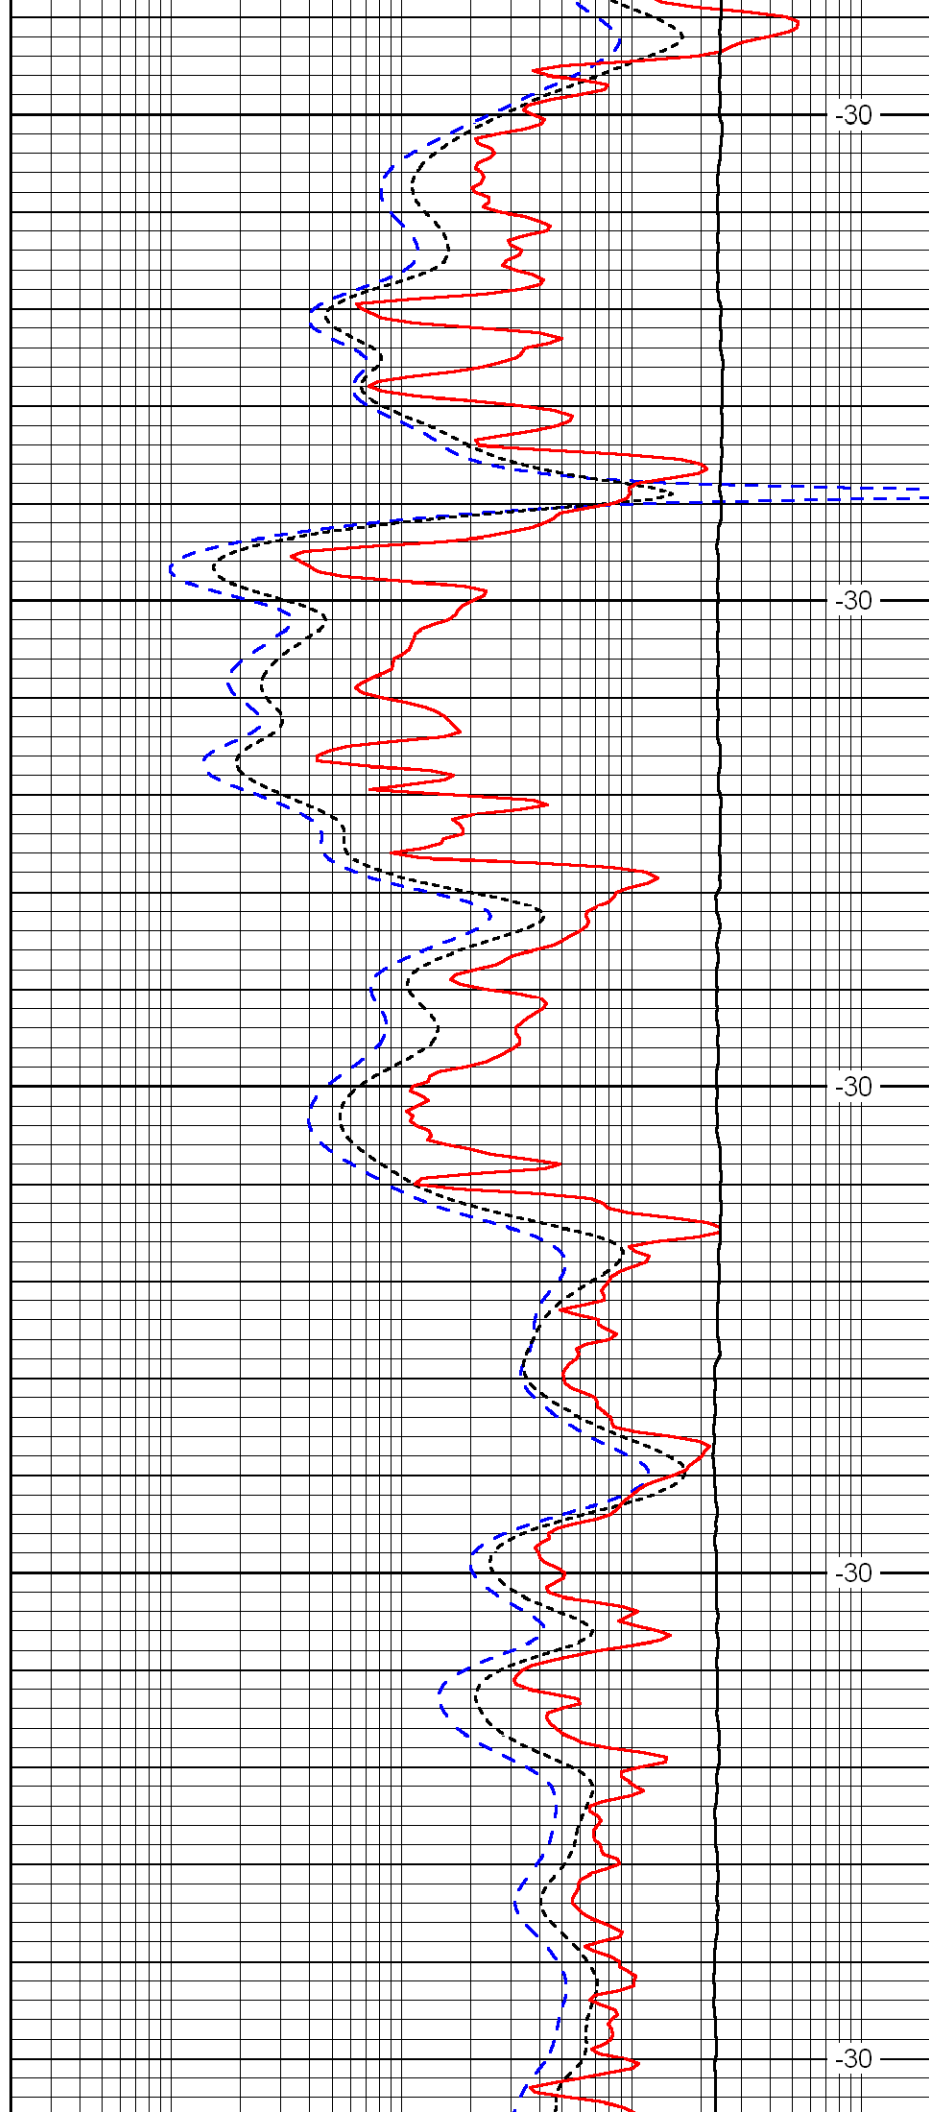


-30

-30

-30

-30

-30

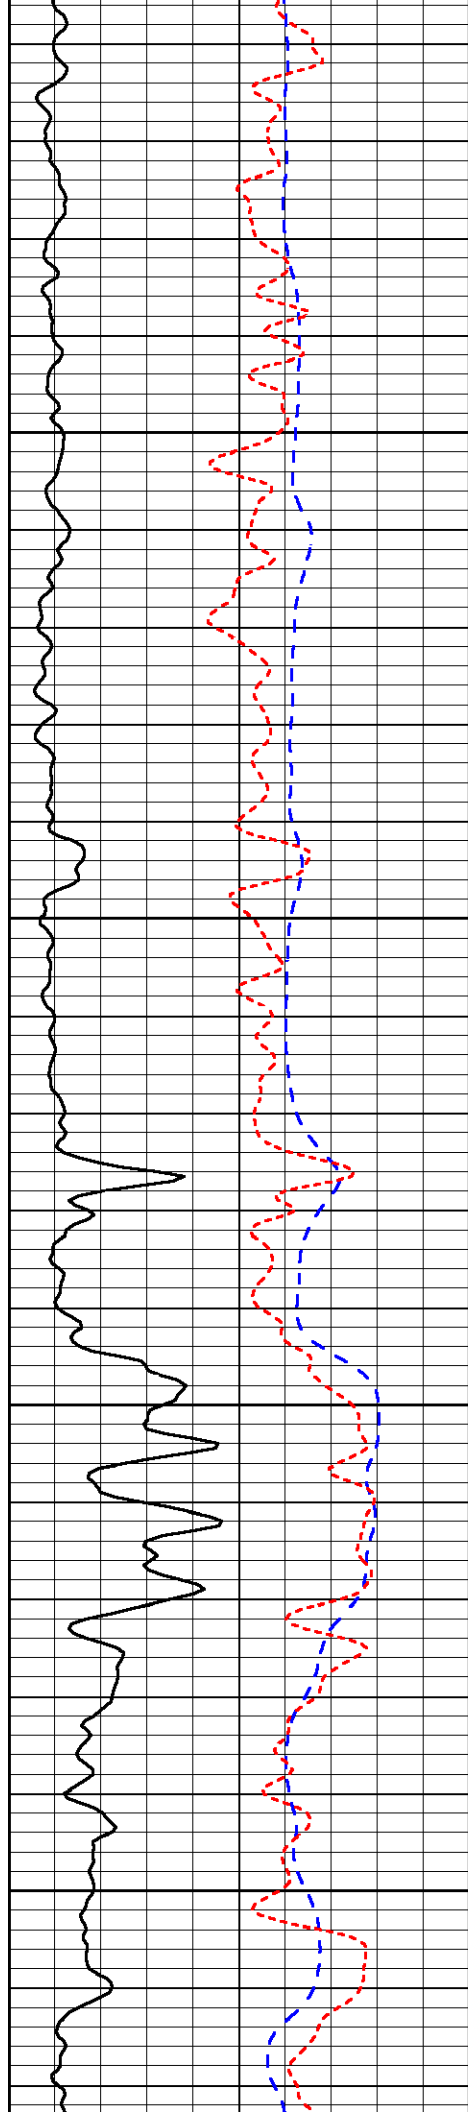


5800

5850

5900

5950

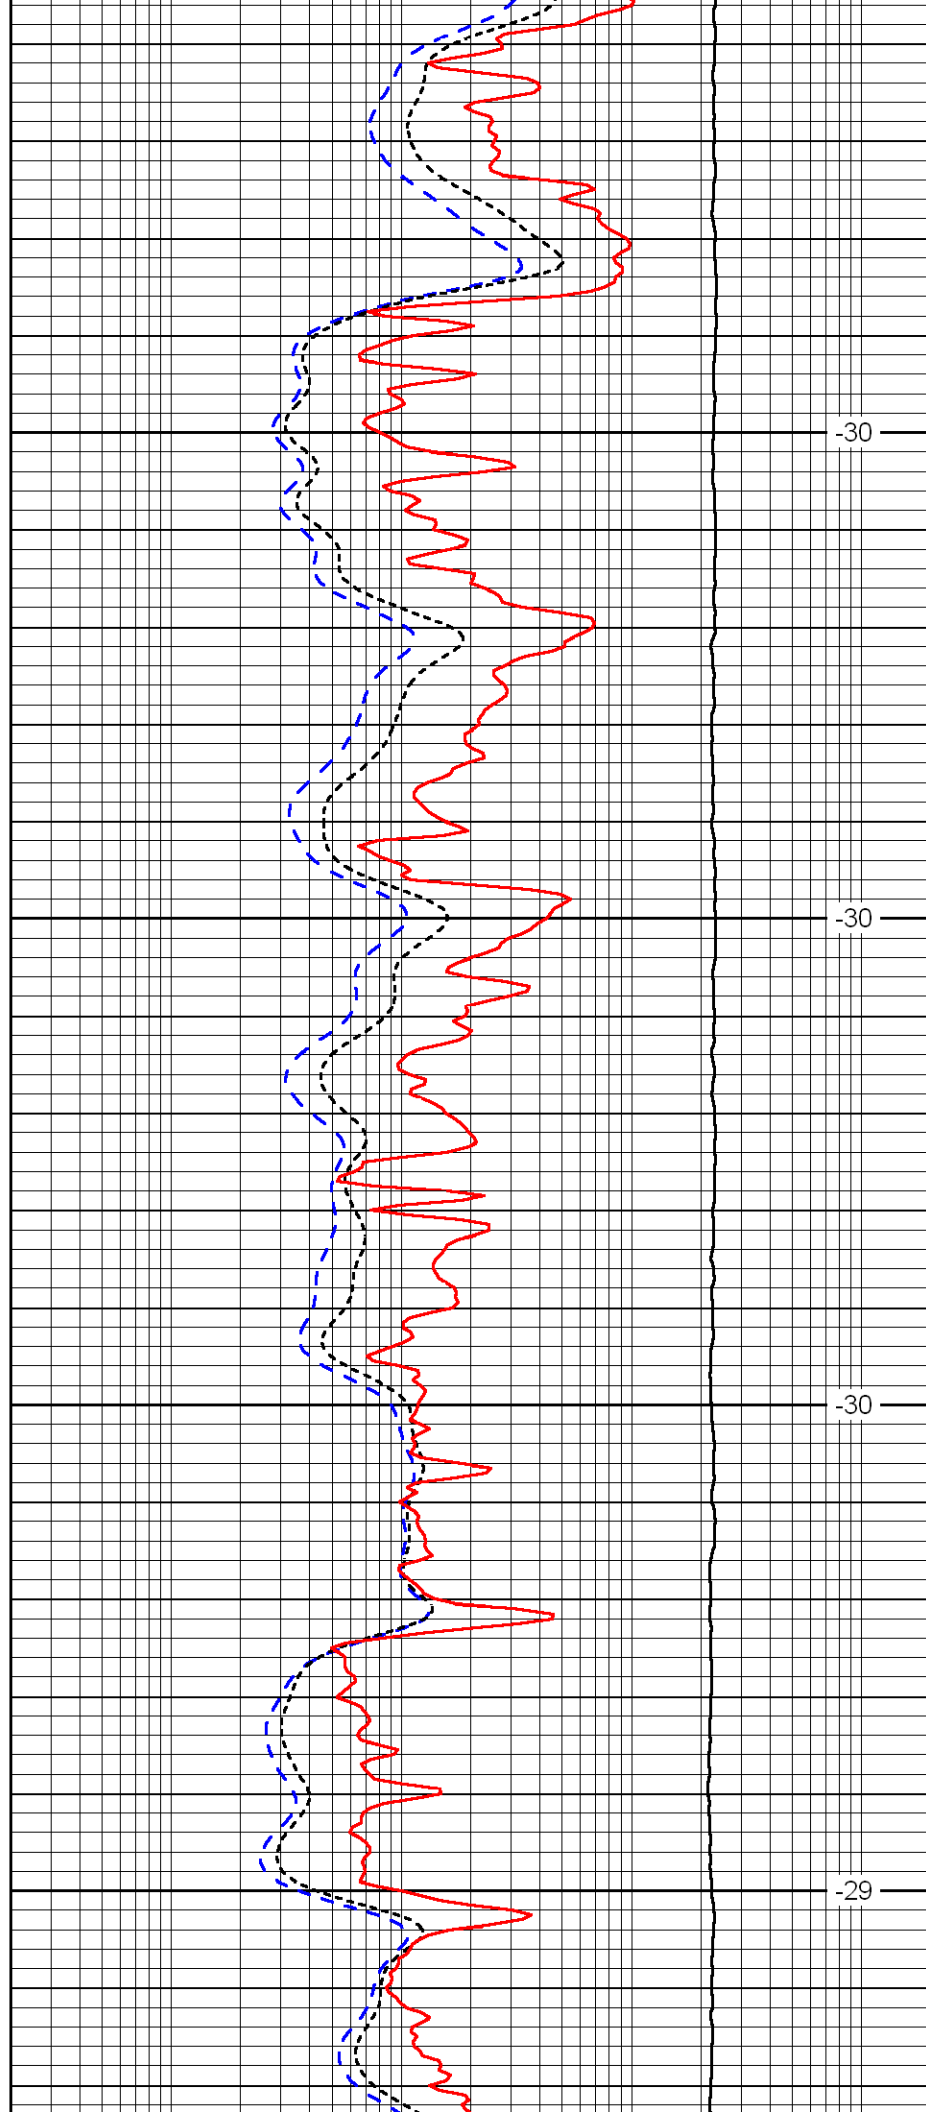


-30

-30

-30

-29

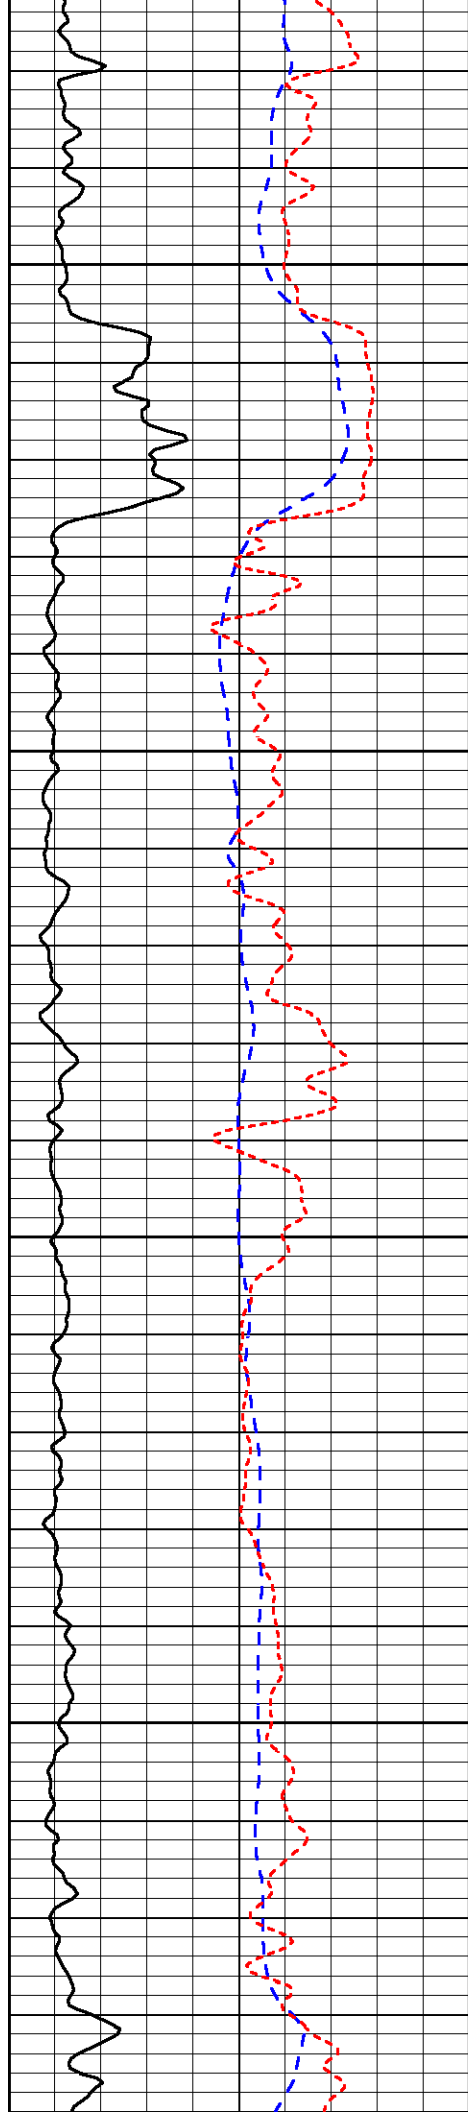


6000

6050

6100

6150

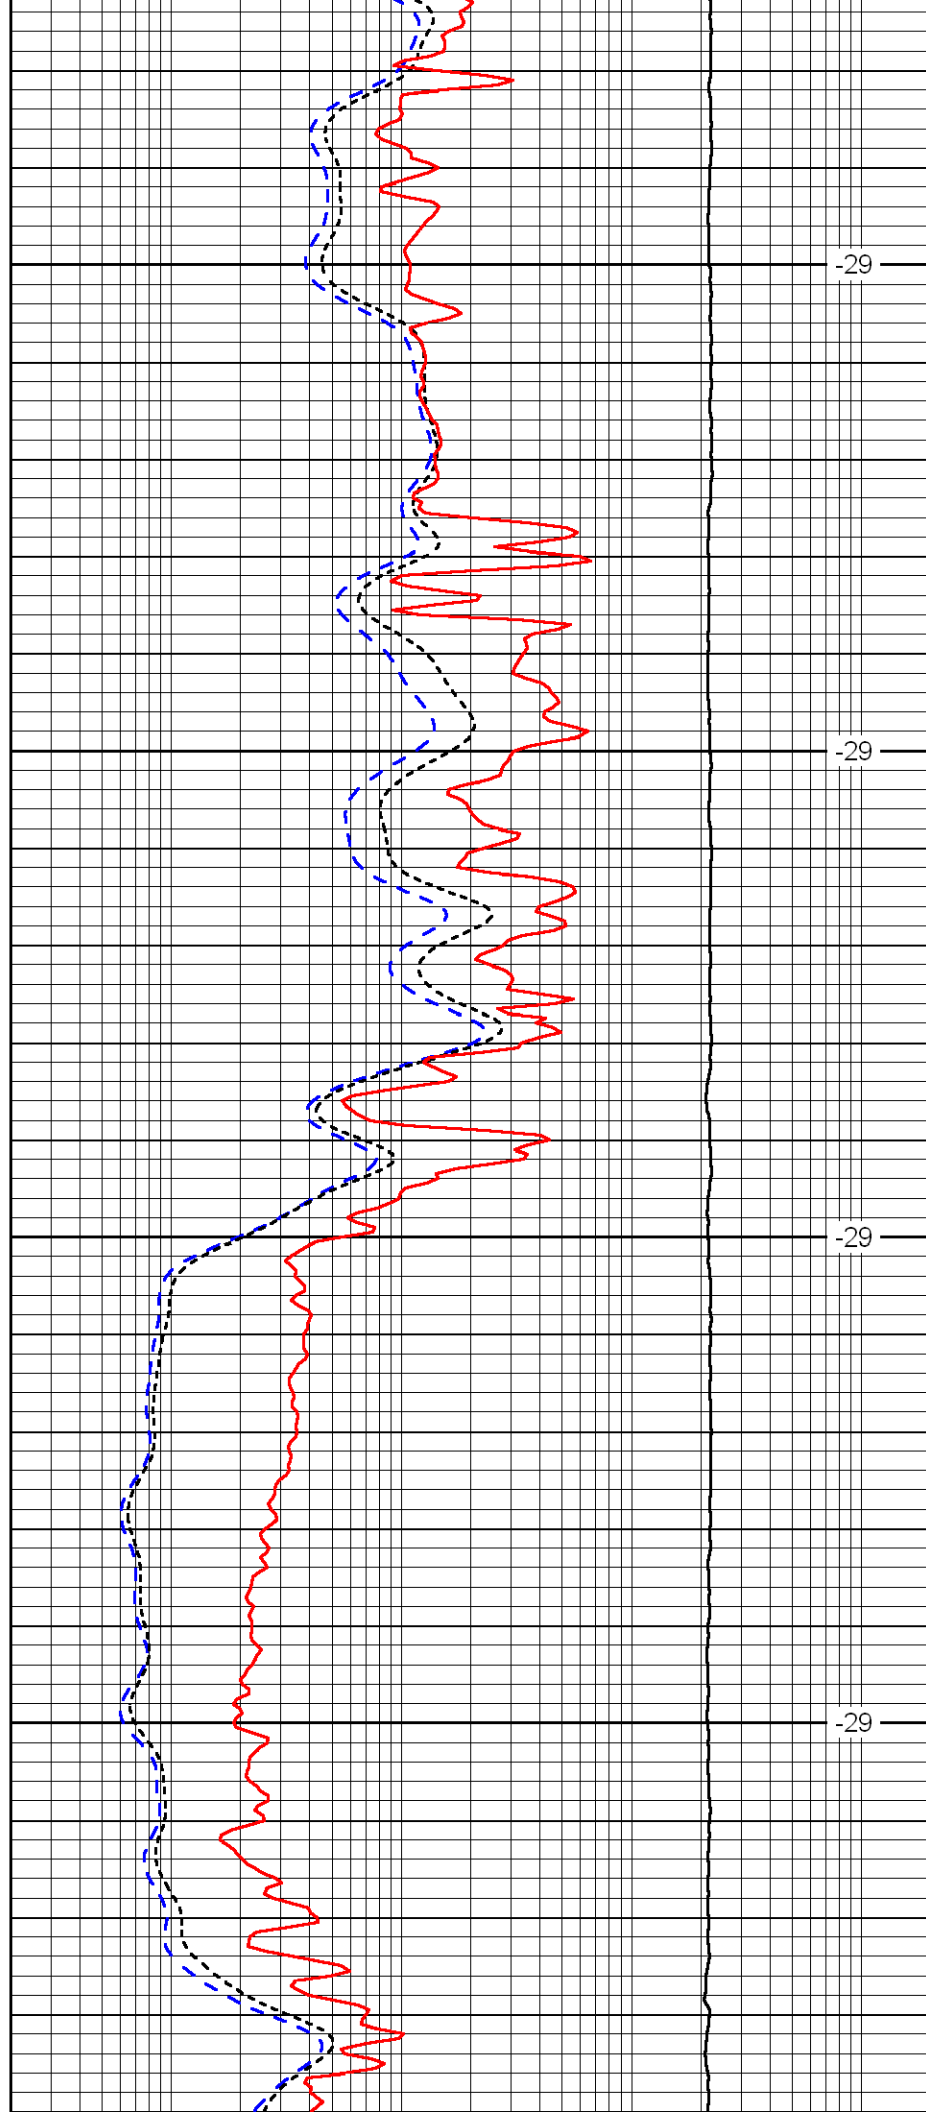


-29

-29

-29

-29

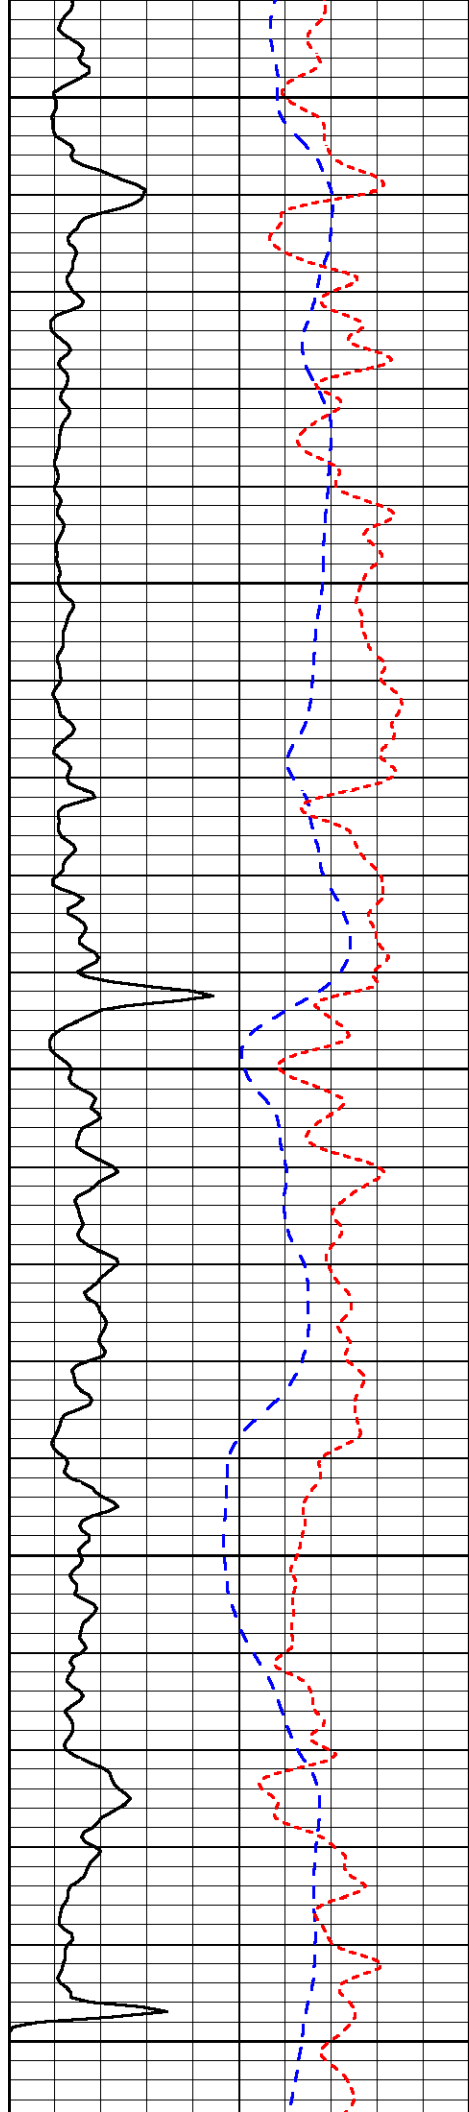


6200

6250

6300

6350

6400

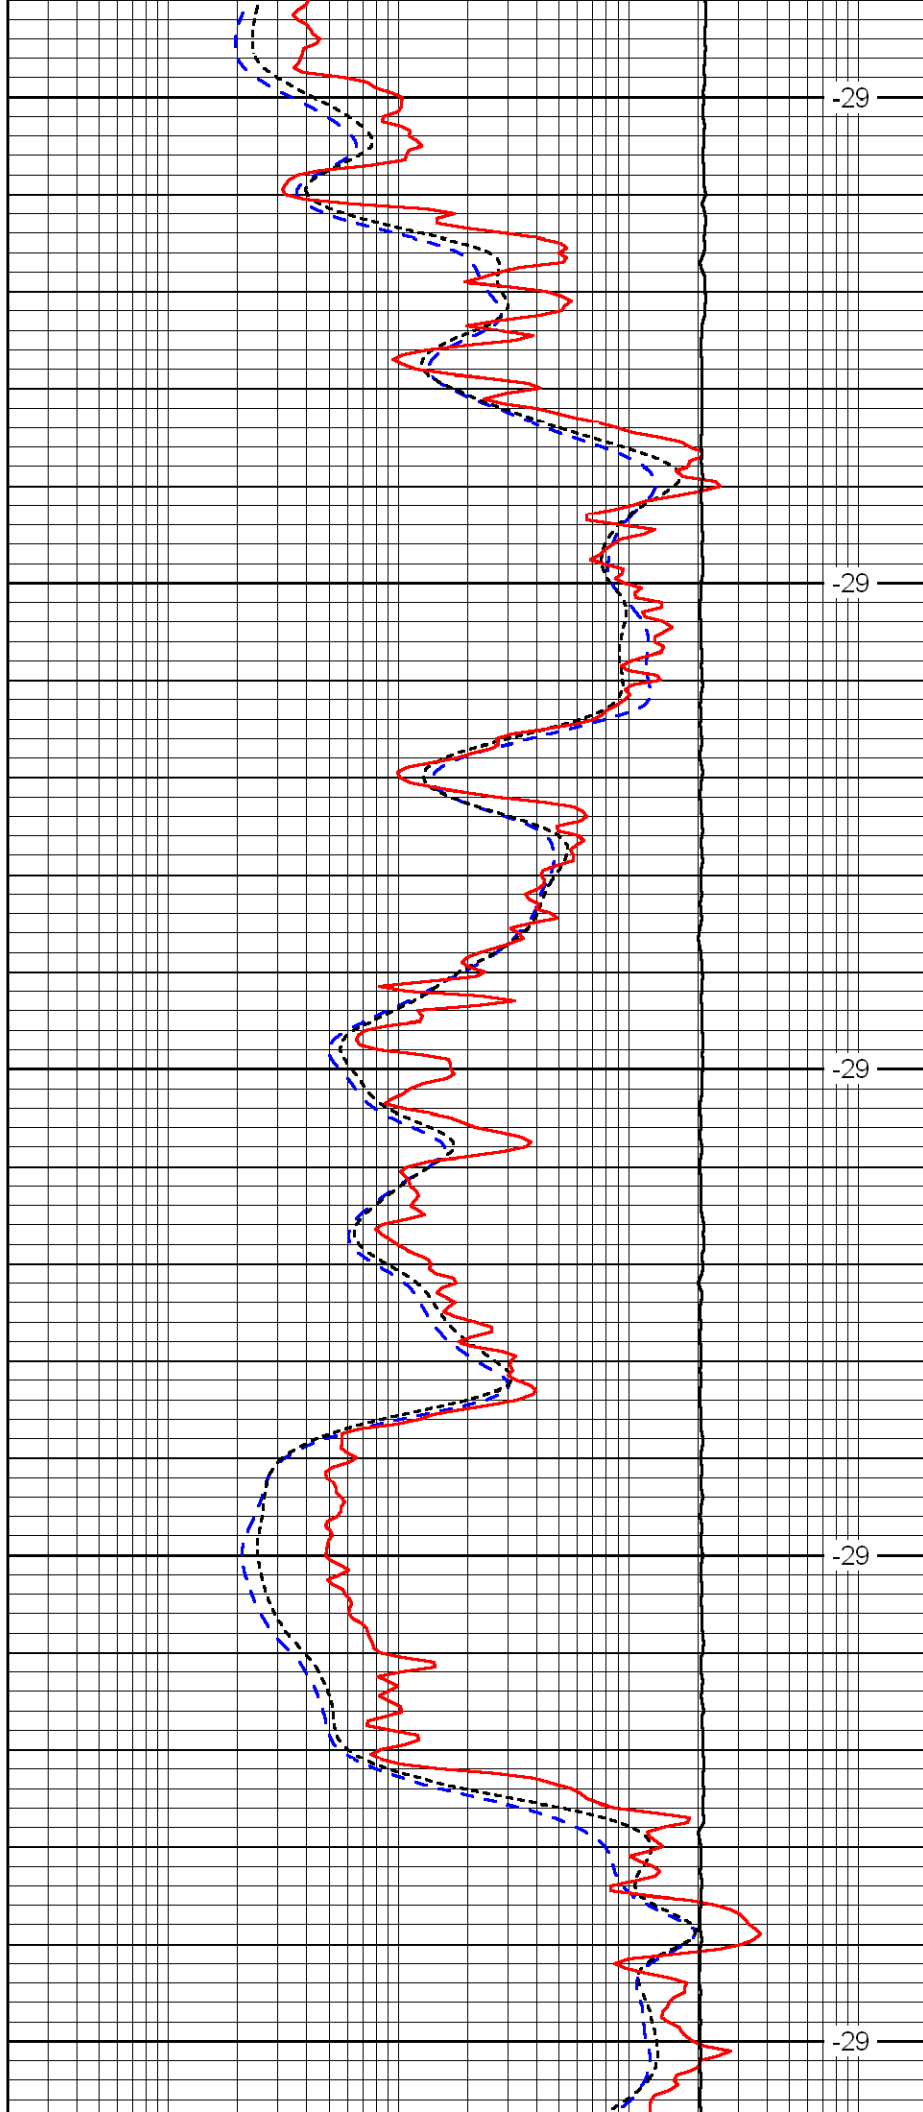



-29

-29

-29

-29

-29

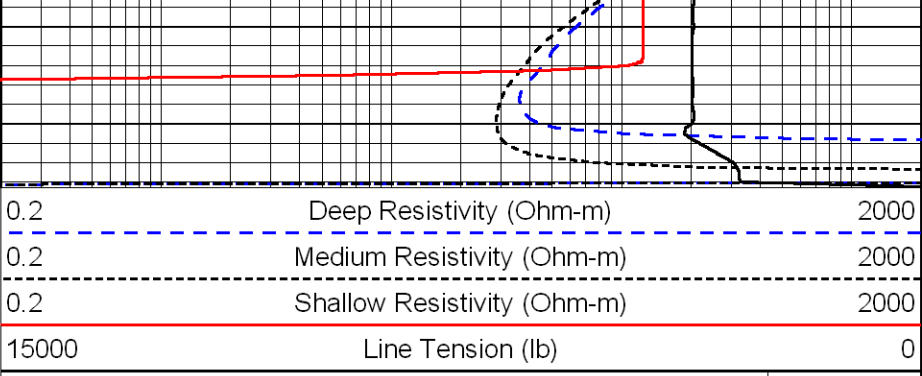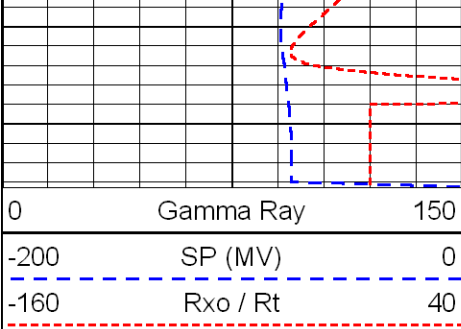

LSPD
(ft/min)