


15-039-19033-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

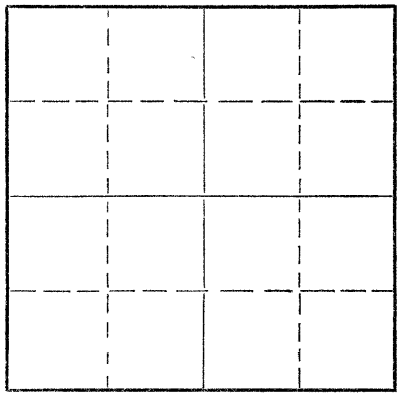

Locate well correctly on above
Section Plat

Decatur County. Sec. 34 Twp. 5 S Rge. 27 ~~X~~ EY W (W)
Location as "NE/CNW/SW" or footage from lines NE 1/4 NE 1/4 SW 1/4
Lease Owner R. W. Shields, et al
Lease Name Helmer Well No. 1
Office Address Sharp Building, Lincoln, Nebraska
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/27 1952
Application for plugging filed 12/27 1952
Application for plugging approved 12/27 1952
Plugging commenced 12/27 1952
Plugging completed 12/27 1952
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - - 19 - -
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation - - Depth to top - - Bottom - - Total Depth of Well 4060 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	206 ft.	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from - - feet to - - feet for each plug set.

Filled hole with heavy mud from 4060 feet to 200 feet. Set wooden plug at 200 feet and filled surface pipe with 15 sacks of cement and 1/2 sack of hulls to 153 feet. Filled surface casing with heavy mud from 153 feet to 40 feet. Set wooden plug at 40 feet and filled casing with 10 sacks of cement and 1/2 sack of hulls to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION
DEC 31 1952
CONSERVATION DIVISION
Wichita, Kansas

12-31-52

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.
Address 623 First National Bank Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick ss.
F. R. Stubblefield (employee of owner or contractor or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) F. R. Stubblefield
623 First National Bank Building
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December, 1952

Mildred L. Willis
Notary Public.

My commission expires February 27, 1956.

PLUGGING
FILE SEC 34 T 5 R 27
BOOK PAGE 19 LINE 15