



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-083-21622-00-00

Company American Warrior, Inc.

Well NUSS No. 1-11

Field Stairrett

County Hodgeman State

Kansas

Location

NE - NE - SE - SW
1150' FSL & 2560' FWL

Other Services
CNL/CDL
DIL/BHCS

Sec: 11

Twp: 21 S

Rge: 25 W

Elevation

Permanent Datum Ground Level

Elevation 2302

Log Measured From Kelly Bushing

11 Ft. Above Perm. Datum

K.B. 2313
D.F.
G.L. 2302

Drilling Measured From Kelly Bushing

1/18/2010

Run Number

Two

Depth Driller

4475

Depth Logger

4479

Bottom Logged Interval

4478

Top Log Interval

3600

Casing Driller

8.625 @ 212

Casing Logger

209

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

4.700

Density / Viscosity

9.4 48

pH / Fluid Loss

9.0 8.8

Source of Sample

Flowline

Rm @ Meas. Temp

1.70 @ 55

Rmf @ Meas. Temp

1.28 @ 55

Rmc @ Meas. Temp

2.30 @ 55

Source of Rmf / Rmc

Charts

Rm @ BHT

0.77 @ 121

Operating Rig Time

5 Hours

Max Rec. Temp. F

121

Equipment Number

15

Location

Hays

Recorded By

B. Becker

Witnessed By

Jason Alm

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Ness City, Ks
South to X Rd (1mi past county line);
7 West; 1 South; 1/2 West; North Into

Database File: c:\warrior\data\amwar_nuss no. 1-11\awhd.db
Dataset Pathname: DIL\awstk
Presentation Format: micro
Dataset Creation: Tue Jan 19 00:27:03 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

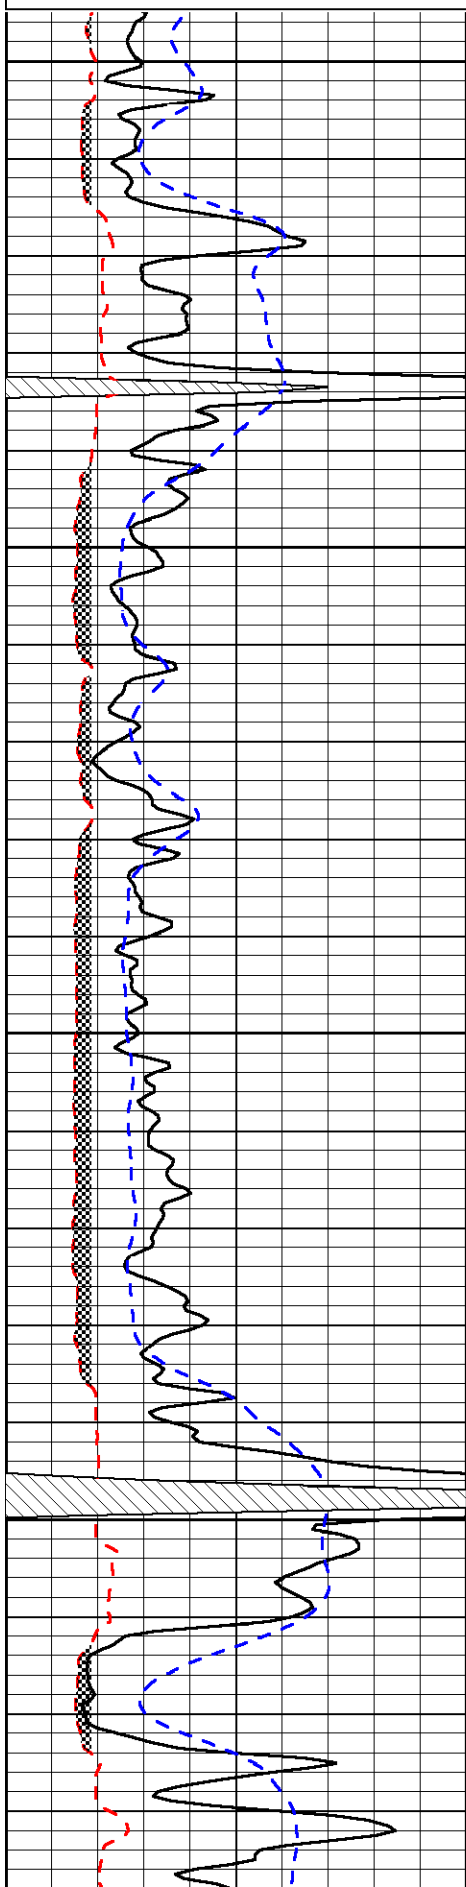


3600

3650

3700

3750

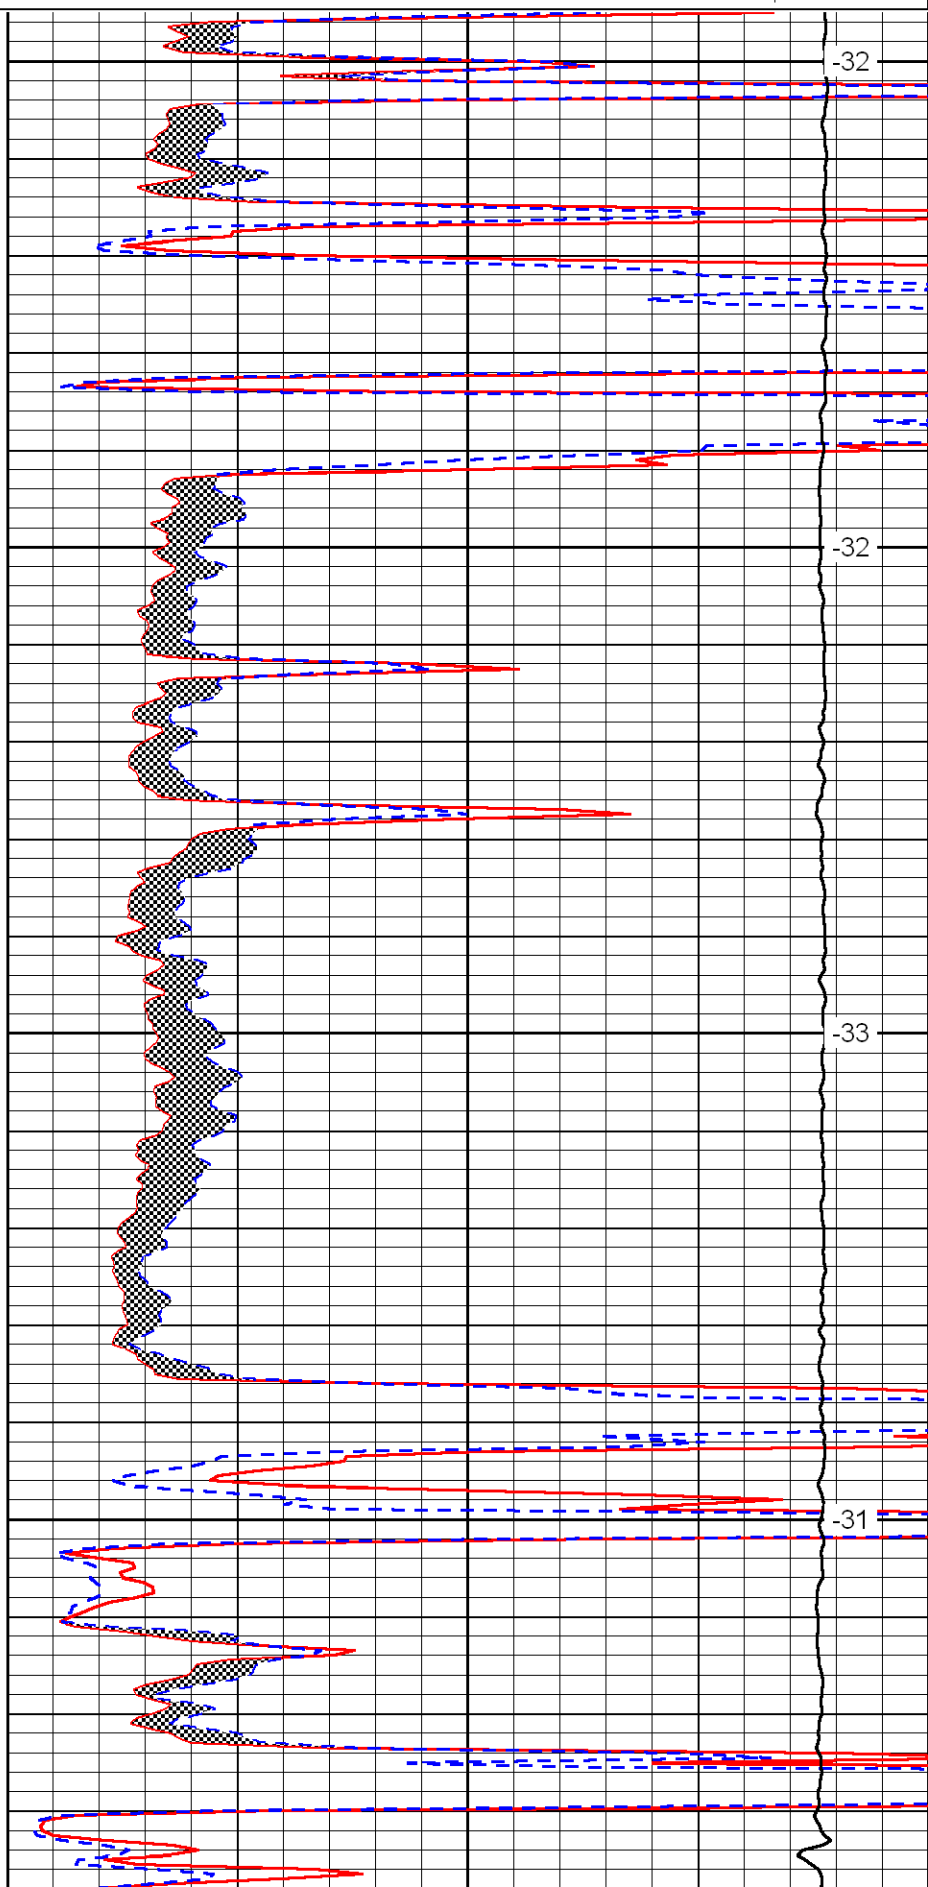


-32

-32

-33

-31

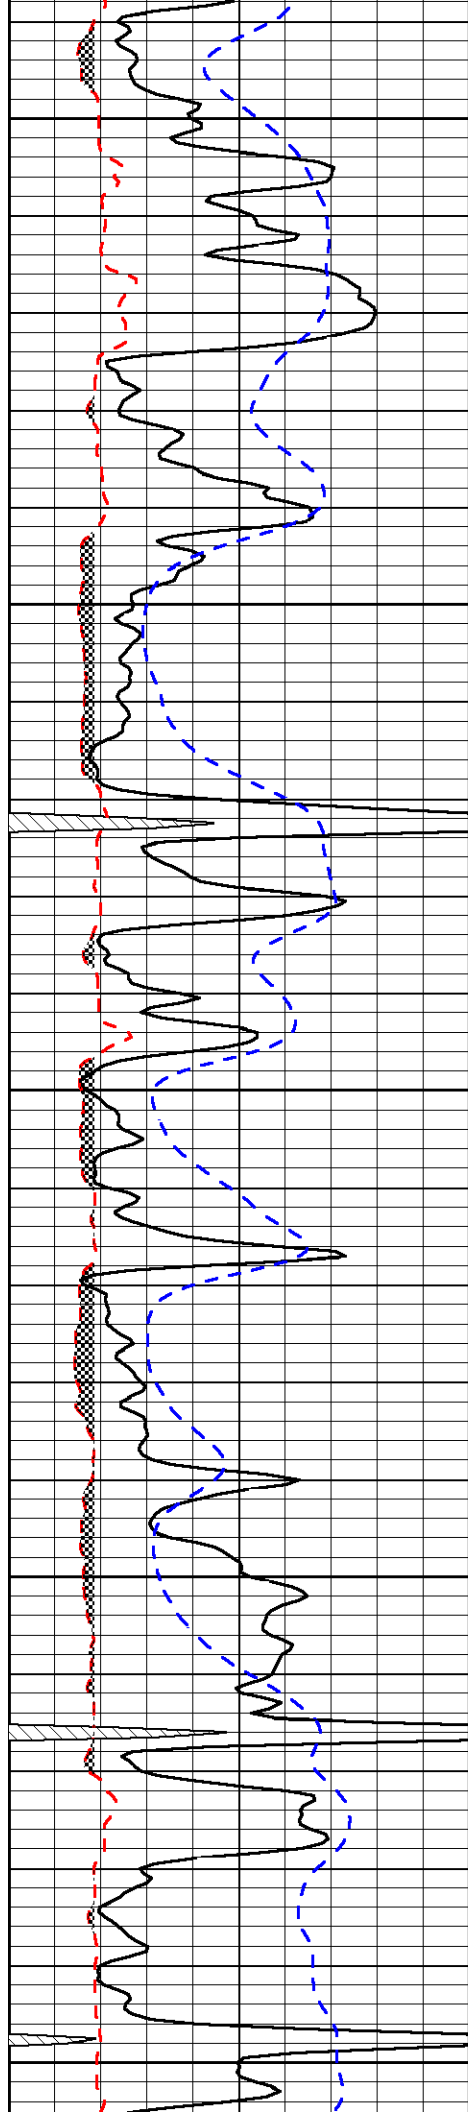


3800

3850

3900

3950

4000

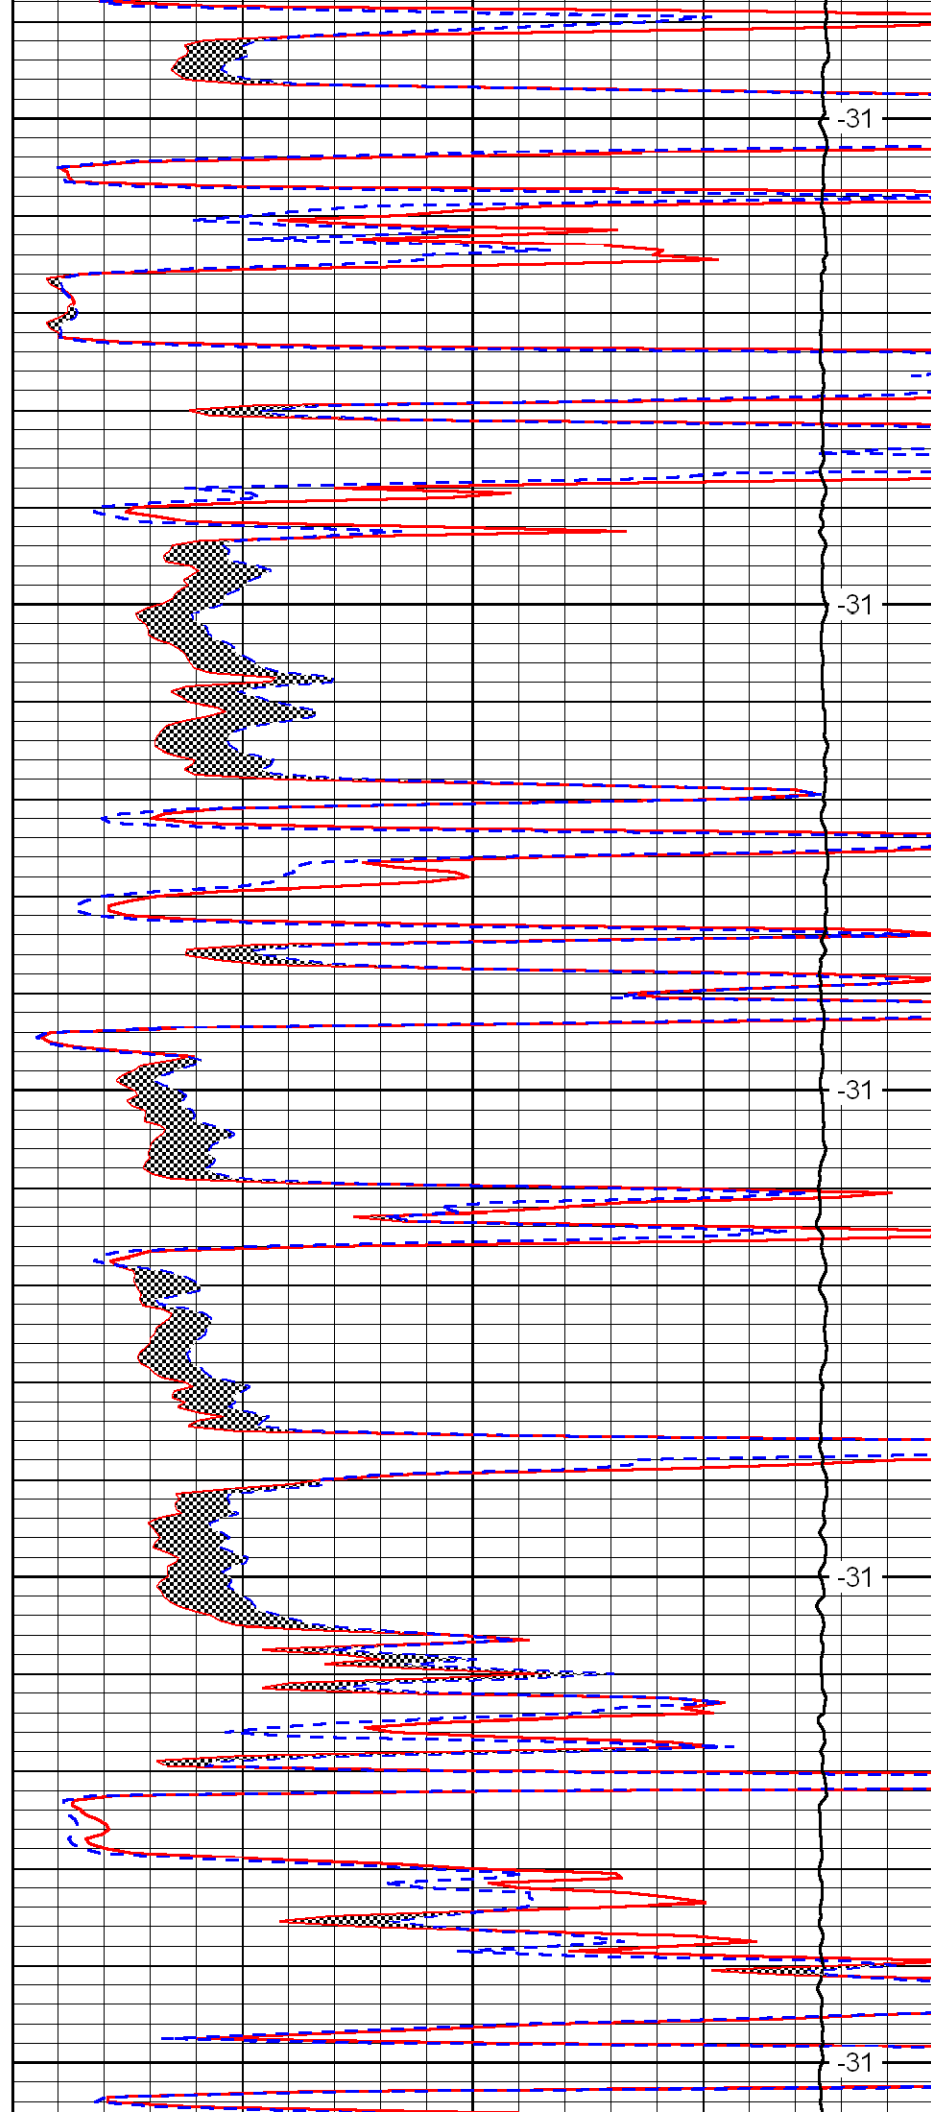


-31

-31

-31

-31

-31

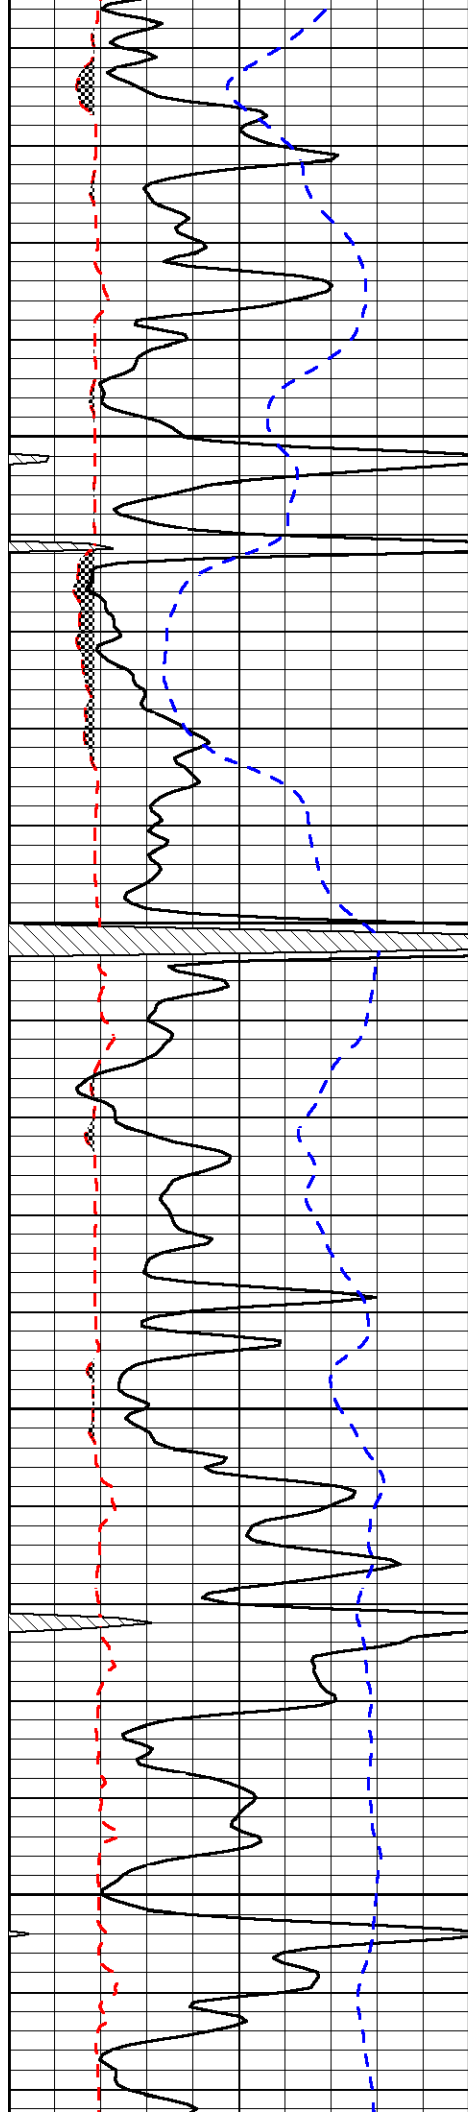



4050

4100

4150

4200

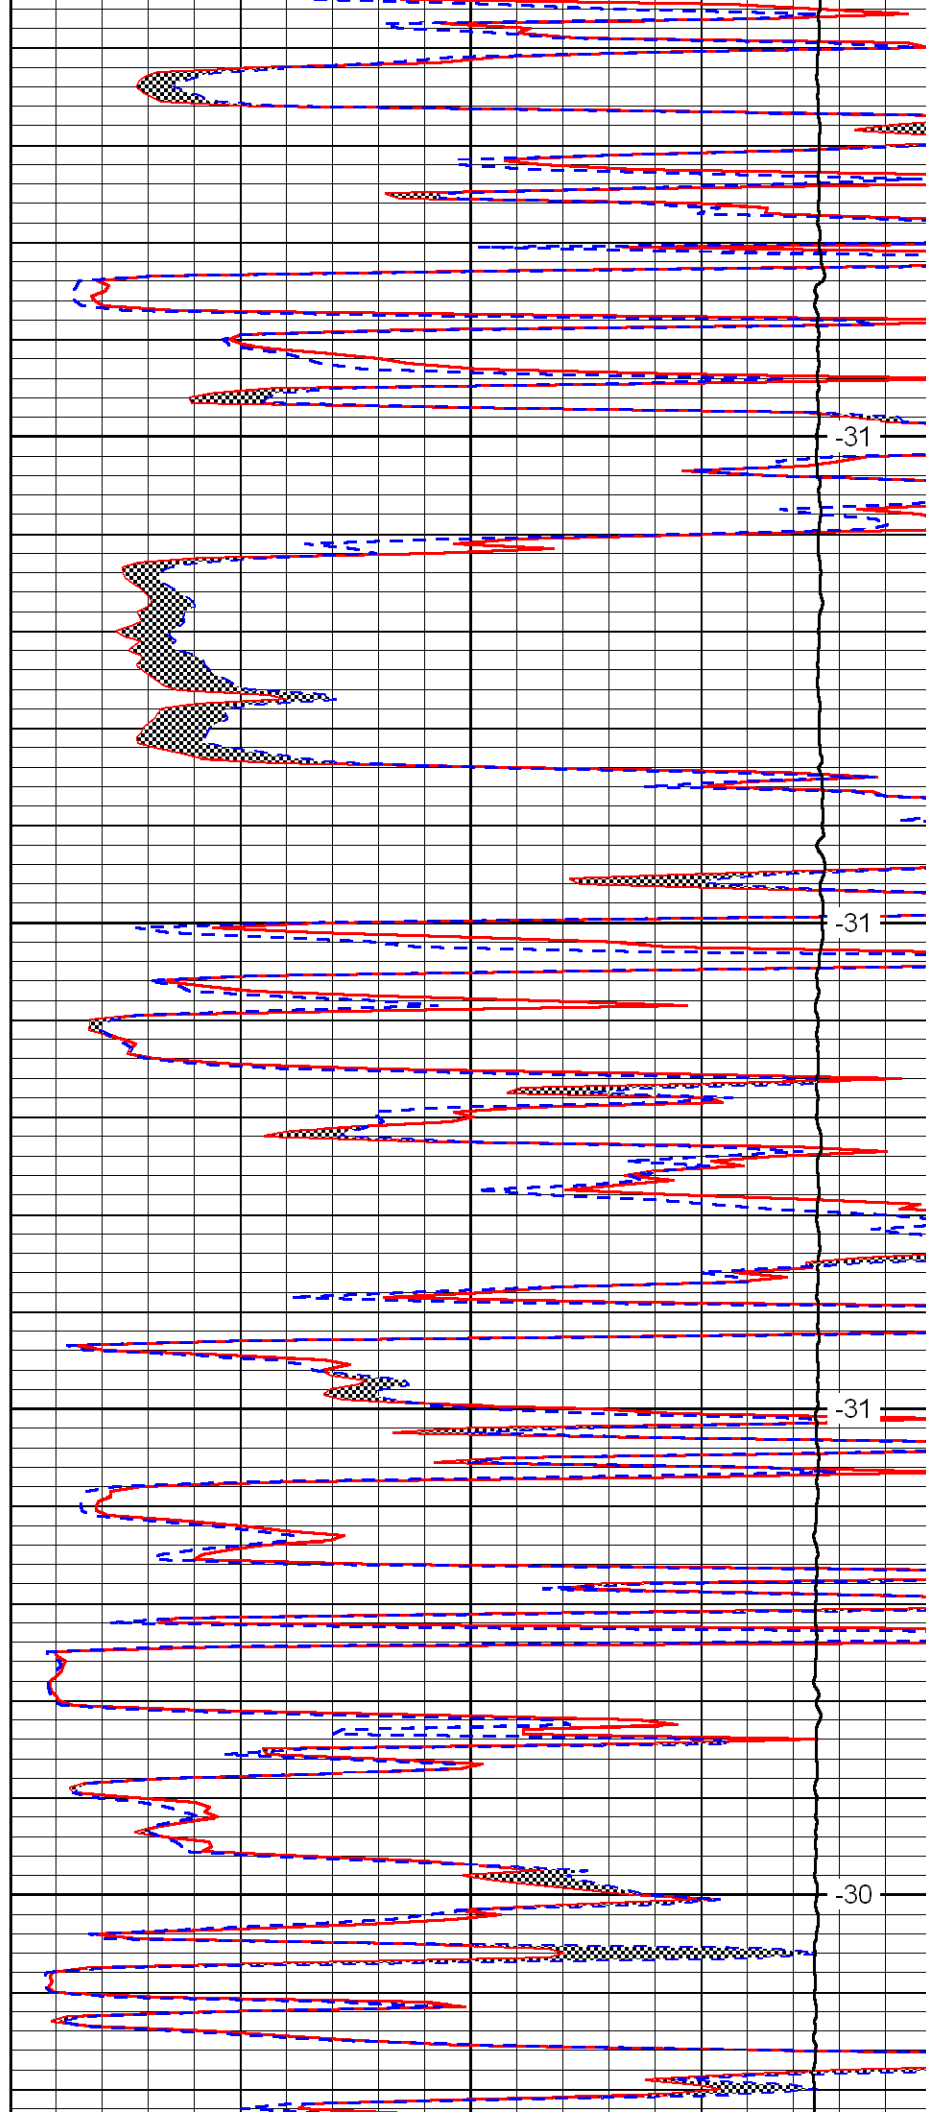

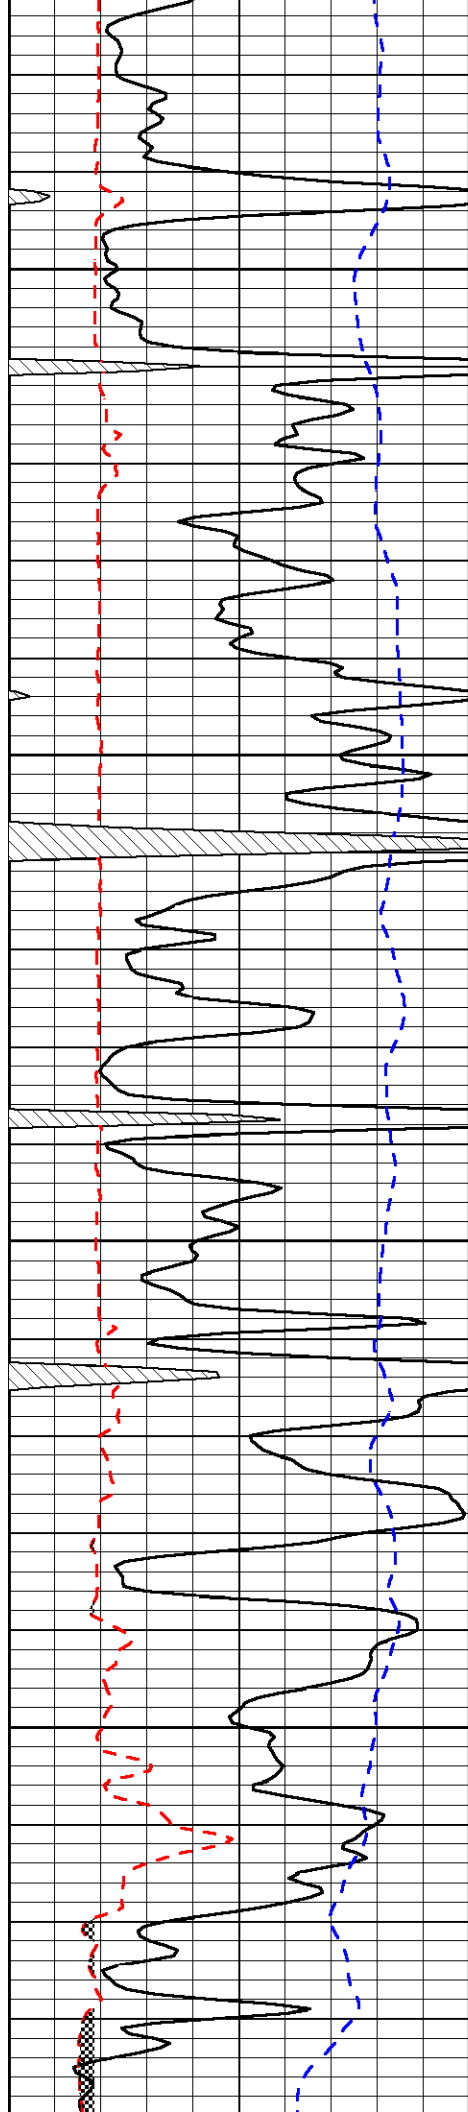


4250

4300

4350

4400

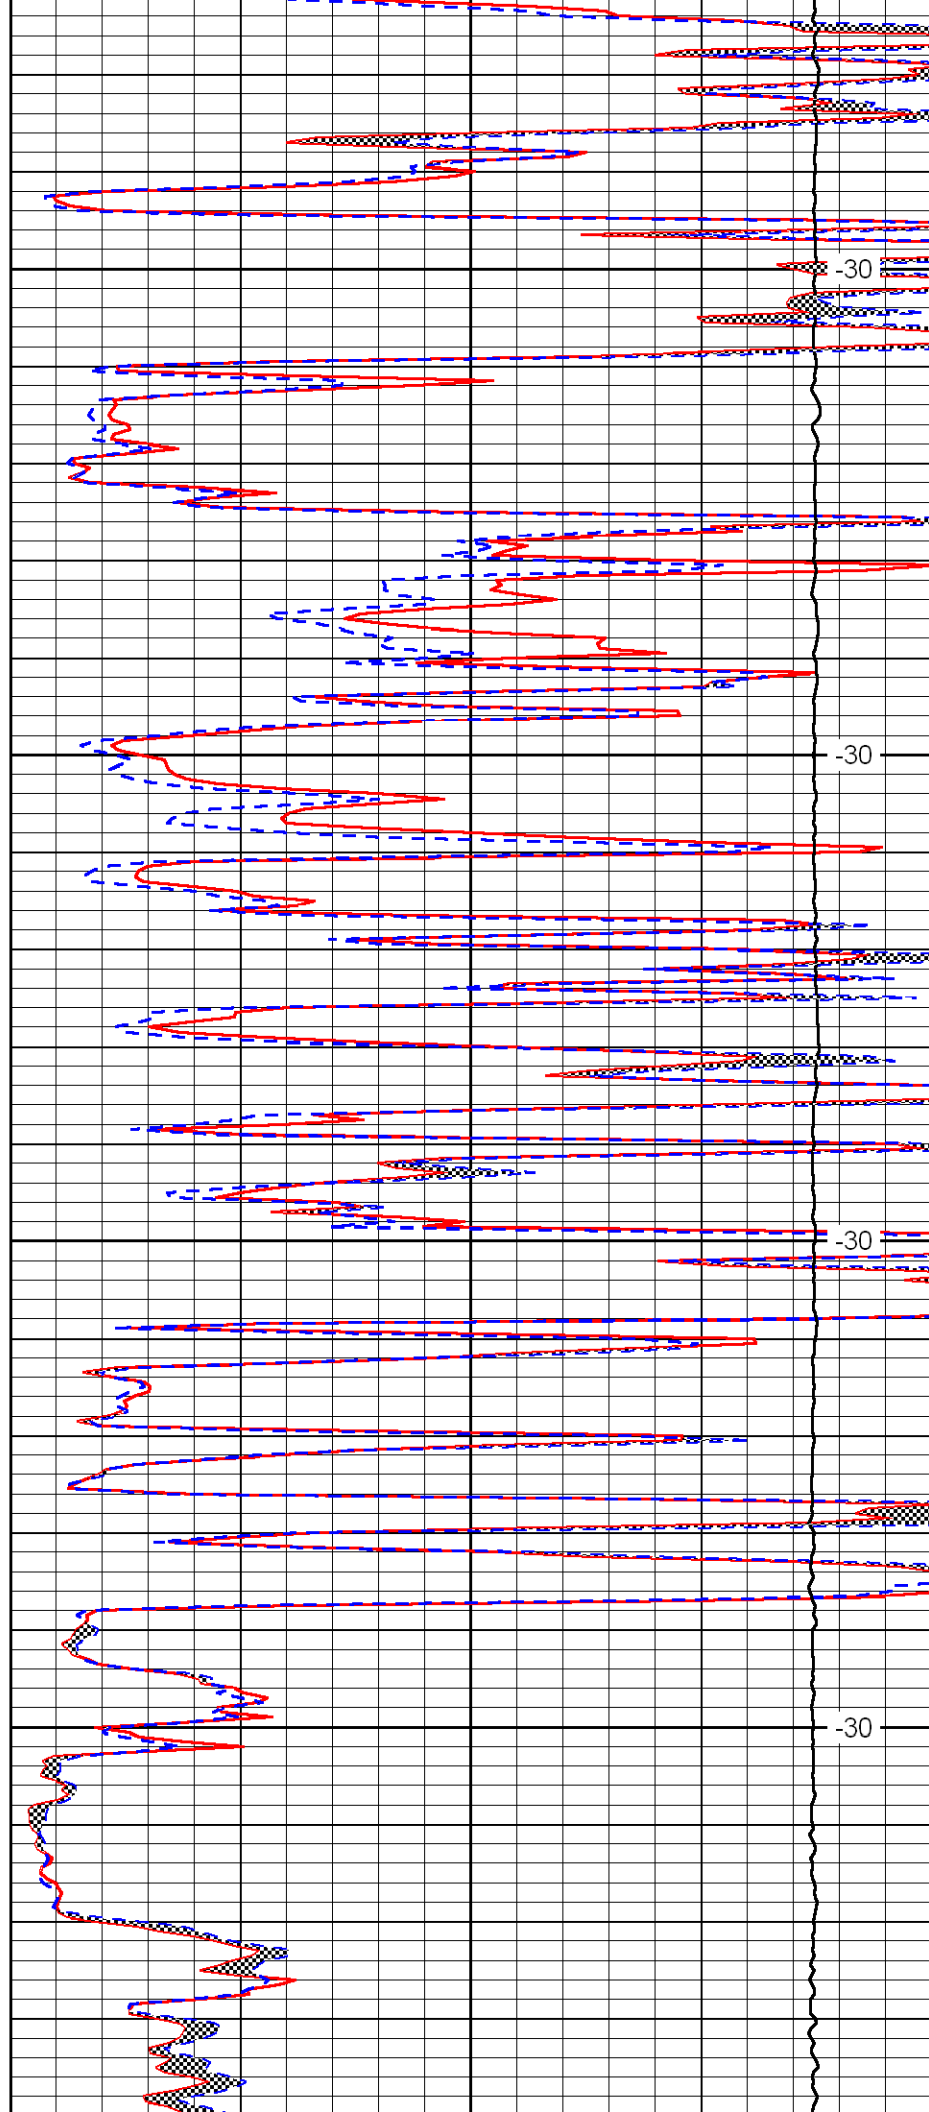


-30


-30

-30

-30

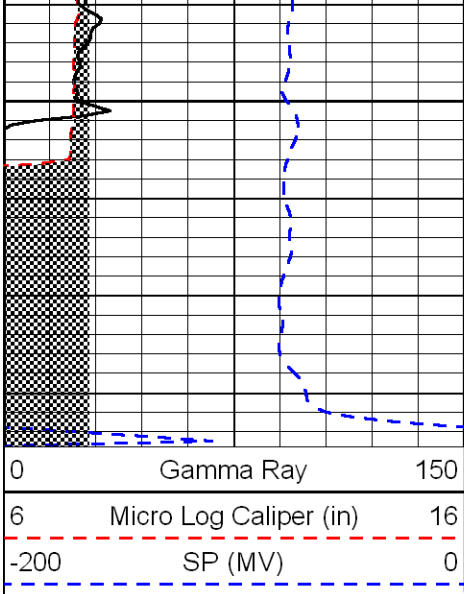

4450

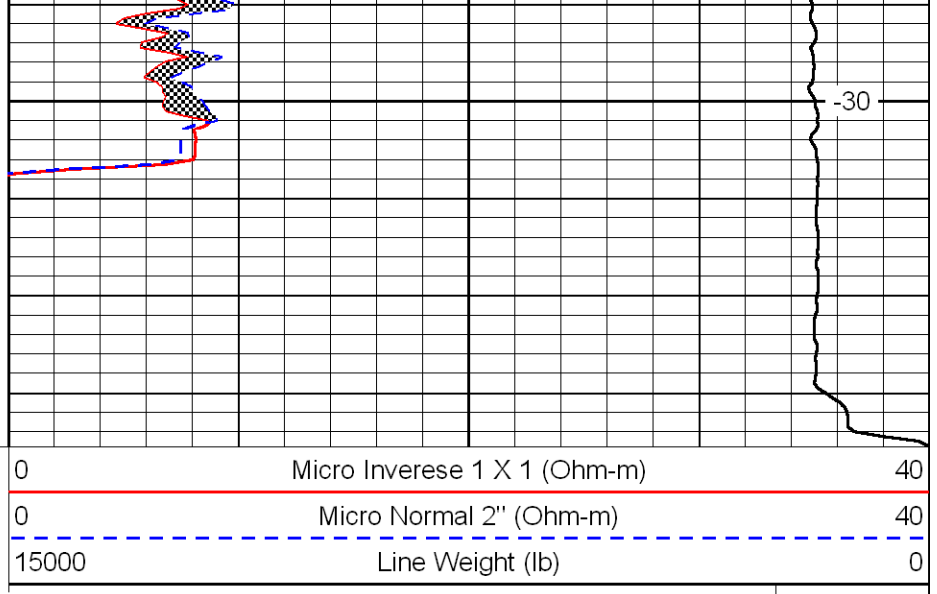

LSPD
(ft/min)