


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

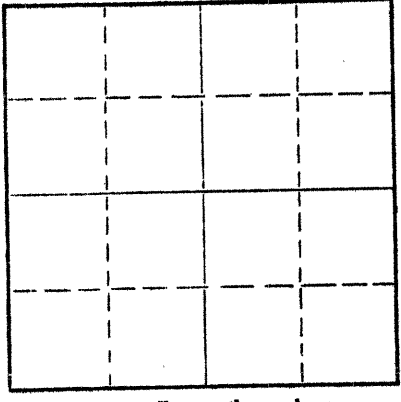

Locate well correctly on above Section Plat

Norton County, Sec. \_\_\_\_\_ Twp. \_\_\_\_\_ Rge. \_\_\_\_\_ (E) \_\_\_\_\_ (W)

Location as "NE/CNW/SW" or footage from lines \_\_\_\_\_  
Lease Owner Ozark Enterprises  
Lease Name Noone & A Well No. # 1  
Office Address Box 427 Logan, Ks. 67646  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9-24 1982  
Application for plugging filed 9-24 1982  
Application for plugging approved 9-24 1982  
Plugging commenced 9-24 1982  
Plugging completed 9-24 1982  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3615' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	209'	8 5/8"	209'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st. Plug set at 1050' with 100 sacks common cement 50-50 Poz 6% Gel 3% Cal Cl  
2nd. Plug set at 250' with 40 sacks common cement 50-50 Poz 6% Gel 3% Cal Cl  
3rd. Plug set at 40' with 10 sacks common cement 50-50 Poz 6% Gel 3% Cal Cl  
10 sacks in rathole  
Heavy drilling mud between each plug.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing  
Address Plainville, Ks. 67663


STATE OF Kansas, COUNTY OF Graham, ss.  
Jerry M. Helberg (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry M. Helberg  
Box 32 Morland, Ks. 67650  
(Address)

SUBSCRIBED AND SWORN TO before me this First day of November 1982.

My commission expires December 21, 1983

Carolyn S. Morrison  
RECEIVED Notary Public.  
STATE CORPORATION COMMISSION



NOV 2 1982  
CONSERVATION DIVISION  
Wichita Kansas