

LOG-TECH



Microresistivity Log

DIGITAL LOG

(785) 625-3858

API No.

15-025-21,488-00-00

Company Falcon Exploration, Inc.

Well YBC #1-34 (NW)

Field Wildcat

County Clark State

Kansas

Location

1820' FNL & 450' FWL

Sec: 34

Twp: 30S

Rge: 22W

Elevation

Permanent Datum Ground Level Elevation 2359
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2369
D.F.
G.L. 2359

Date 11/13/2009

Run Number Two

Depth Driller 6360

Depth Logger 6362

Bottom Logged Interval 6361

Top Log Interval 3200

Casing Driller 8.625 @ 682

Casing Logger 681

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 9.600

Density / Viscosity 9.05 45

pH / Fluid Loss 8.5 12.8

Source of Sample Flowline

Rm @ Meas. Temp .55 @ 66

Rmf @ Meas. Temp .41 @ 66

Rmc @ Meas. Temp .74 @ 66

Source of Rmf / Rmc Charts

Rm @ BHT .26 @ 142

Operating Rig Time 6 Hours

Max Rec. Temp. F 142

Equipment Number 10

Location Hays

Recorded By T. Martin

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Kingsdown, 8 S to E Rd, 1 1/2 E, S into



Database File: c:\warrior\data\falcon_ybc #1-34\flcnhd.db
Dataset Pathname: dil/flcnstk
Presentation Format: micro
Dataset Creation: Fri Nov 13 10:58:54 2009
Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

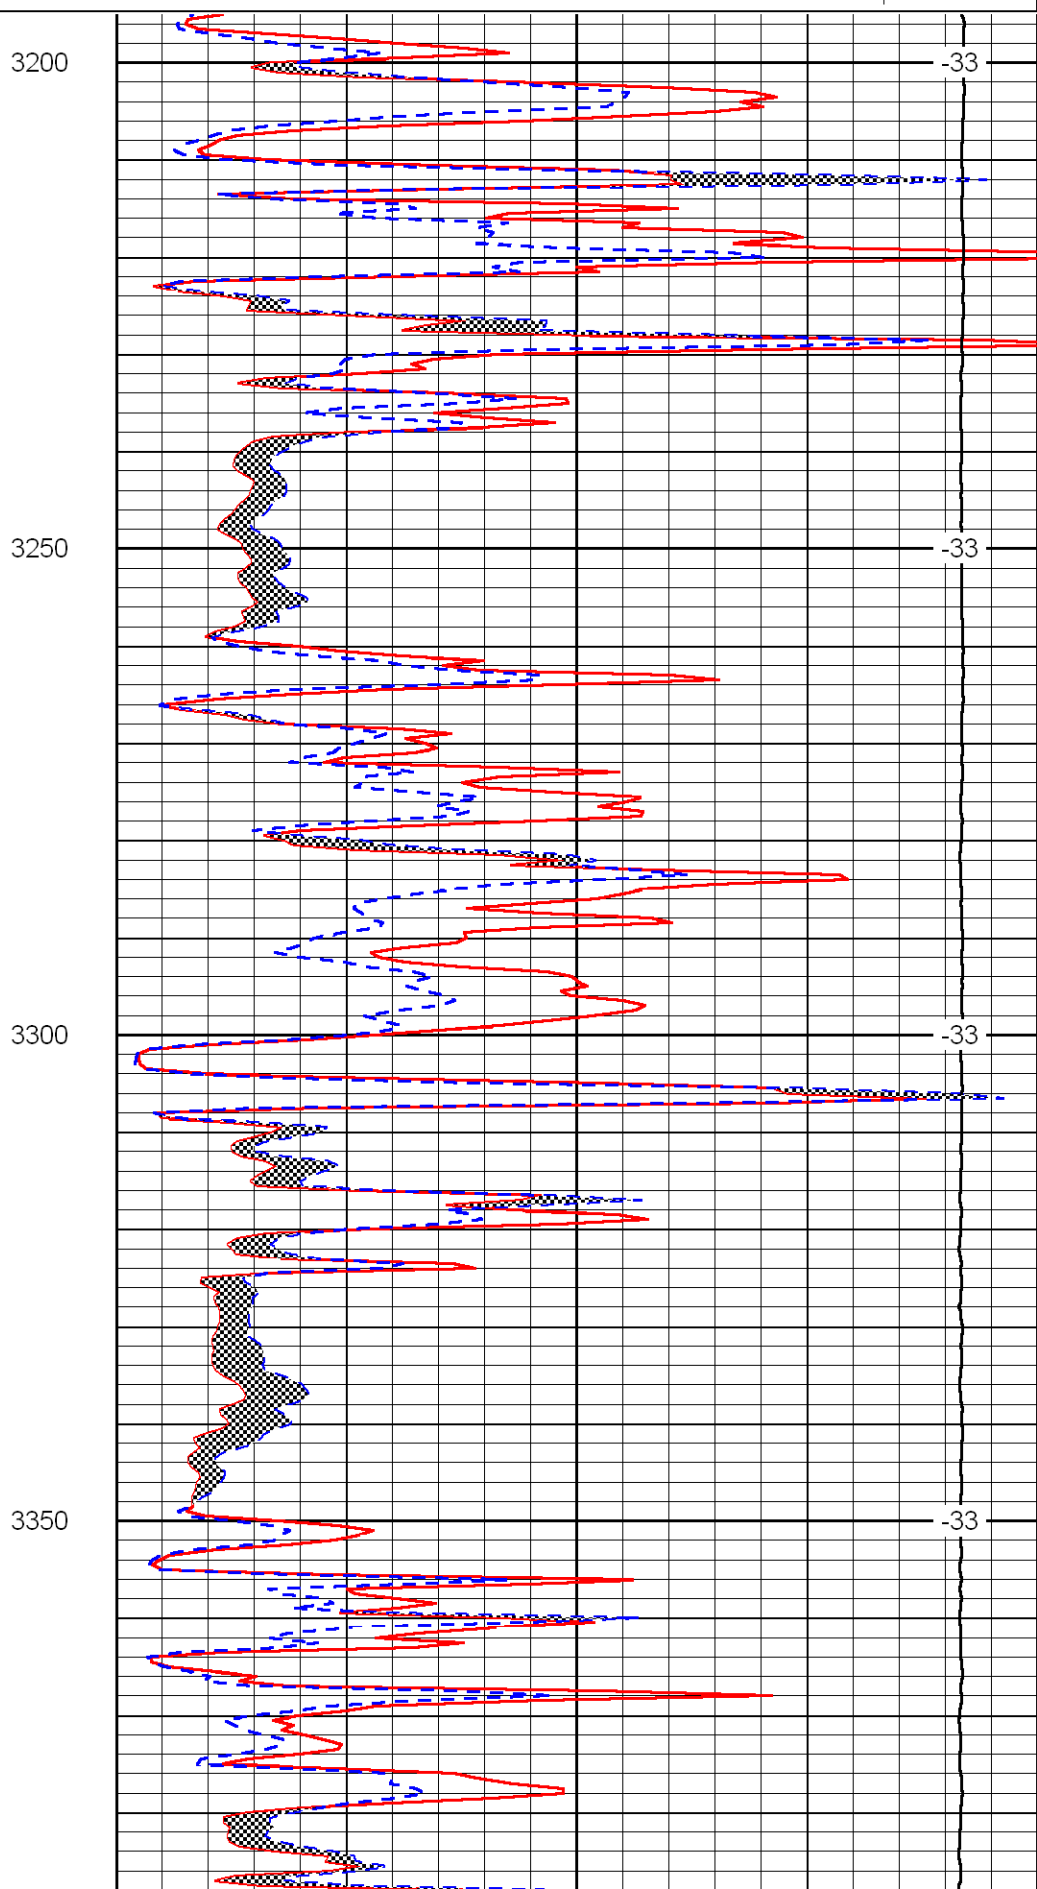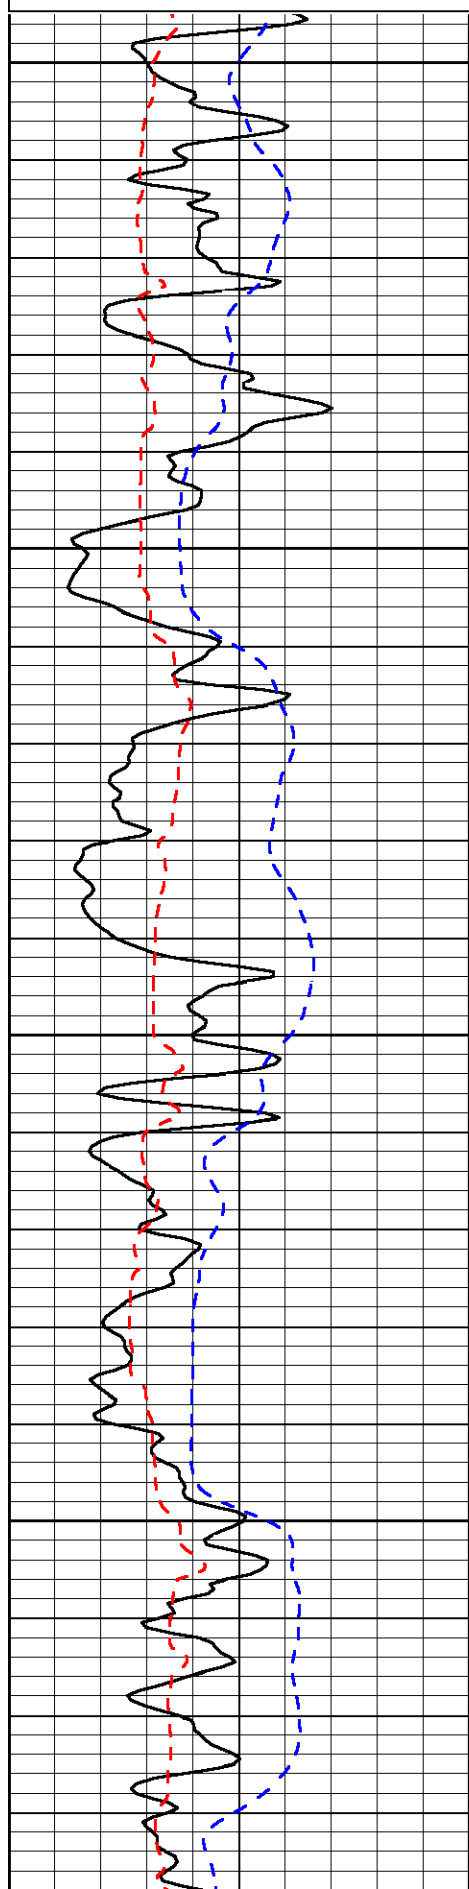

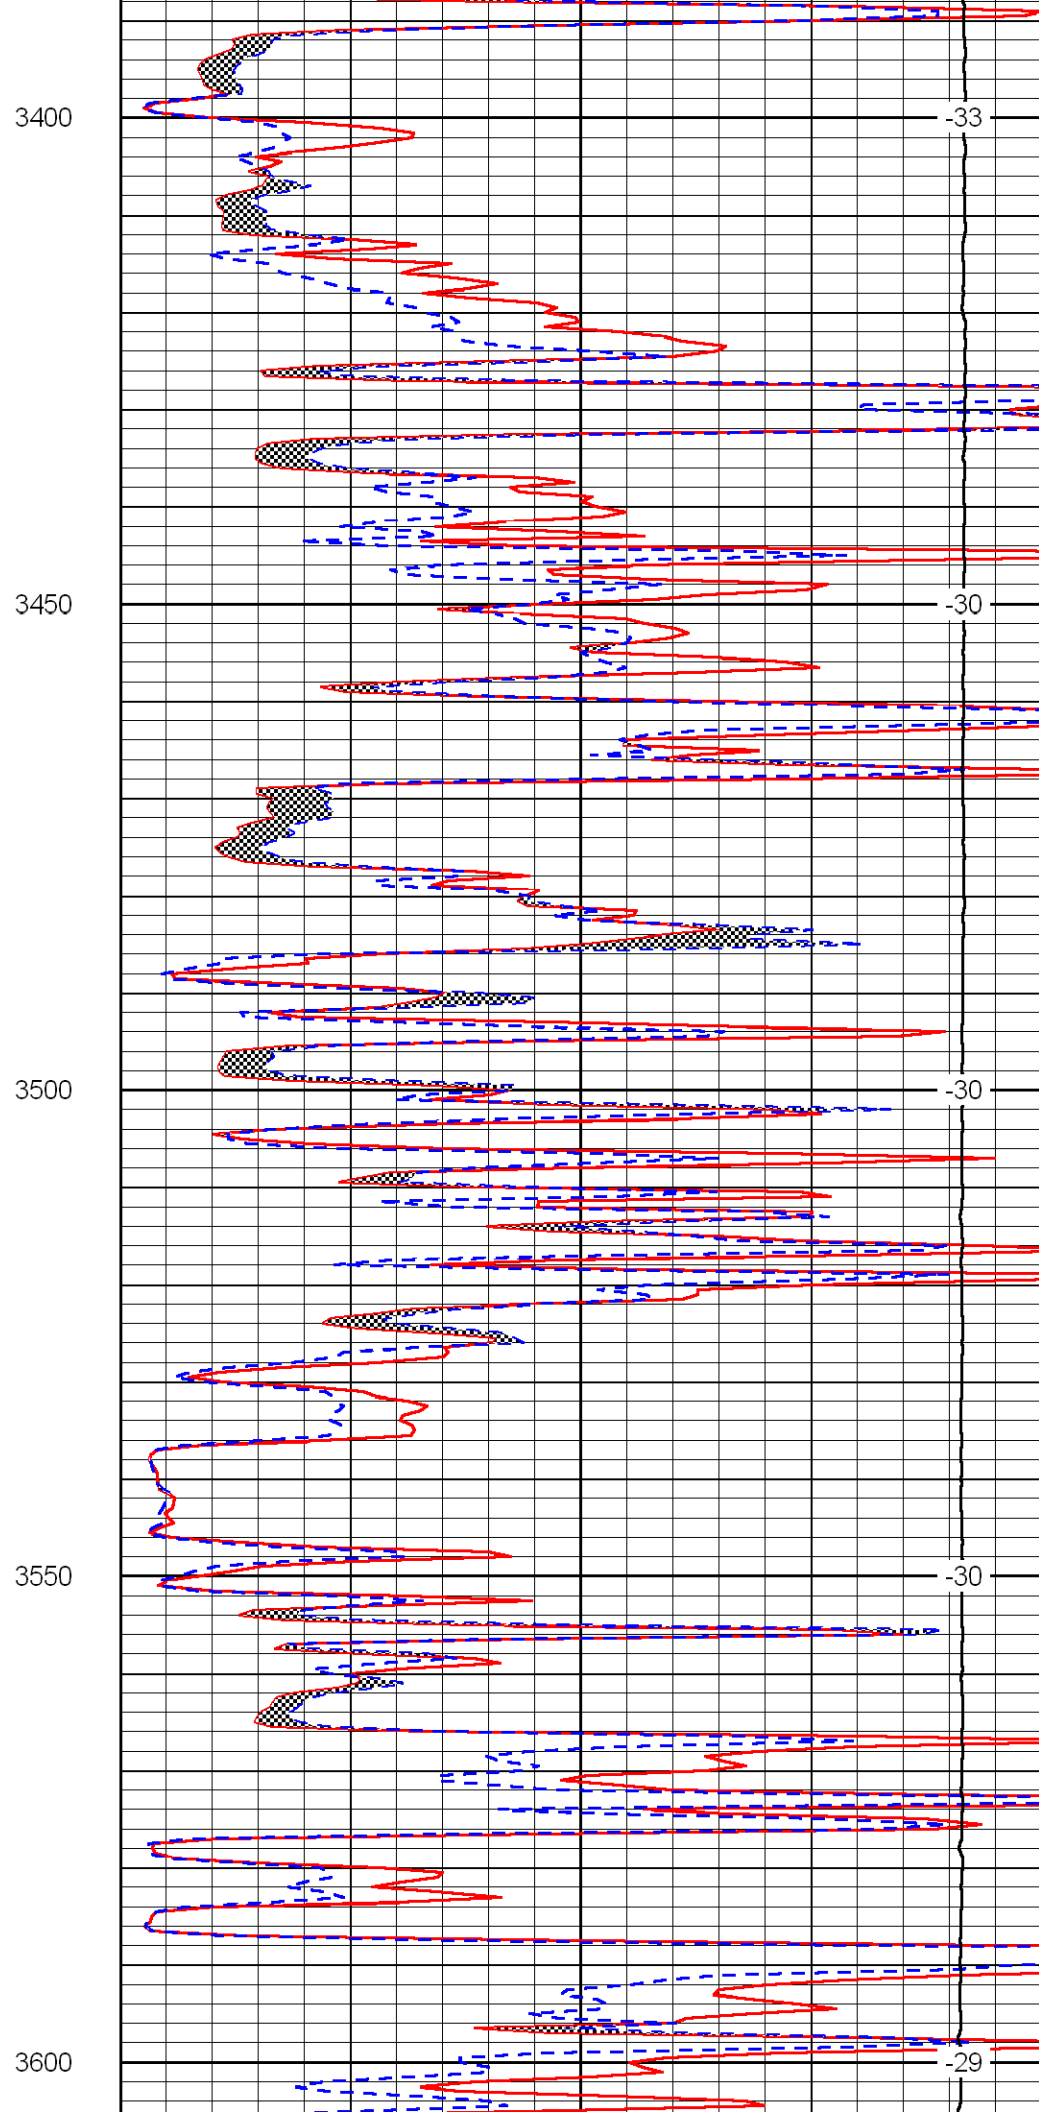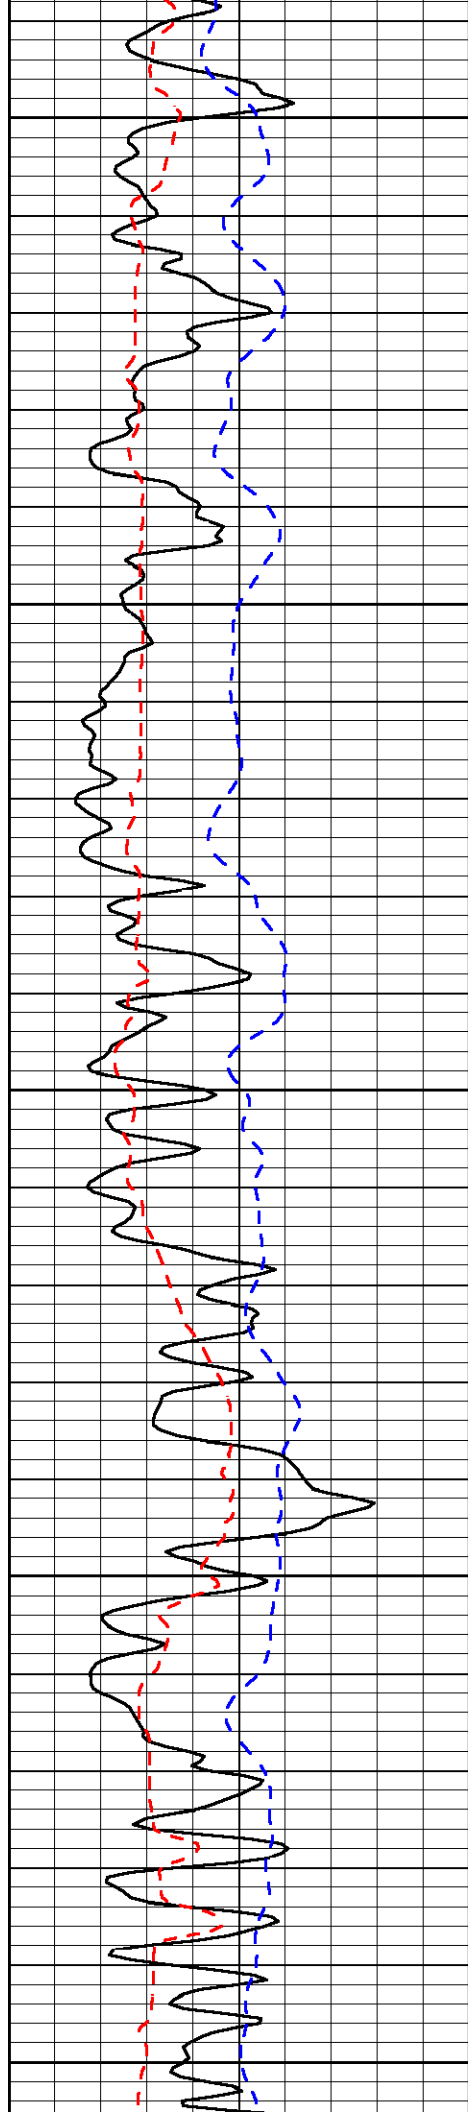

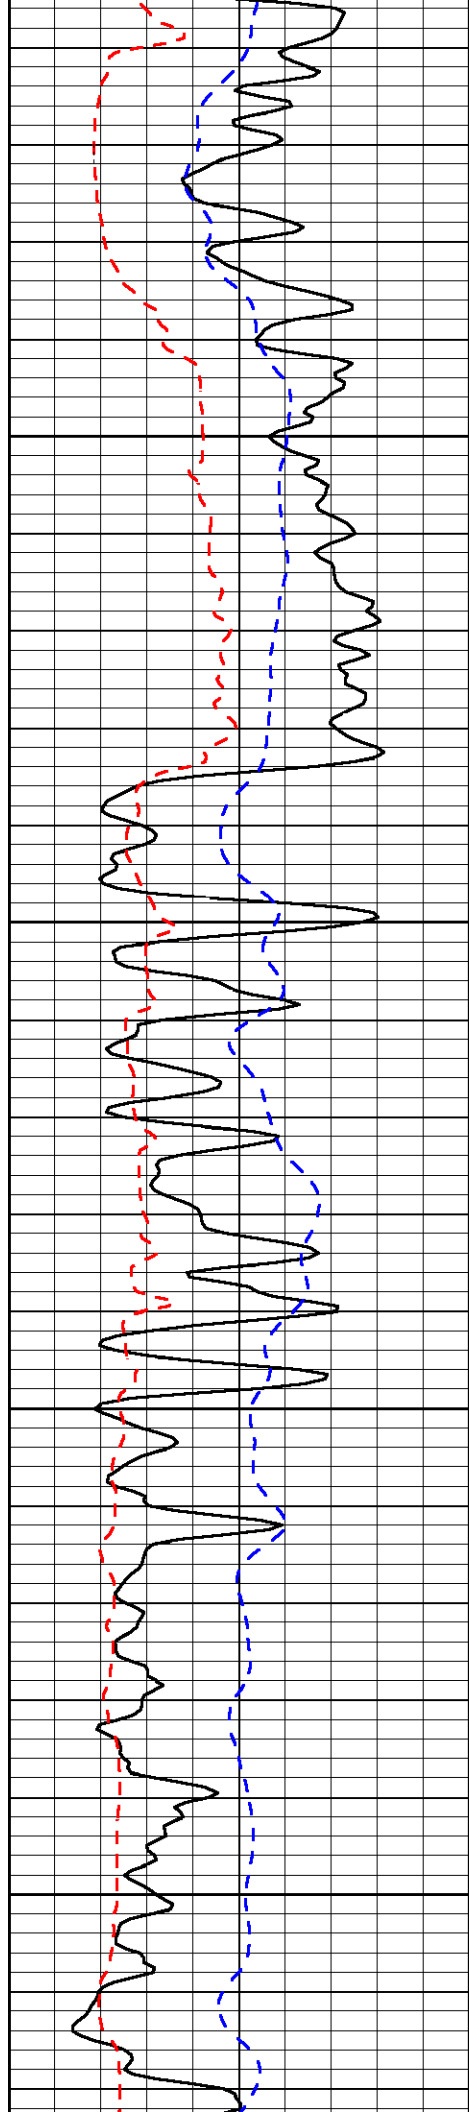


3650

3700

3750

3800

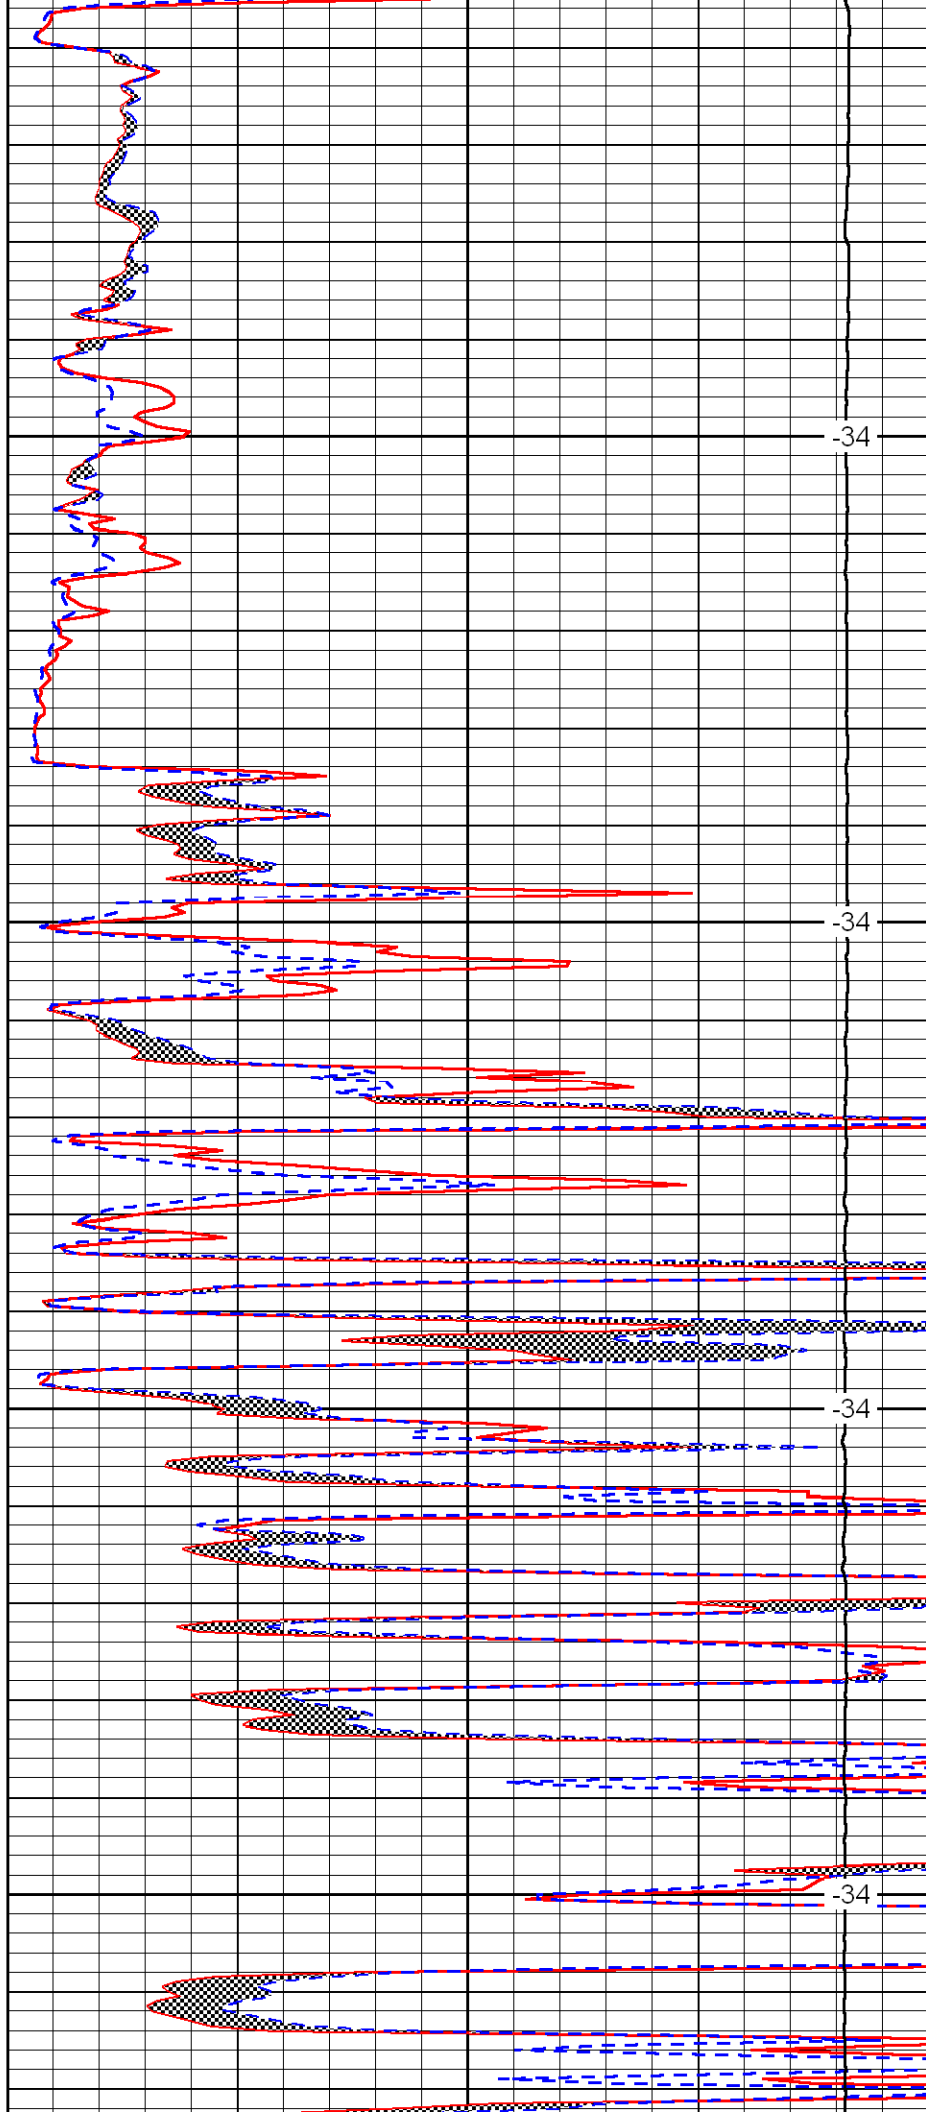


-34

-34

-34

-34

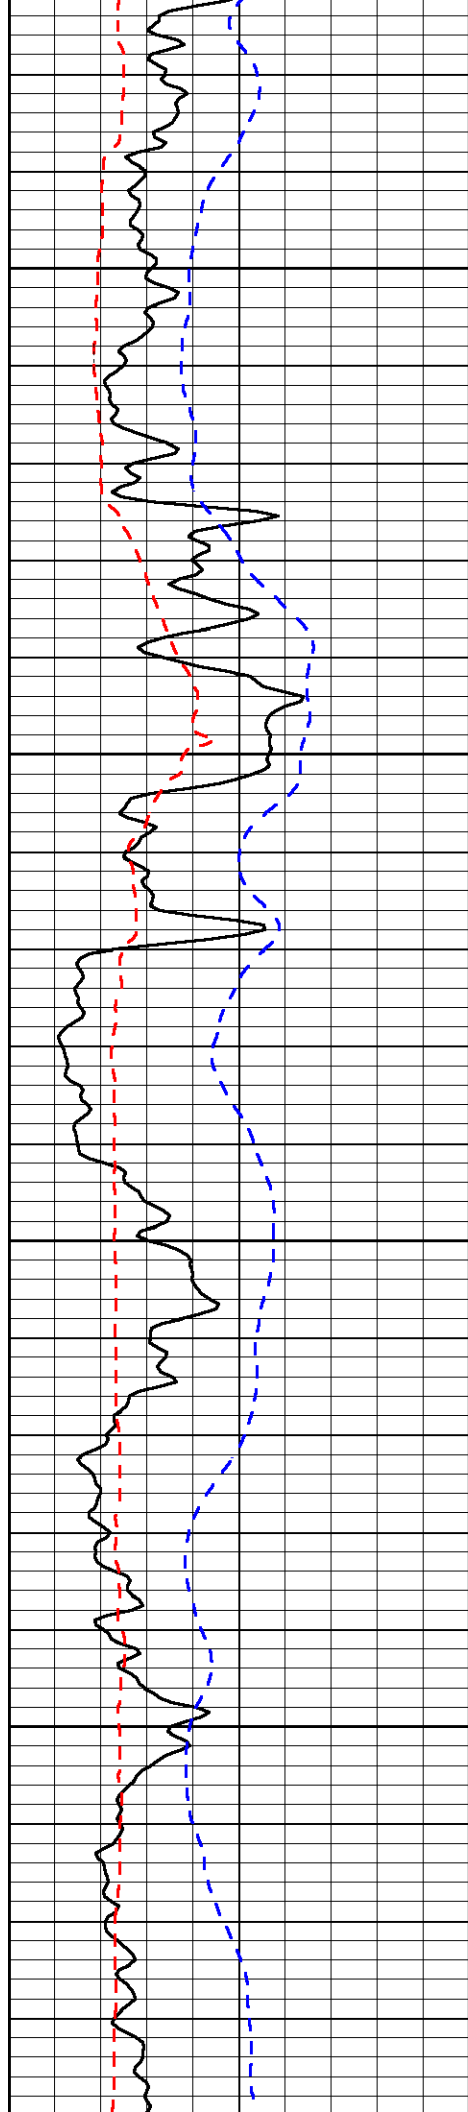


3850

3900

3950

4000

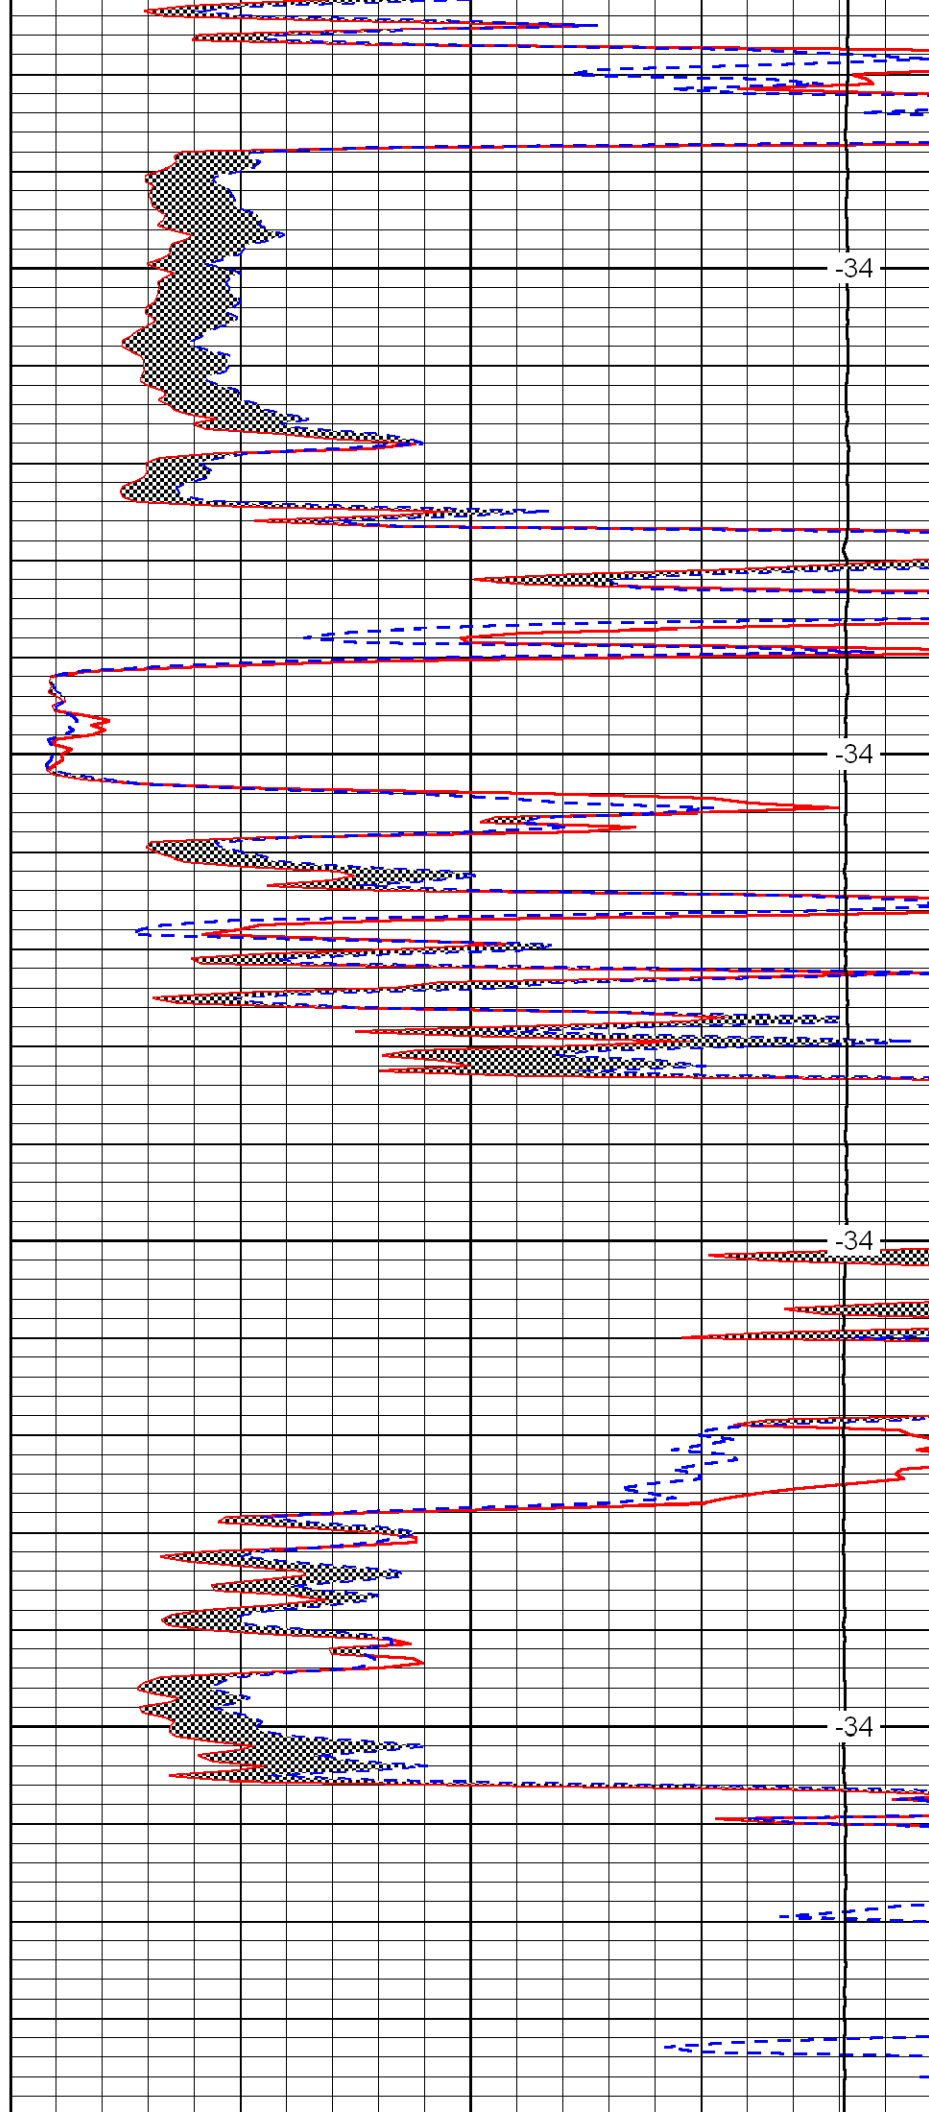


-34

-34

-34

-34

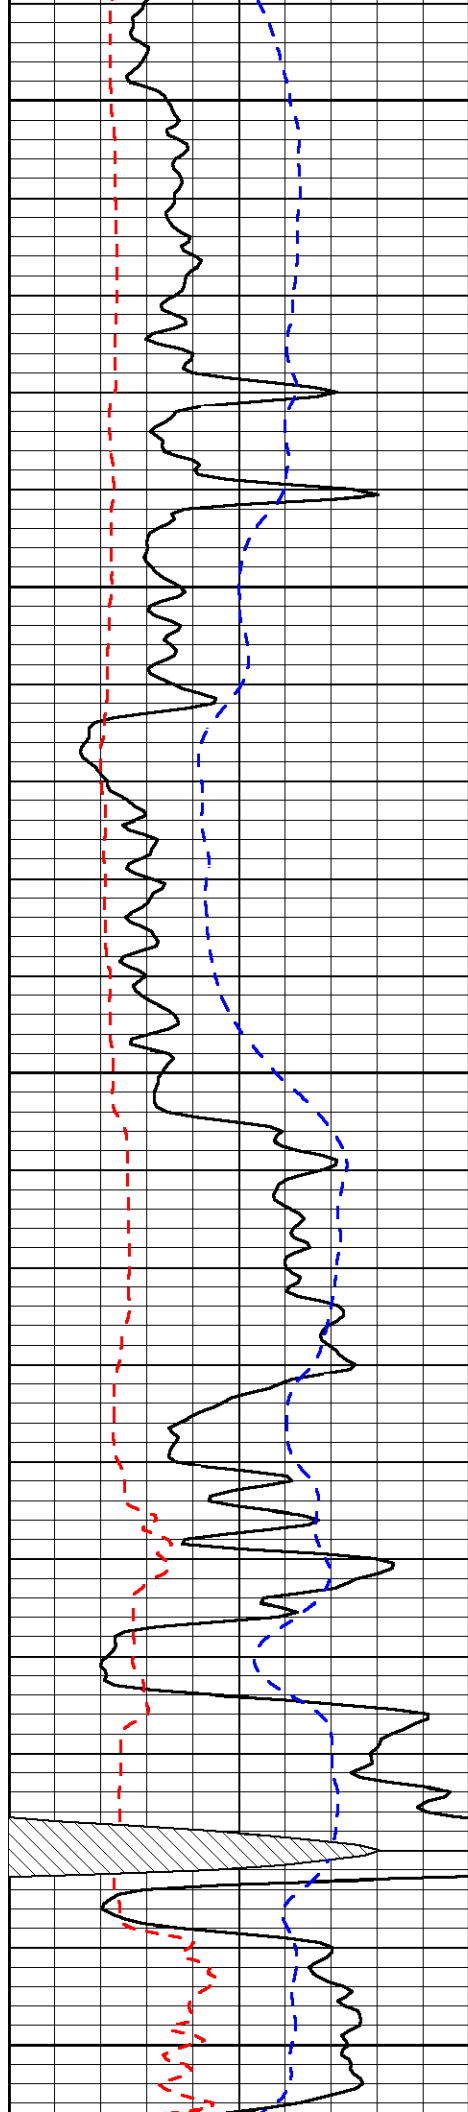


4050


4100

4150

4200

4250

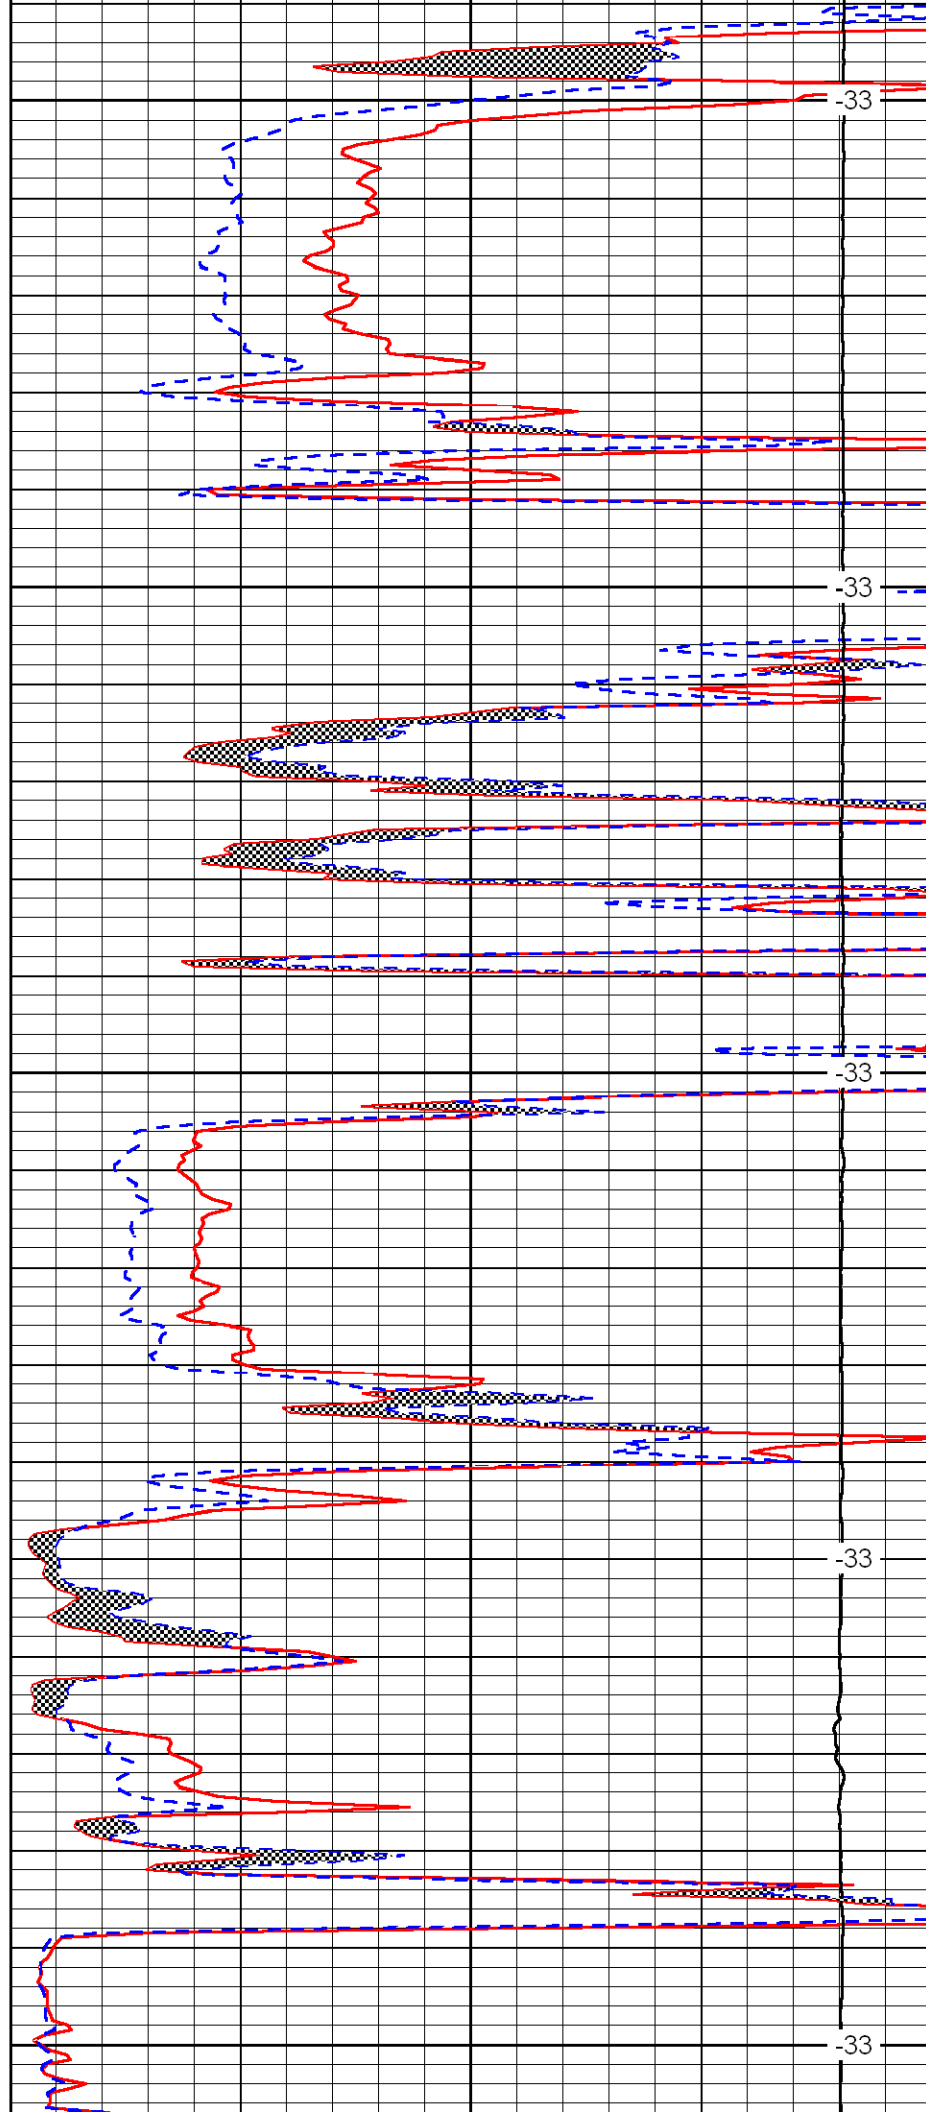

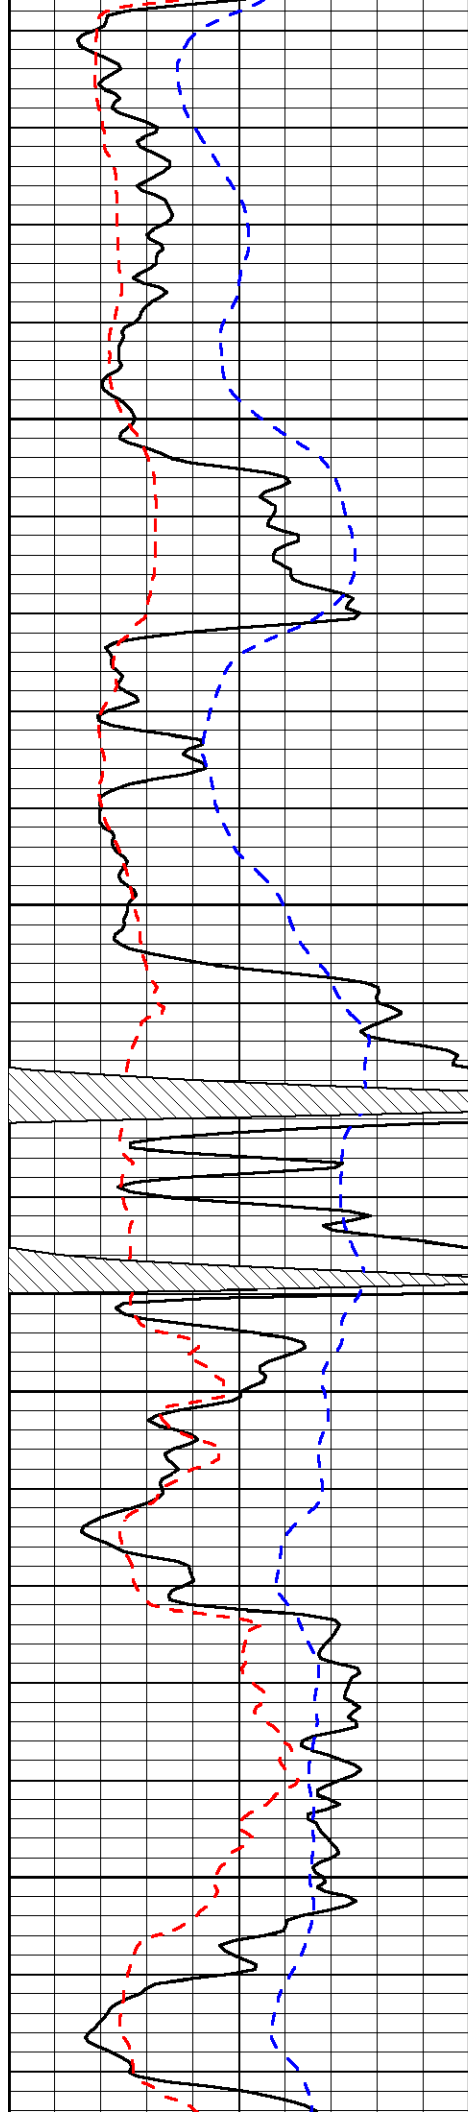


4300

4350

4400

4450

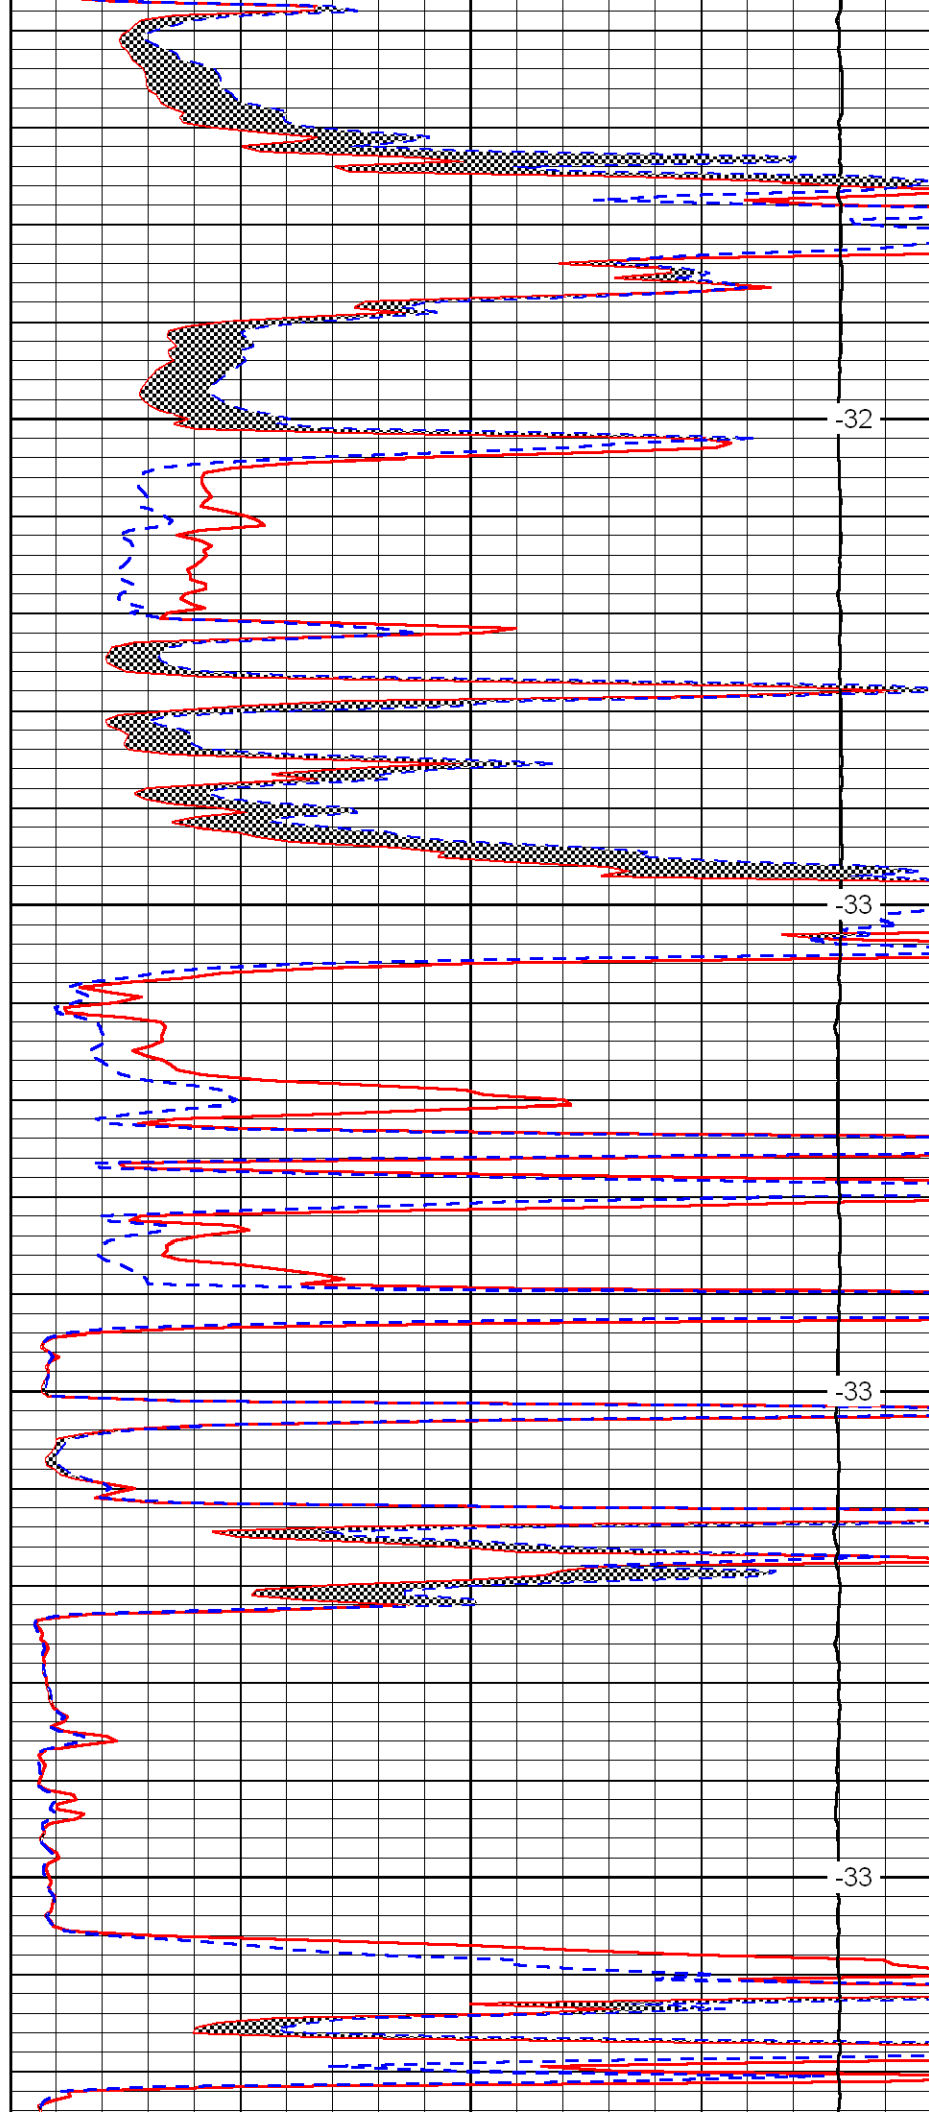


-32

-33

-33

-33

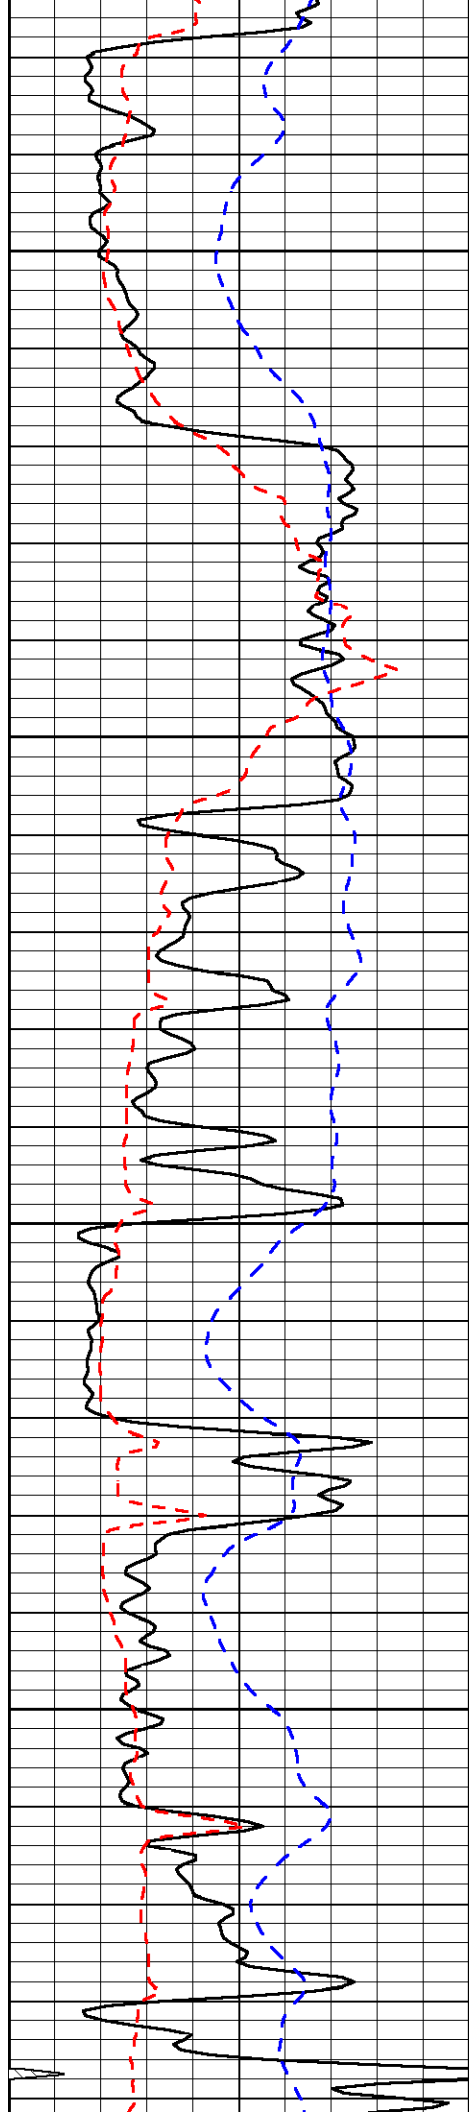


4500

4550

4600

4650

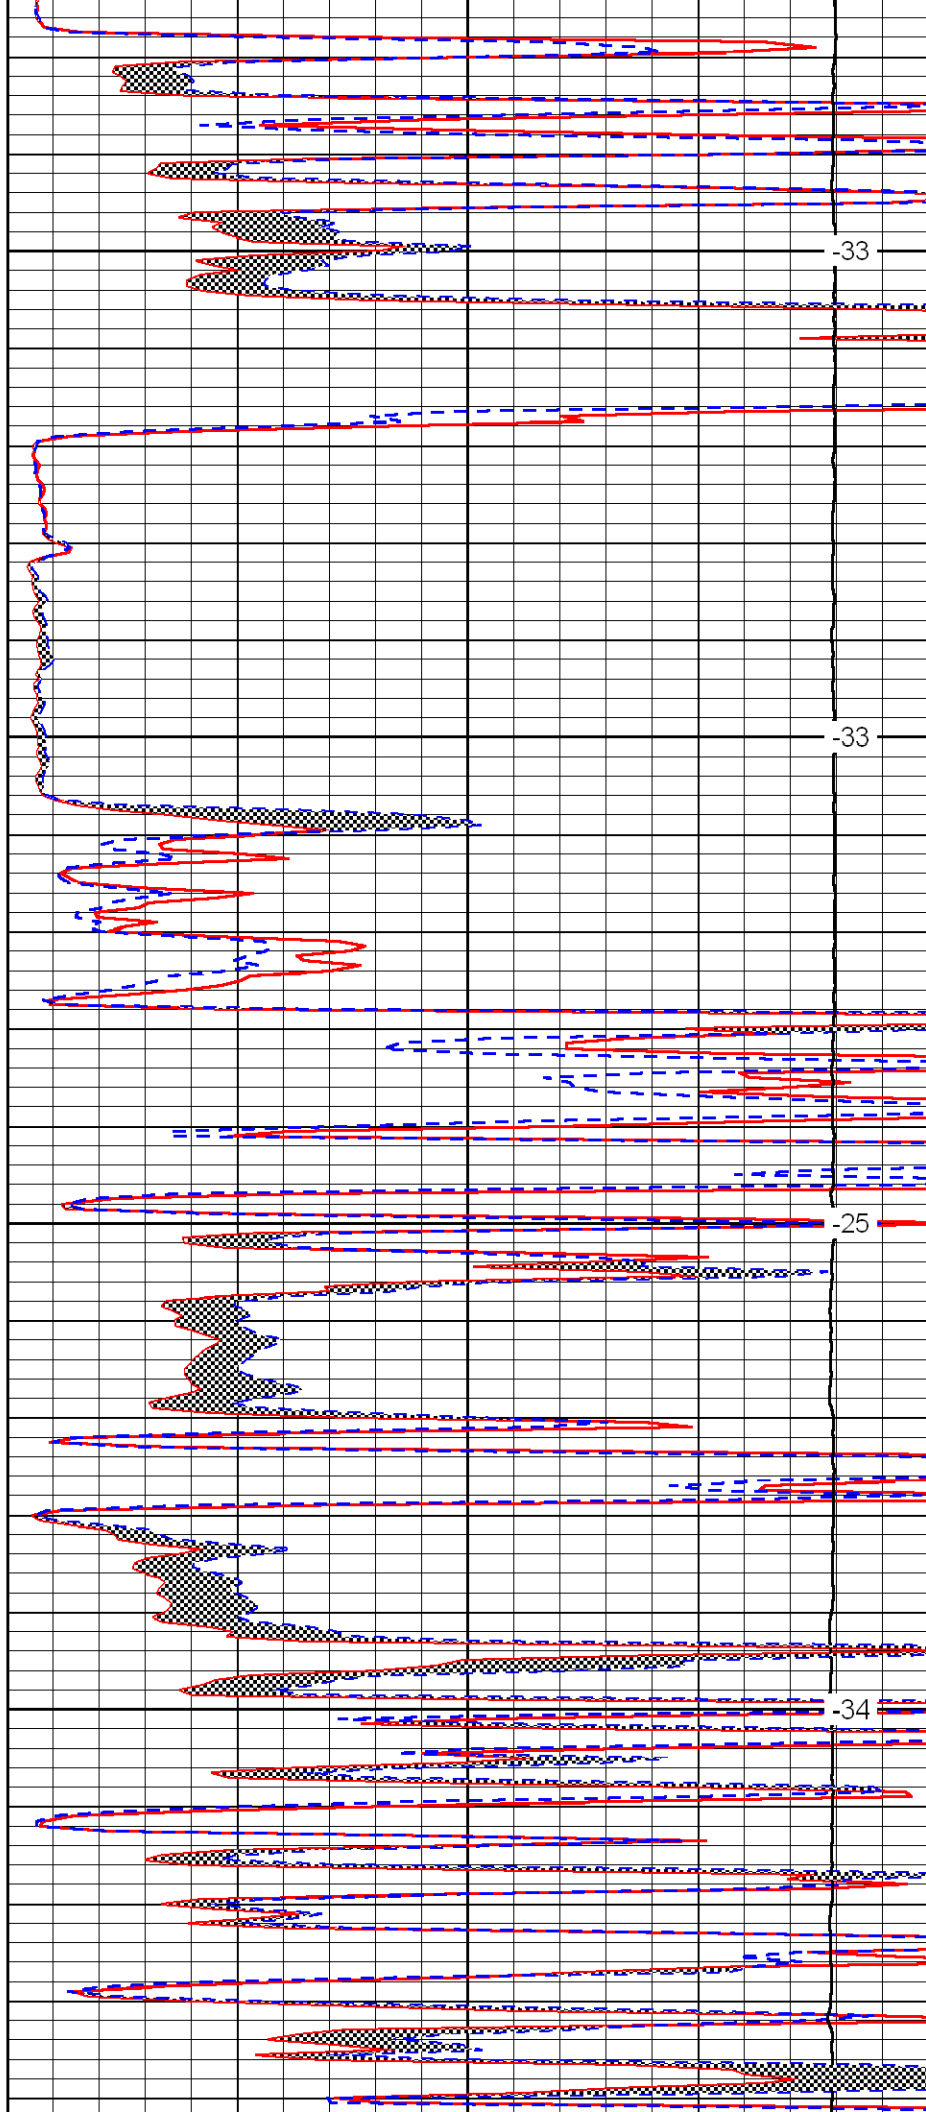


-33

-33

-25

-34

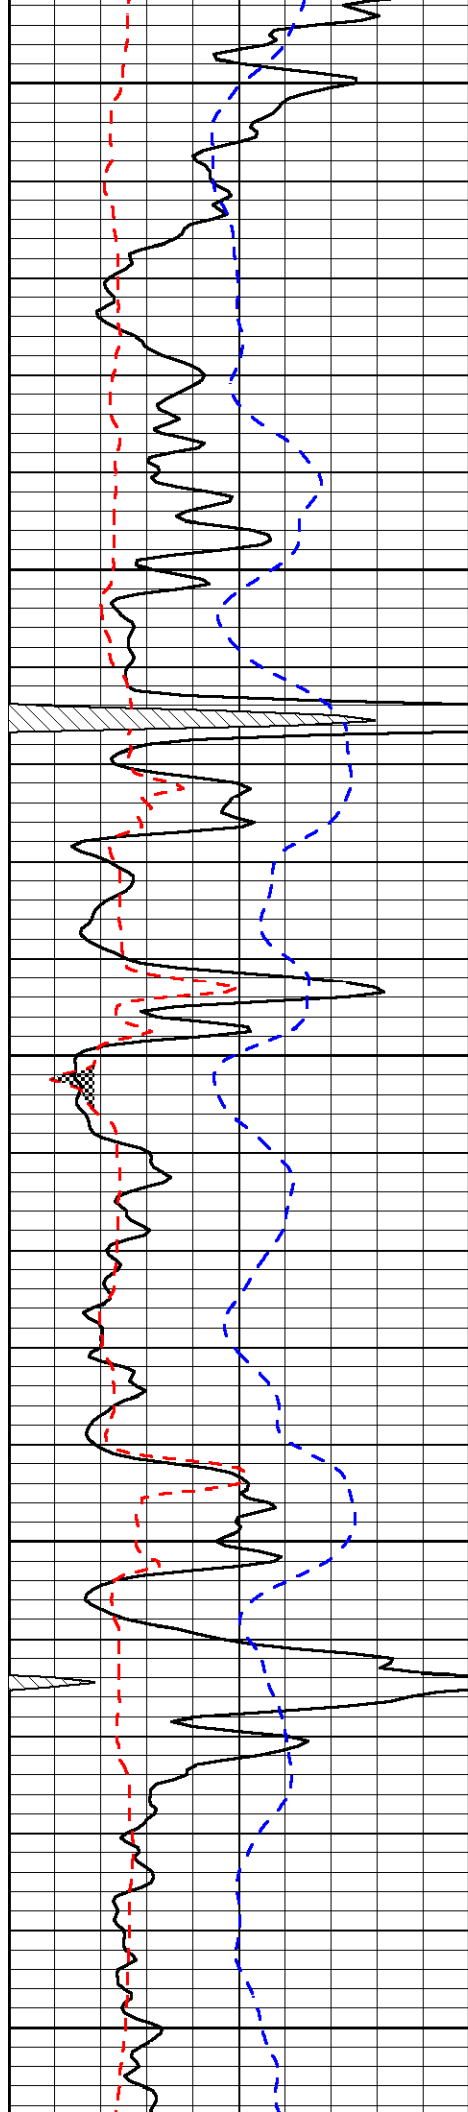


4700

4750

4800

4850

4900

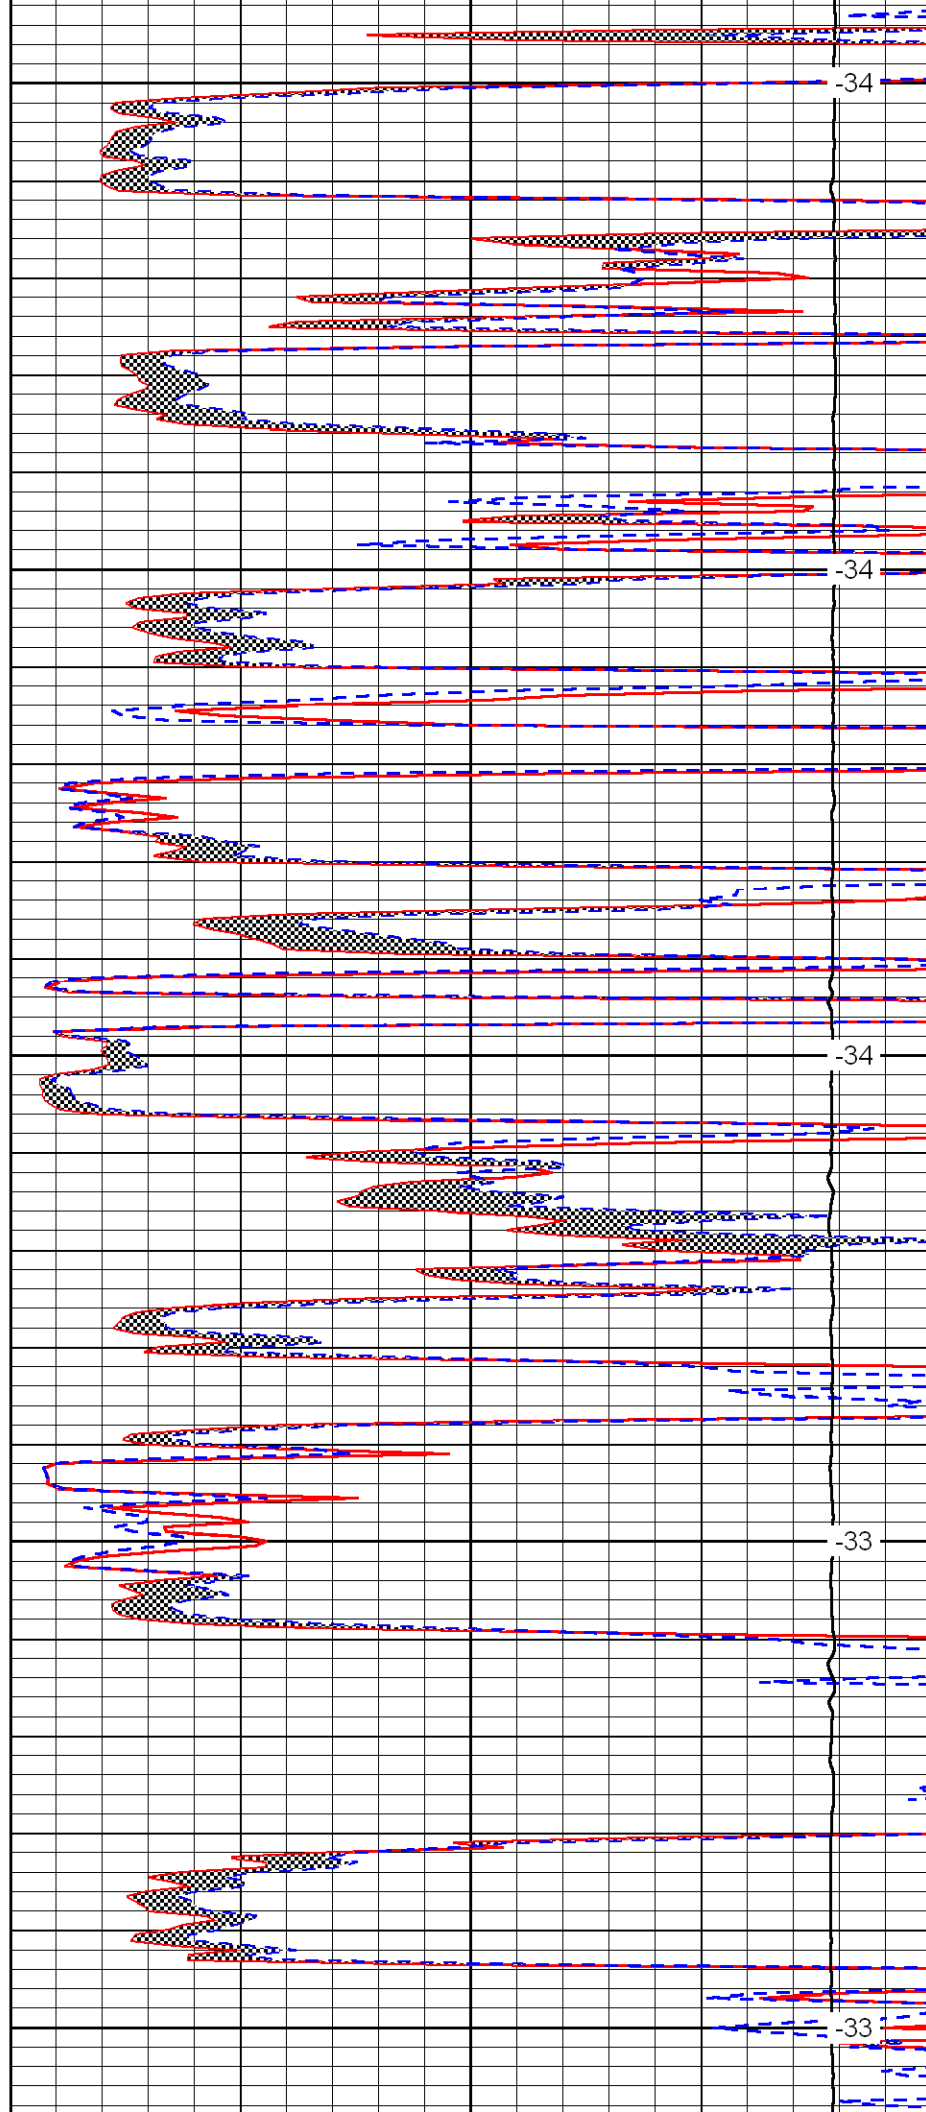


-34

-34

-34

-33

-33

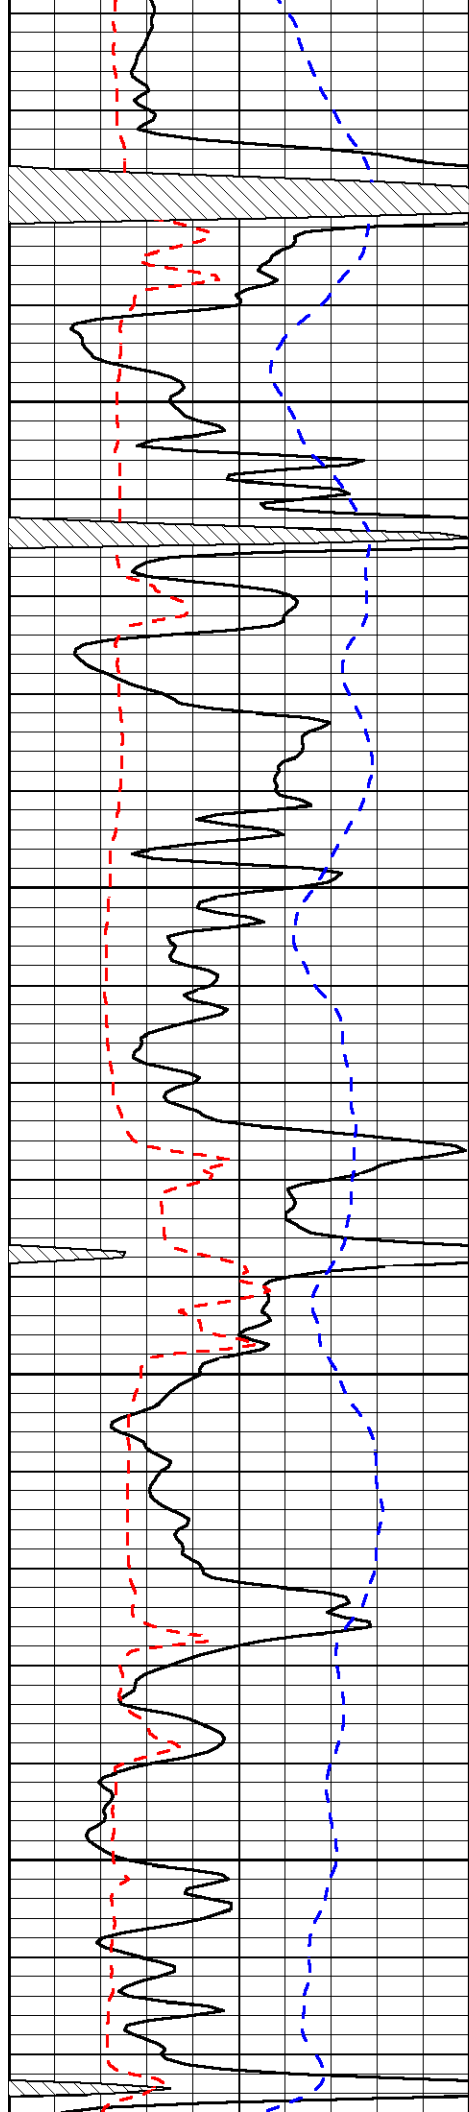


4950

5000

5050

5100

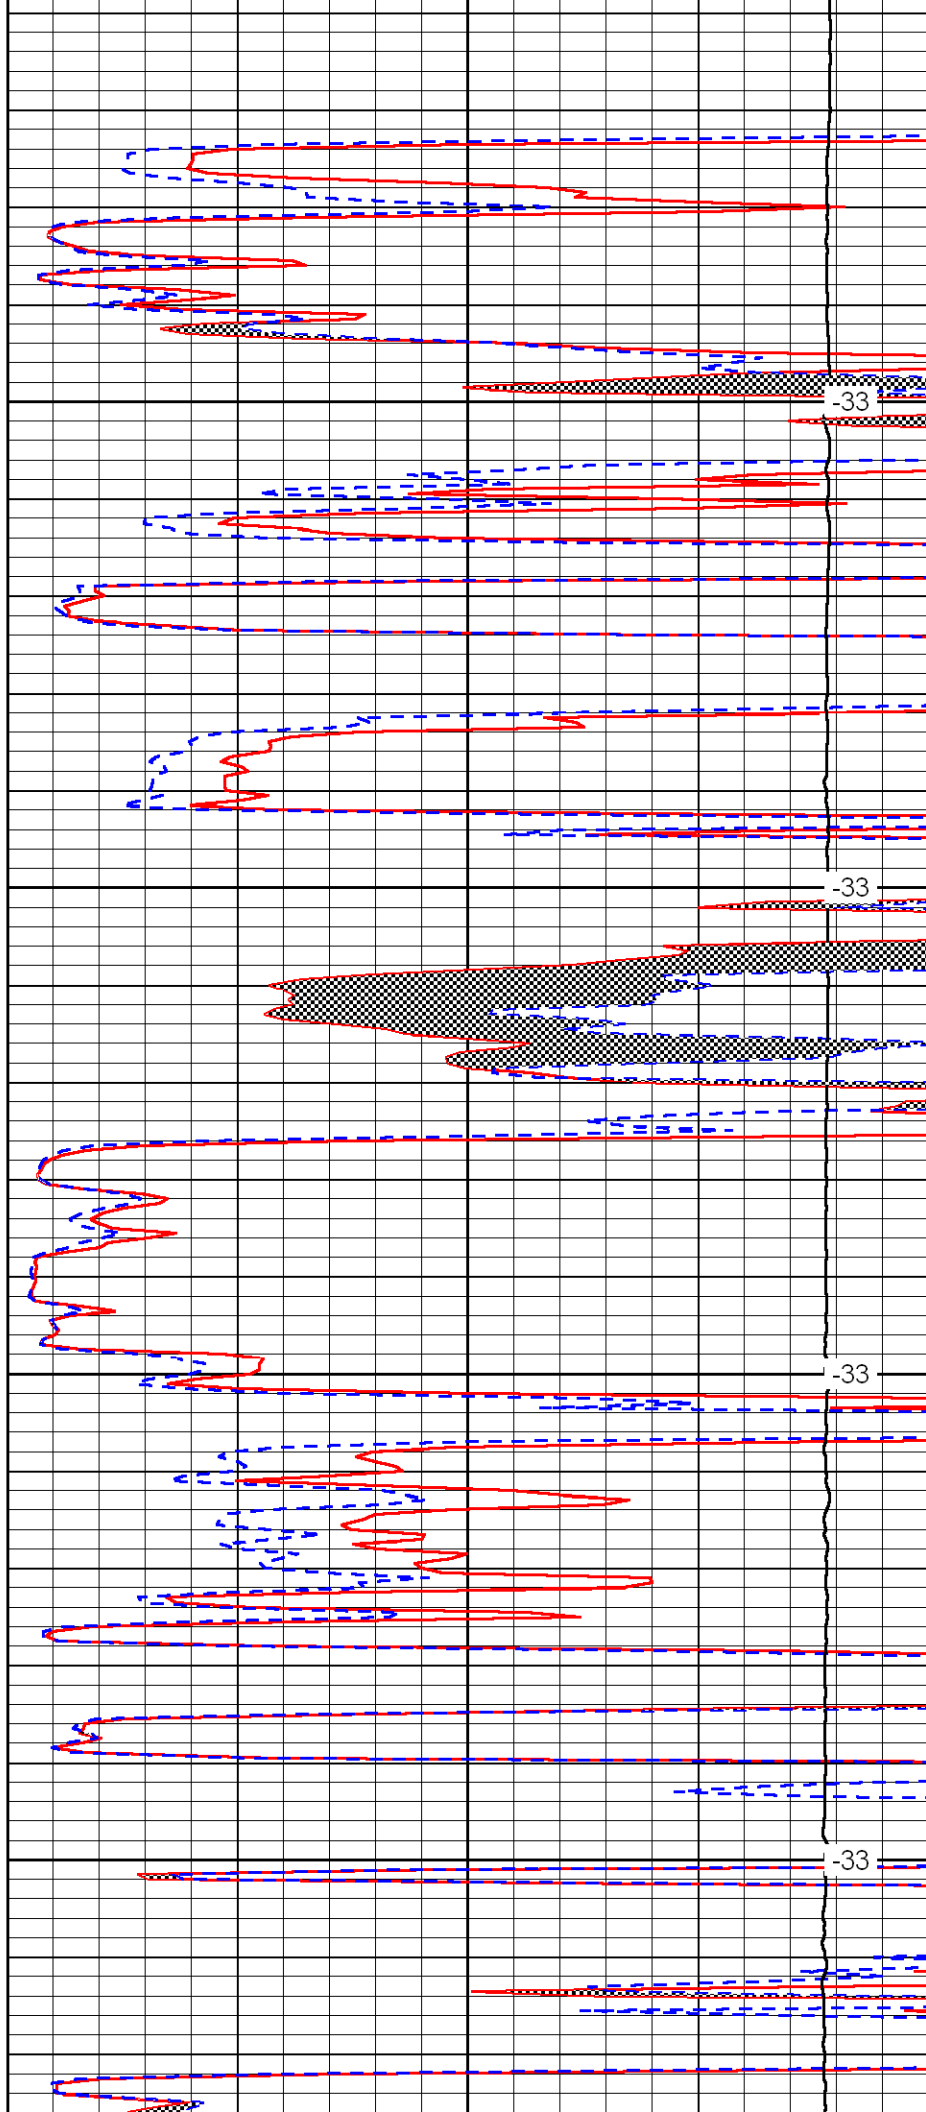


-33

-33

-33

-33

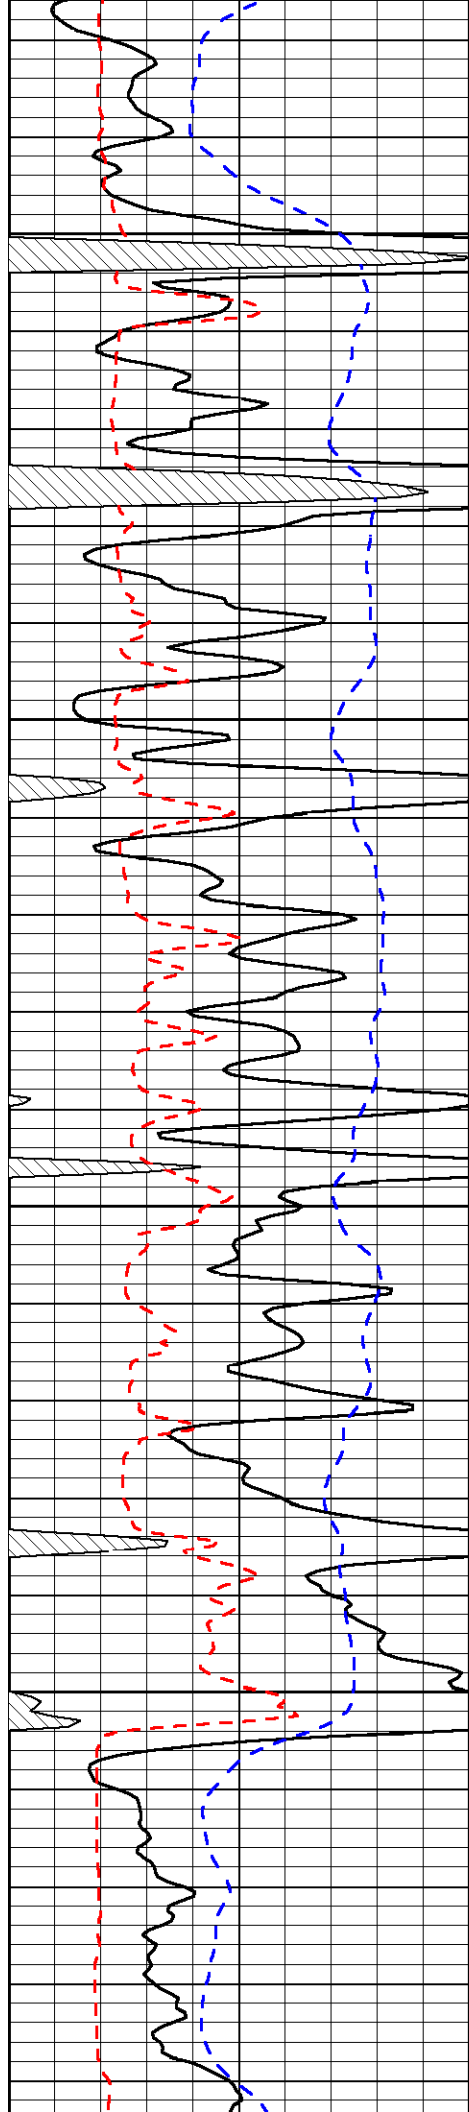


5150

5200

5250

5300

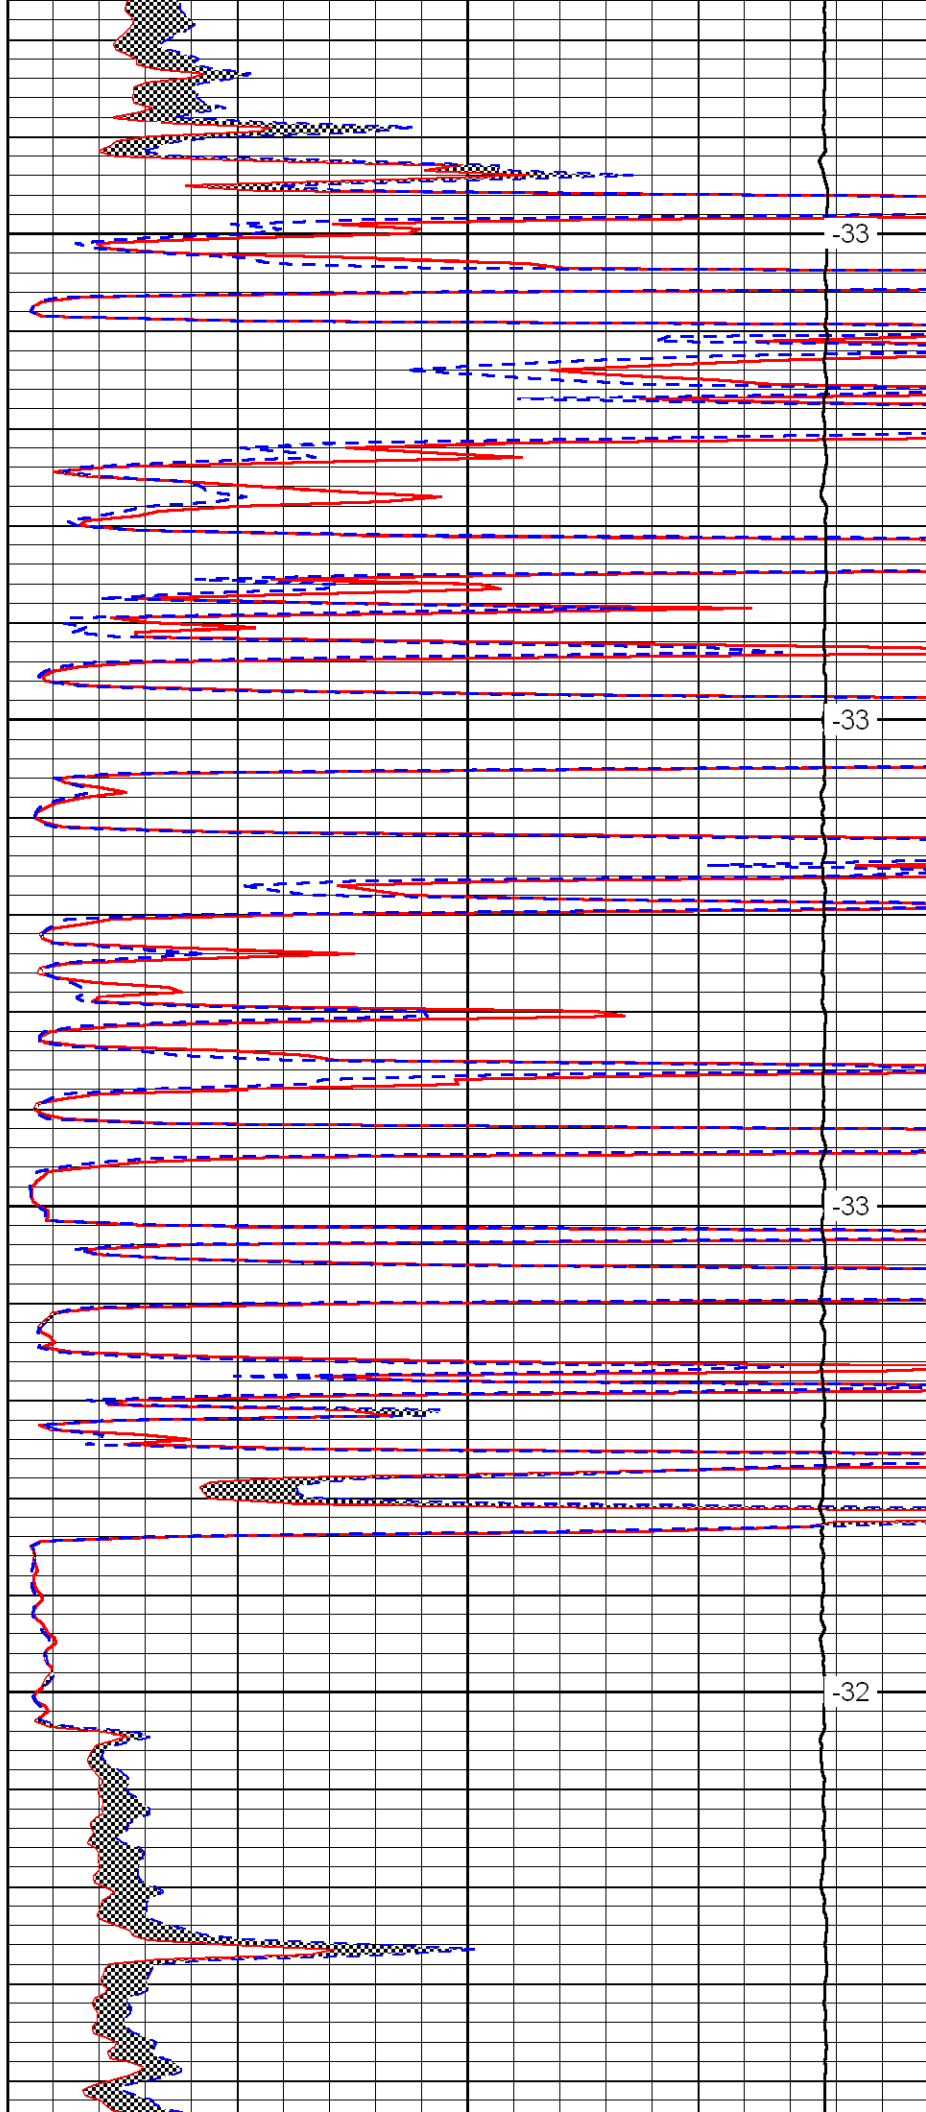


-33

-33

-33

-32

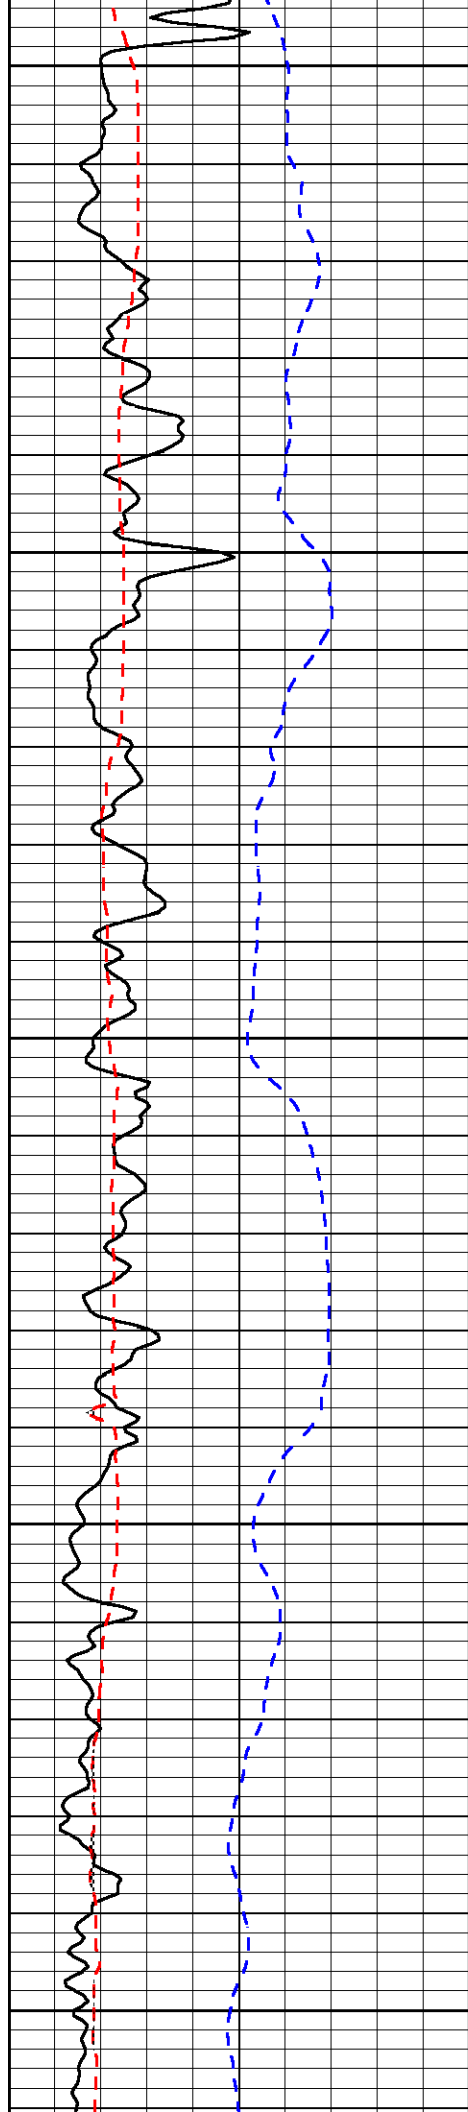


5350


5400

5450

5500

5550

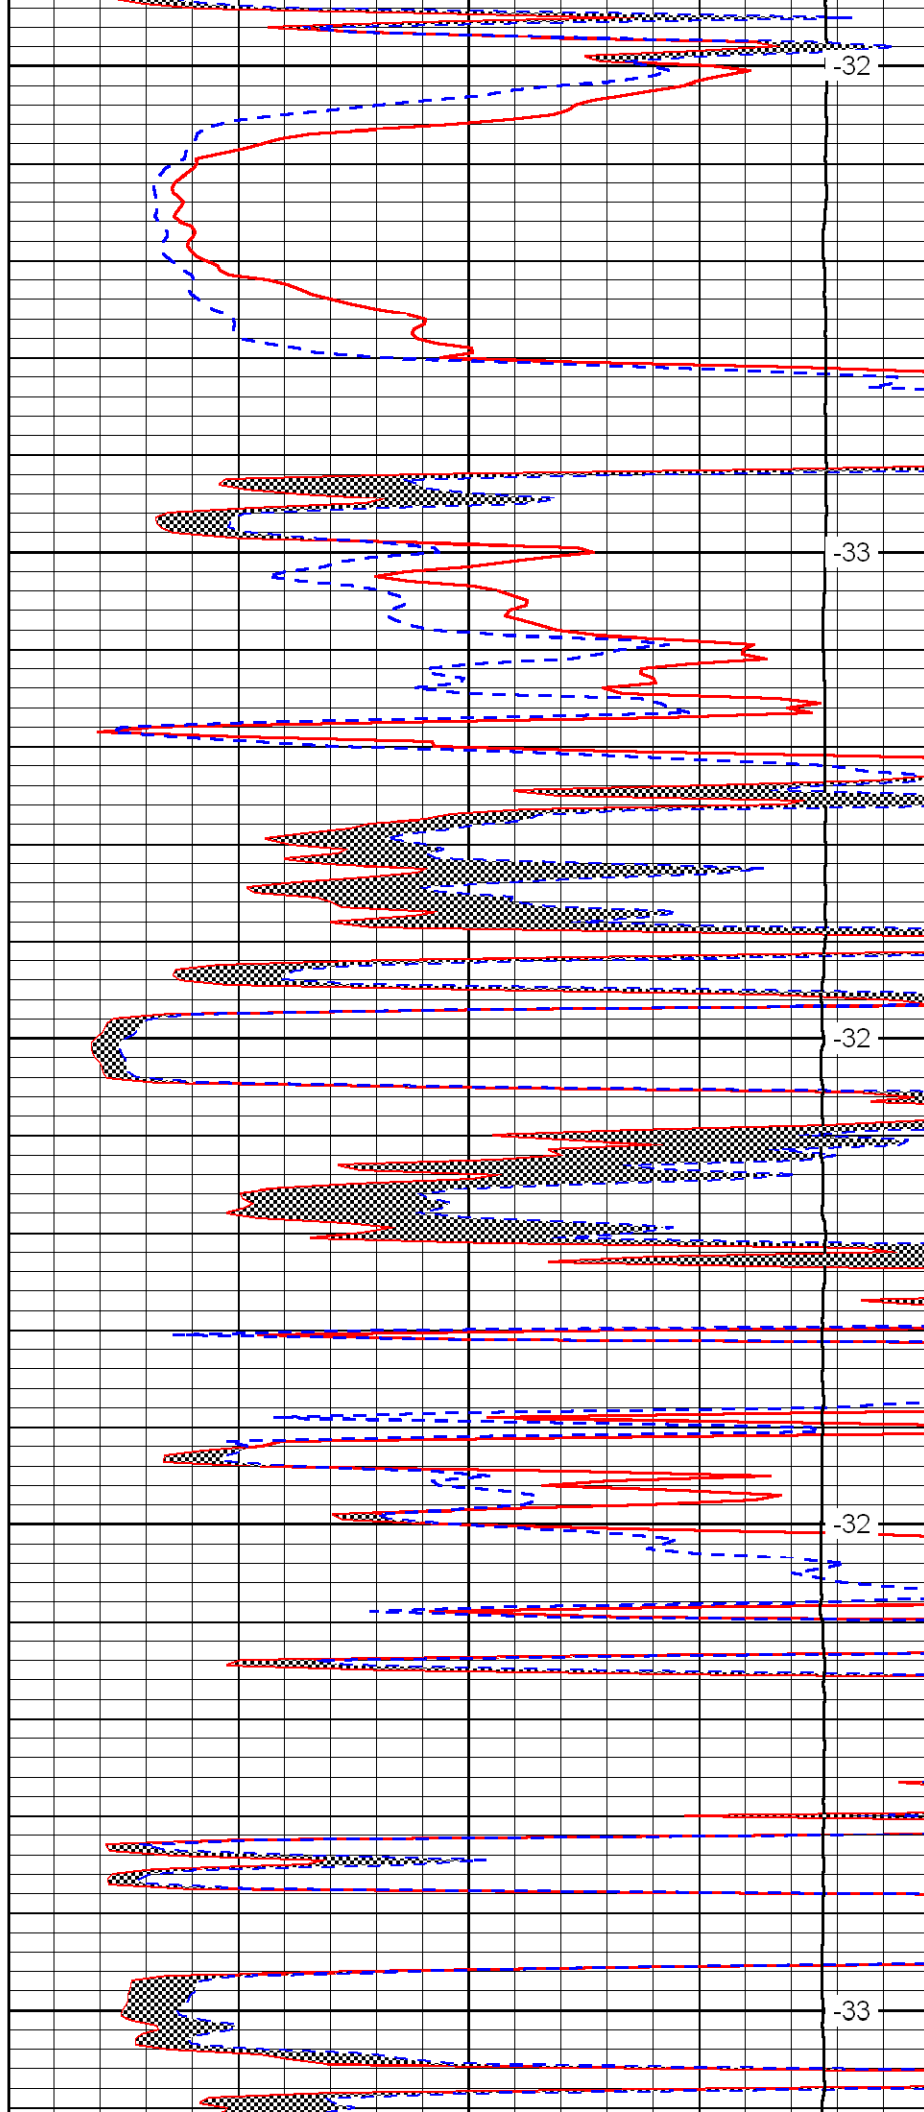

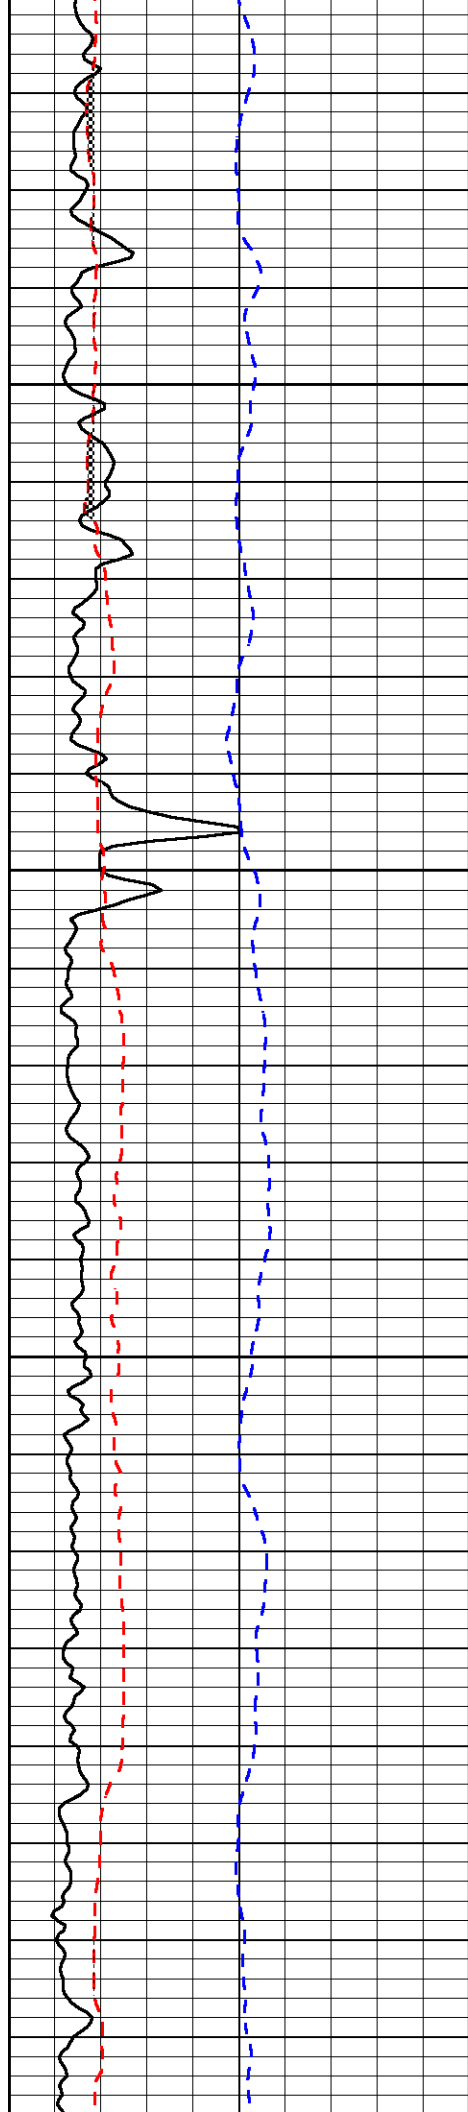



5600

5650

5700

5750

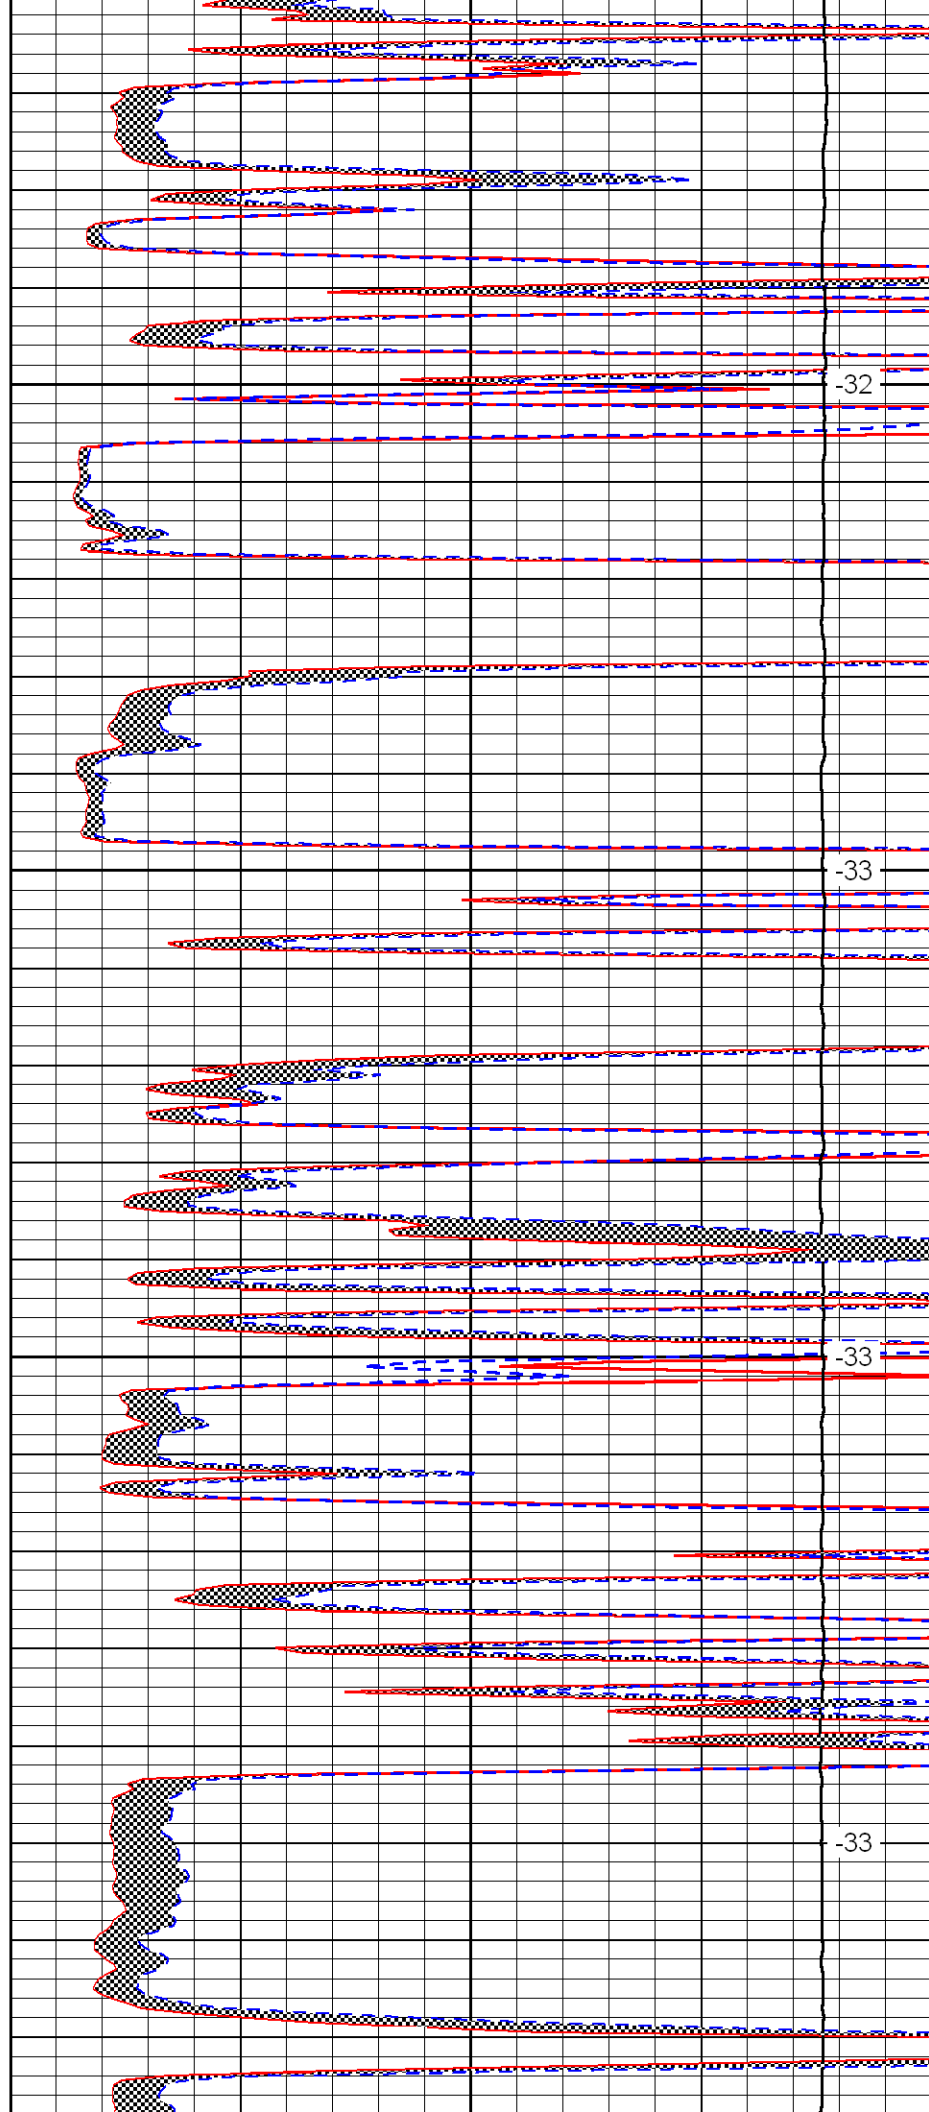

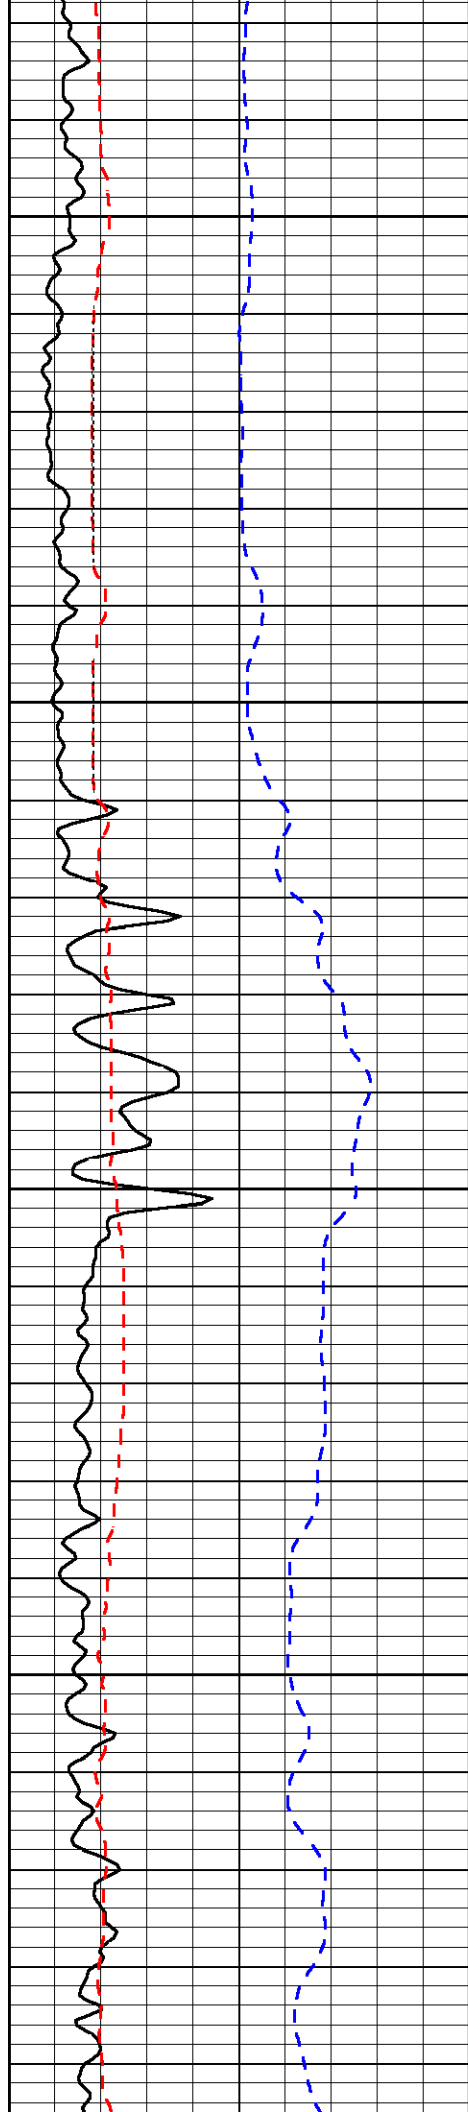



5800

5850

5900

5950

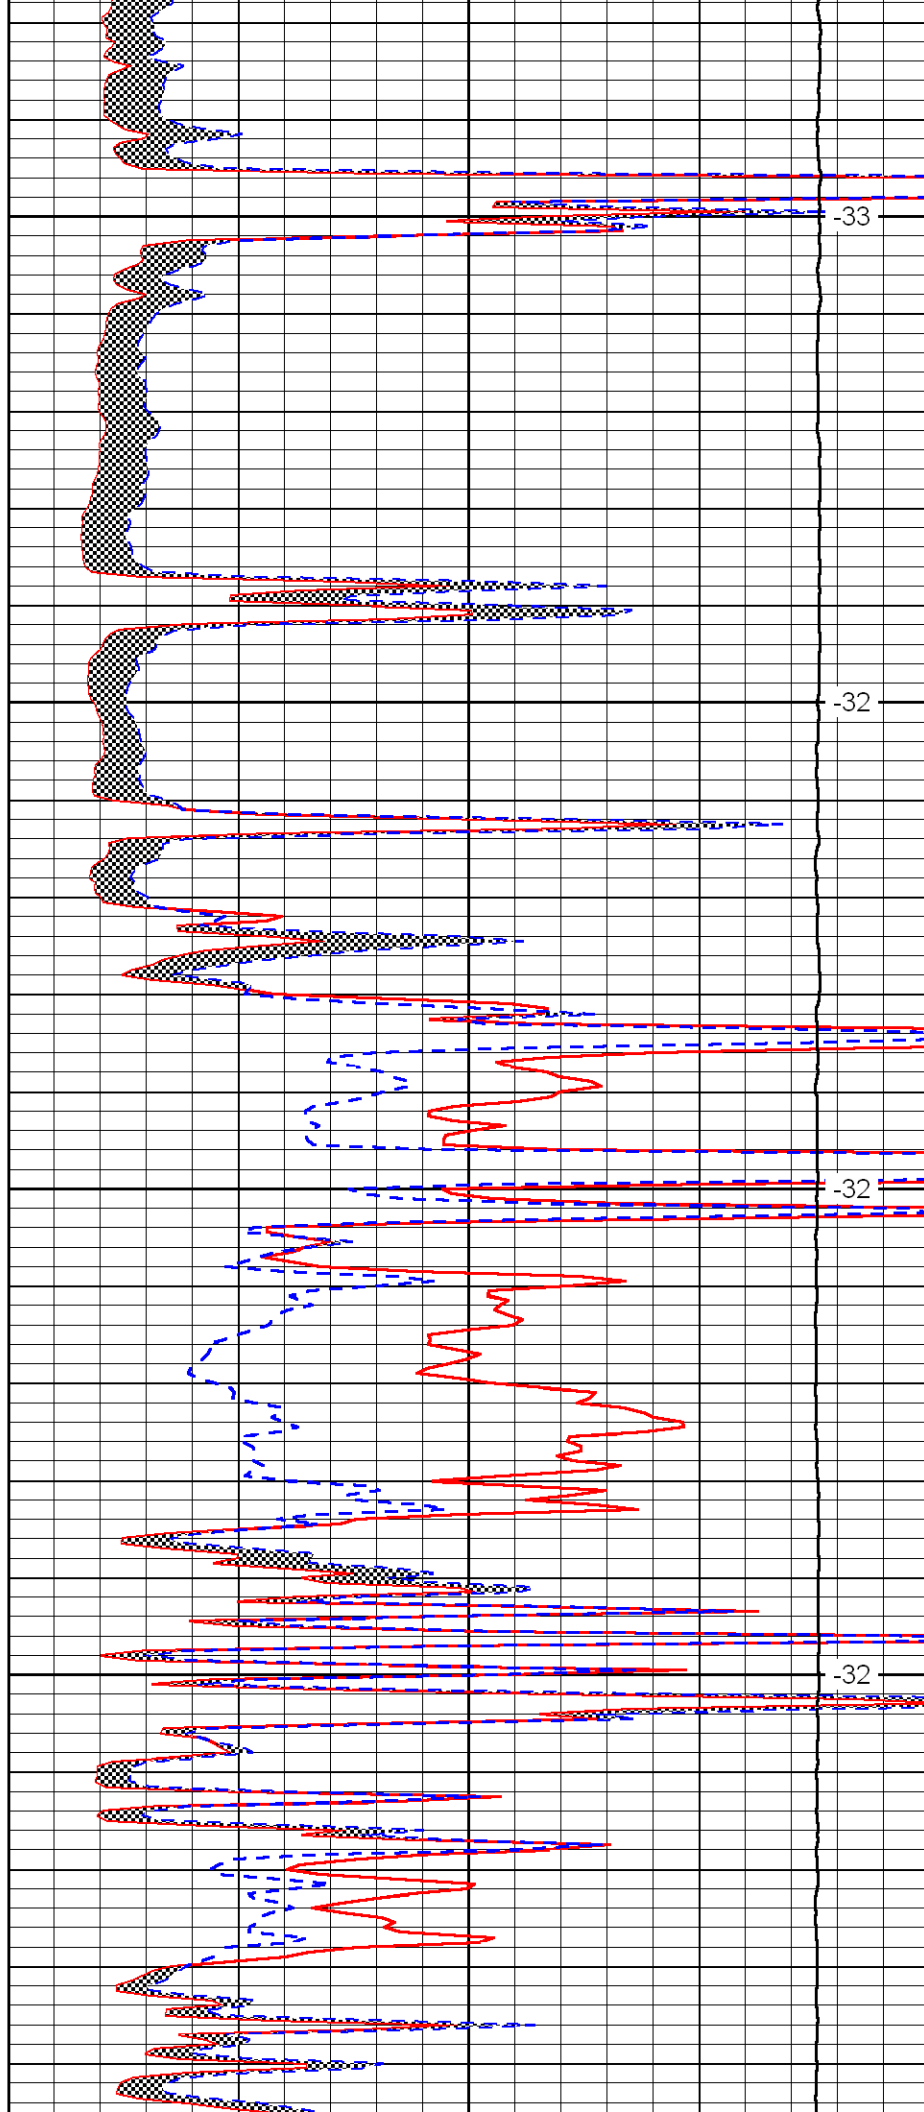

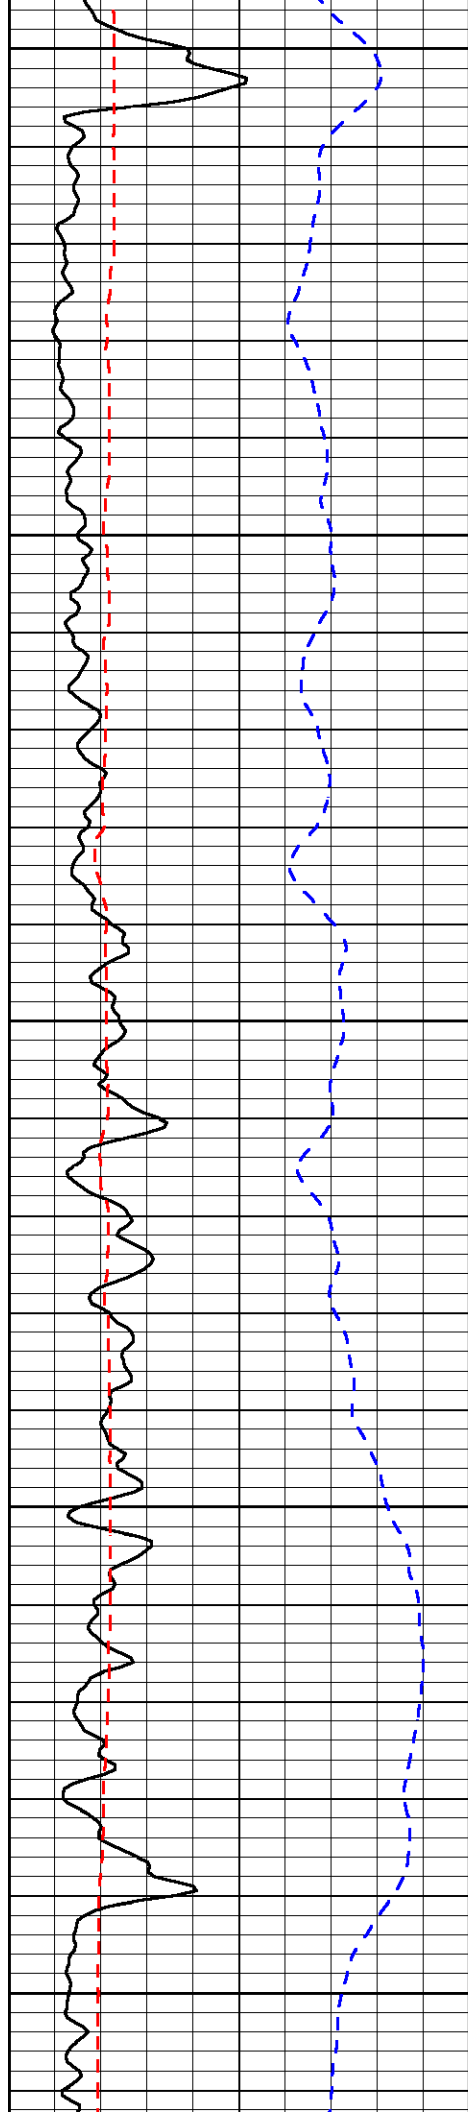


6000

6050

6100

6150

6200

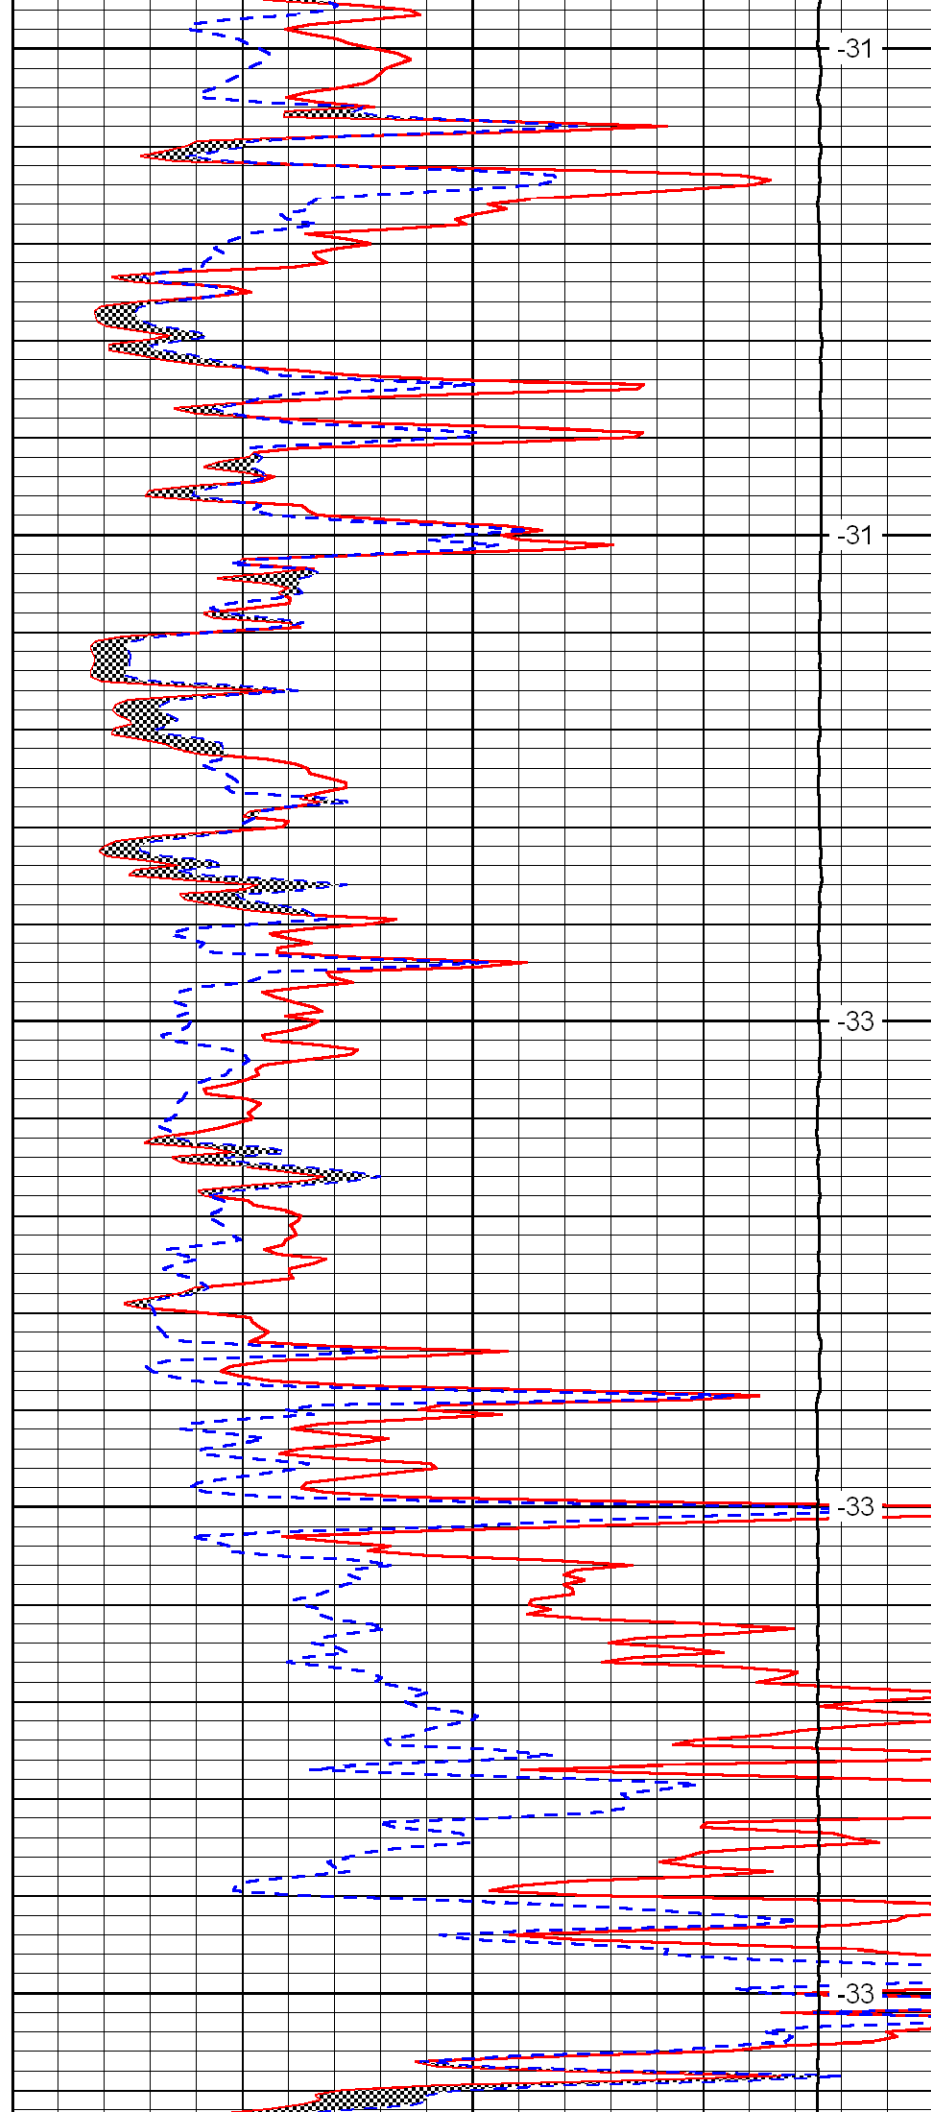



-31

-31

-33

-33

-33

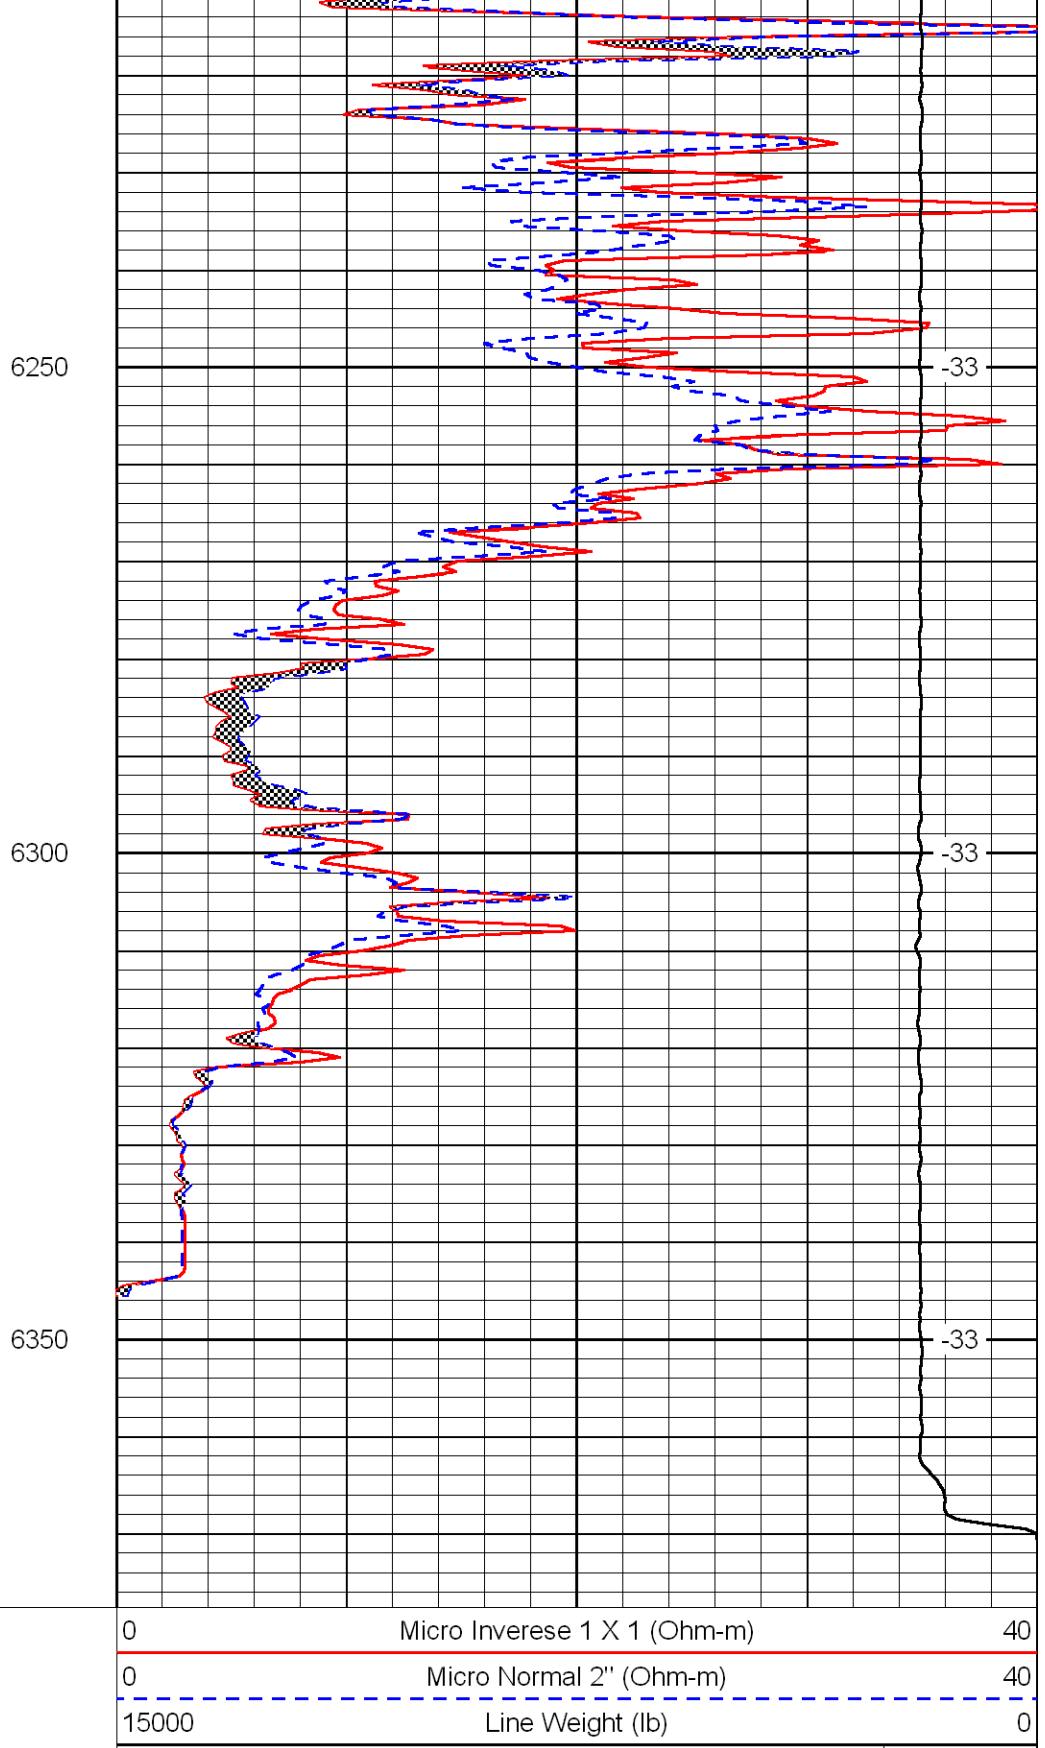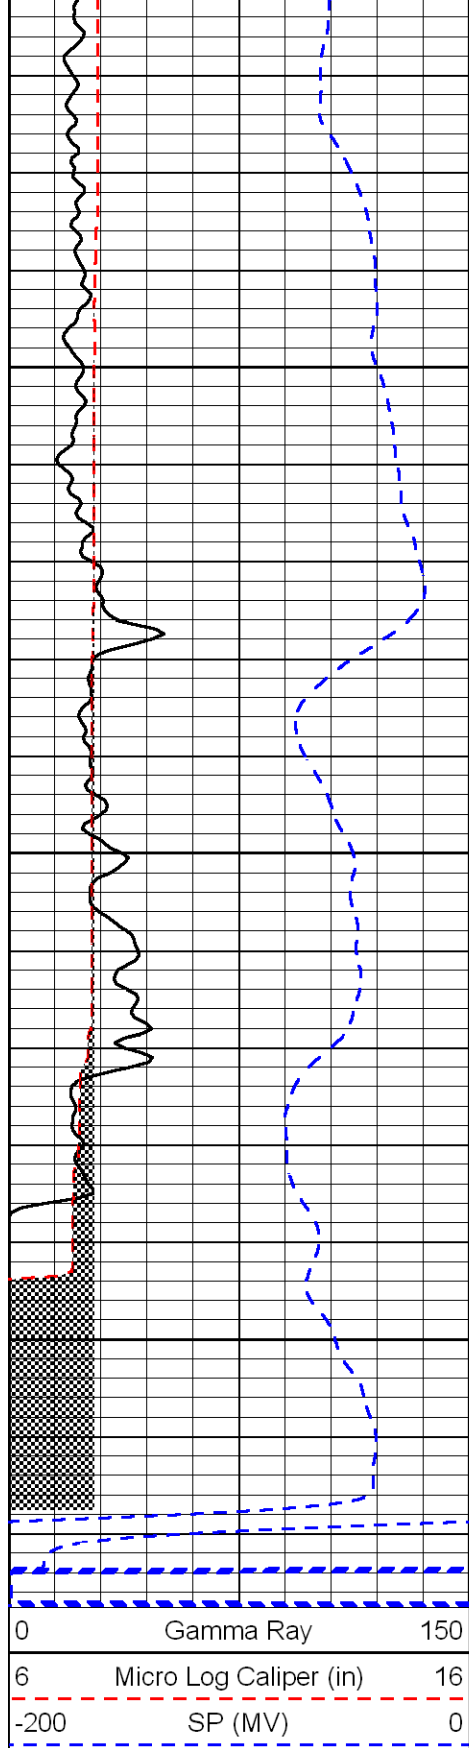

LSPD
(ft/min)