



Borehole Compensated Sonic Log

DIGITAL LOG (785) 625-3858

API No.

15-025-21,488-00-00

Company Falcon Exploration, Inc.

Well YBC #1-34 (NW)

Field Wildcat

County Clark

State Kansas

Location

1820' FNL & 450' FWL

Sec: 34

Twp: 30S

Rge: 22W

Elevation

Permanent Datum Ground Level Elevation 2359
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2369
D.F.
G.L. 2359

Date 11/13/2009

Run Number Two

Type Log BHC Sonic

Depth Driller 6360

Depth Logger 6362

Bottom Logged Interval 6341

Top Logged Interval 650

Type Fluid In Hole Chemical

Salinity, PPM CL 9,600

Density 9.05

Level Full

Max. Rec. Temp. F 142

Operating Rig Time 6 Hours

Equipment -- Location 10 Hays

Recorded By T. Martin

Witnessed By Keith Reavis

Borehole Record

Casing Record

Run No

Bit

From

To

Size

Wgt.

From

To

1 12.25

00

682

8.625

24#

00

682

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858



Kingsdown, 8 S to E Rd, 1 1/2 E, S into



Database File: c:\warrior\data\falcon_ybc #1-34\flcnhd.db
Dataset Pathname: dil/flcnstk
Presentation Format: sonic
Dataset Creation: Fri Nov 13 10:58:54 2009
Charted by: Depth in Feet scaled 1:240



0	Gamma Ray	150	Sonic Int	140	Delta Time (usec/ft) (usec/ft)	40
150	Gamma Ray	300	5 (msec)	0	SPOR (pu)	-10
6	Caliper (in)	16		15000	LTEN (lb) (lb)	0
						LSPD (ft/min)


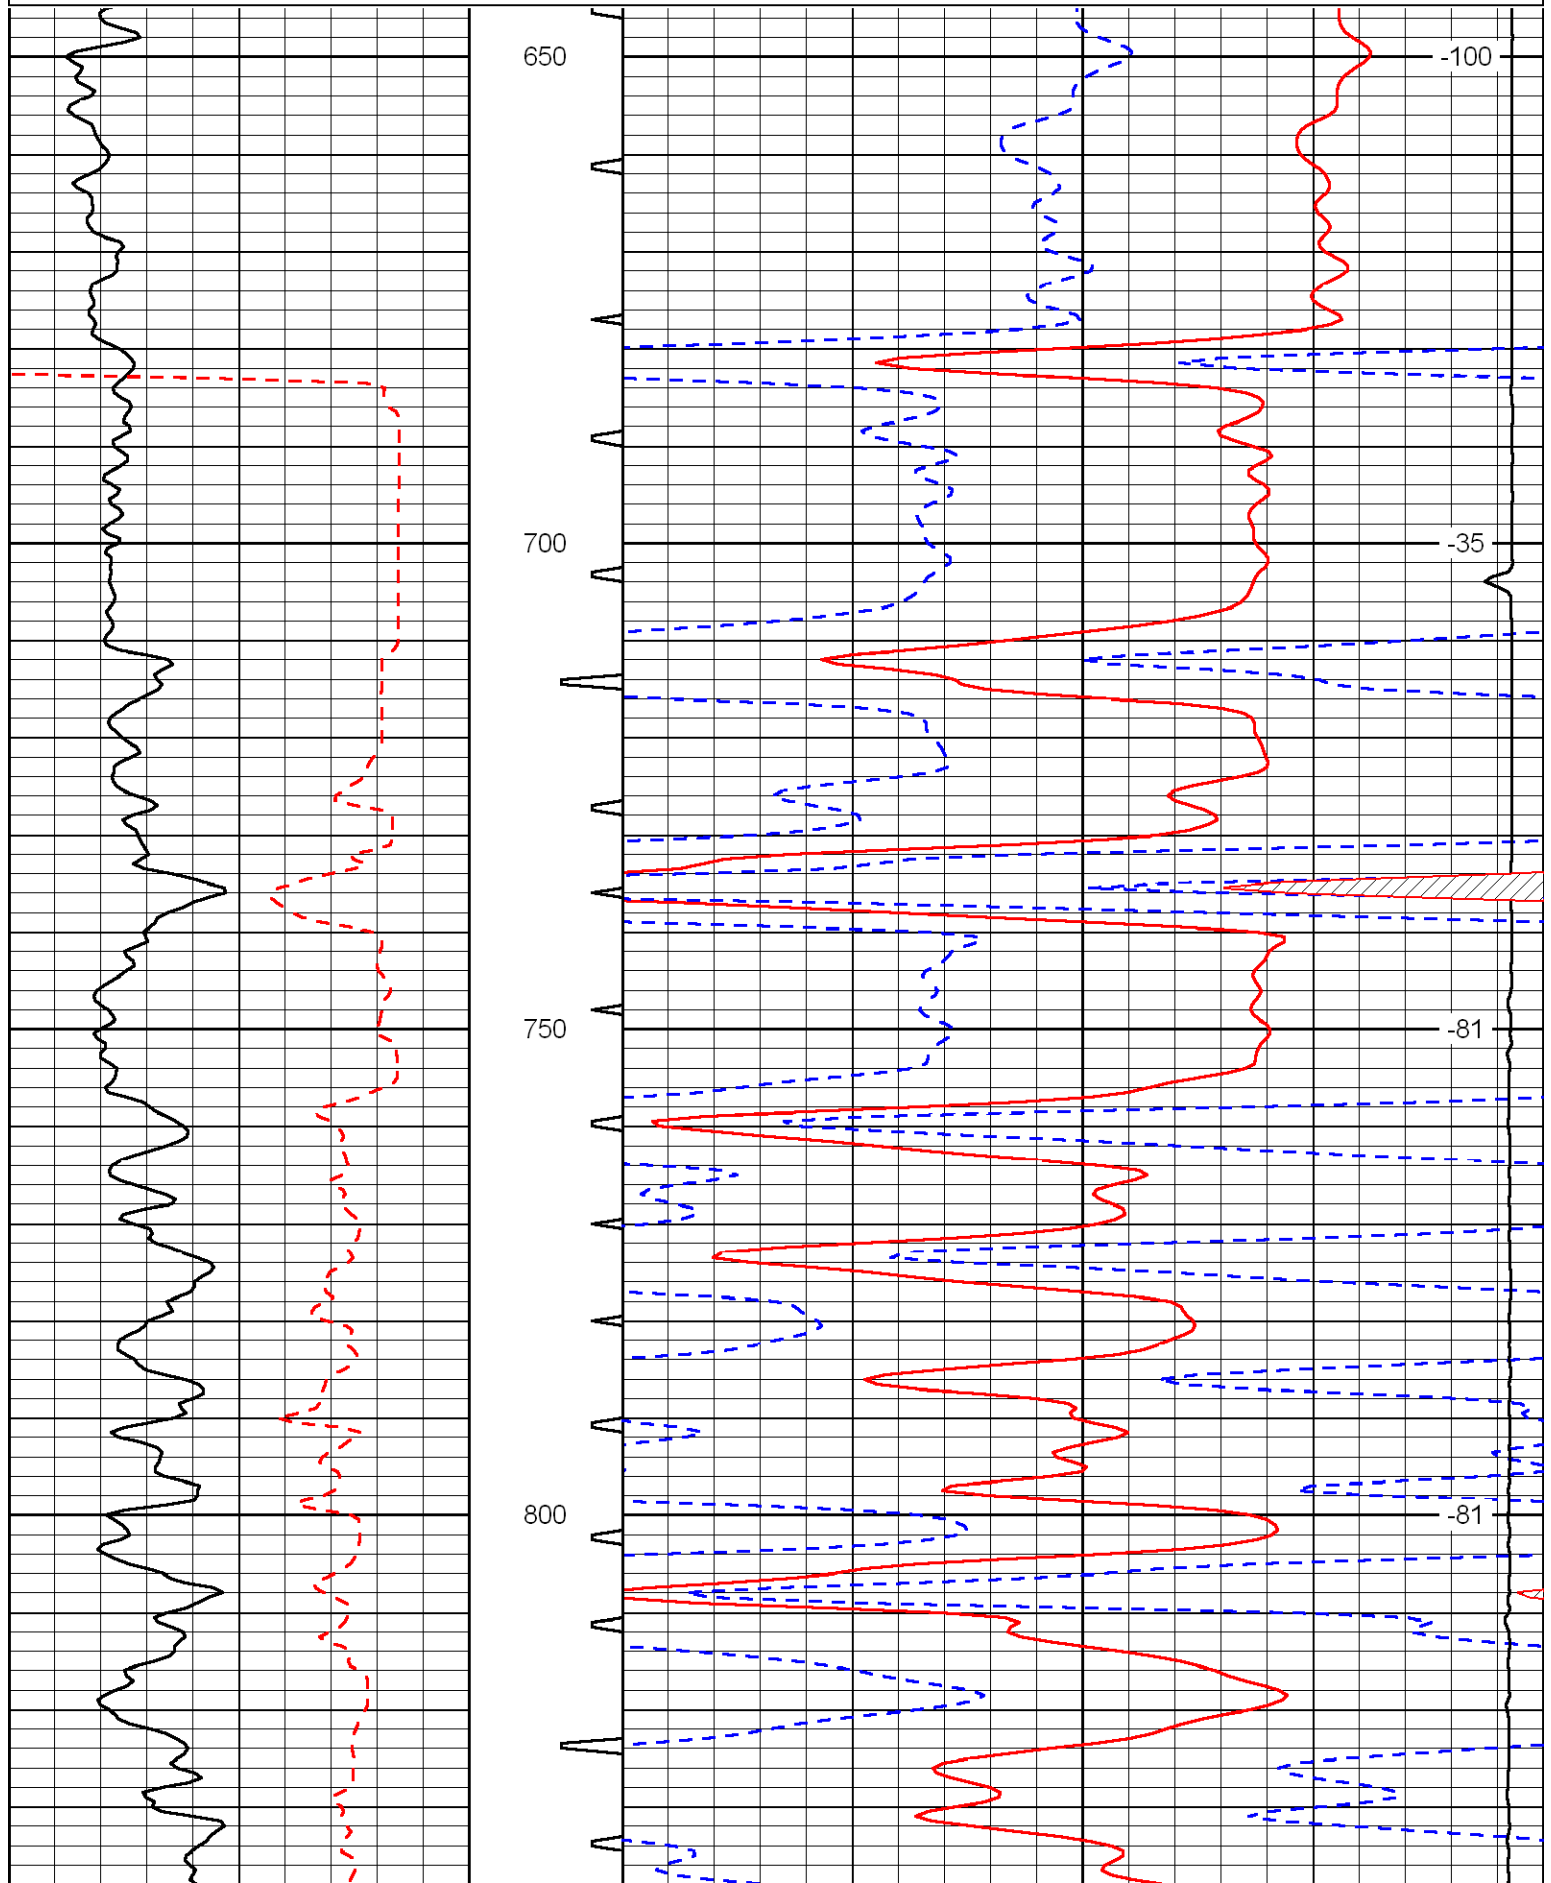


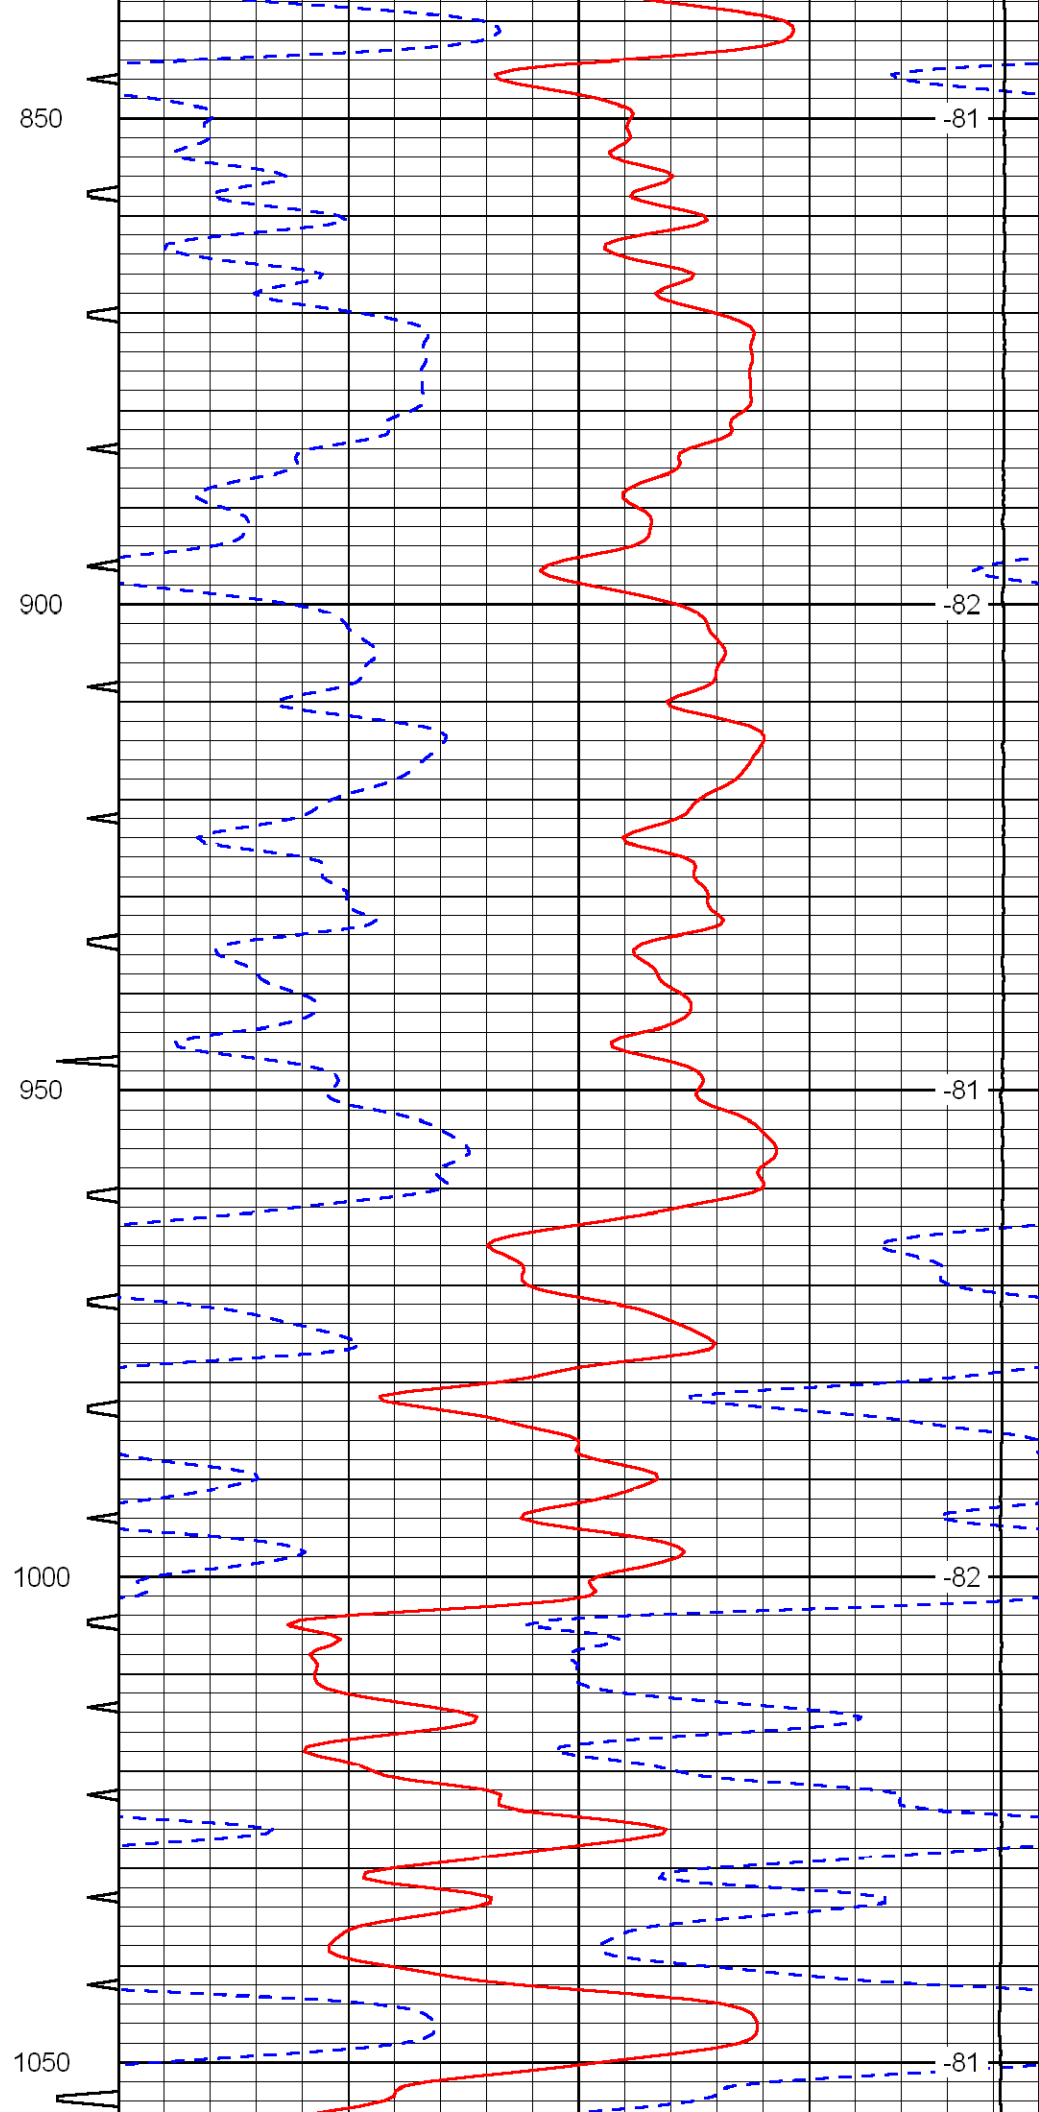
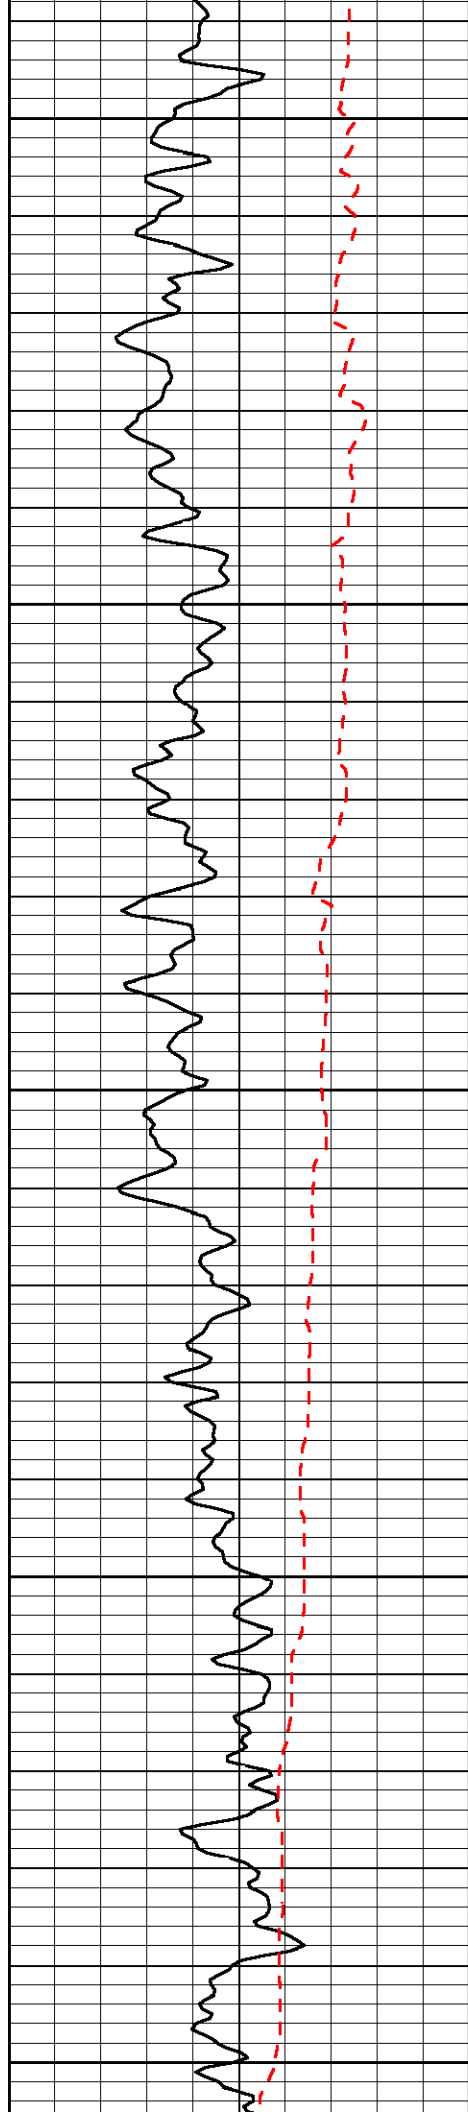


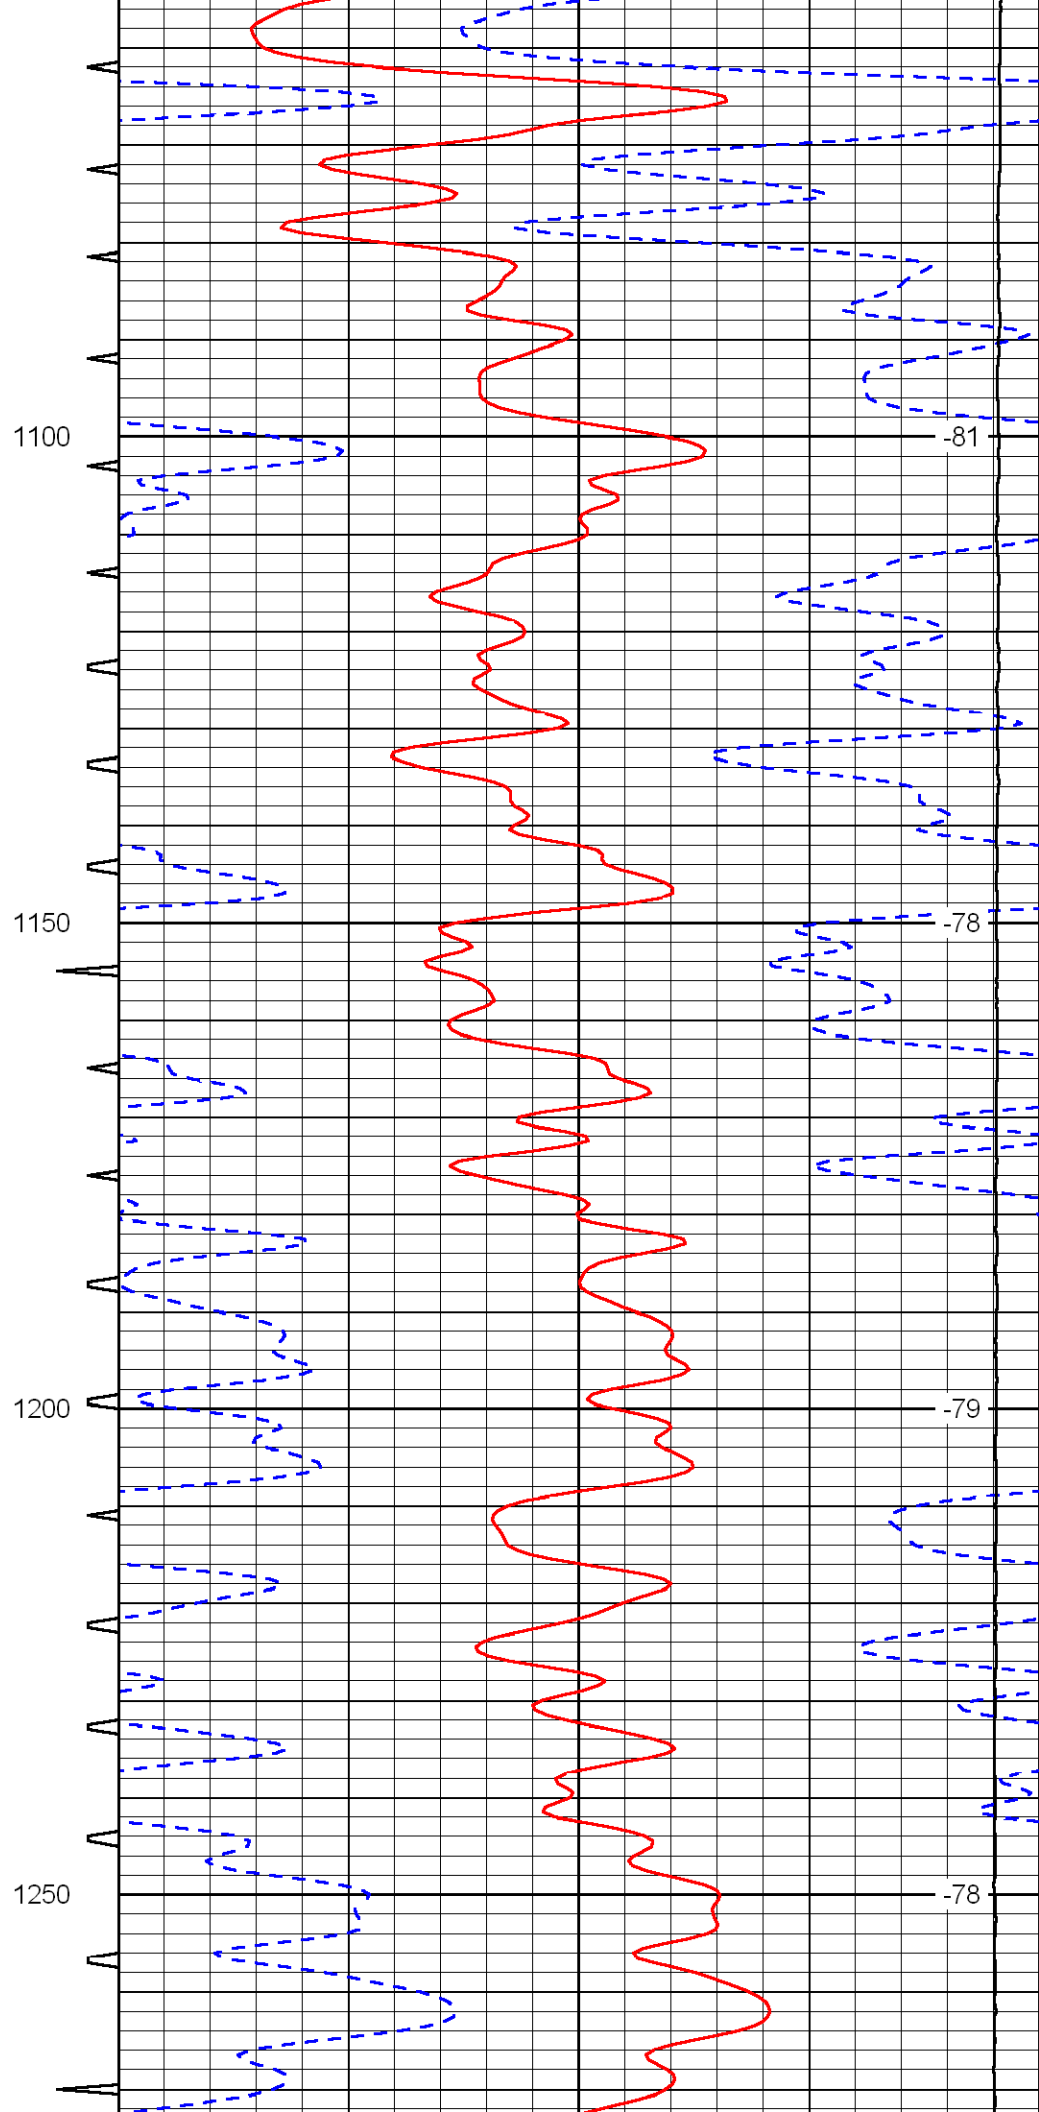
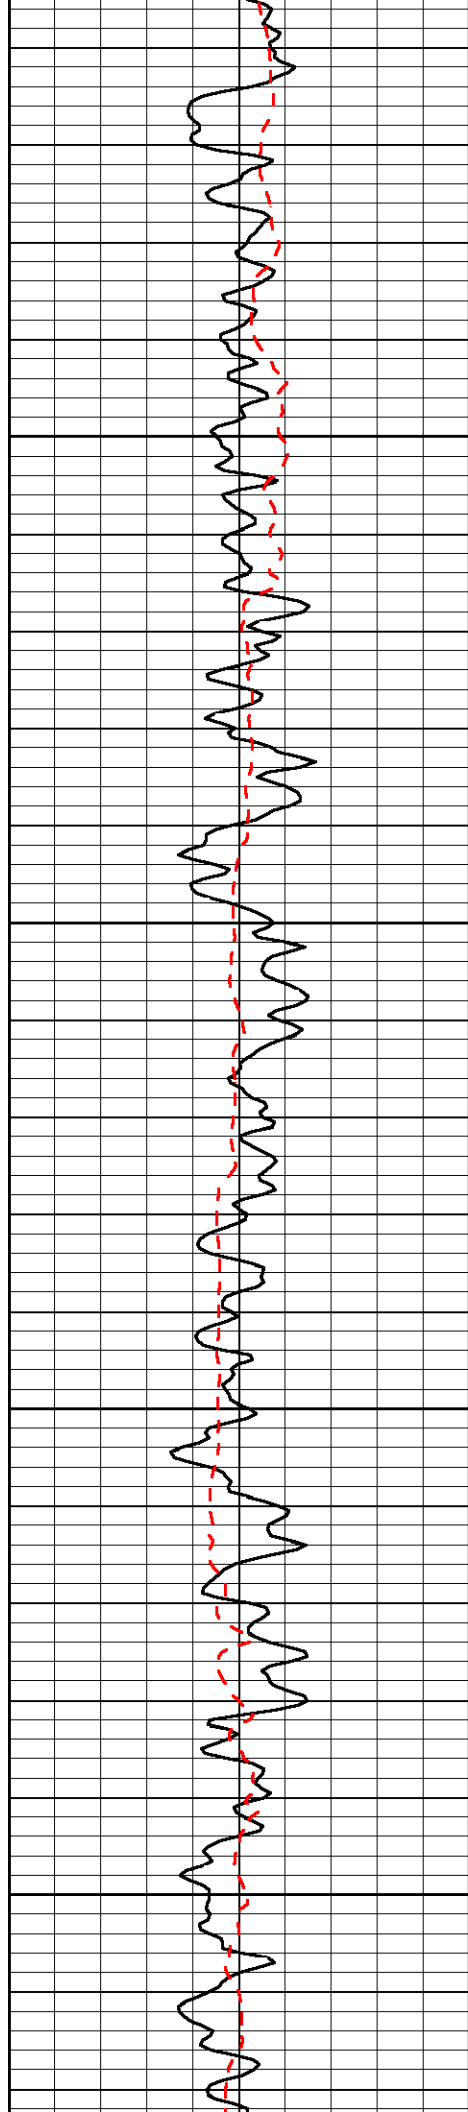


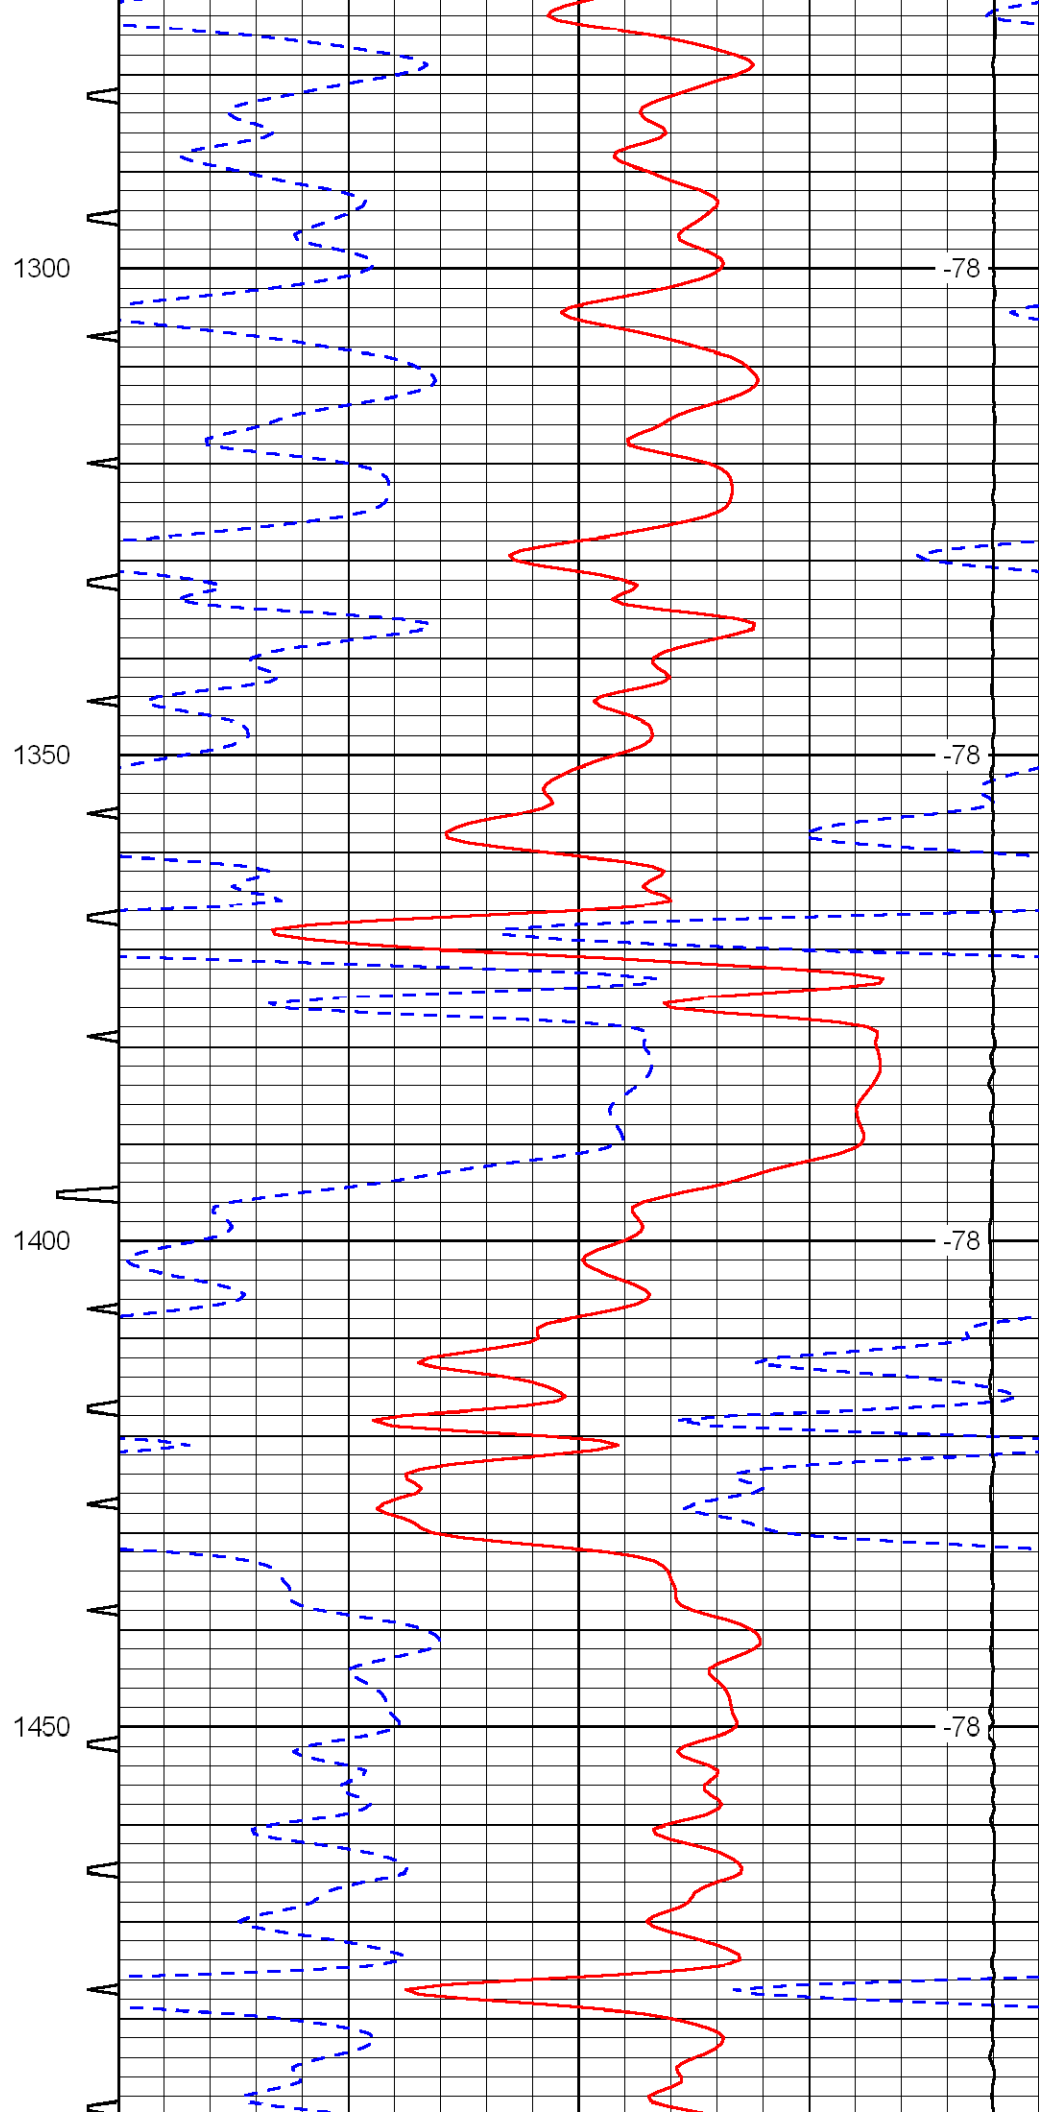
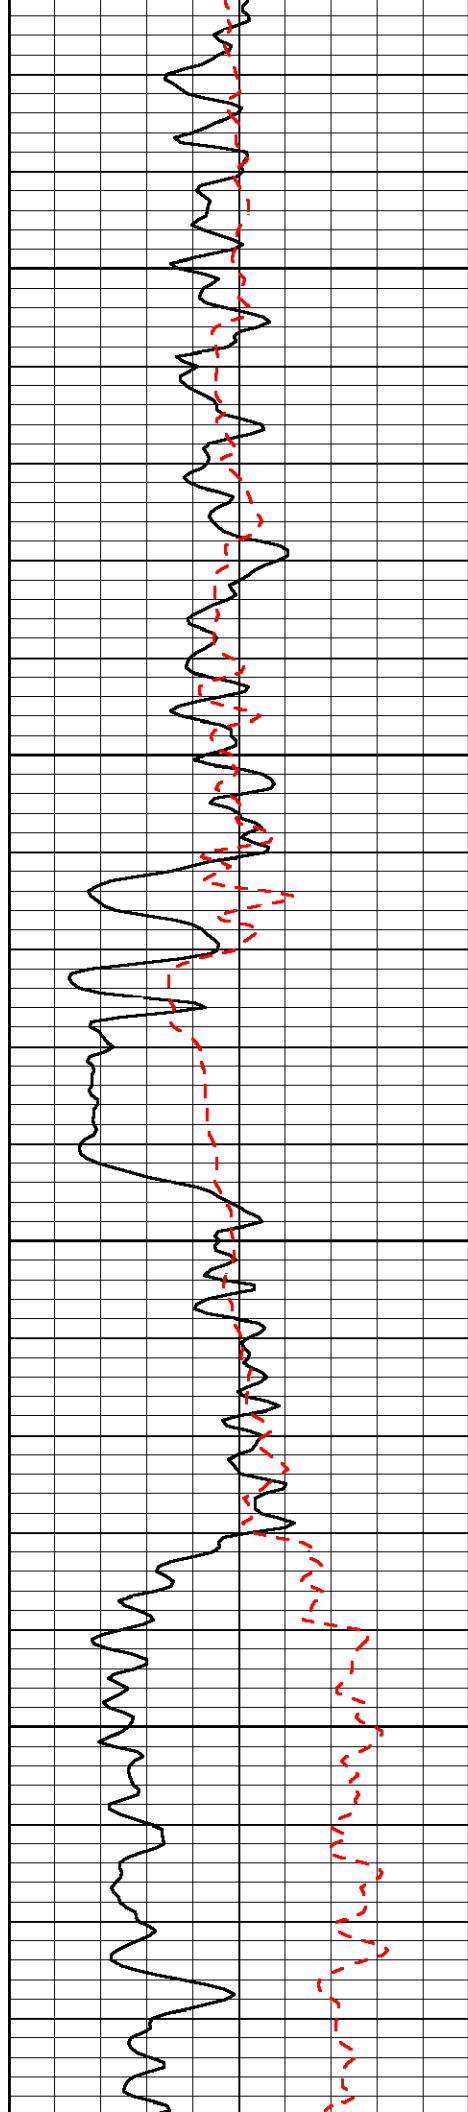


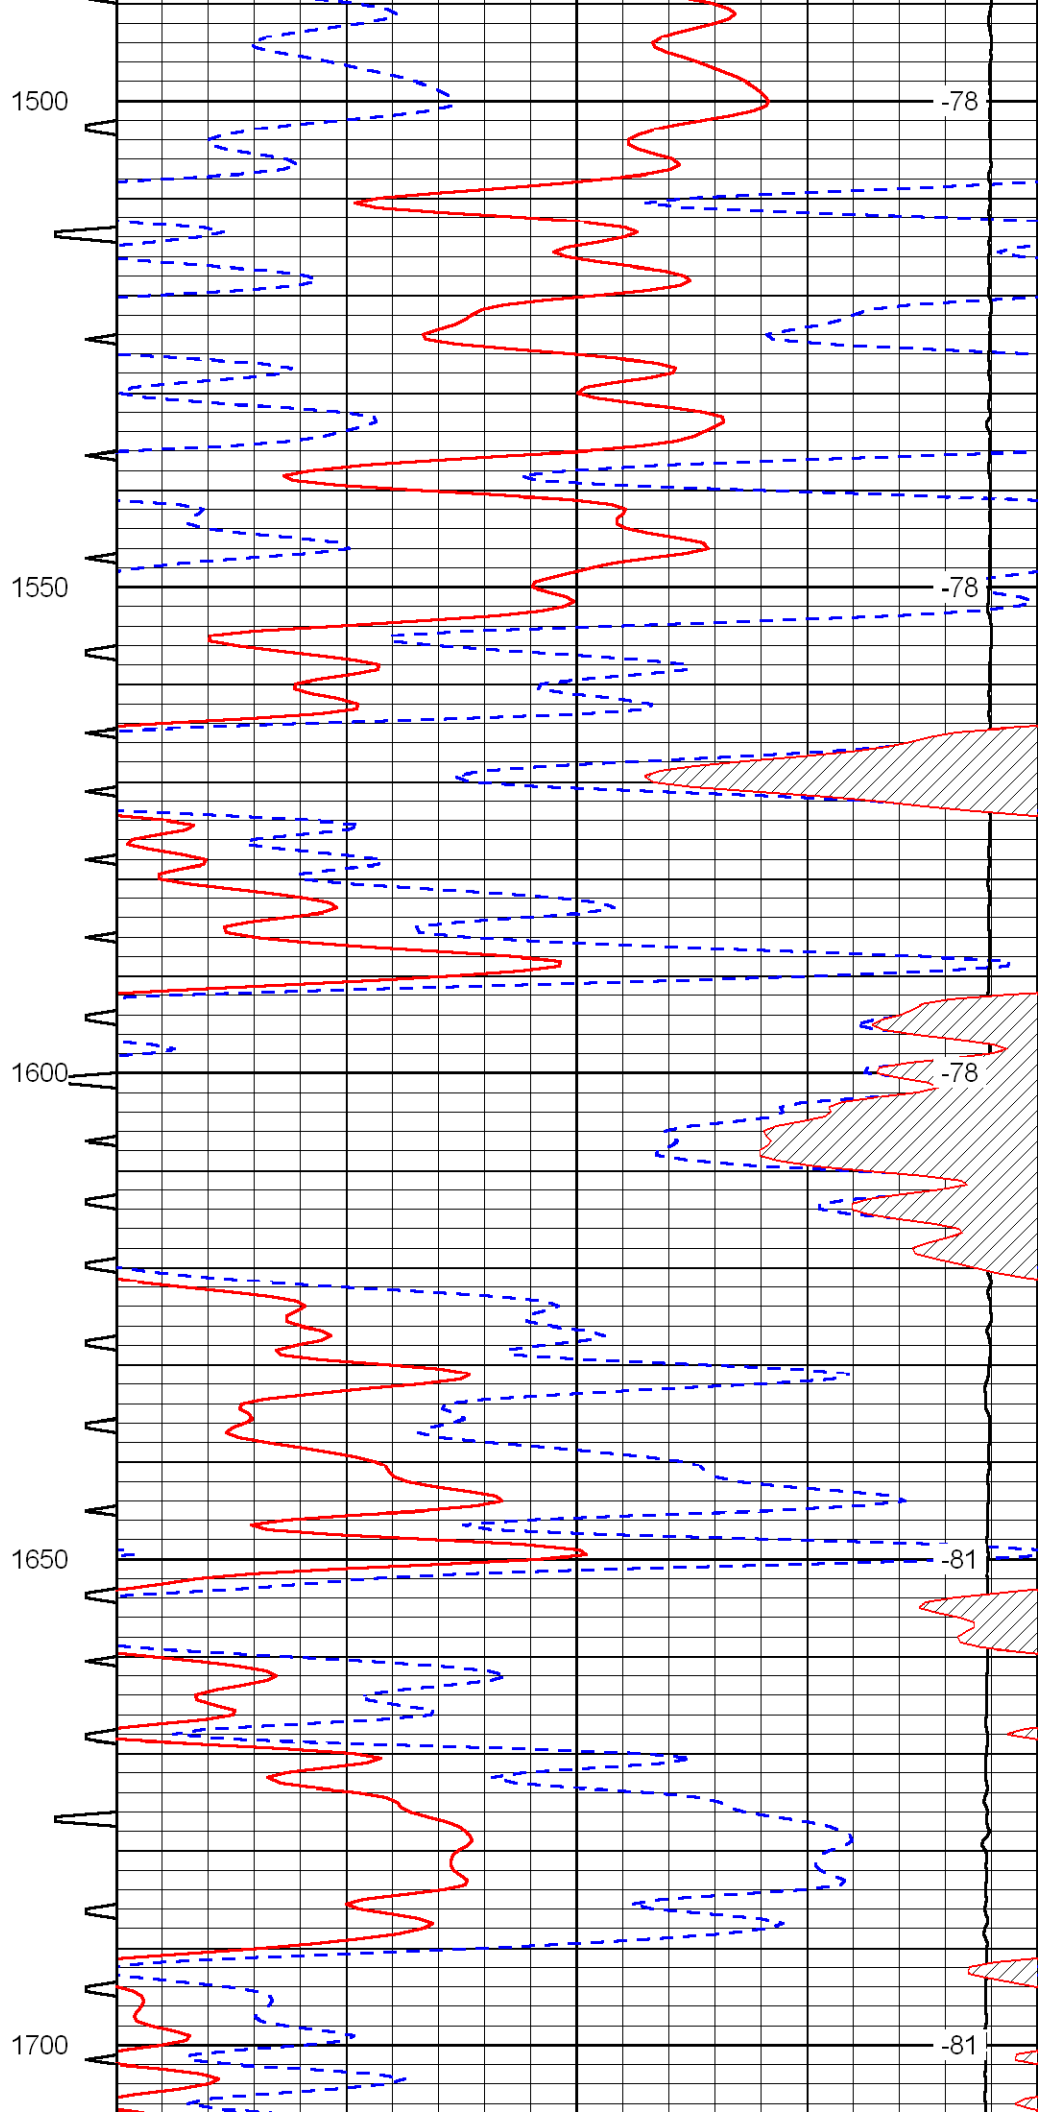
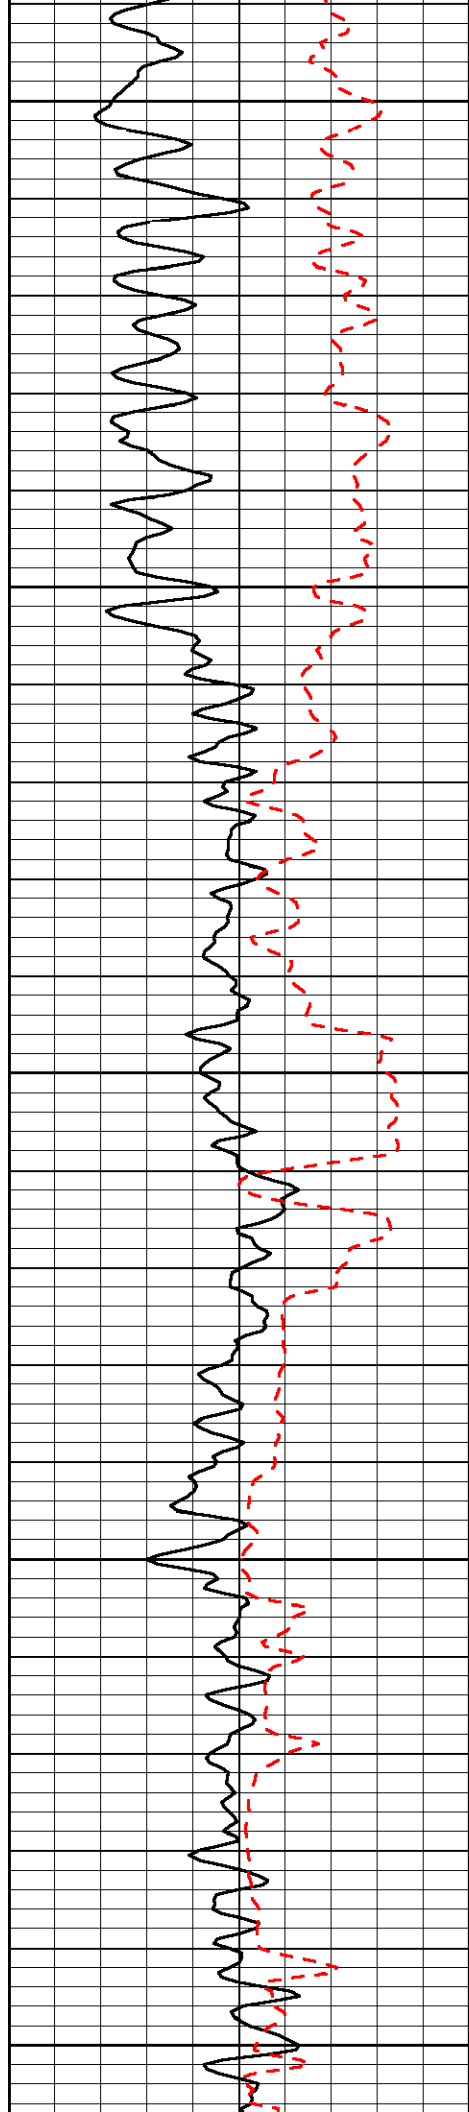


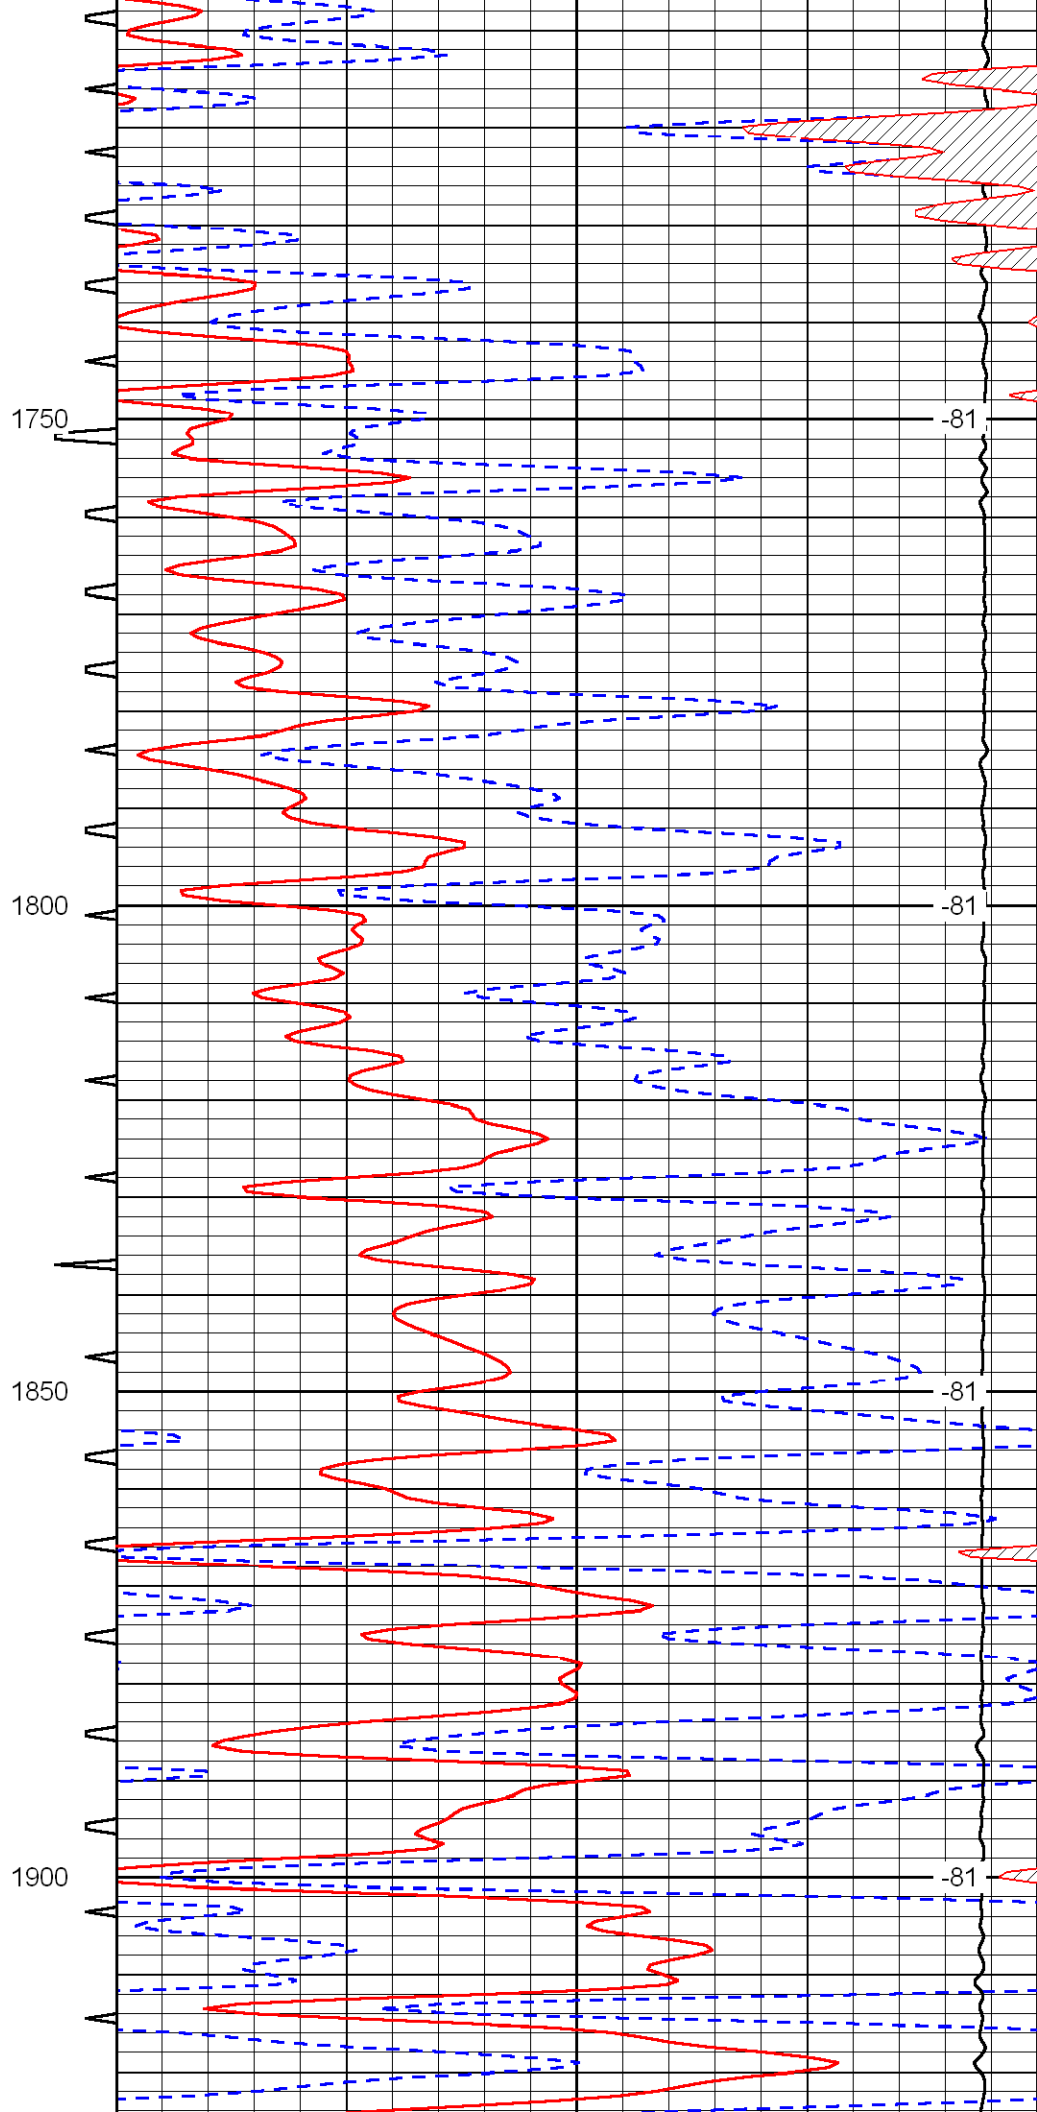
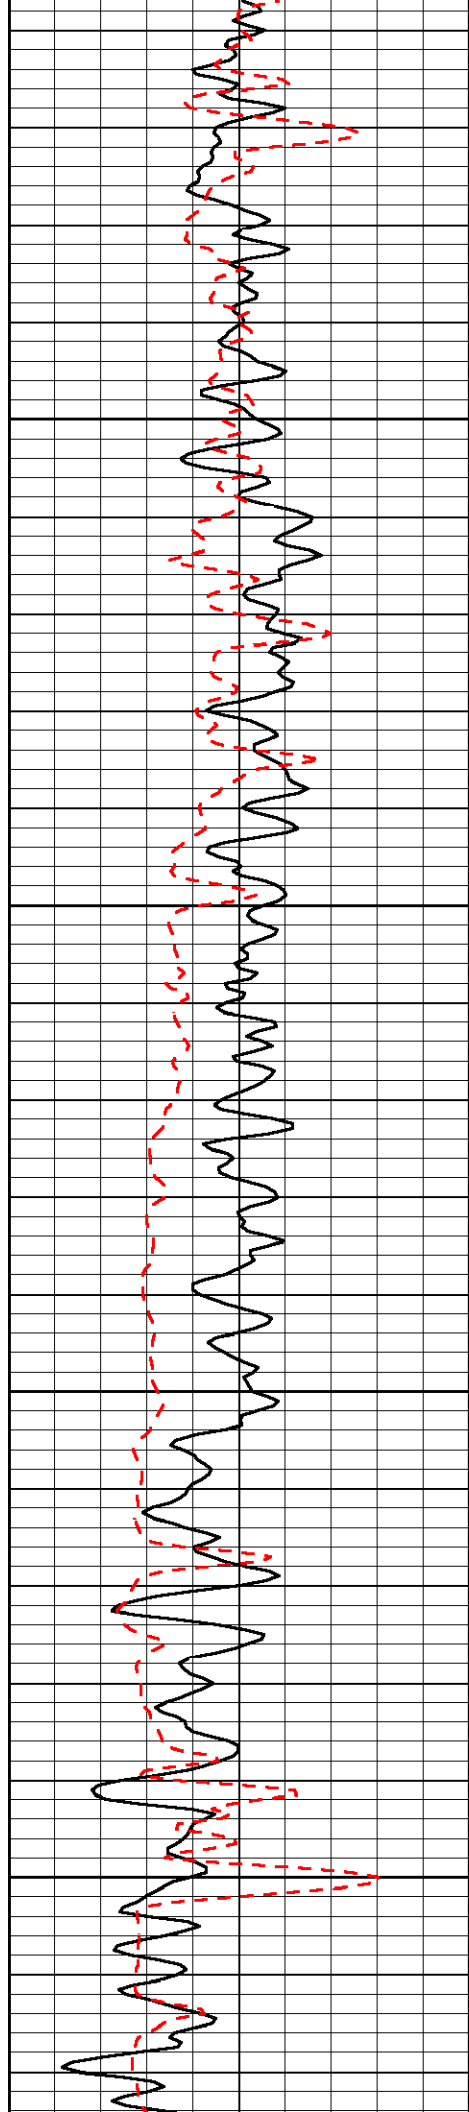


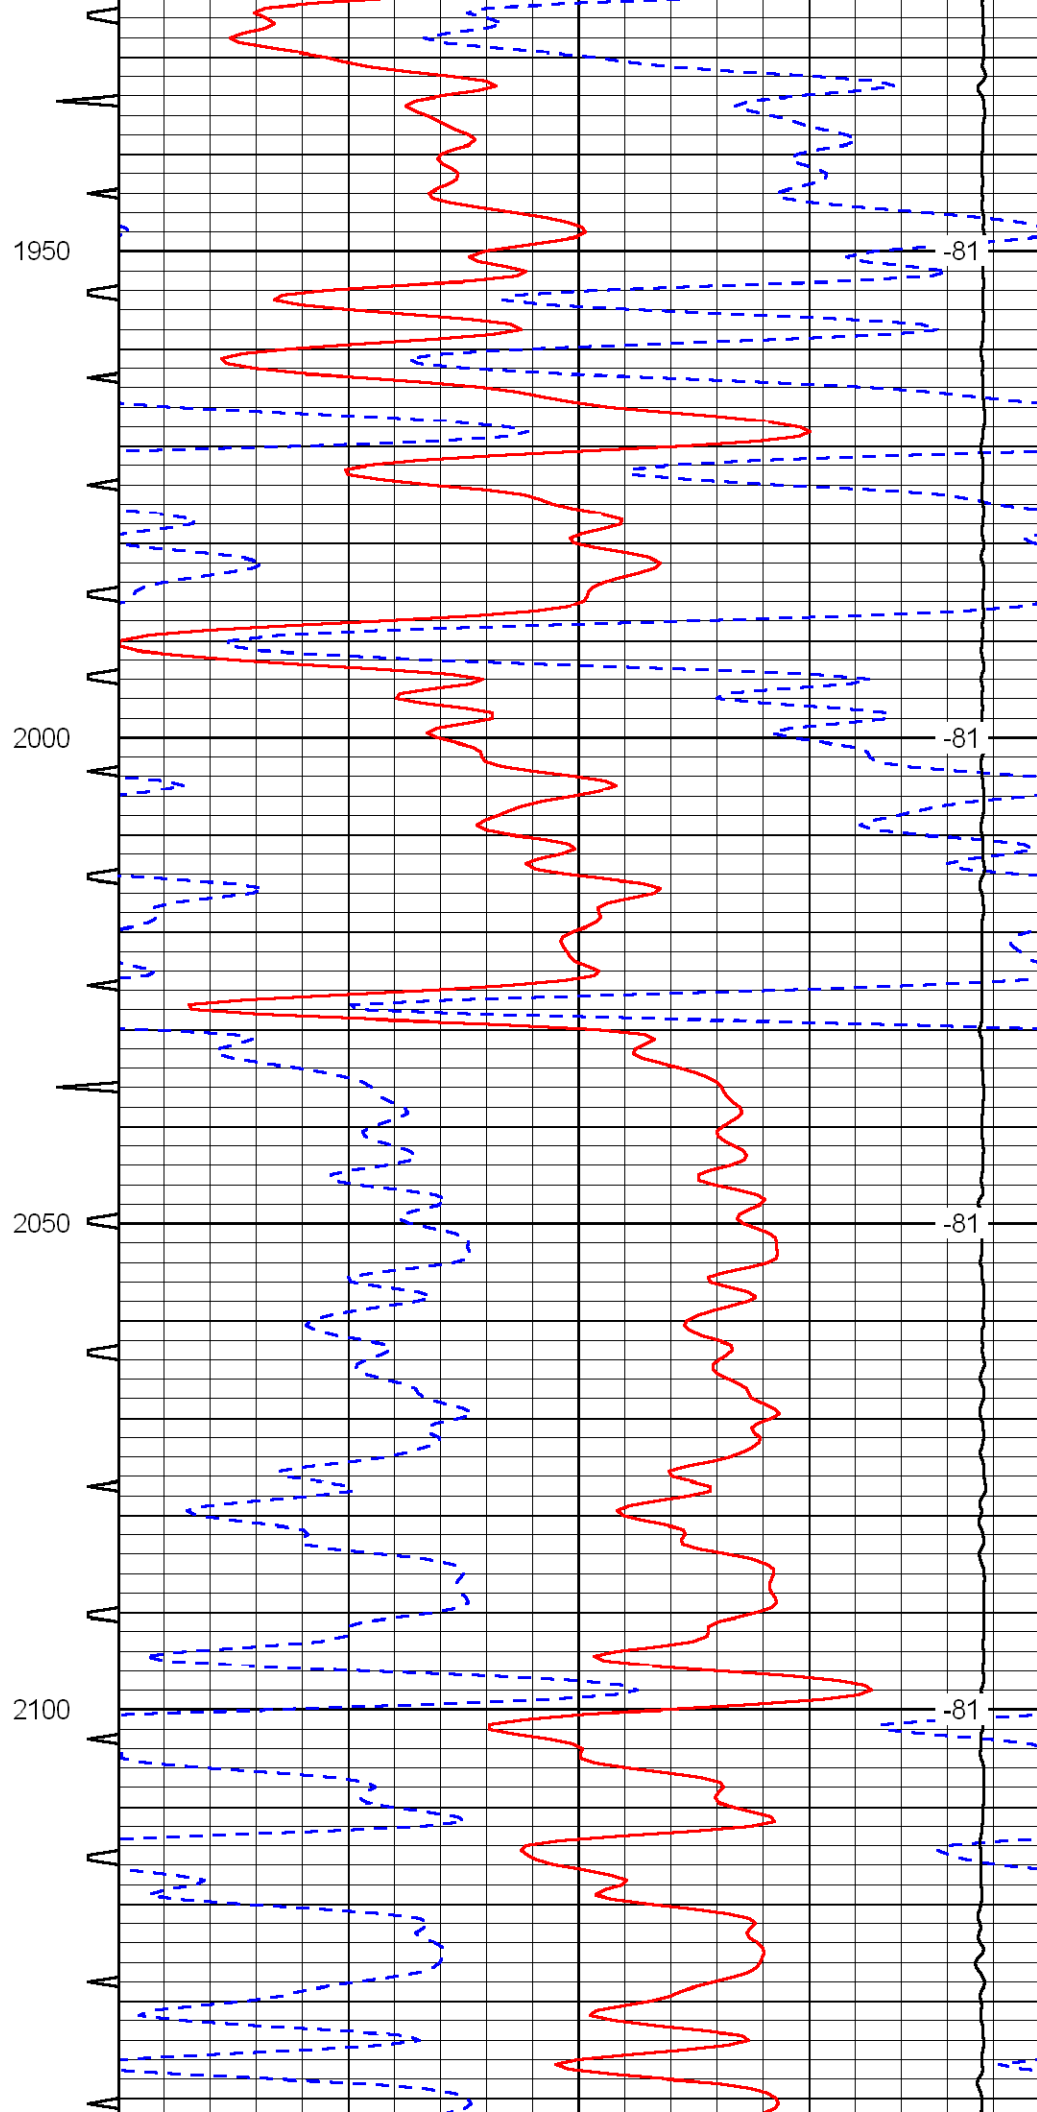
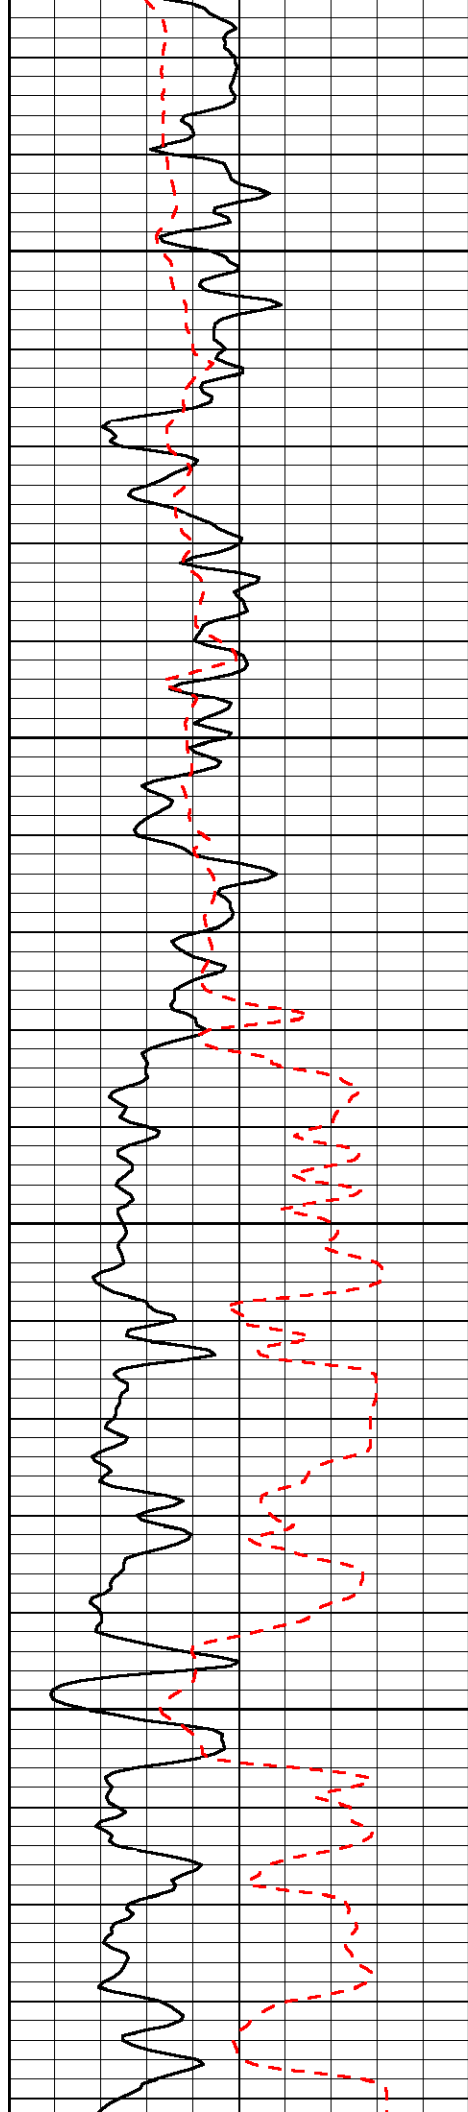


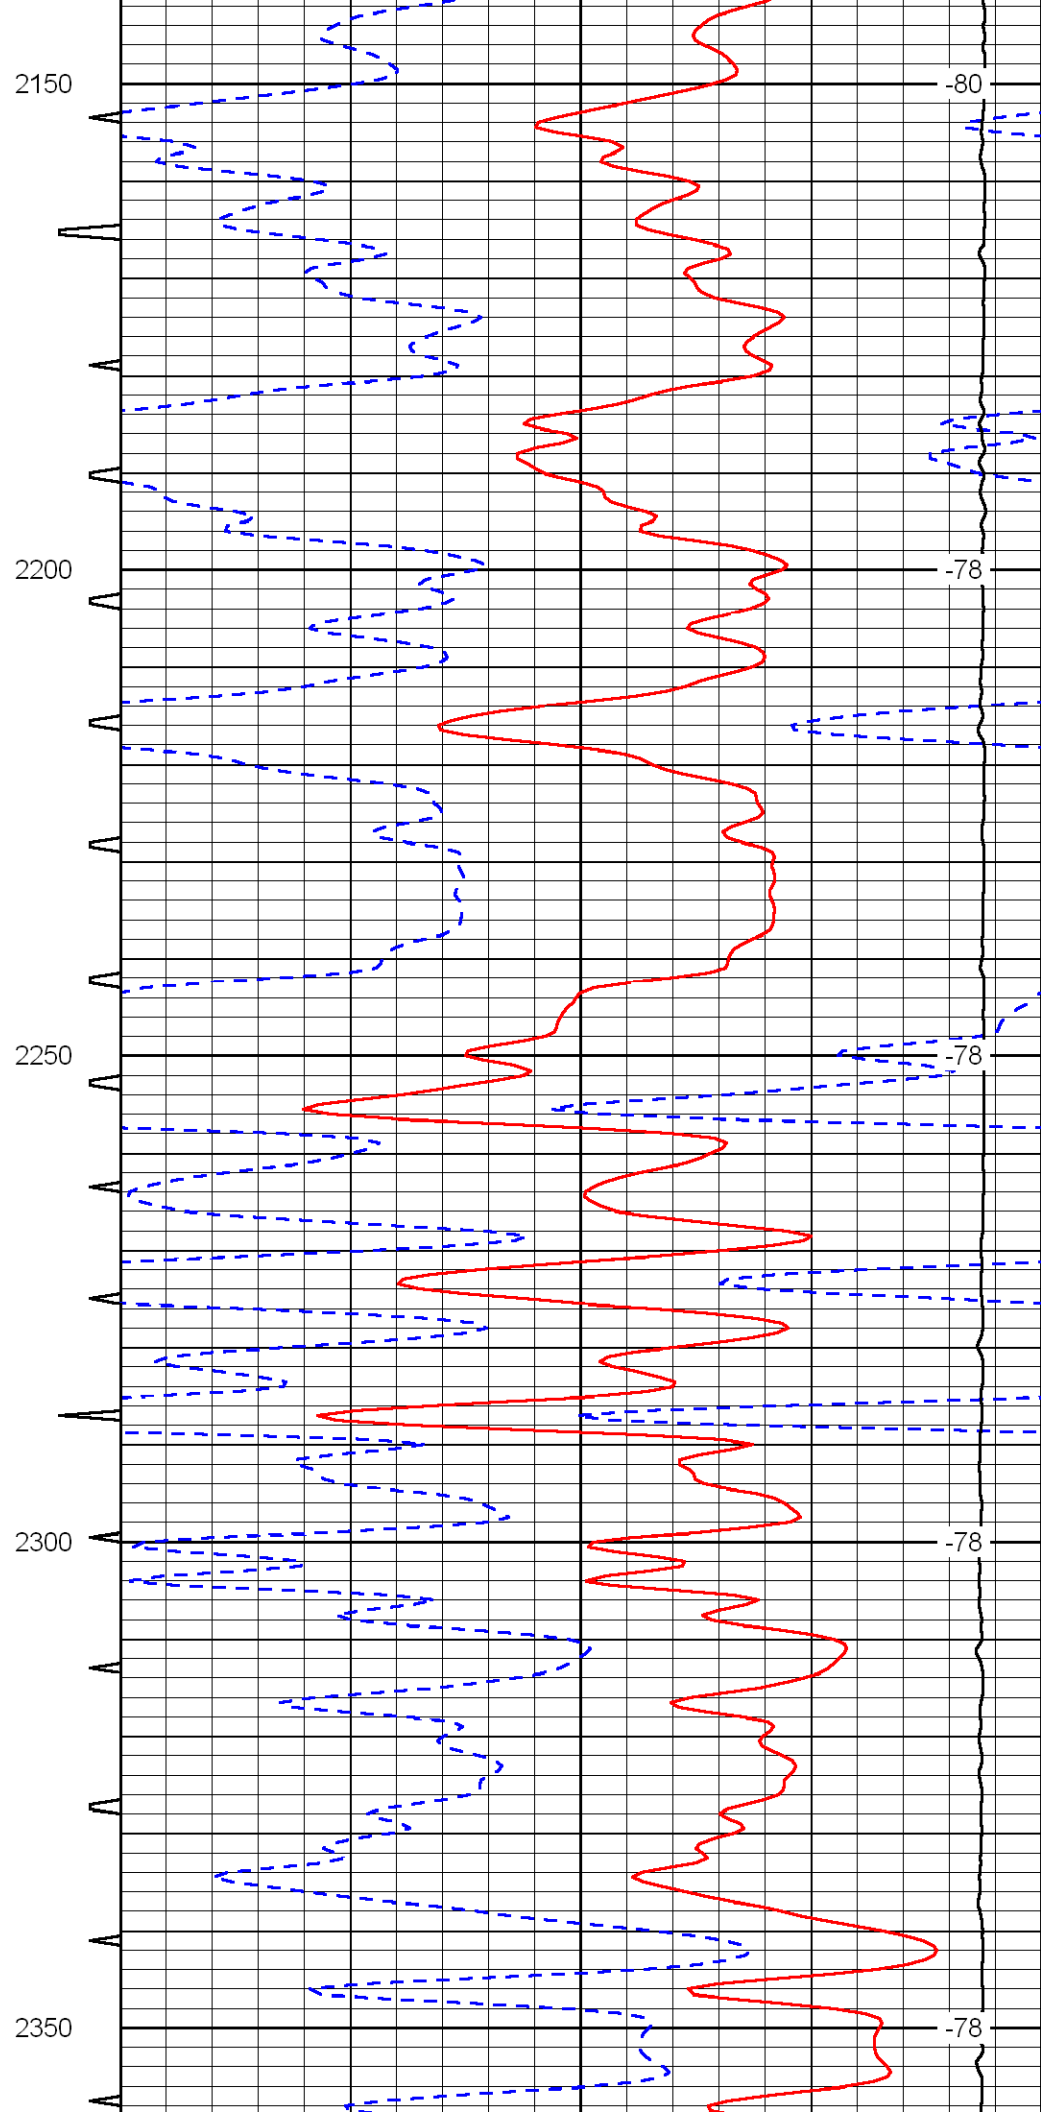
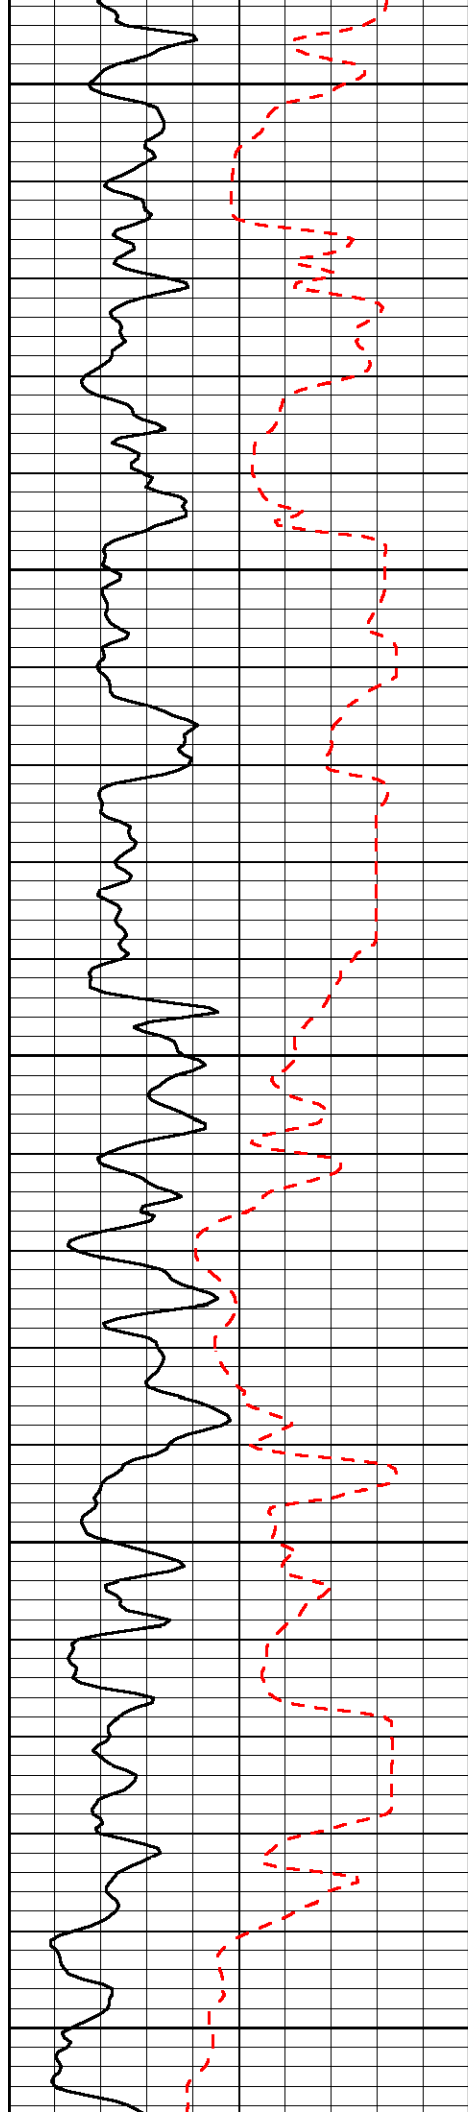


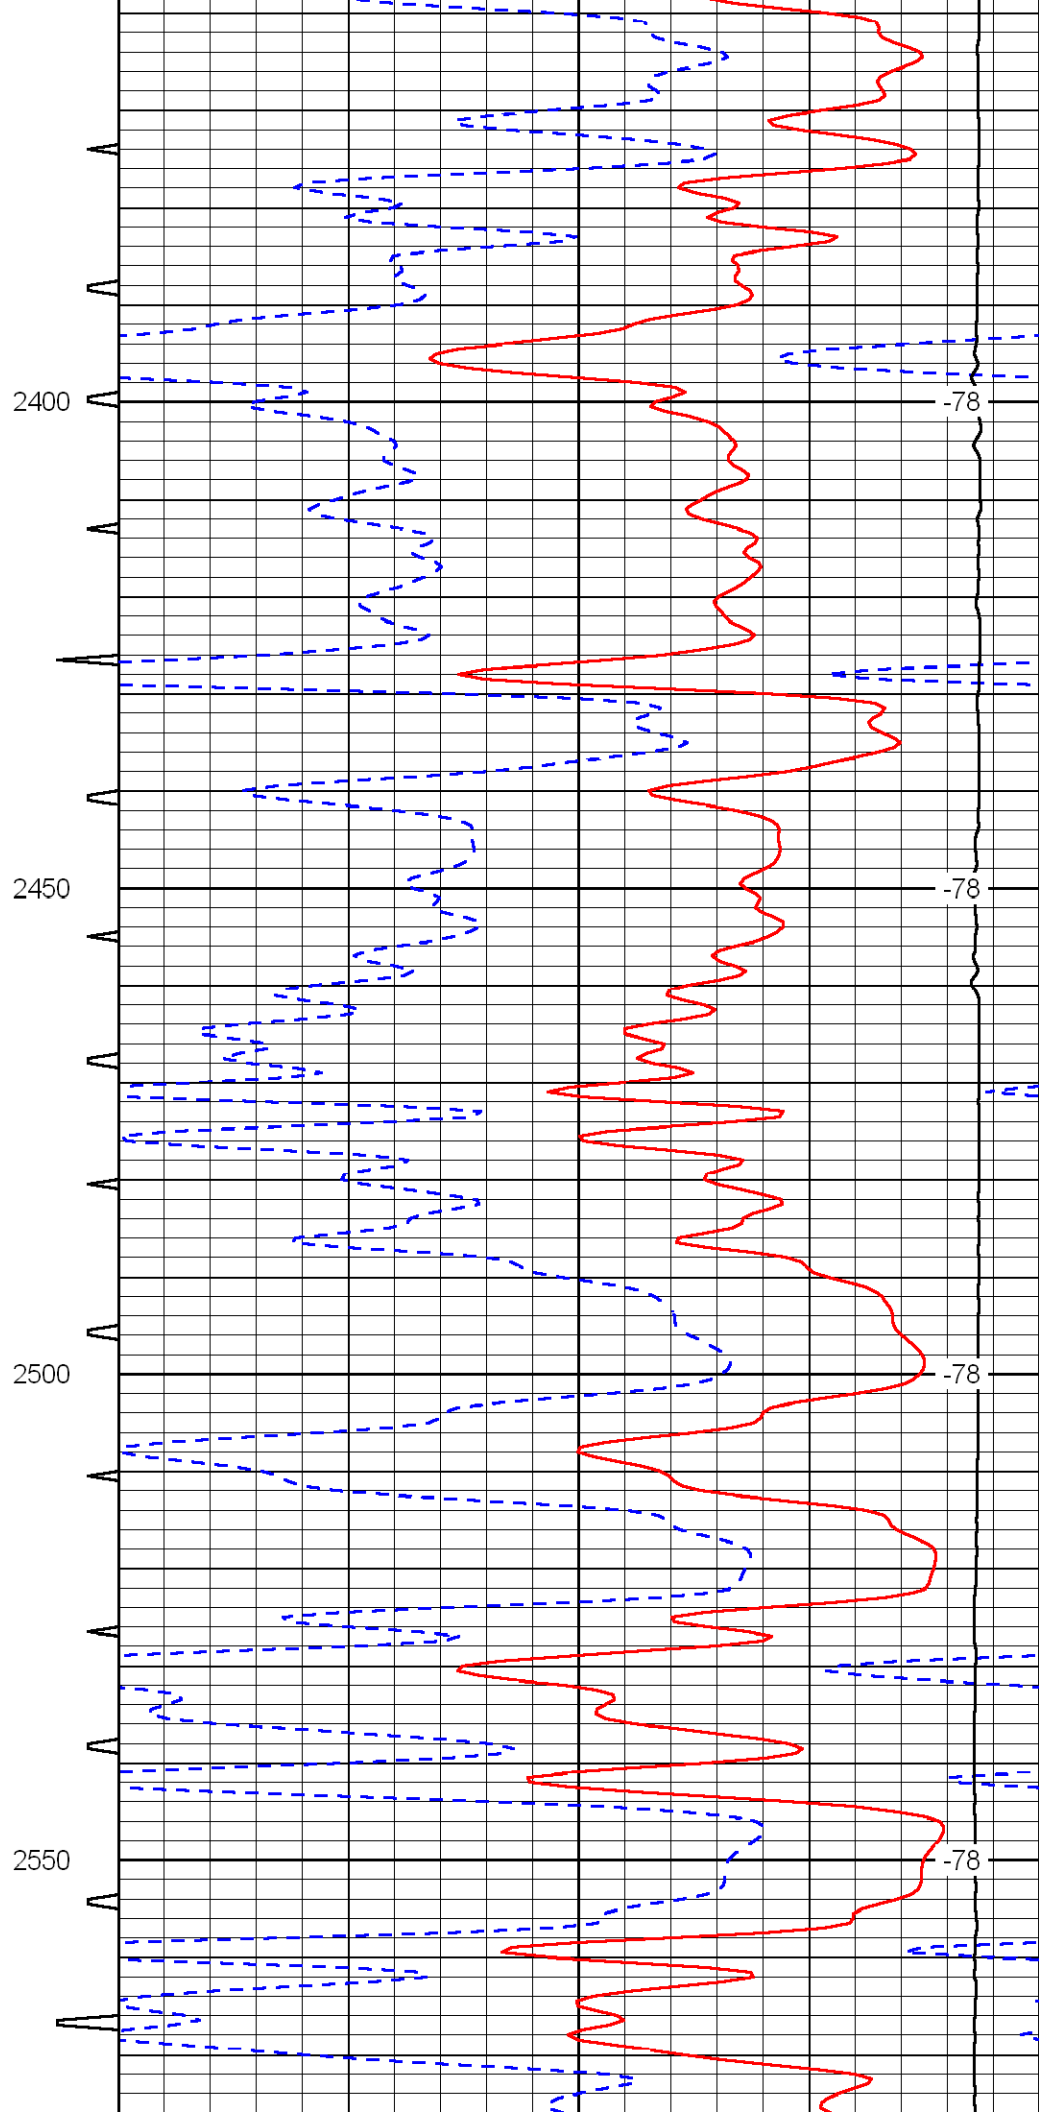
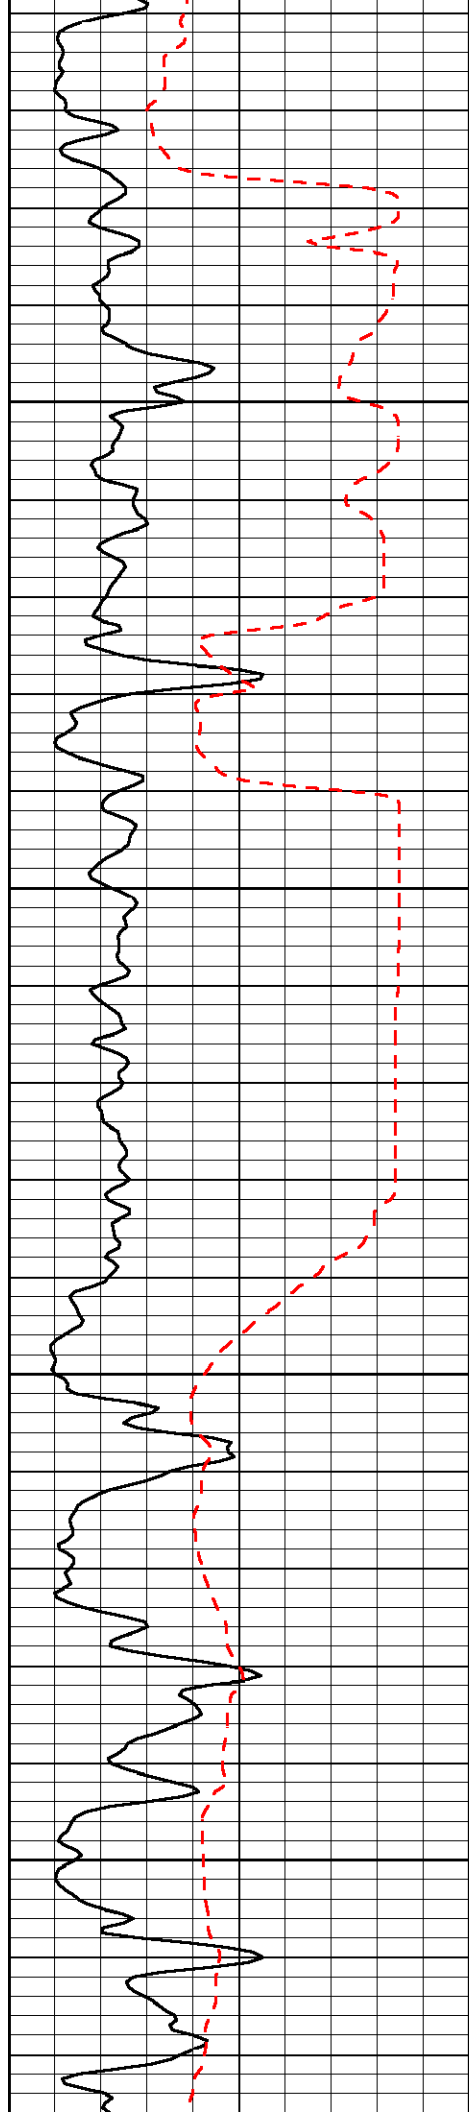


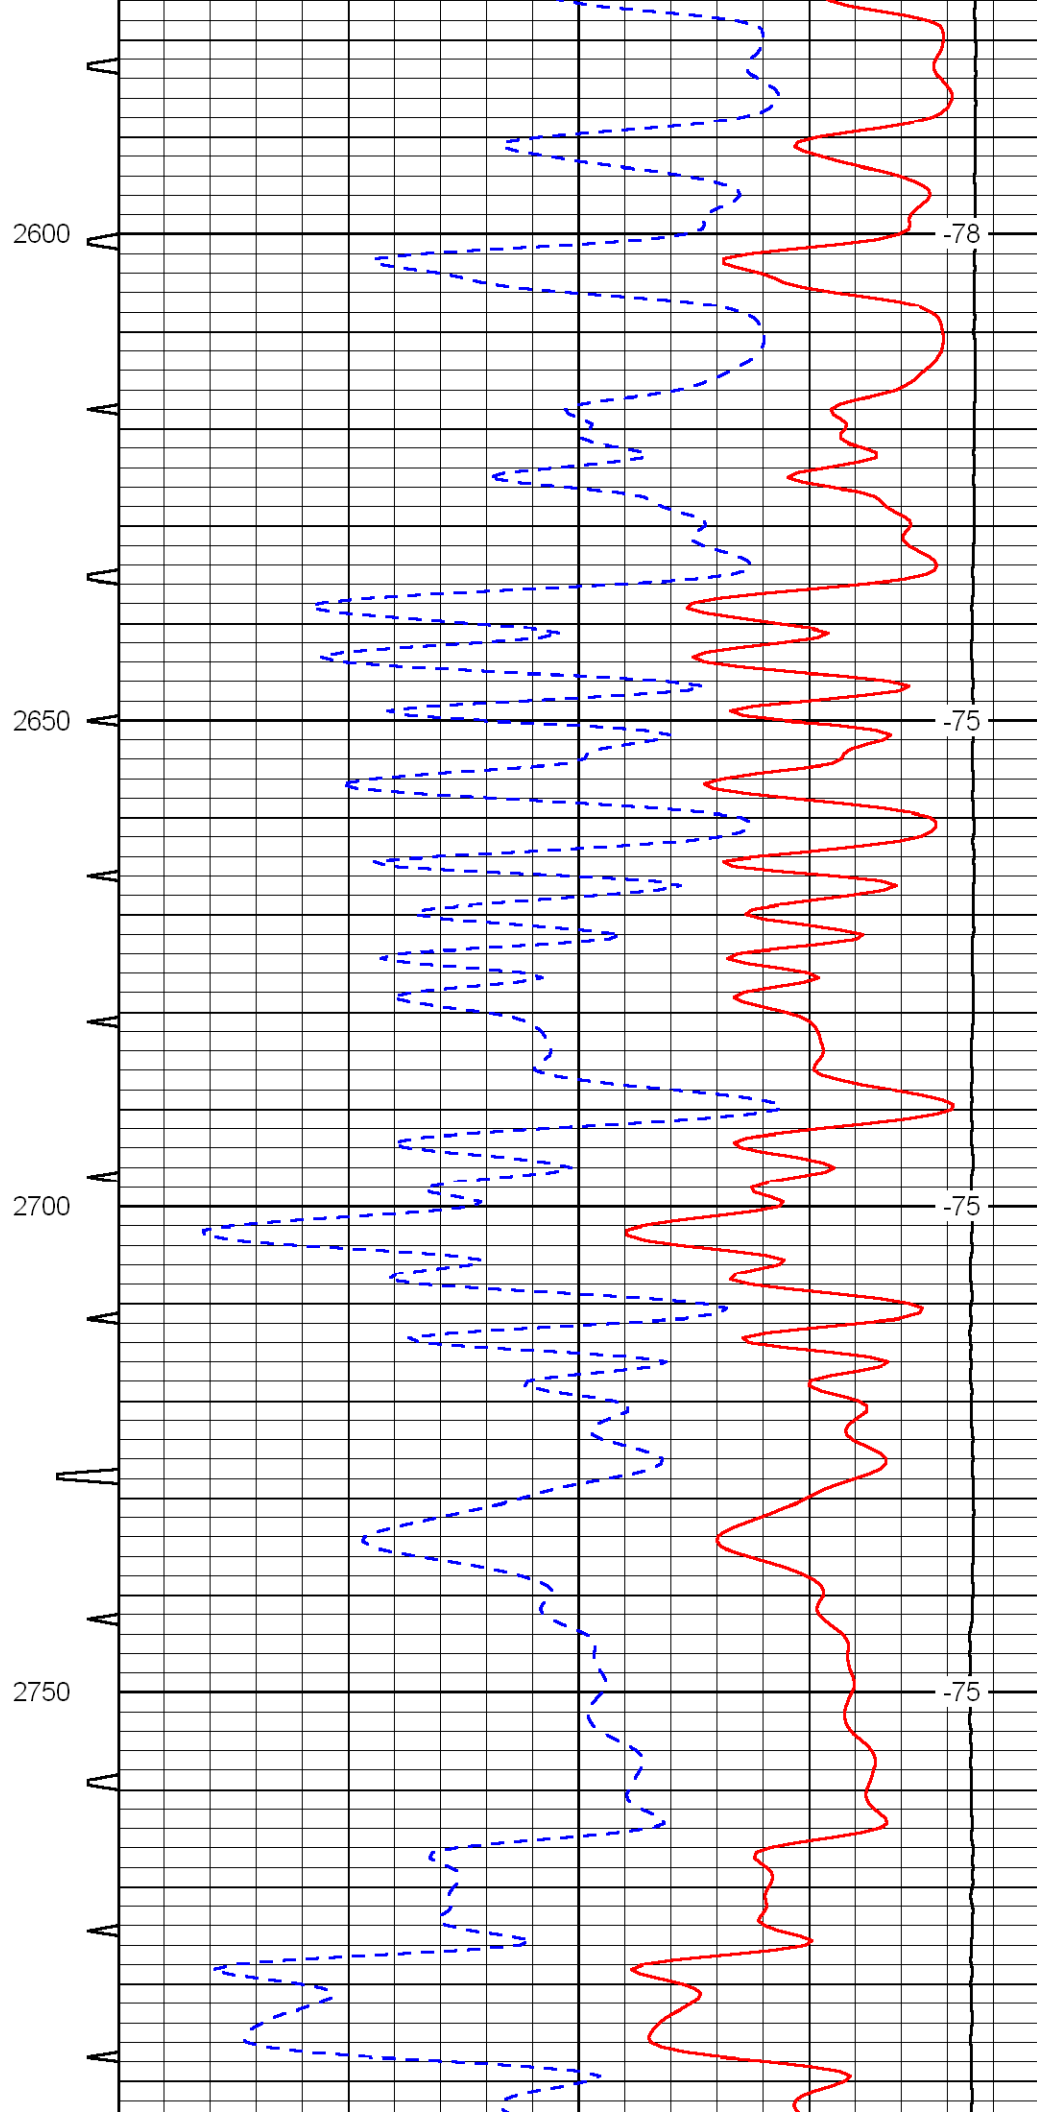
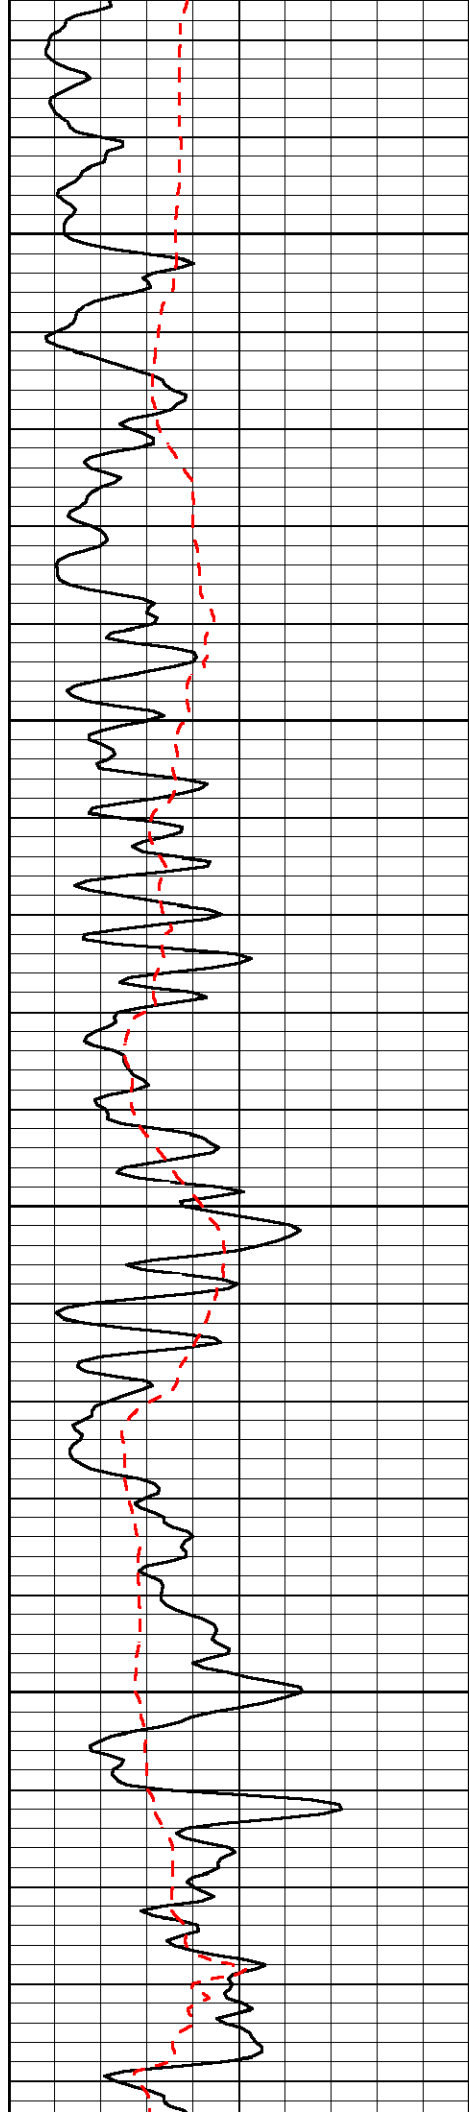


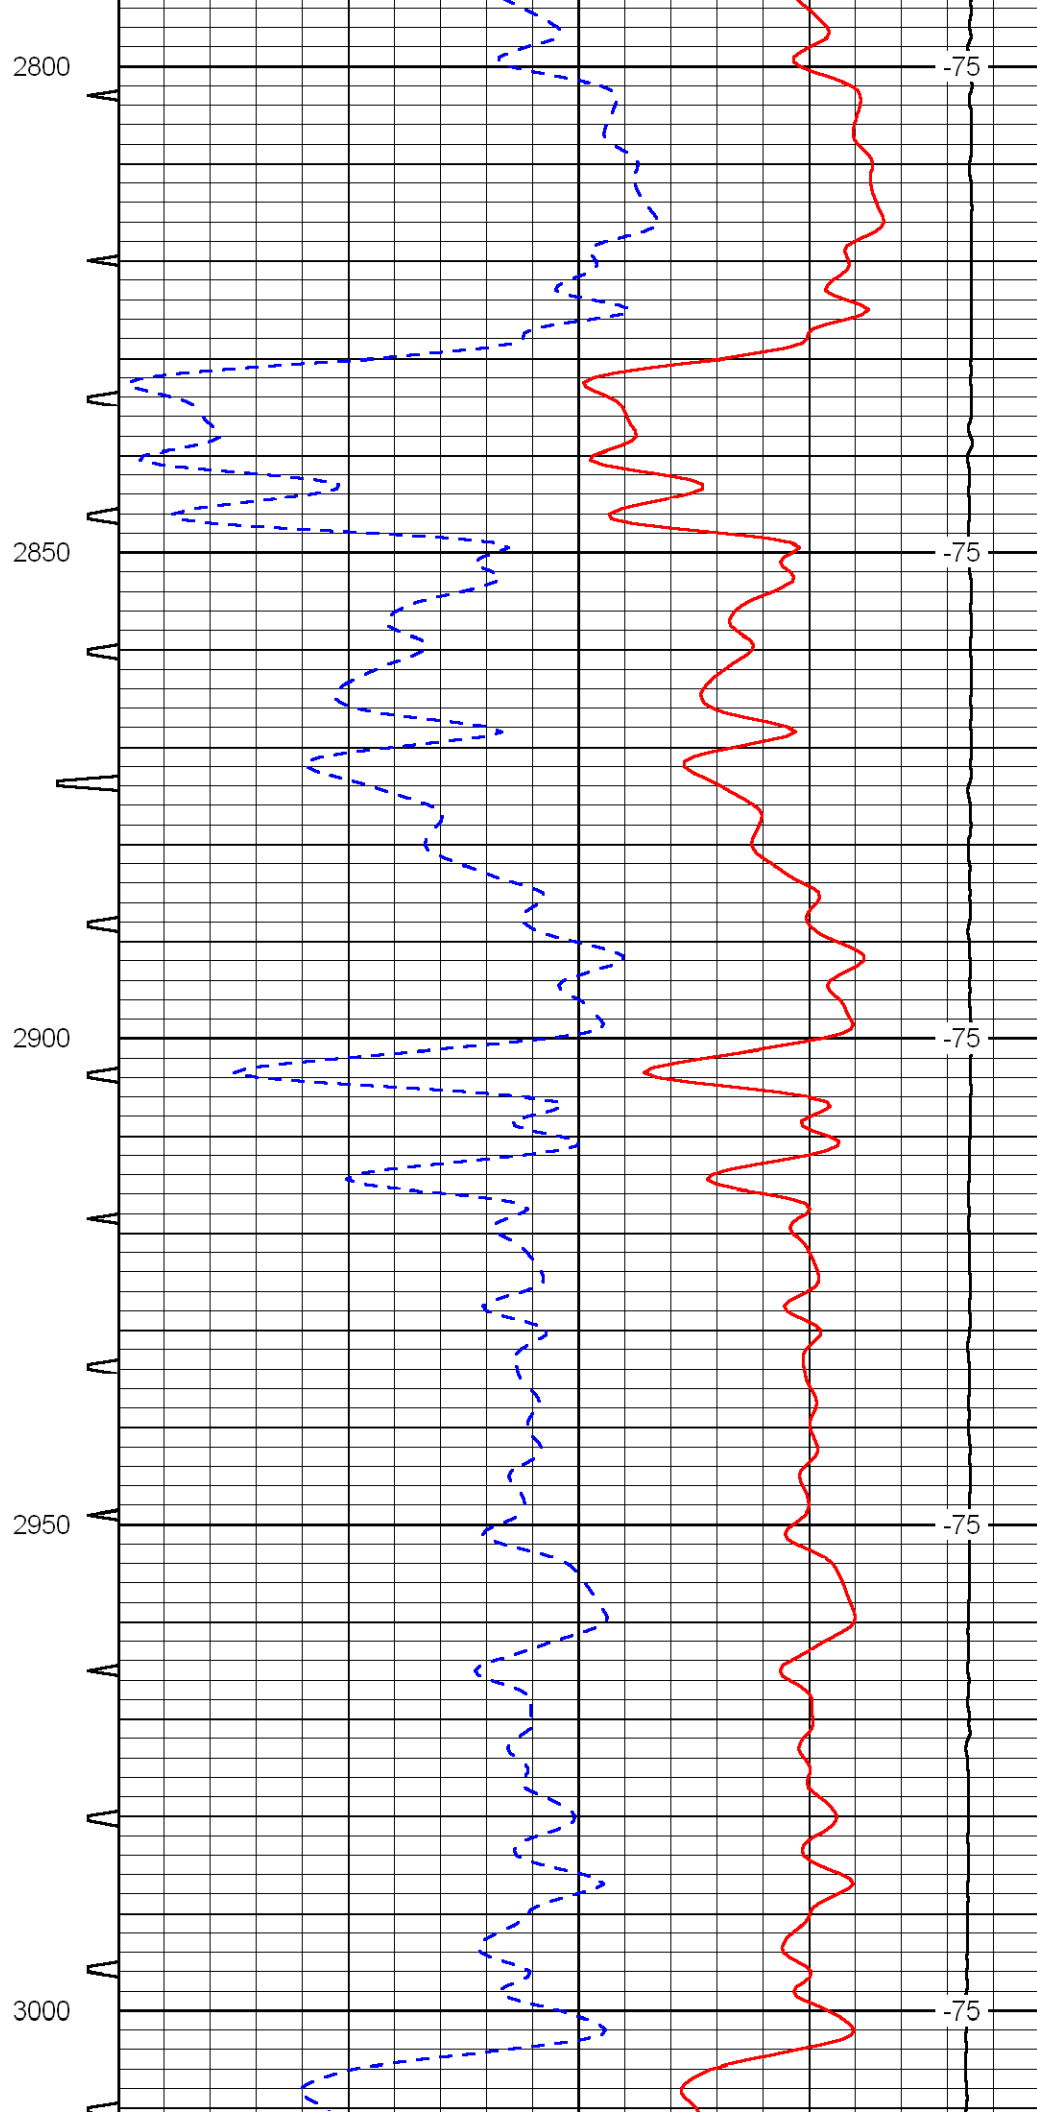
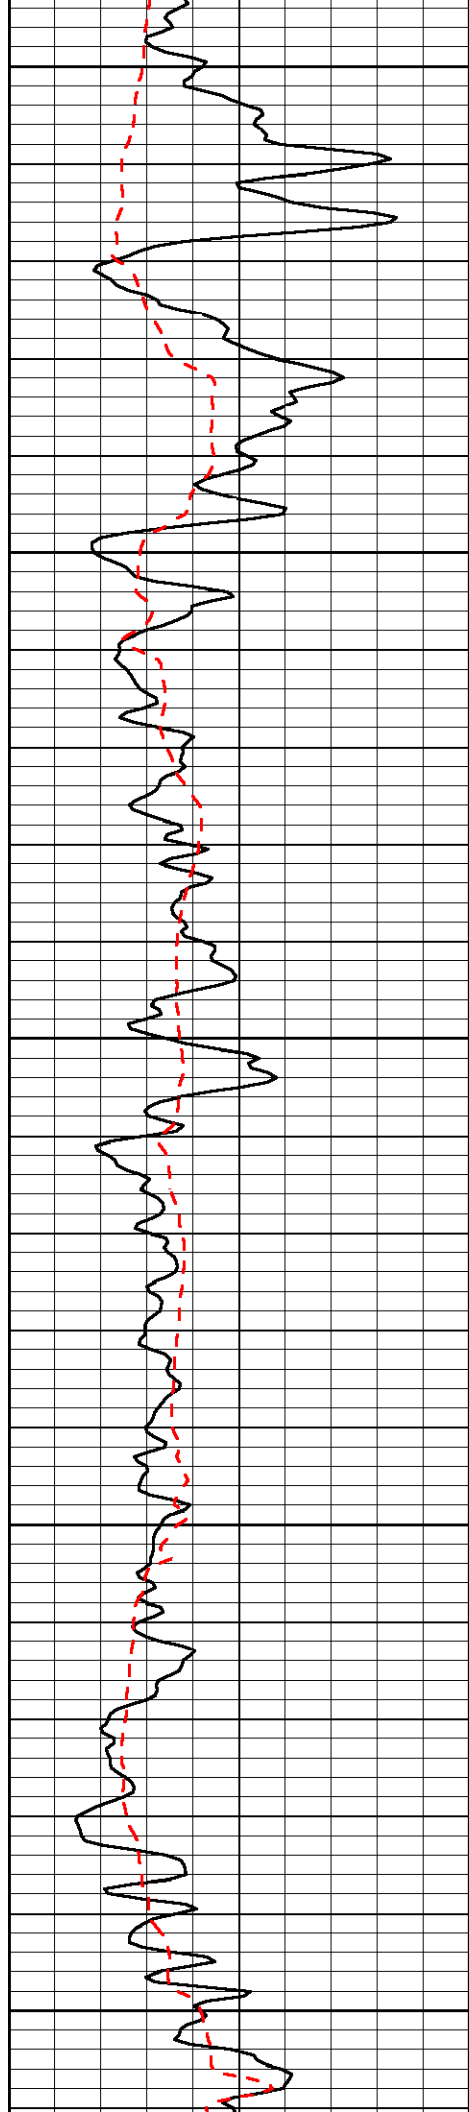


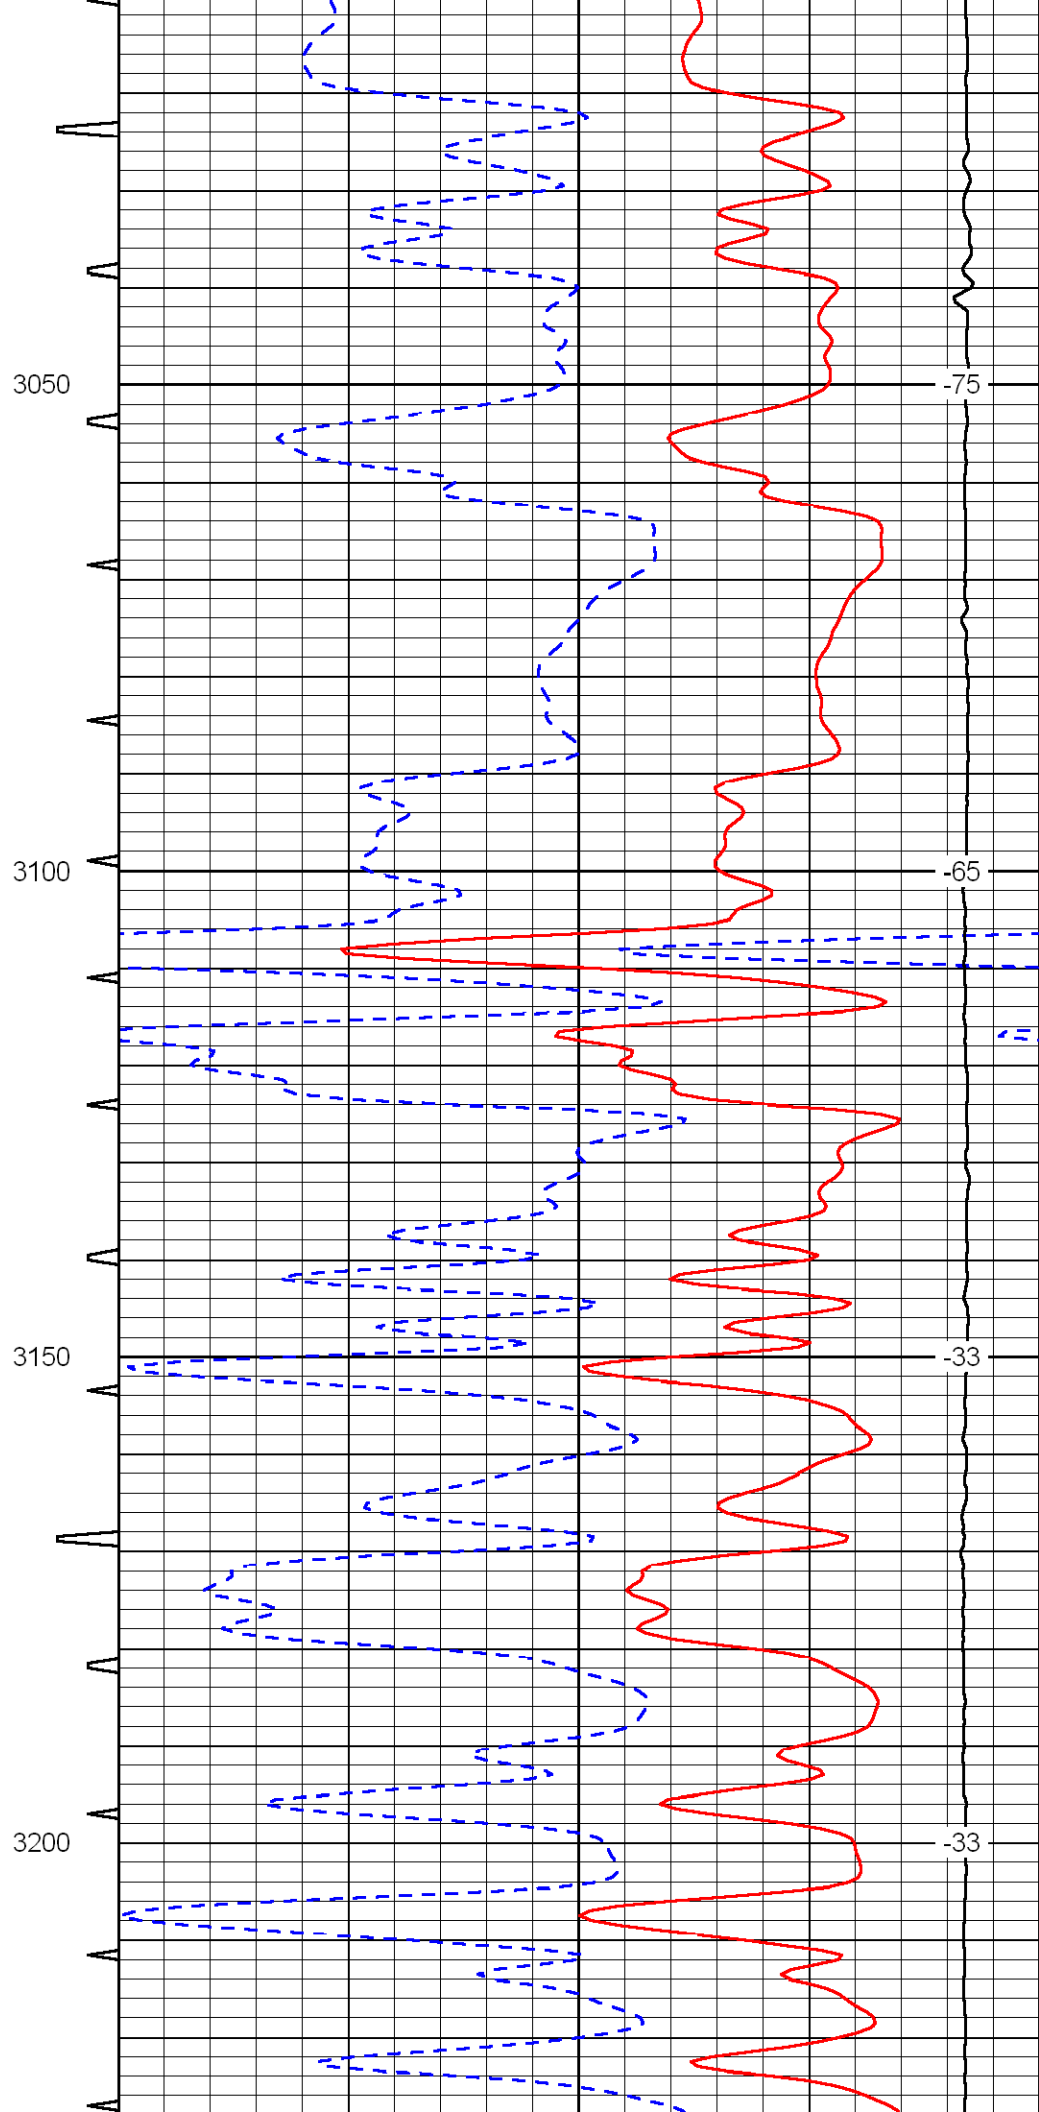
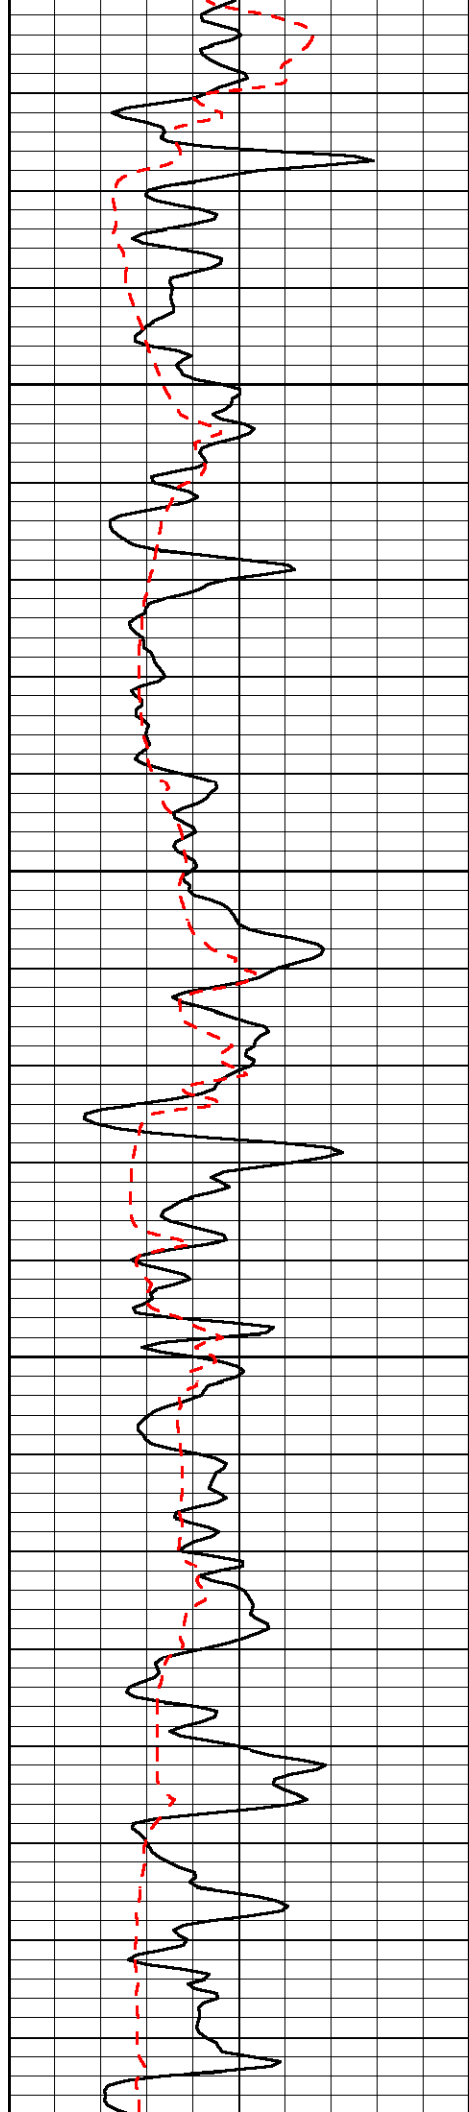


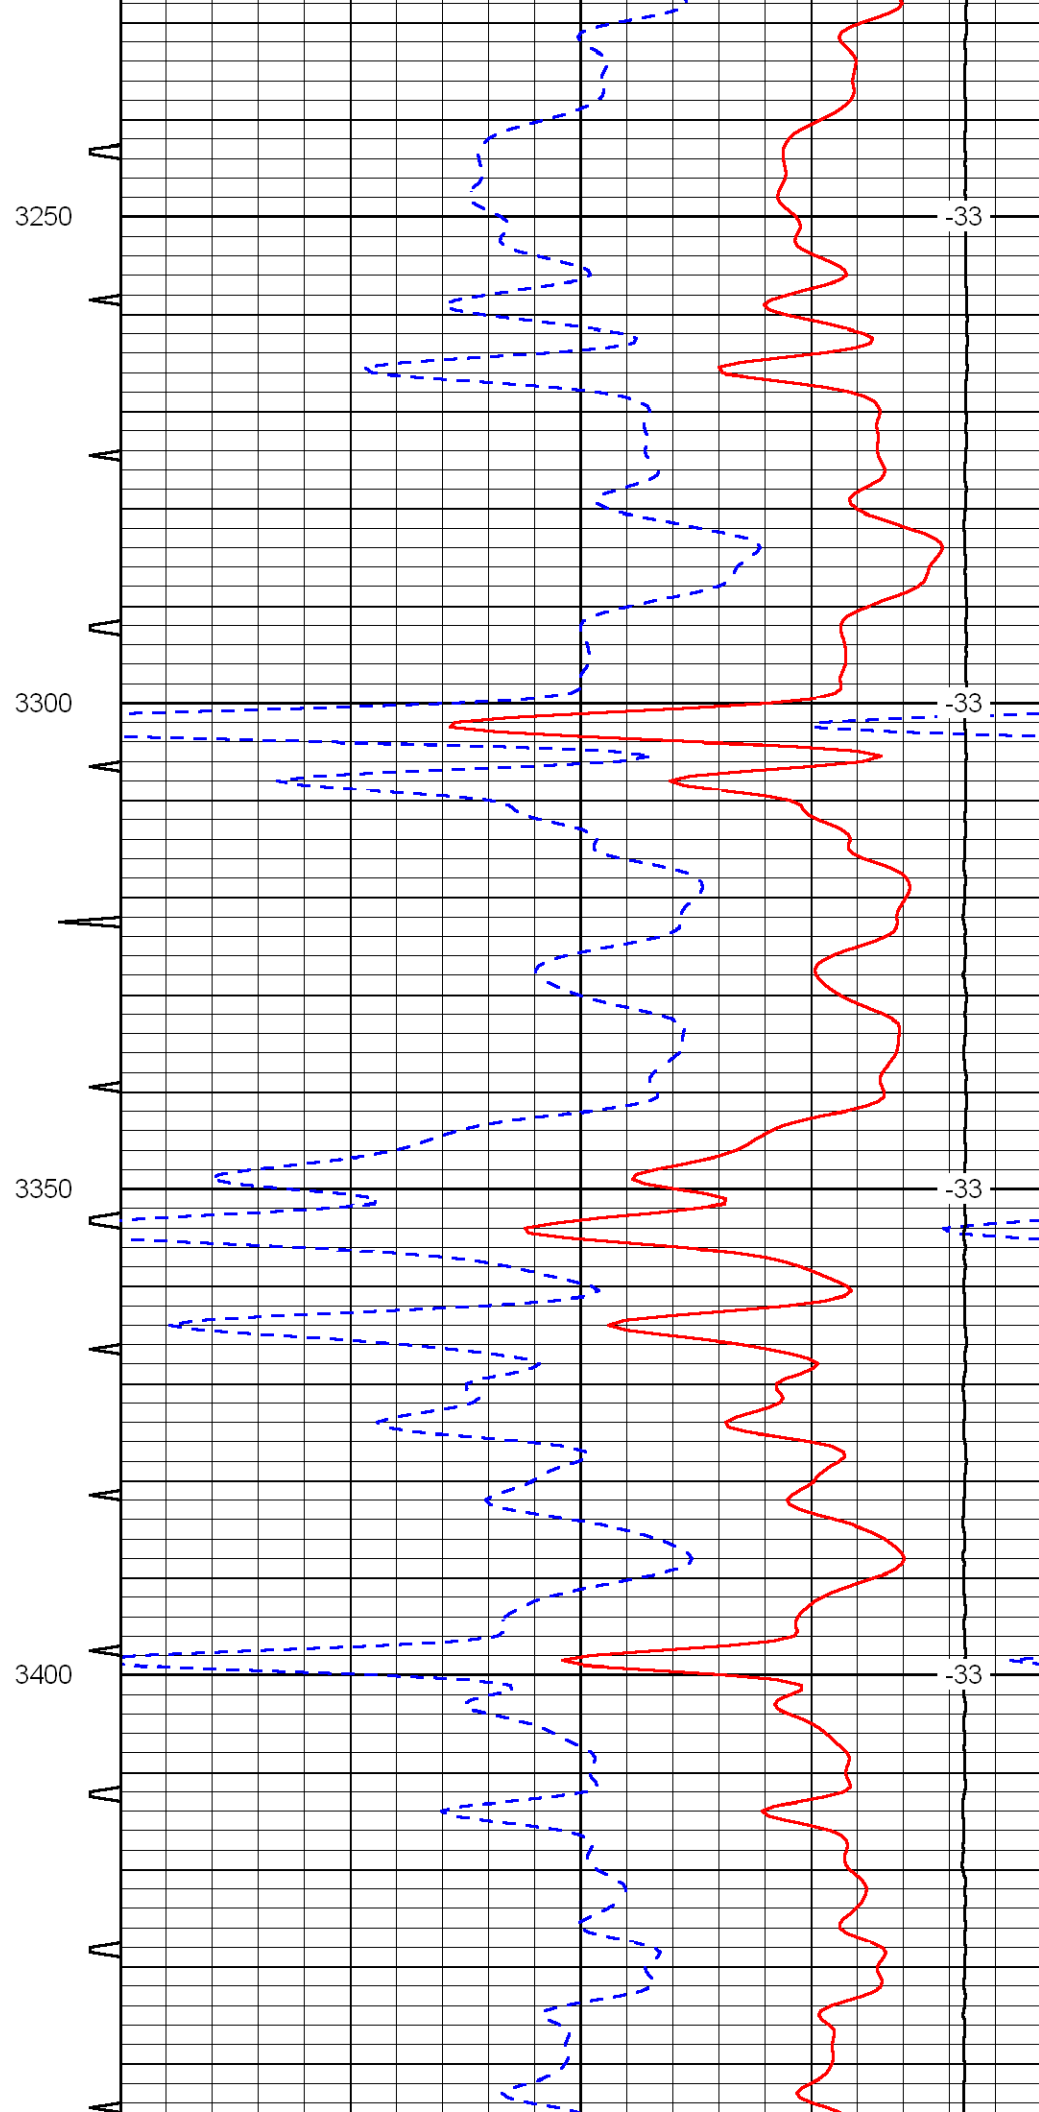
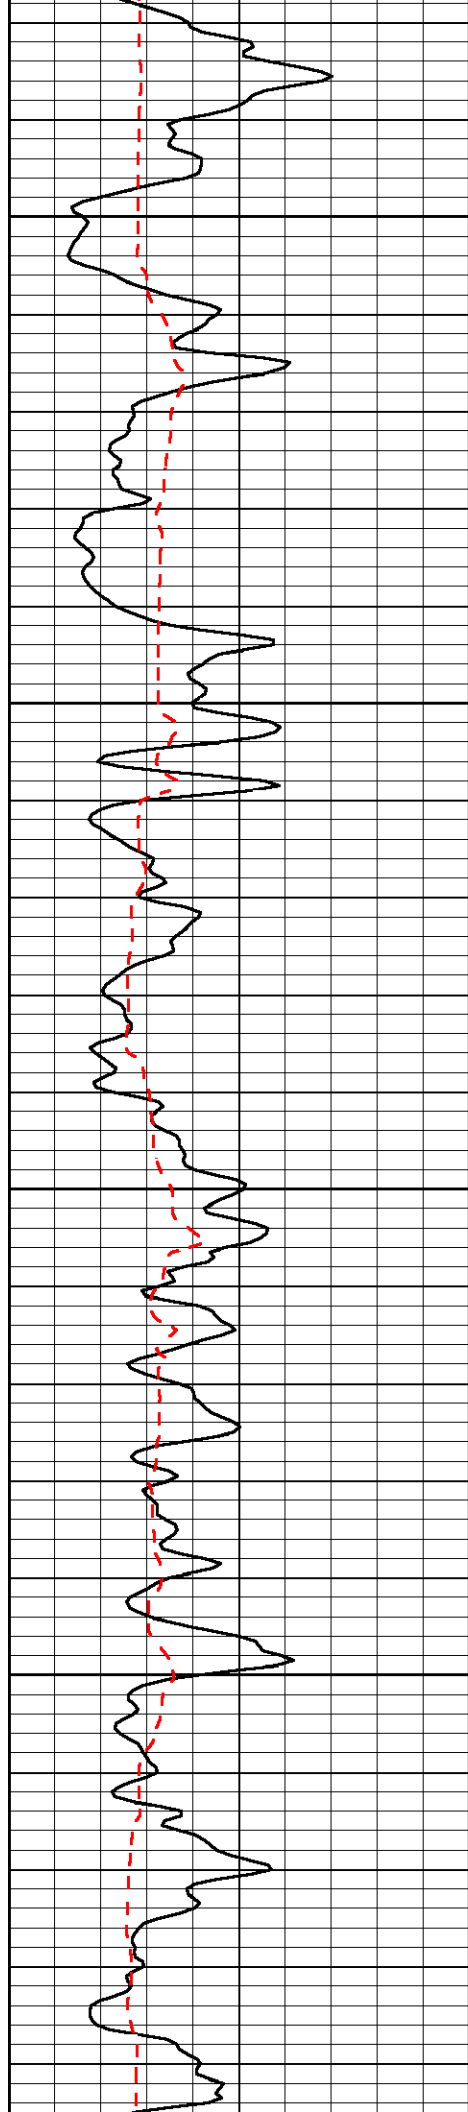


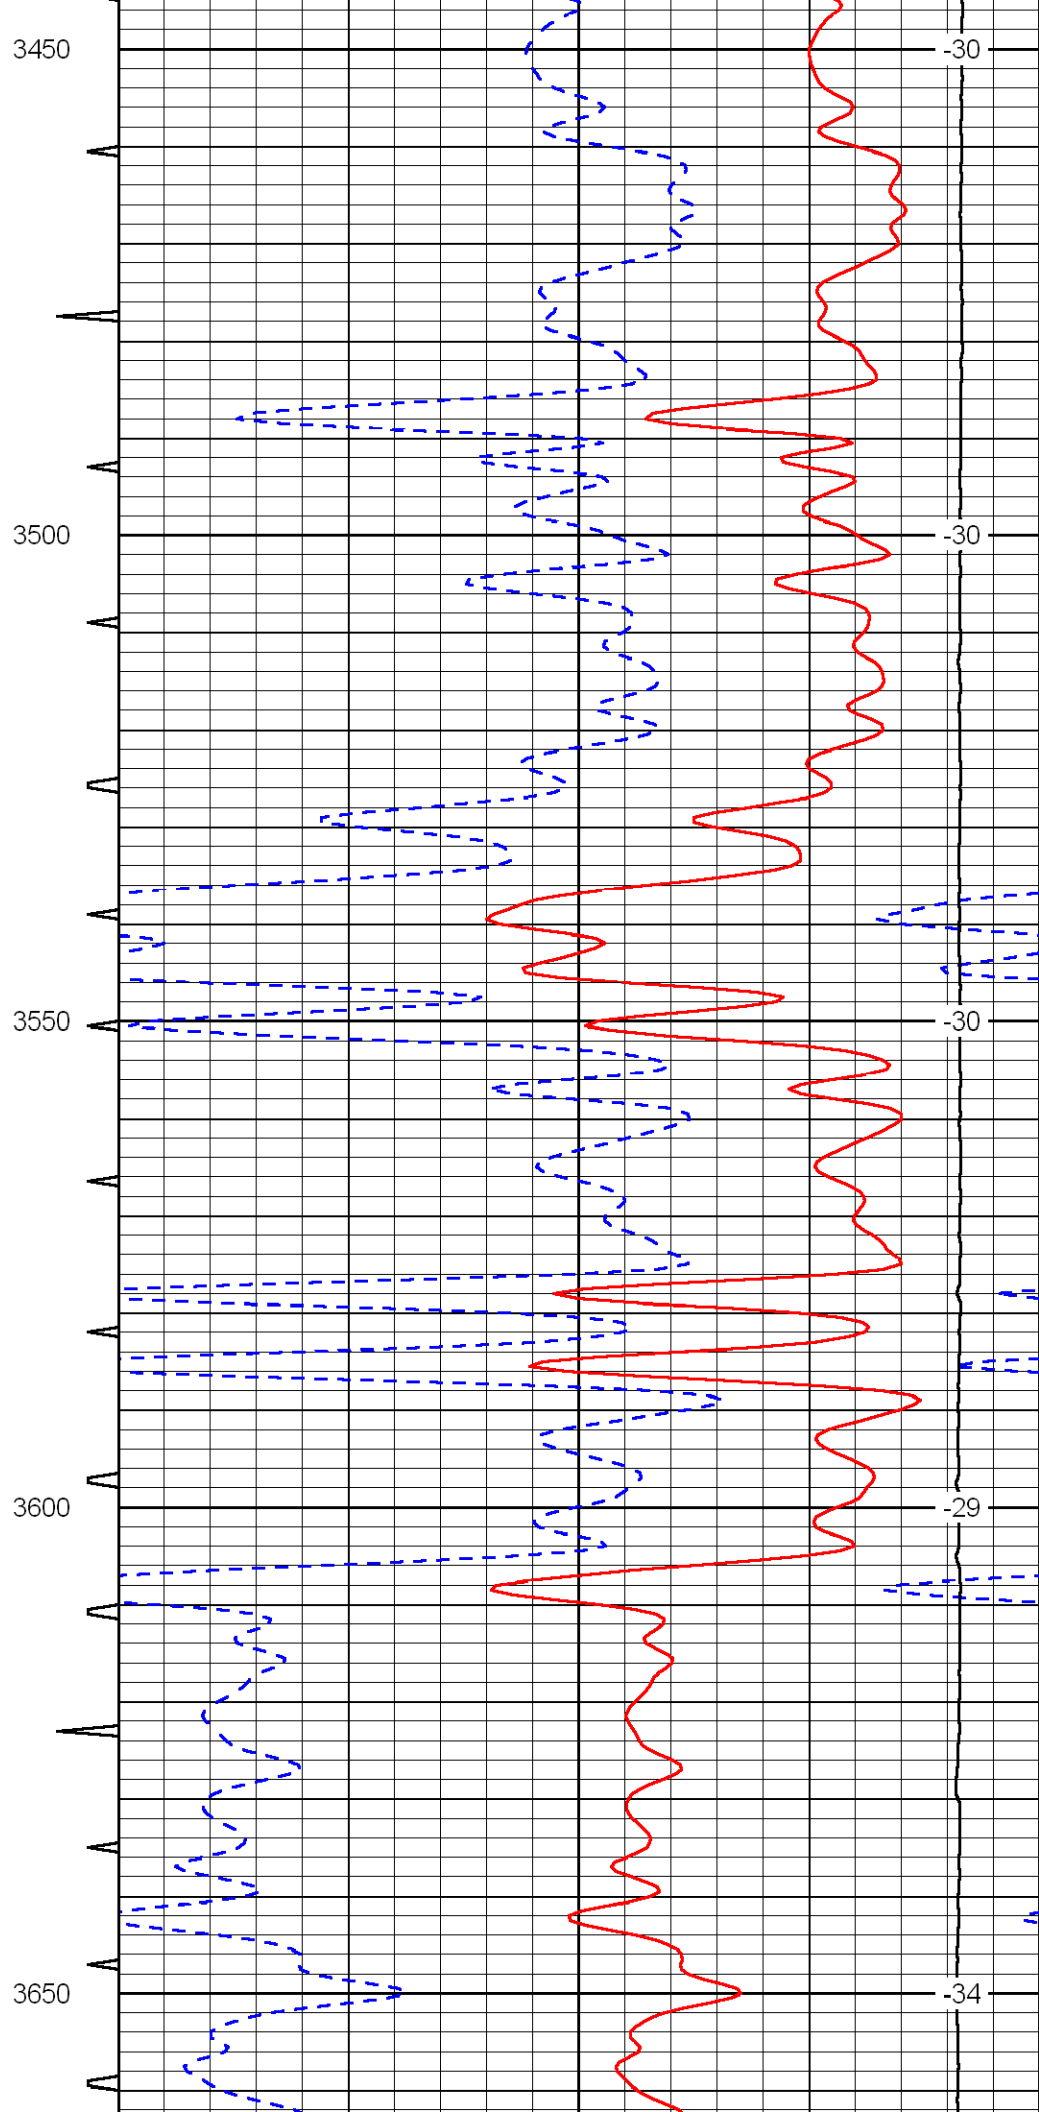
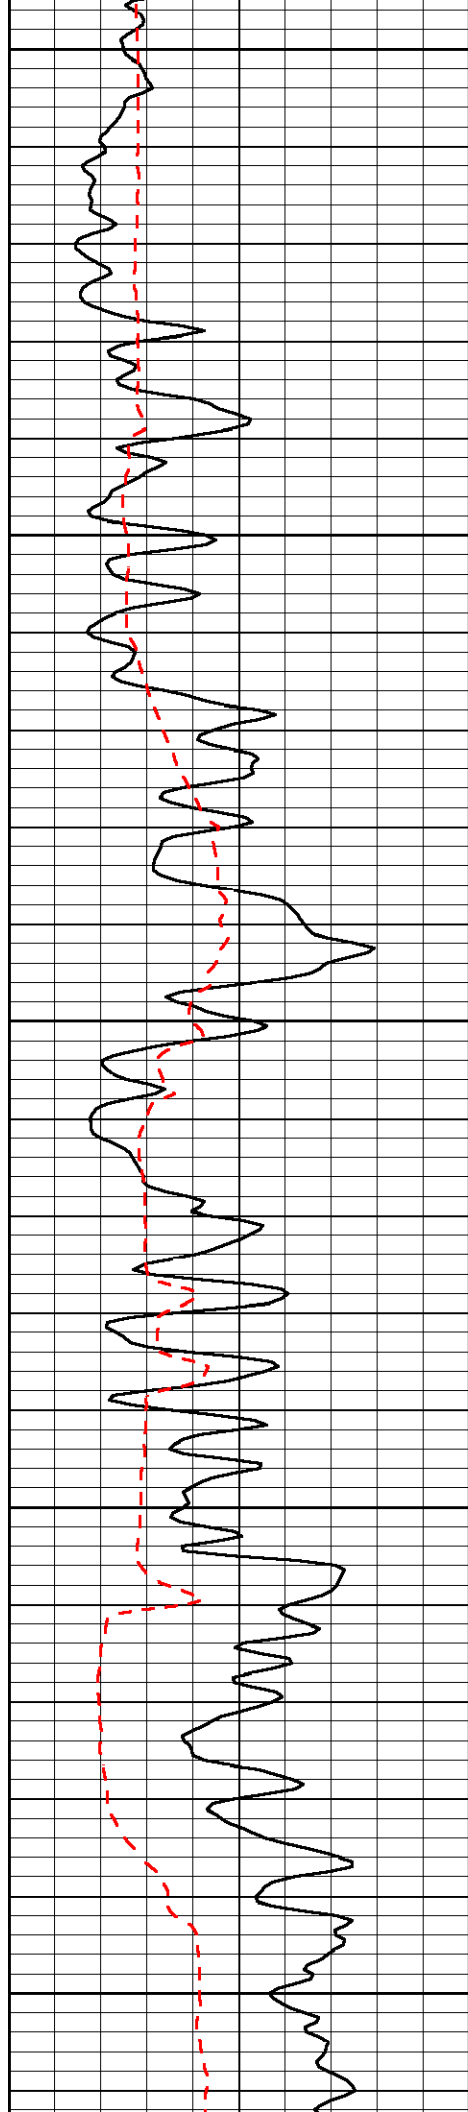


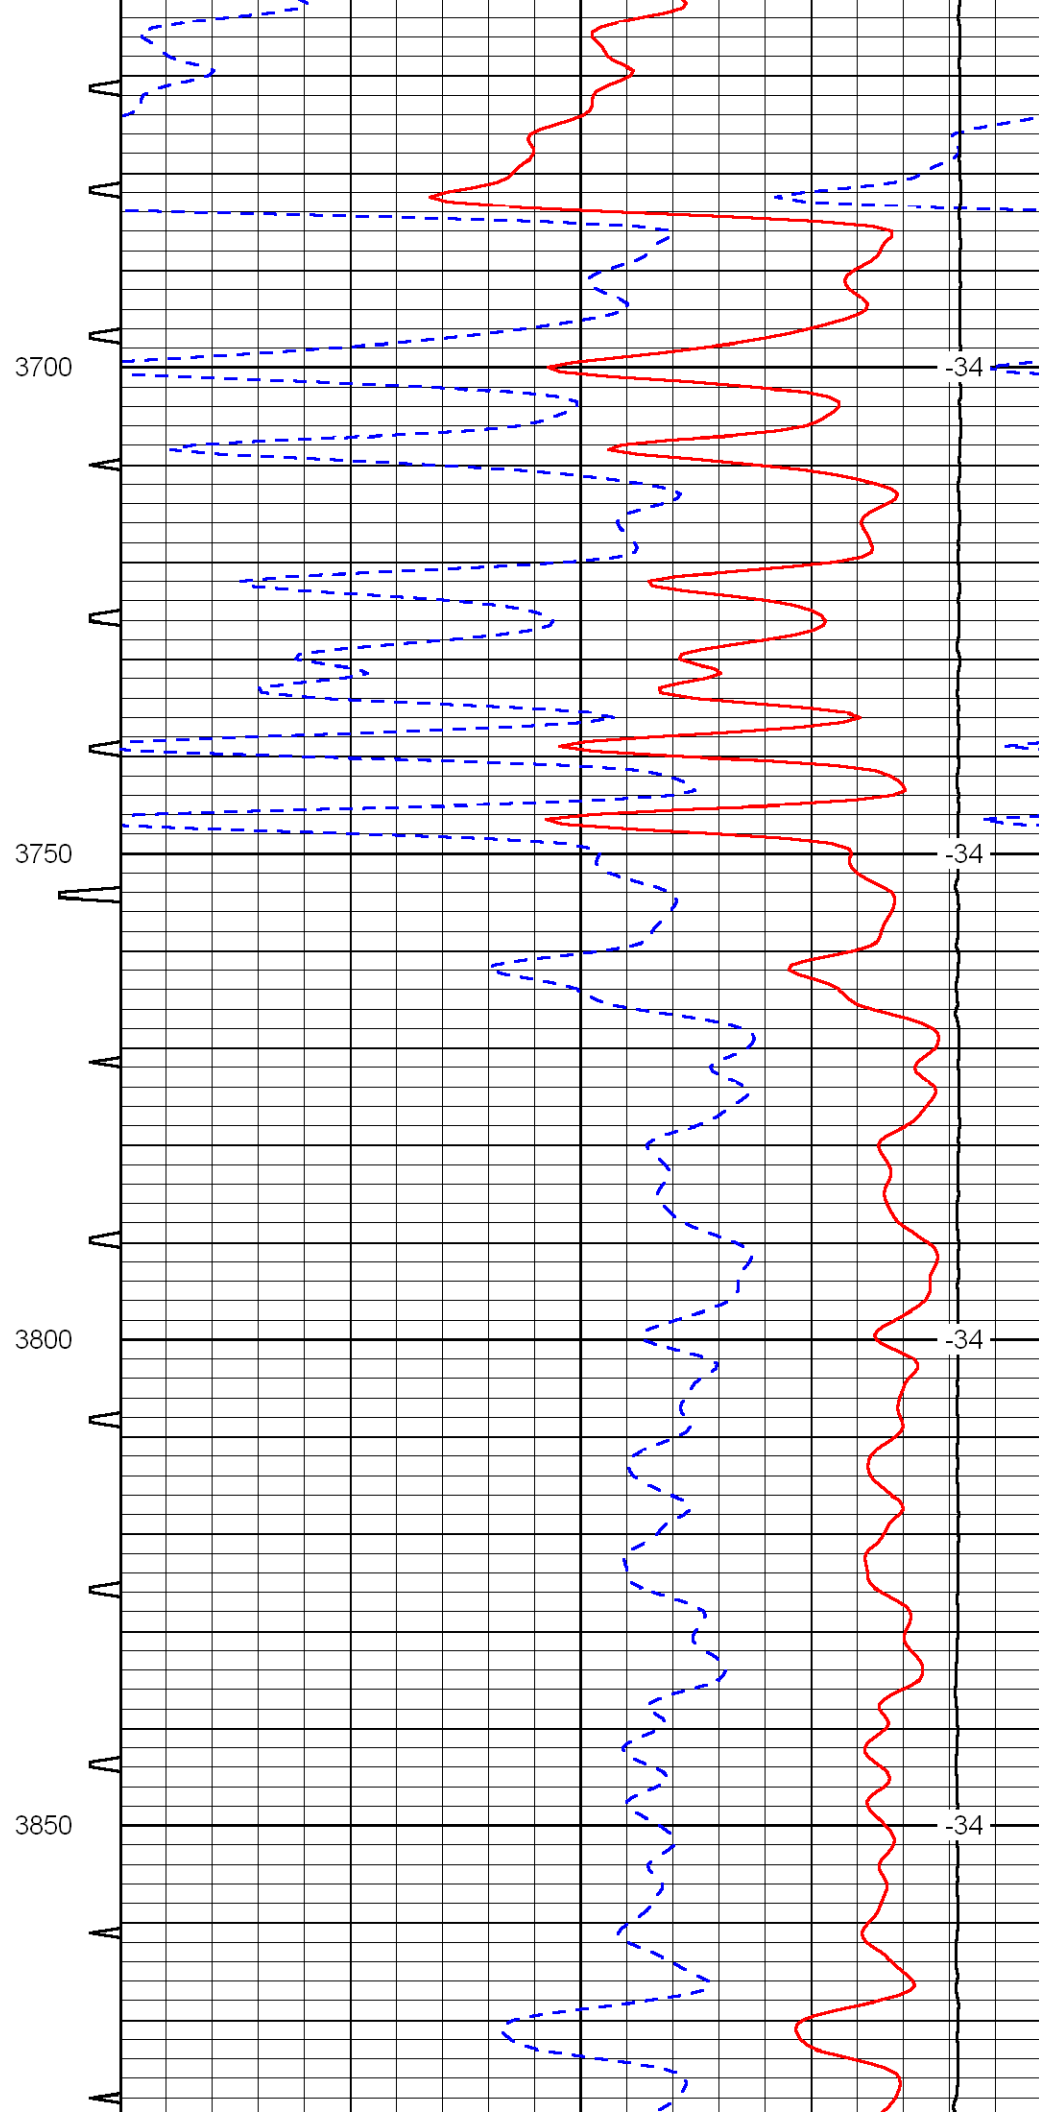
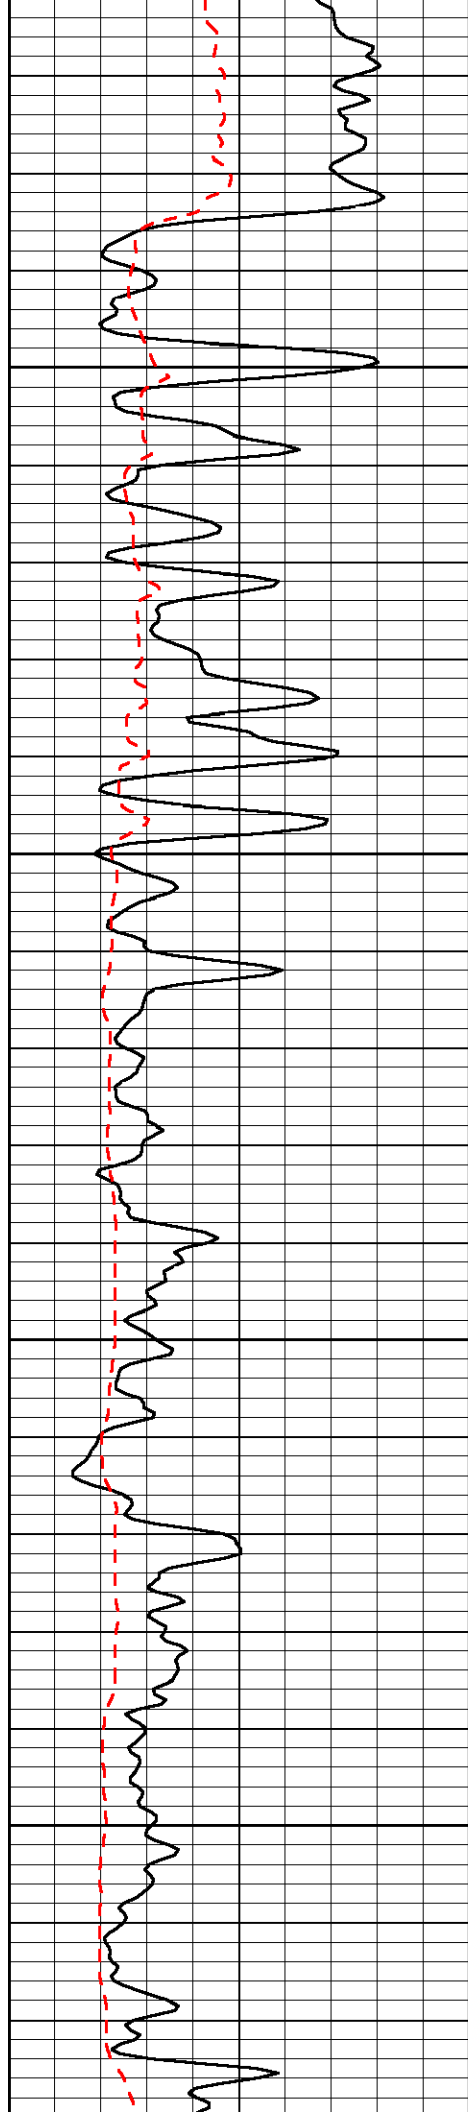


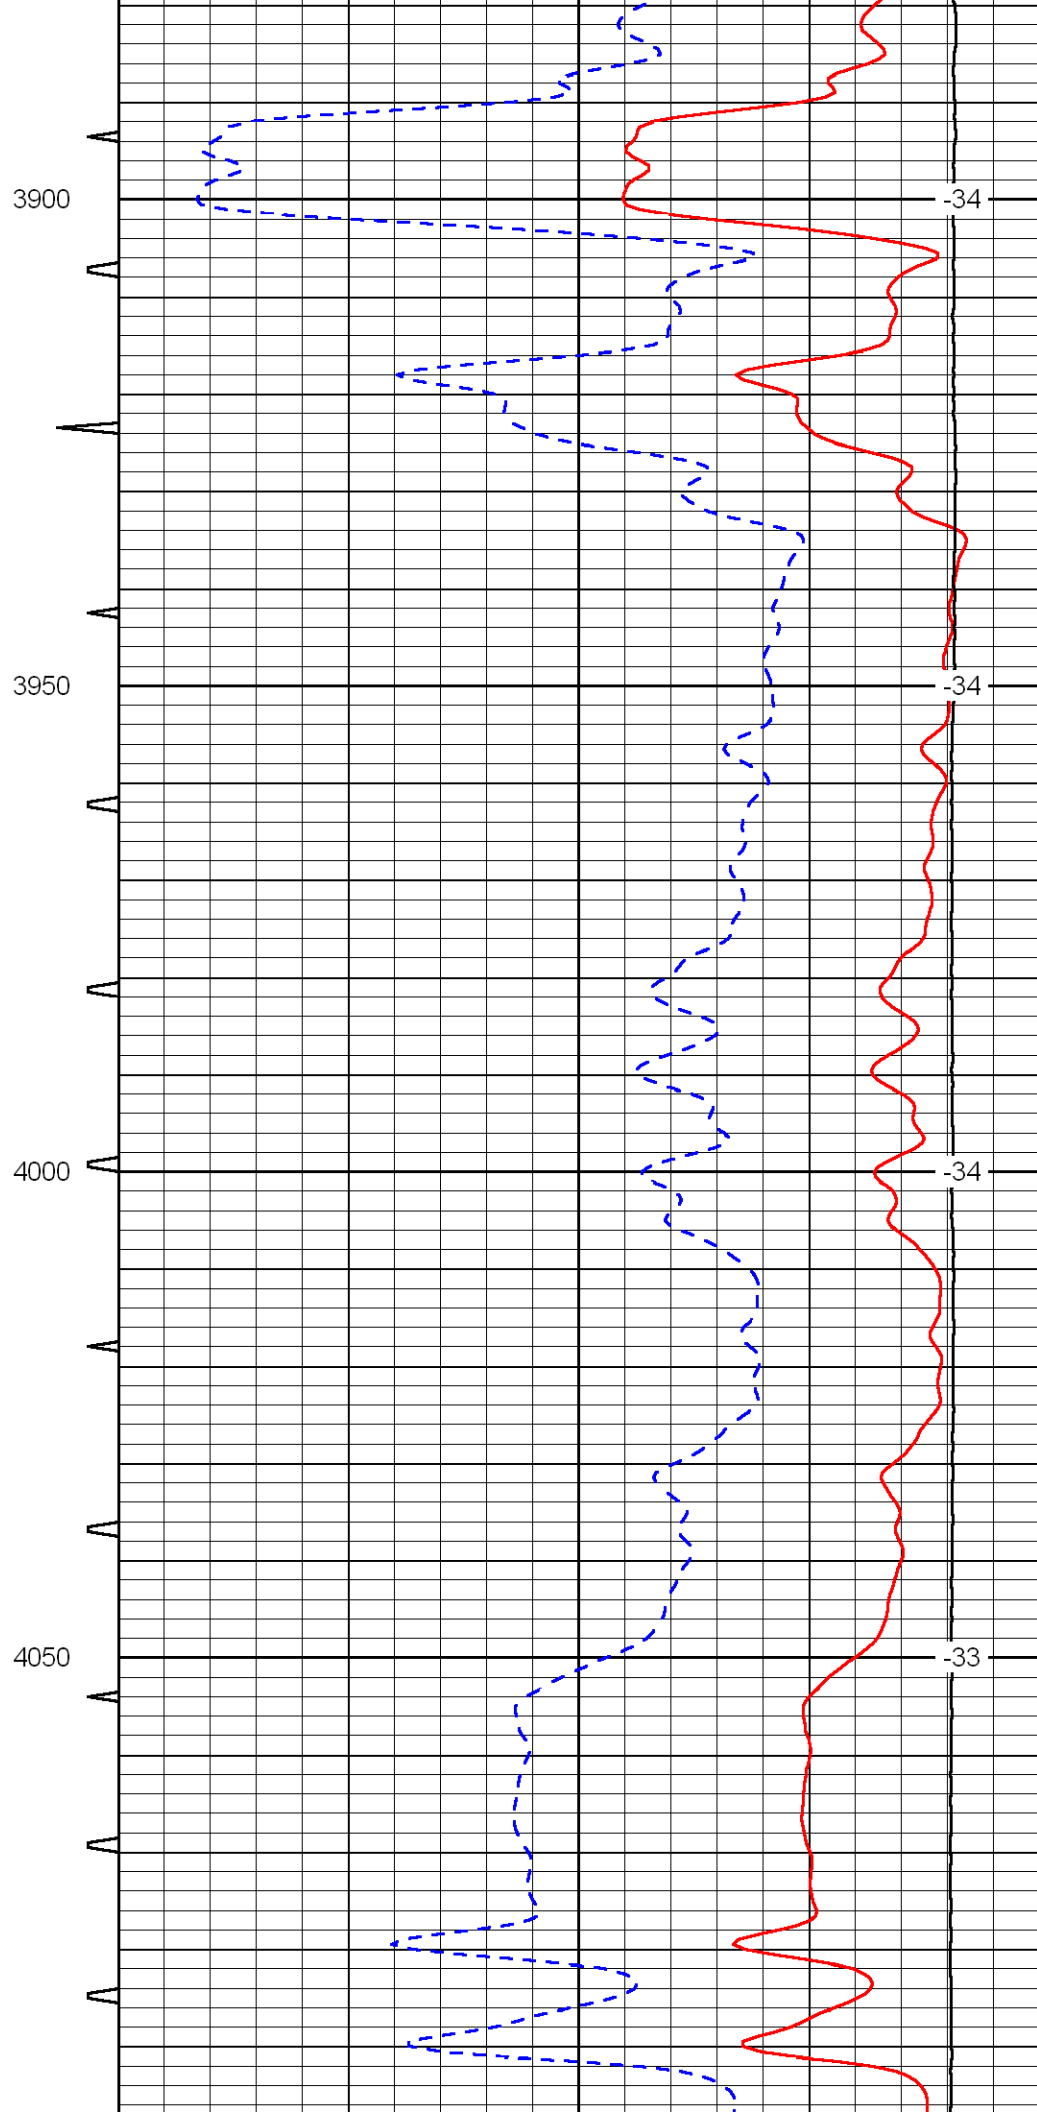
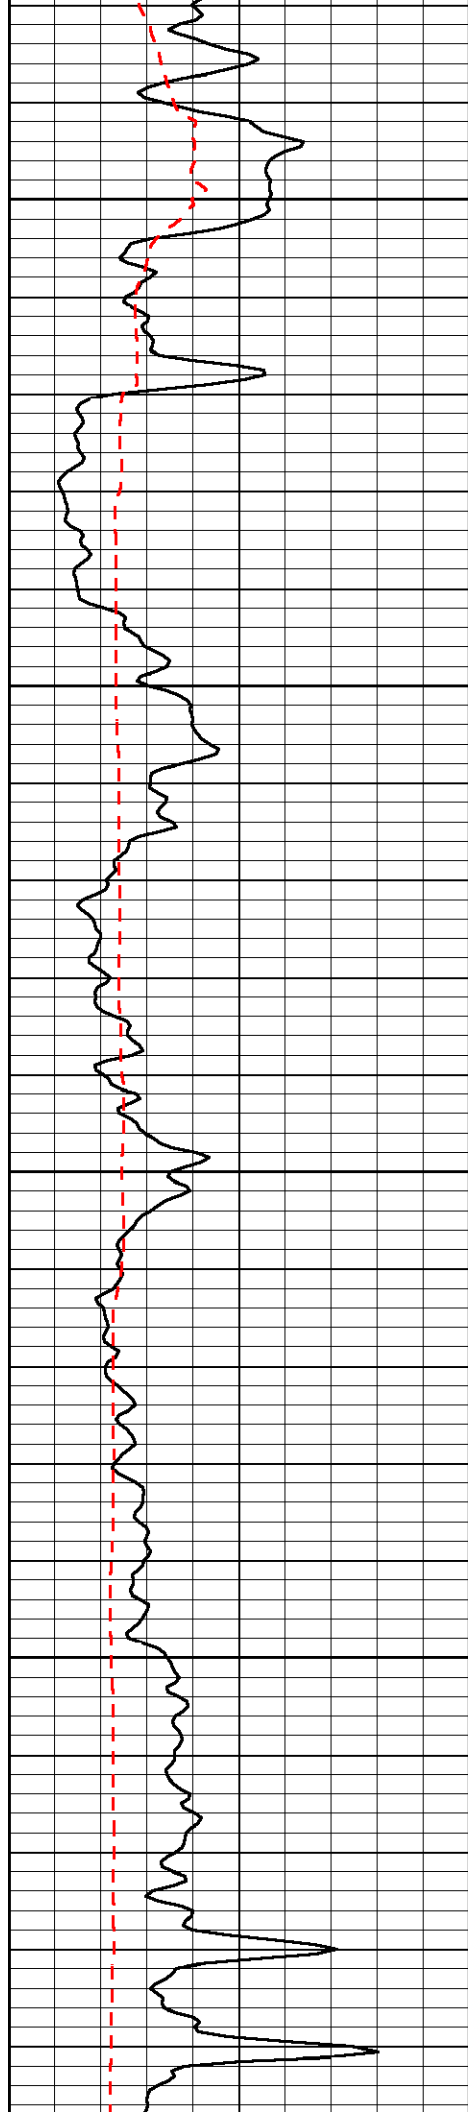


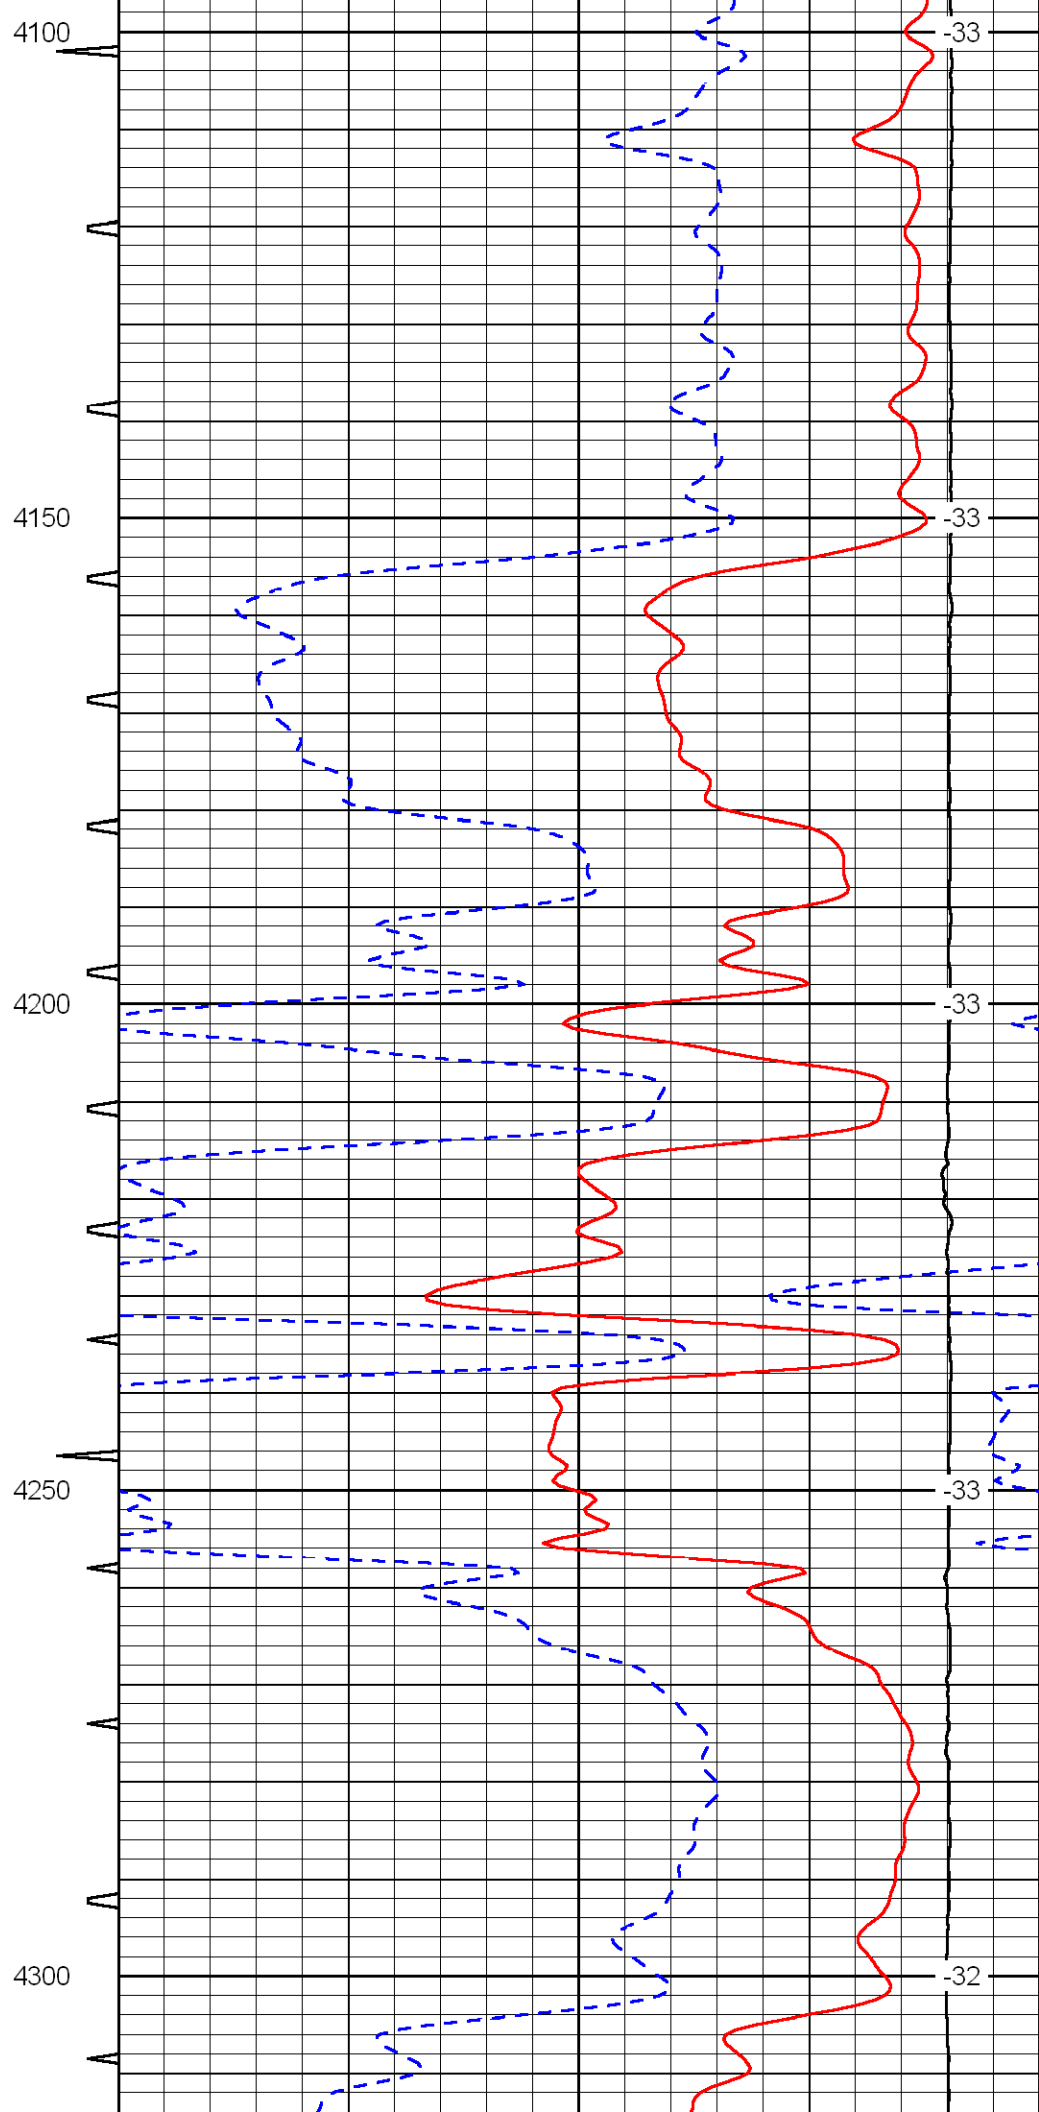
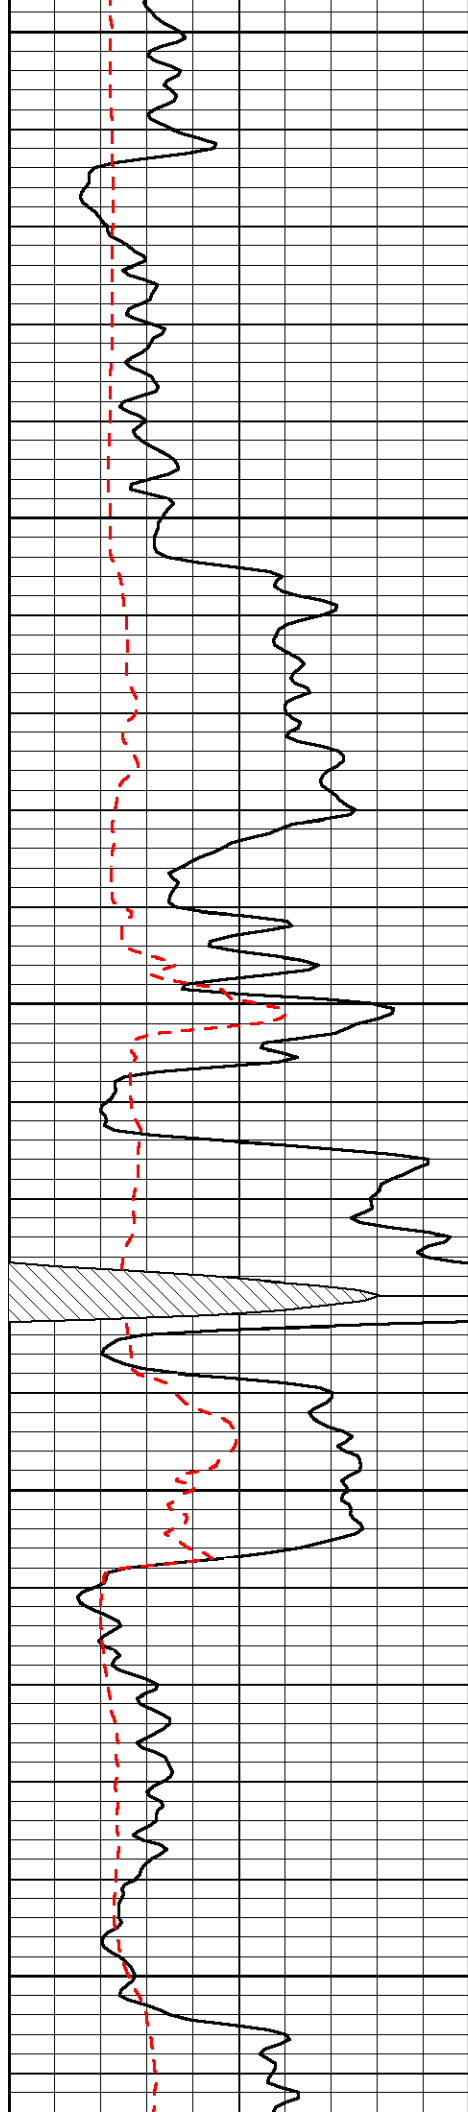


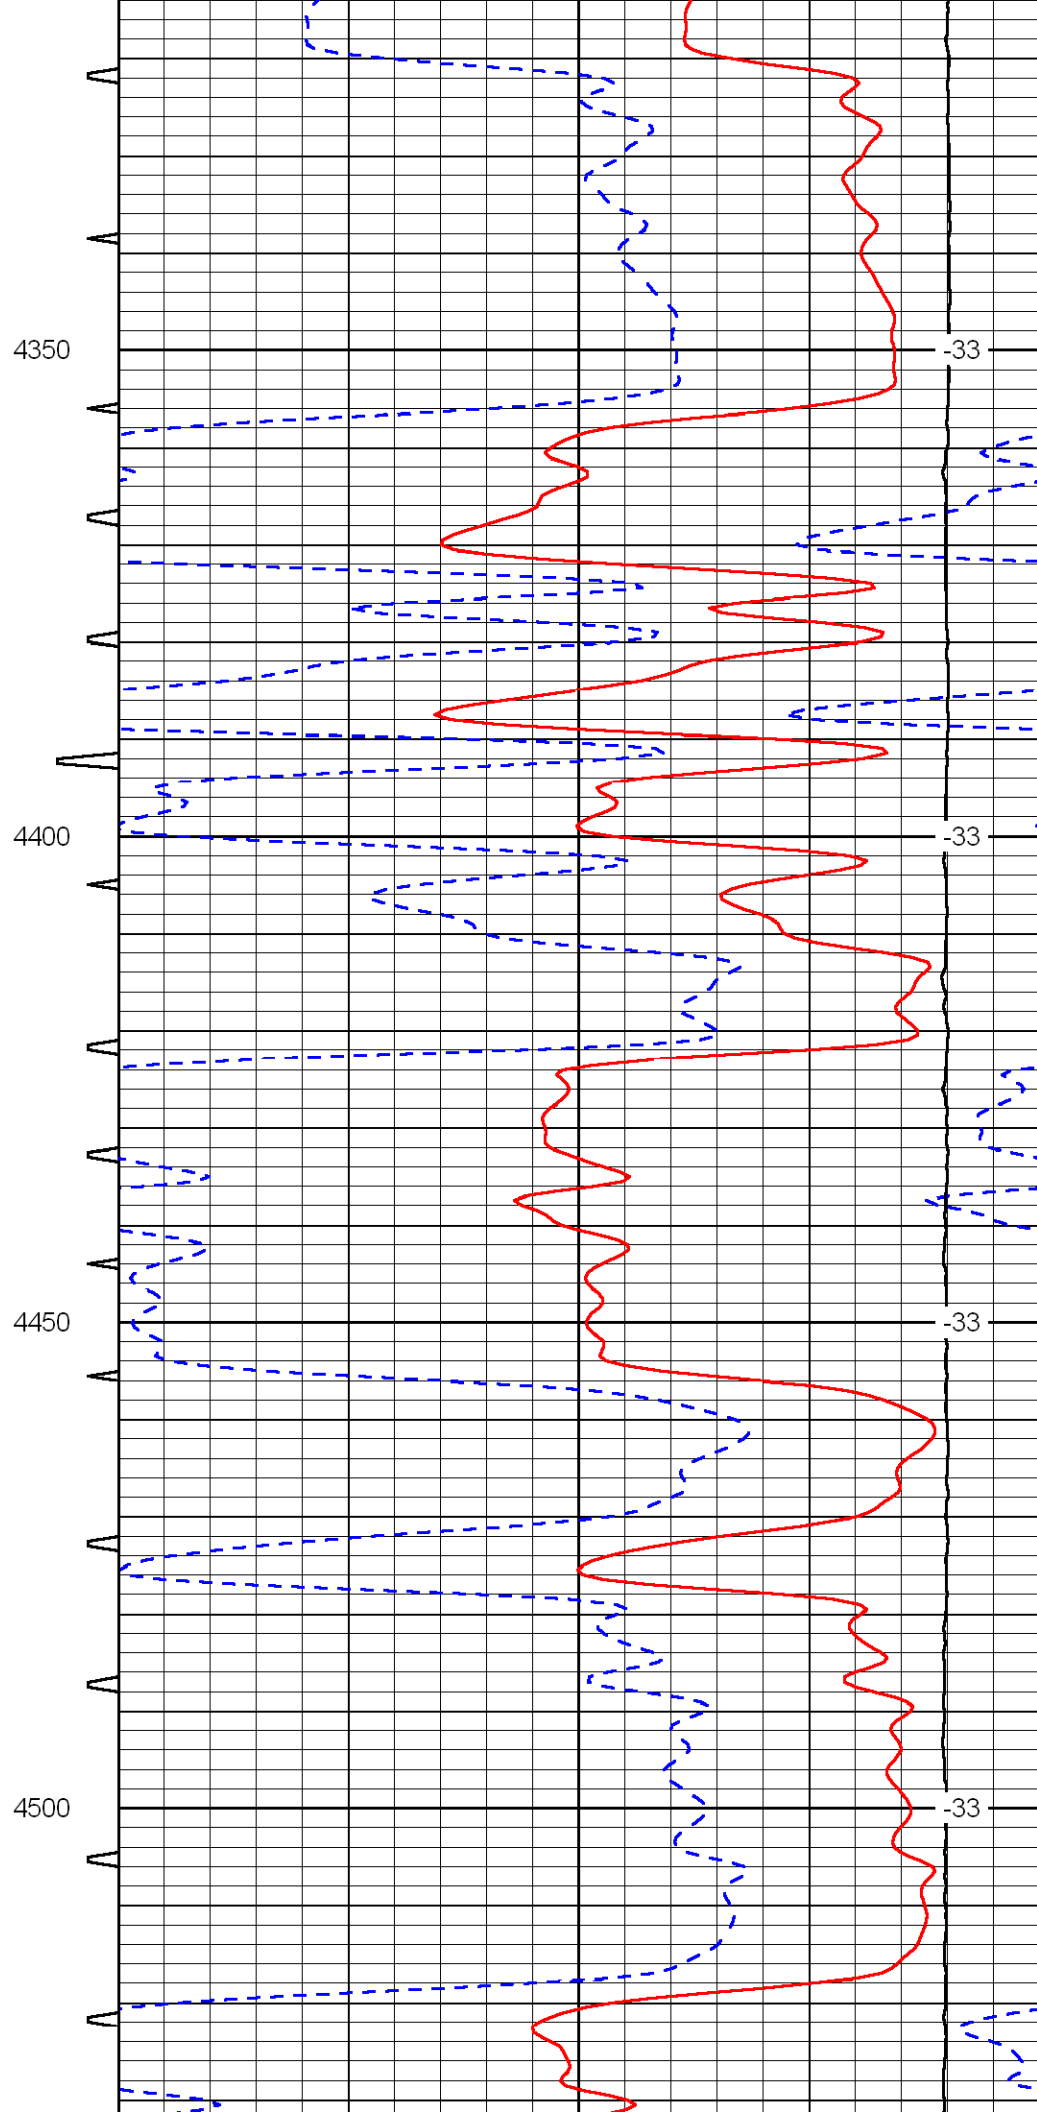
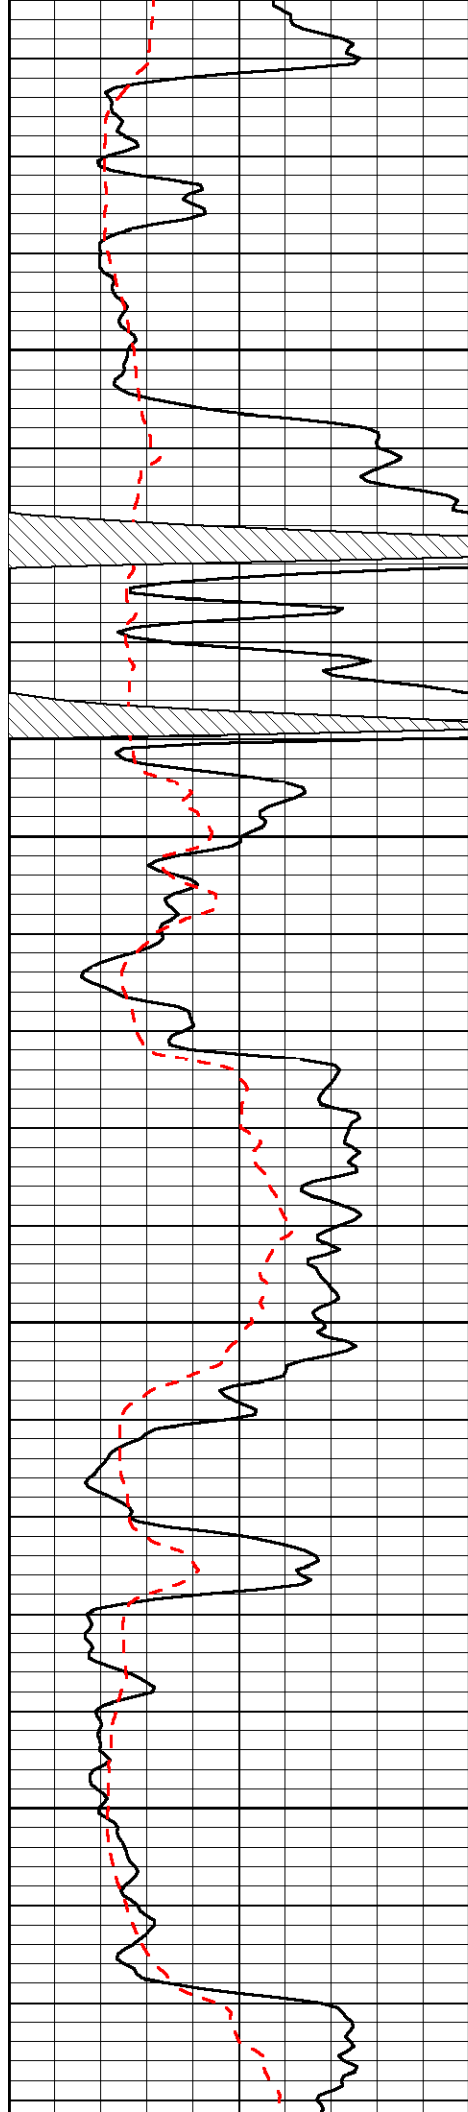


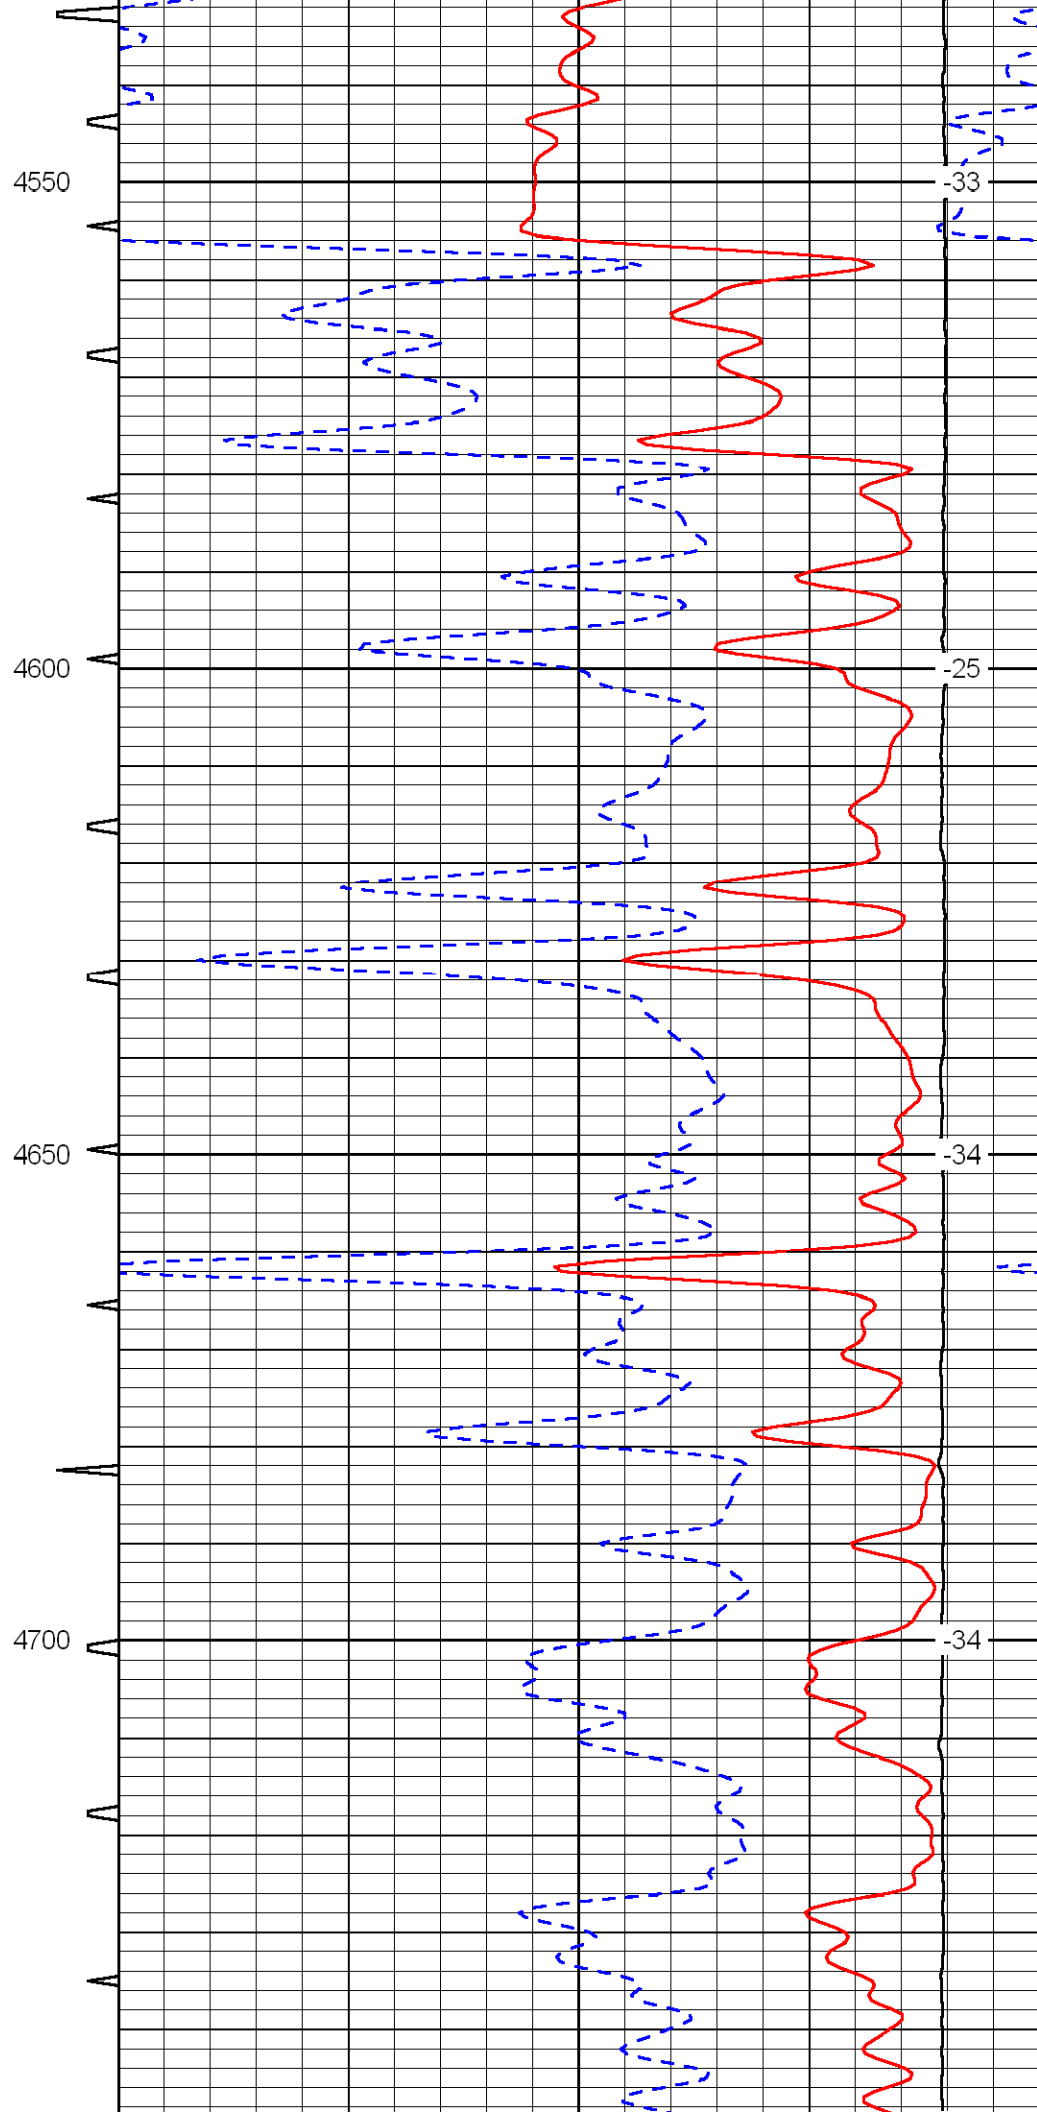
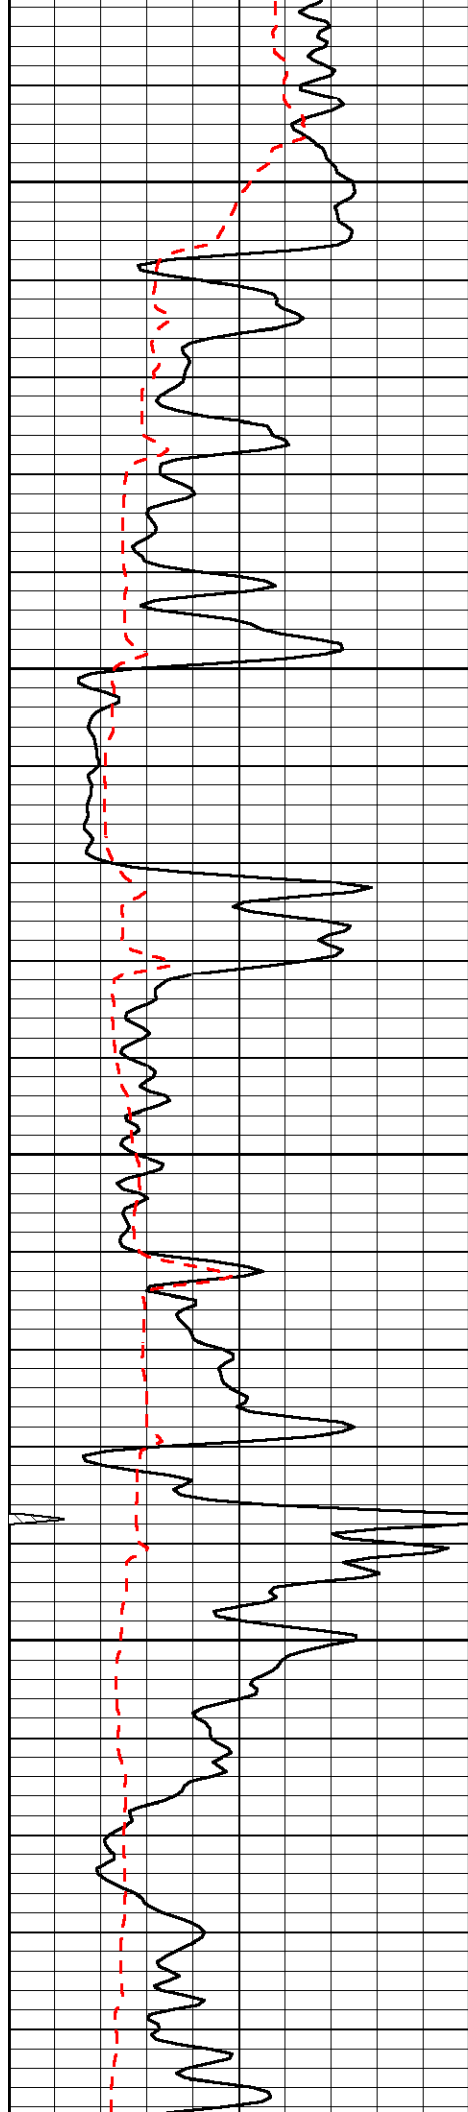


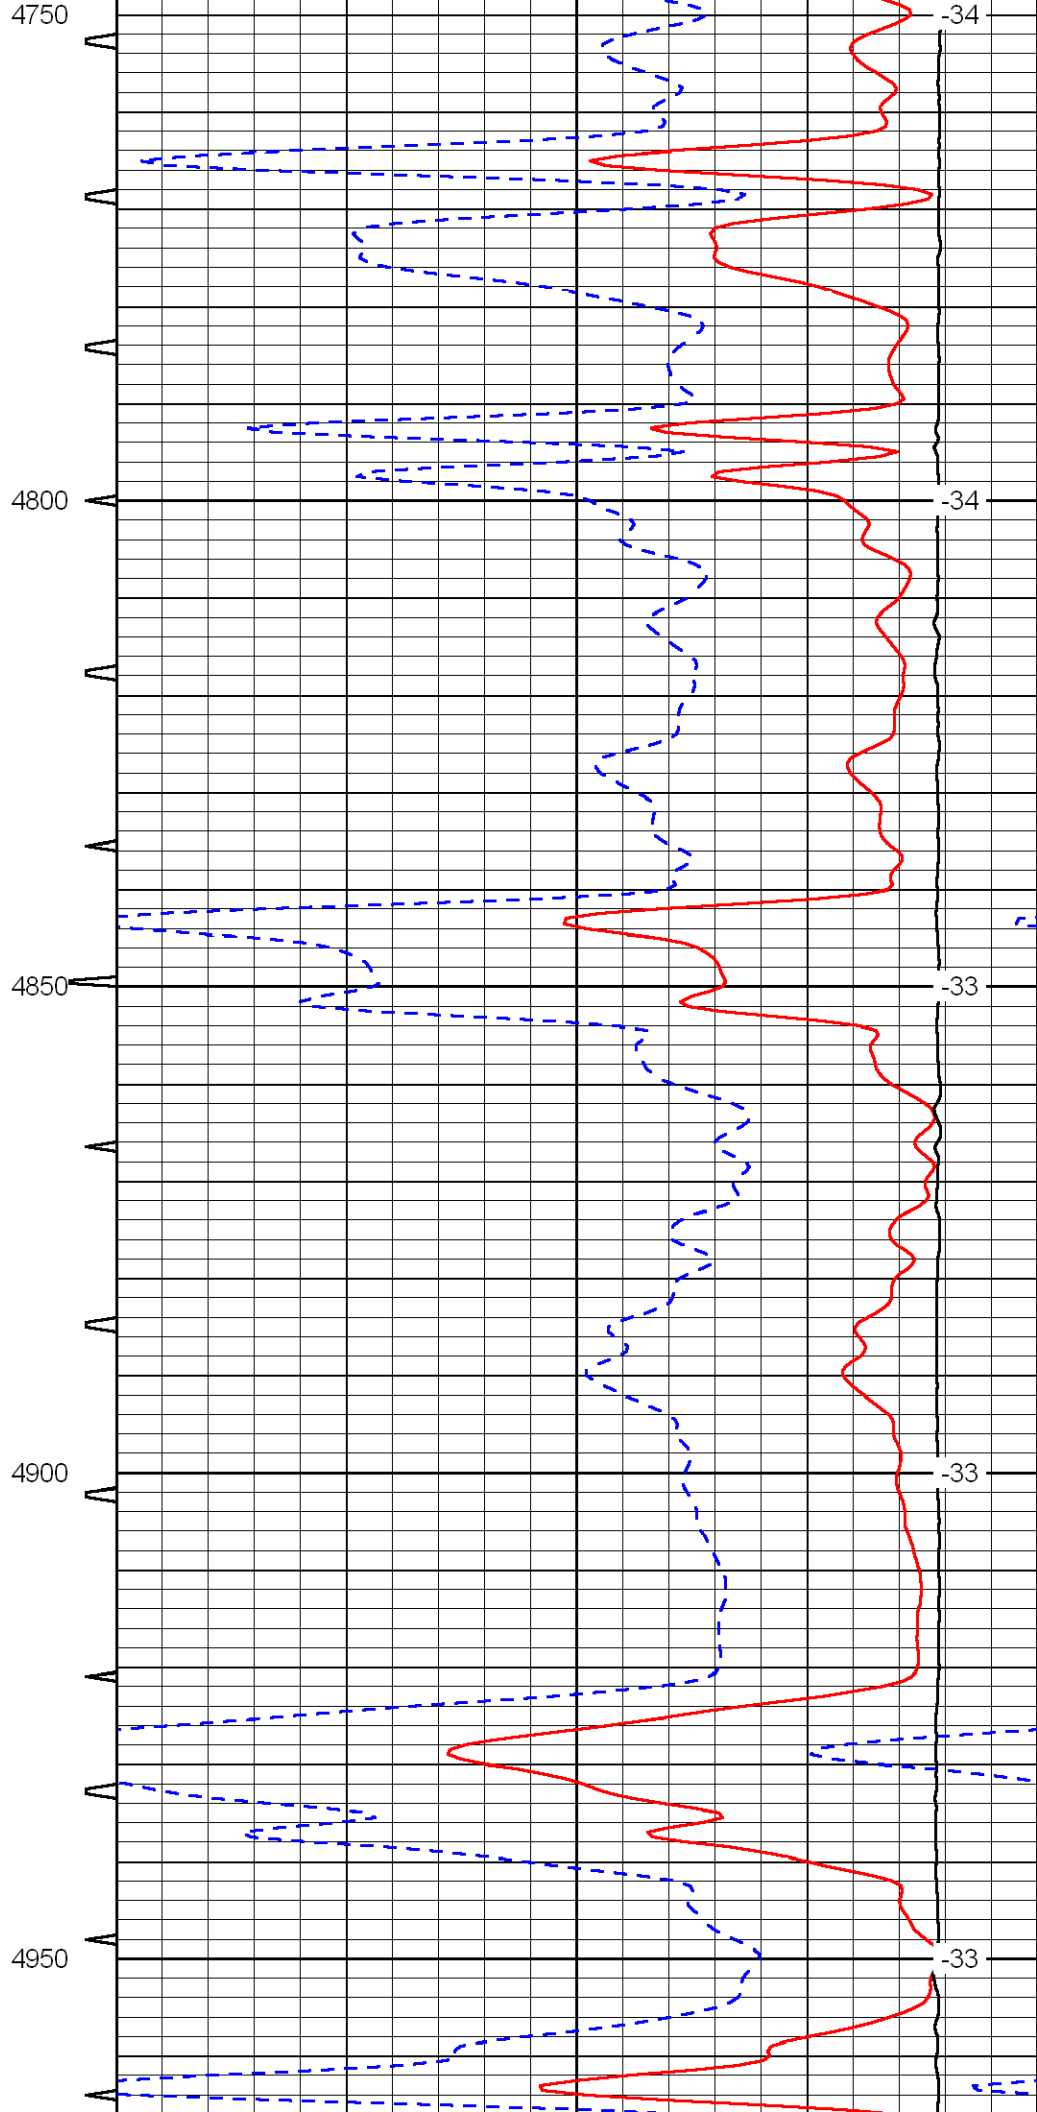
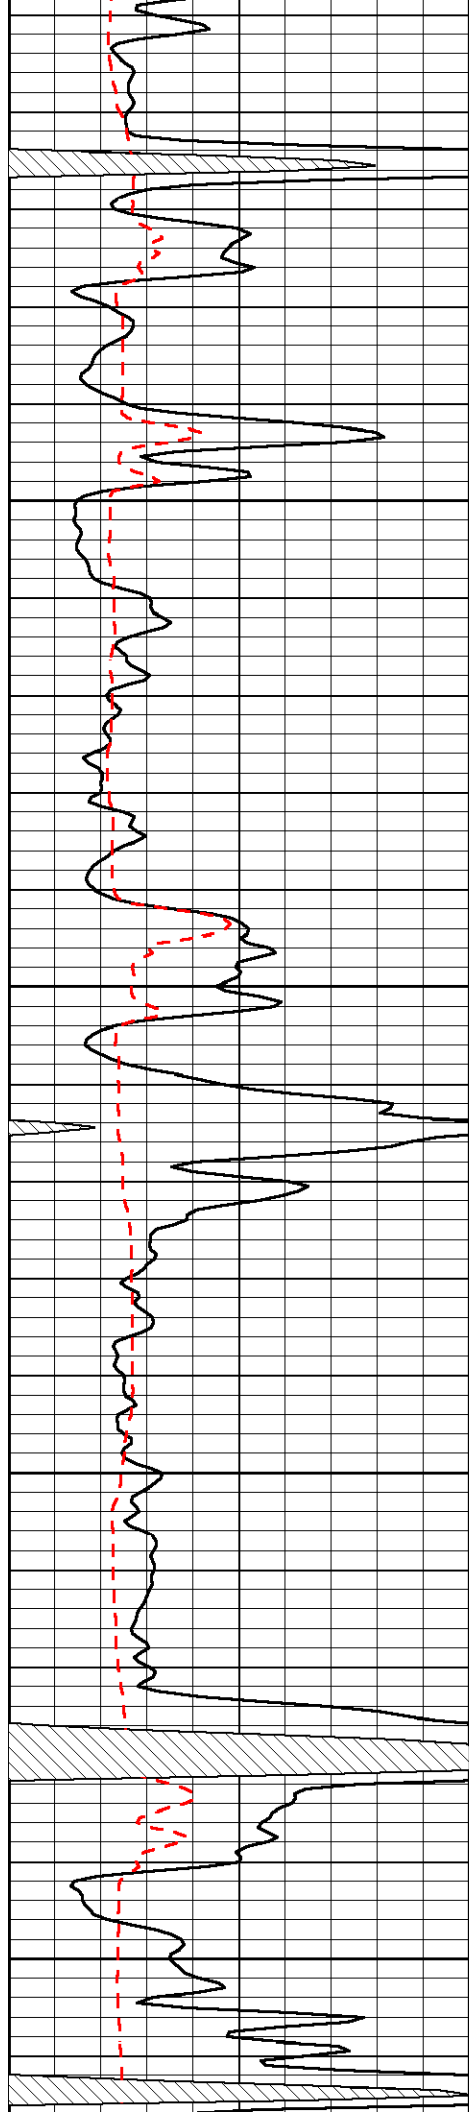


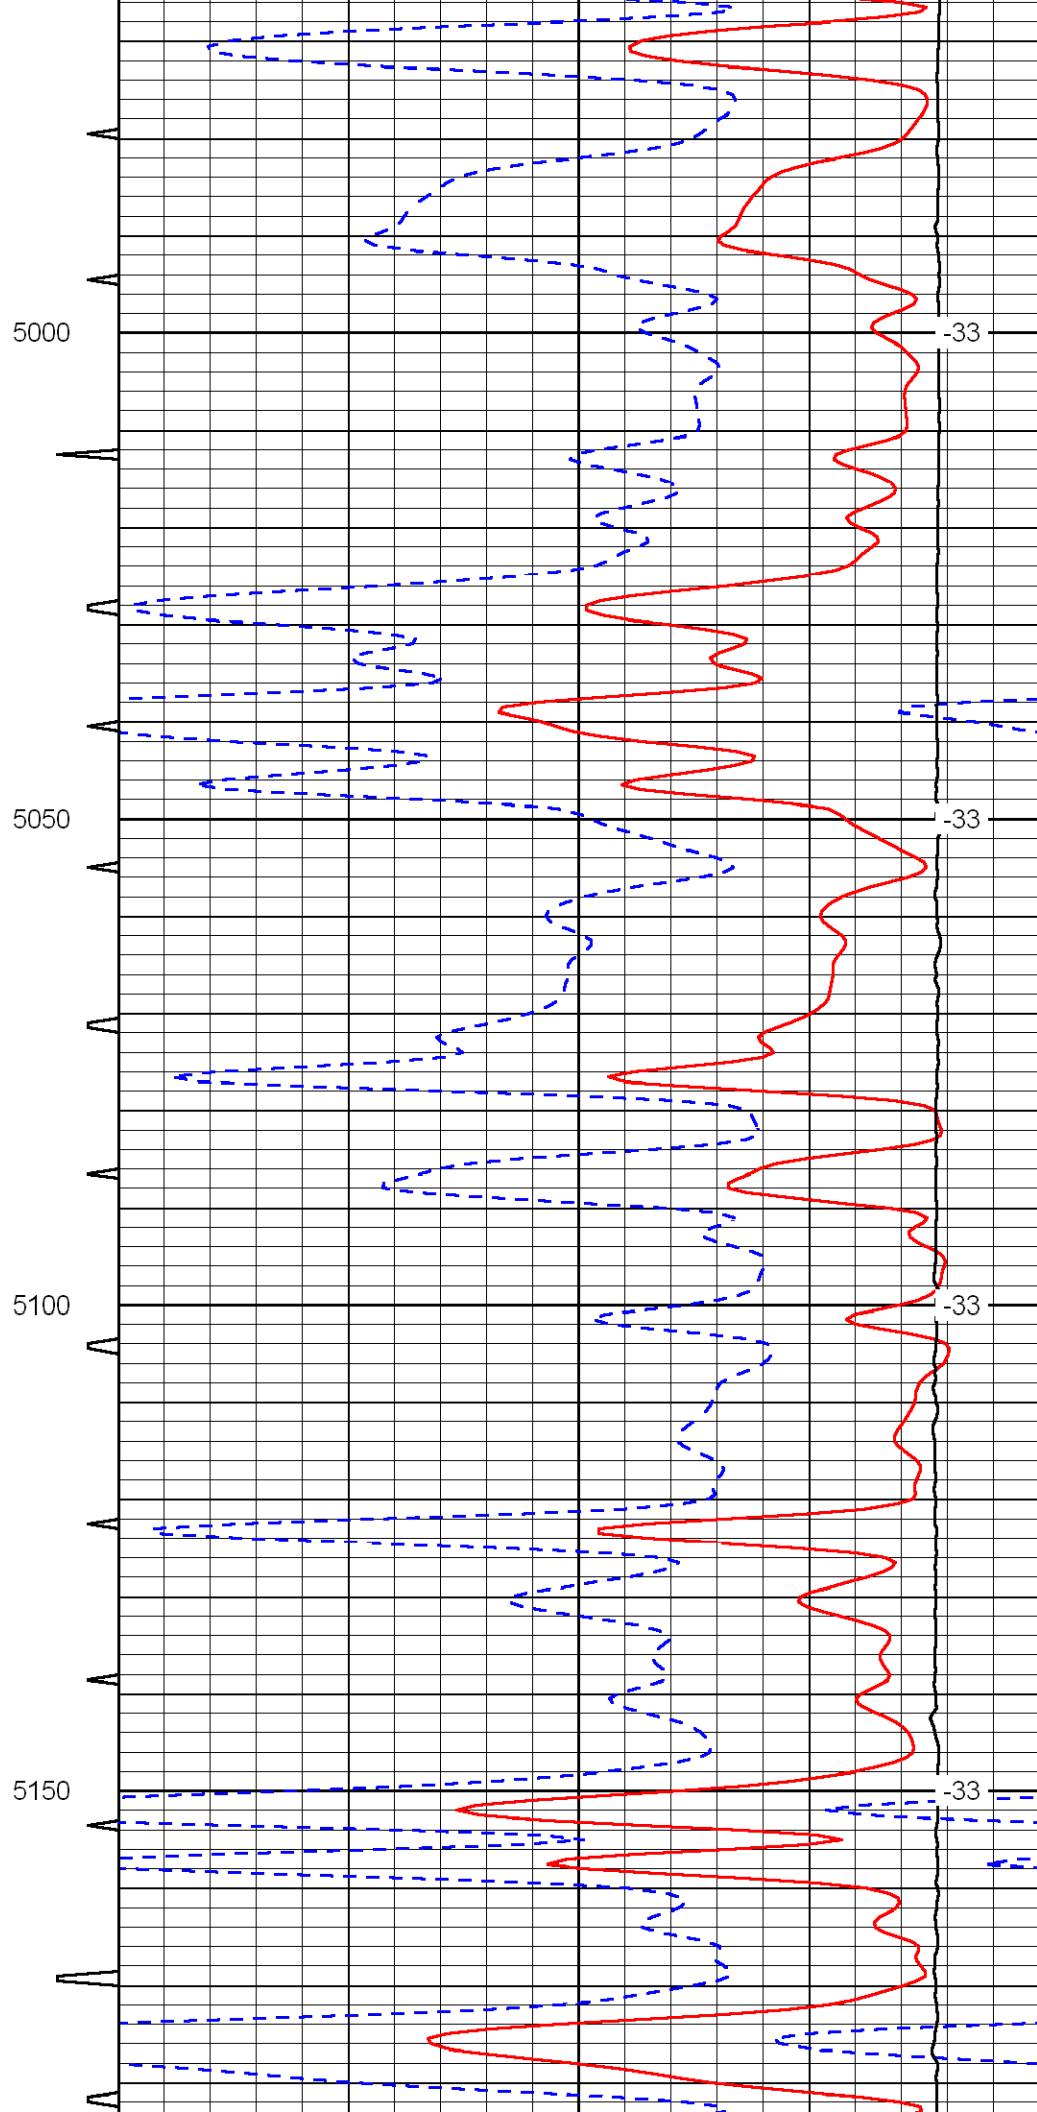
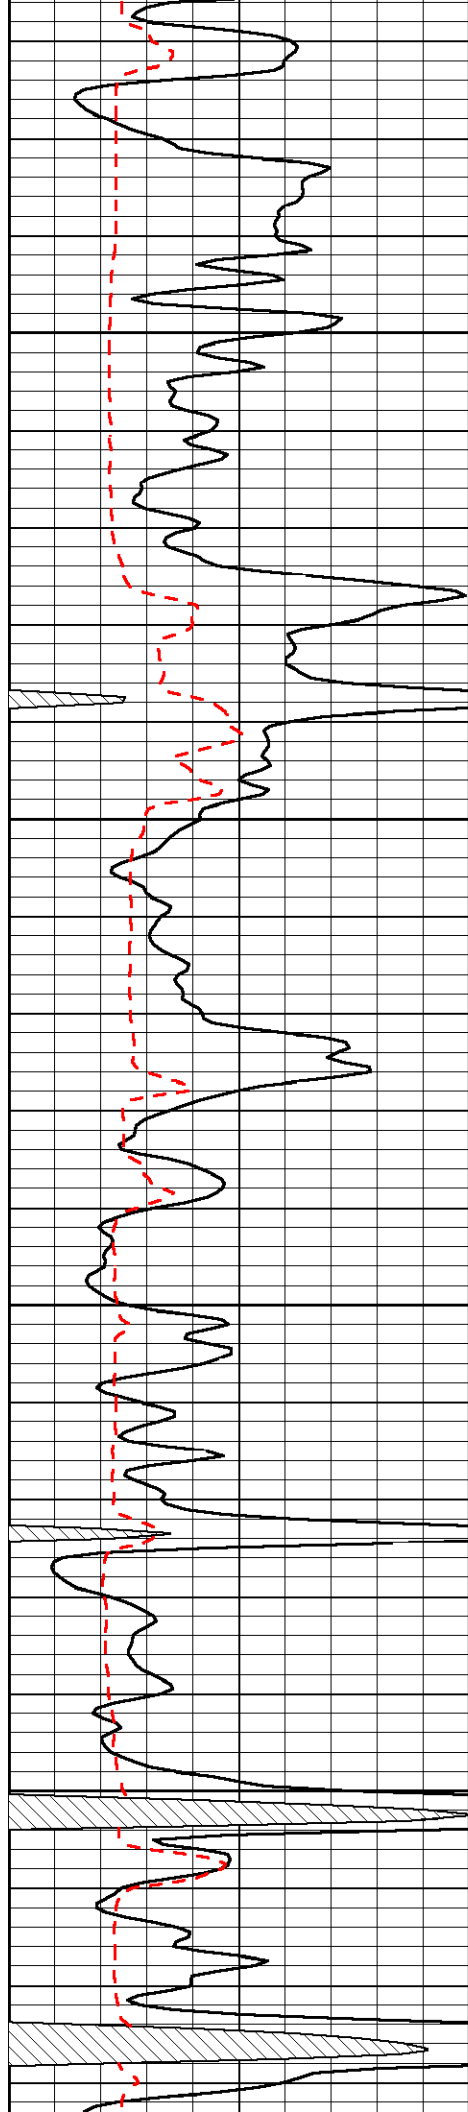


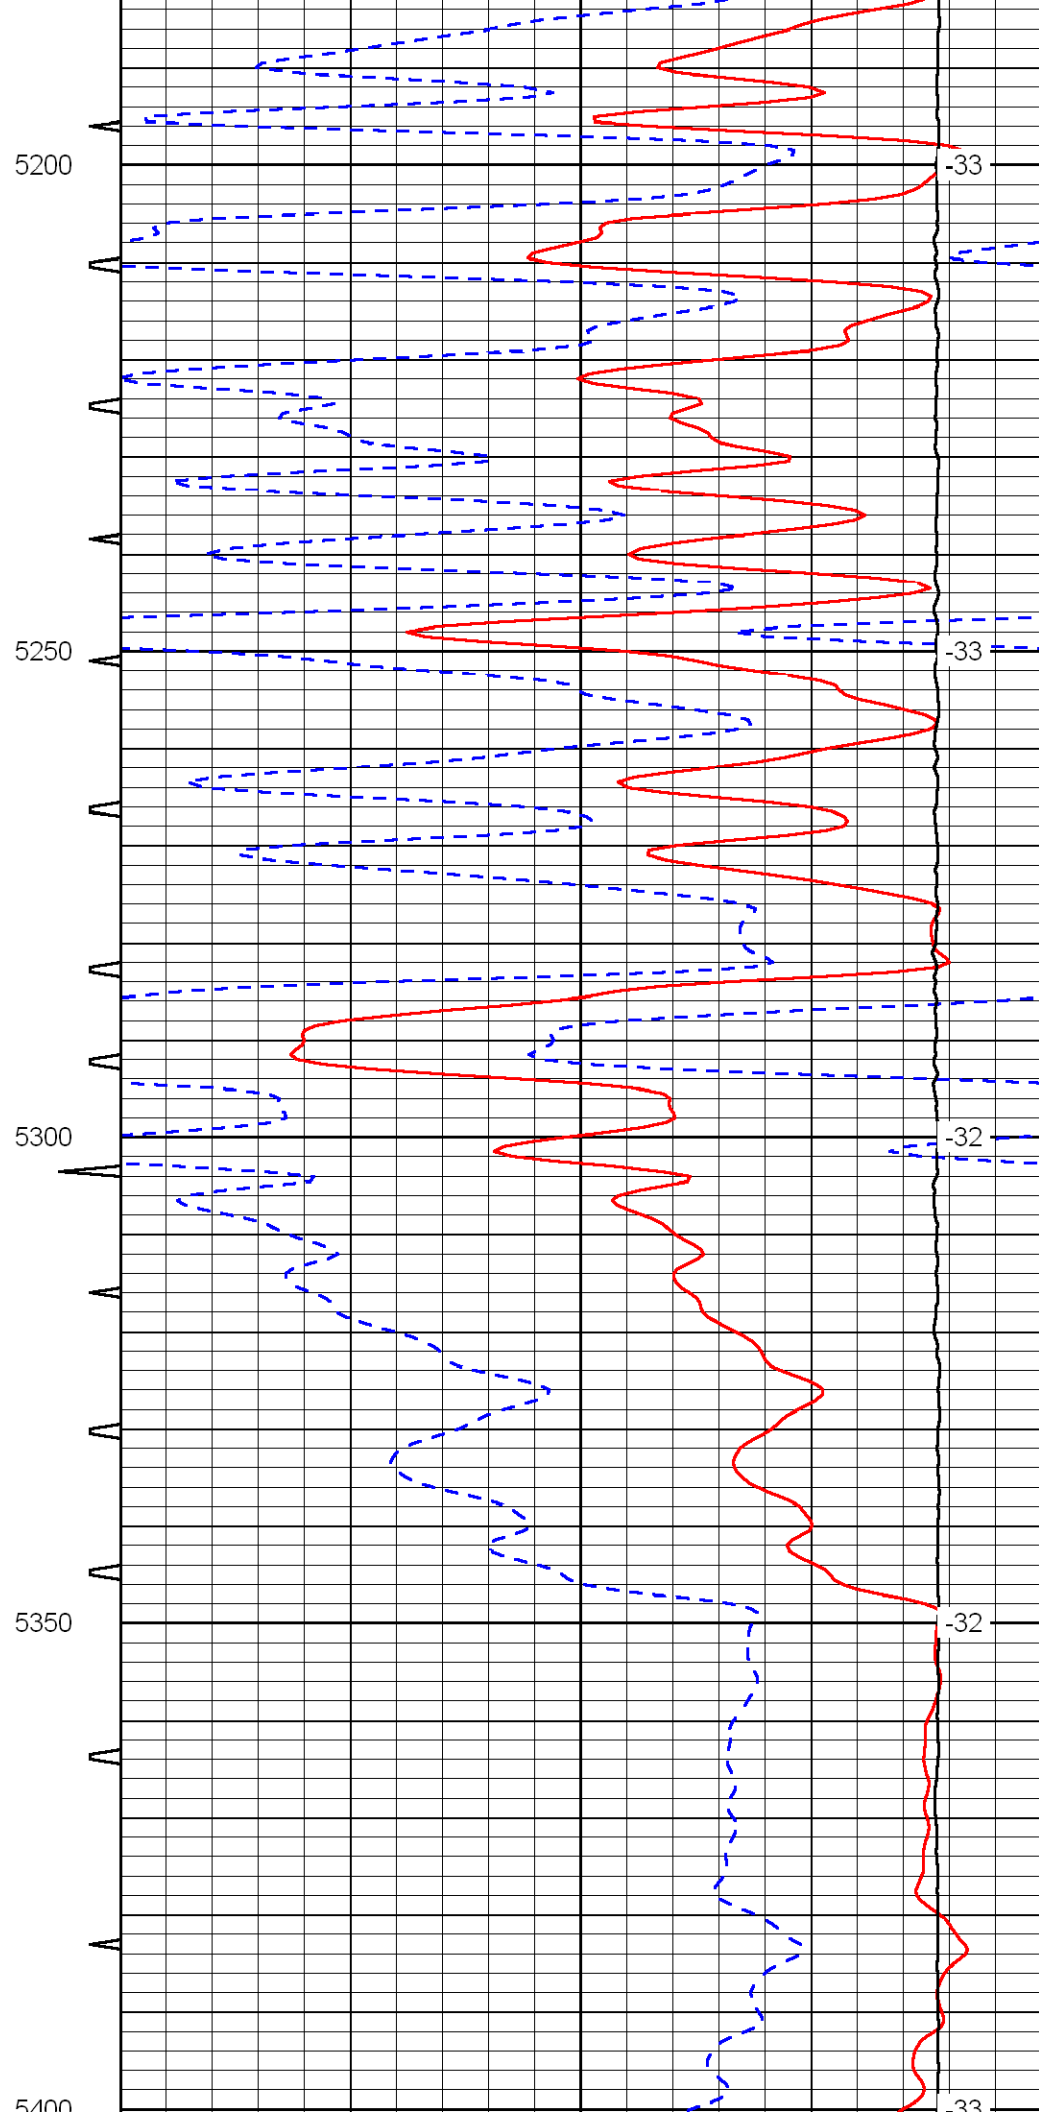
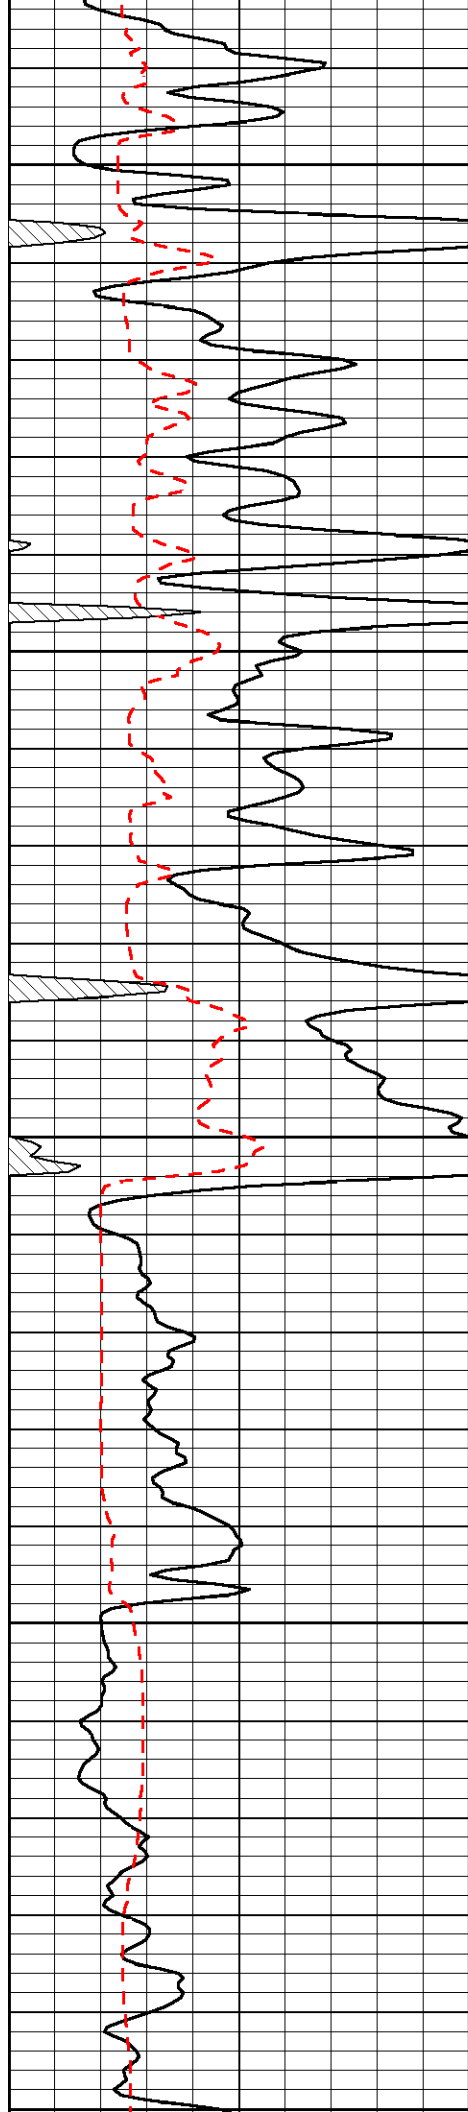


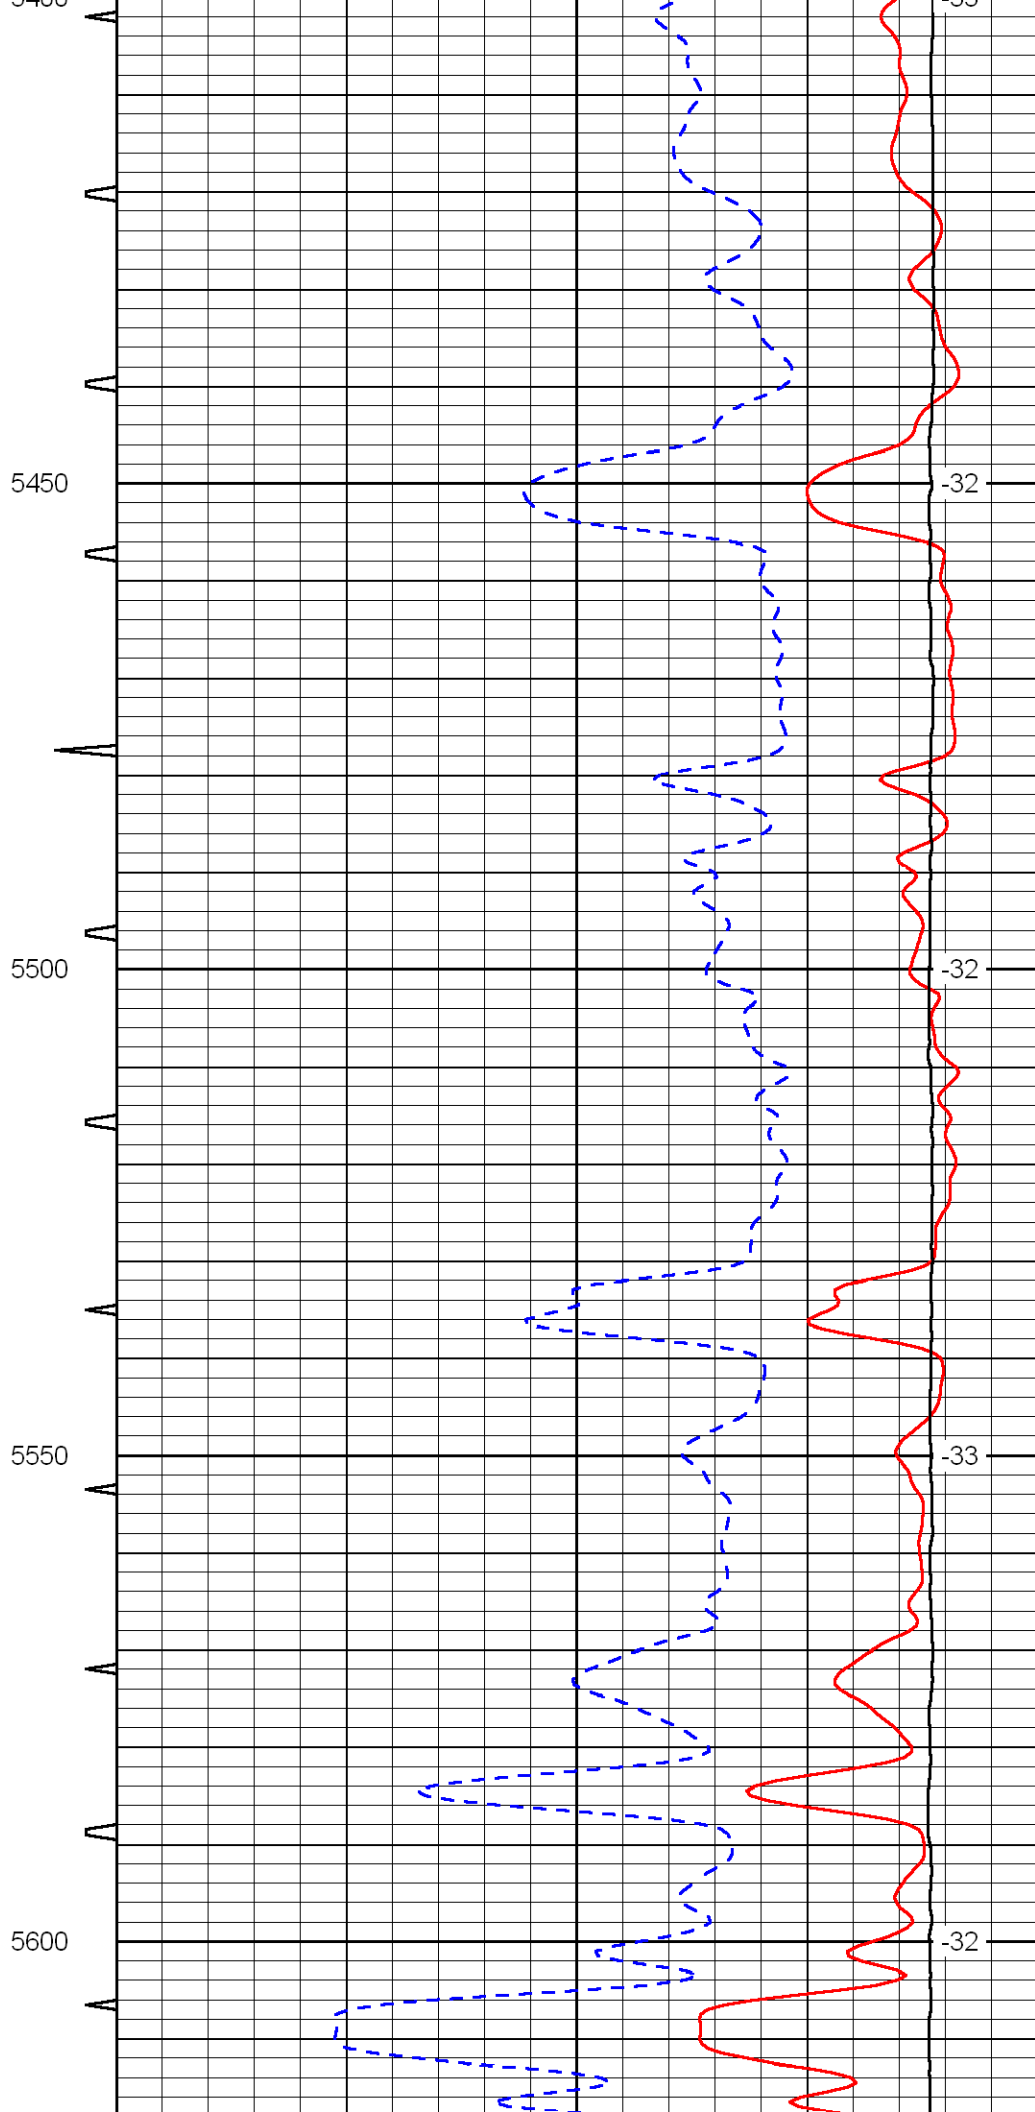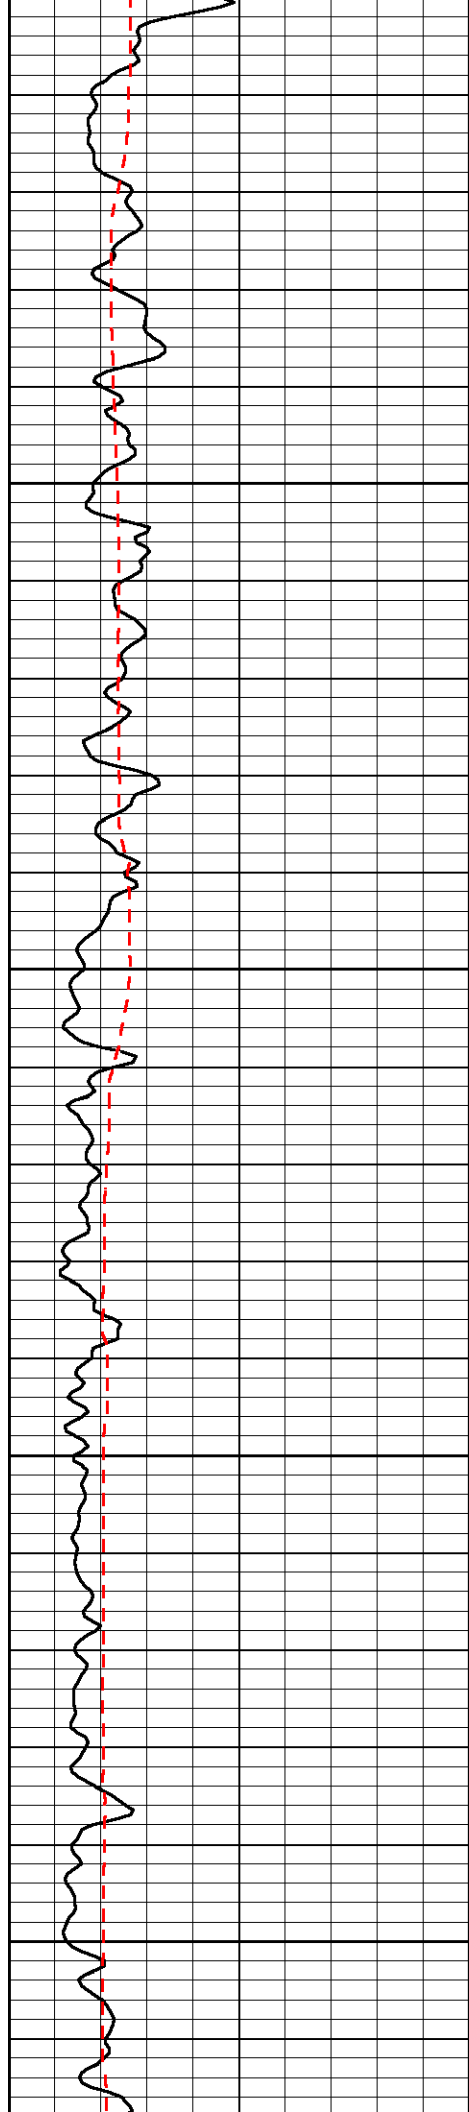

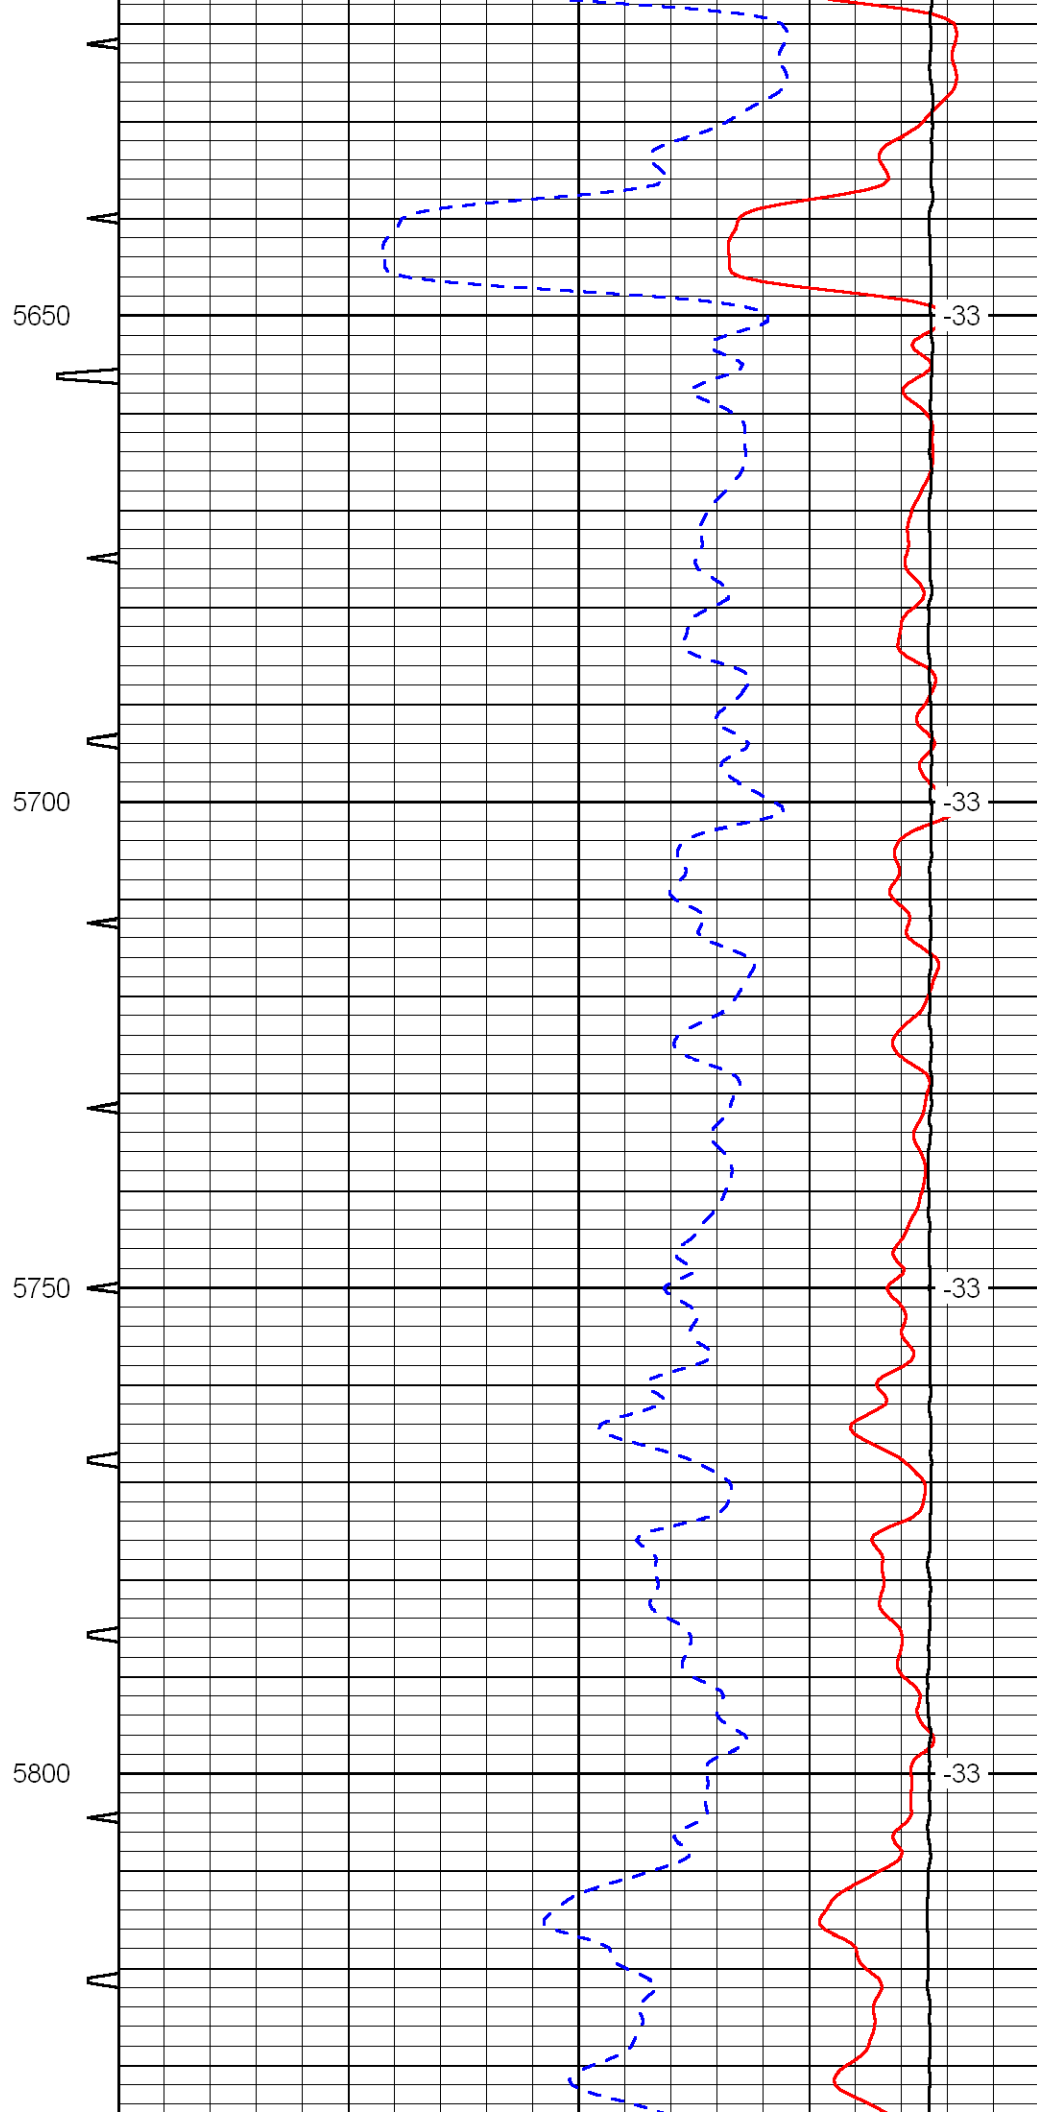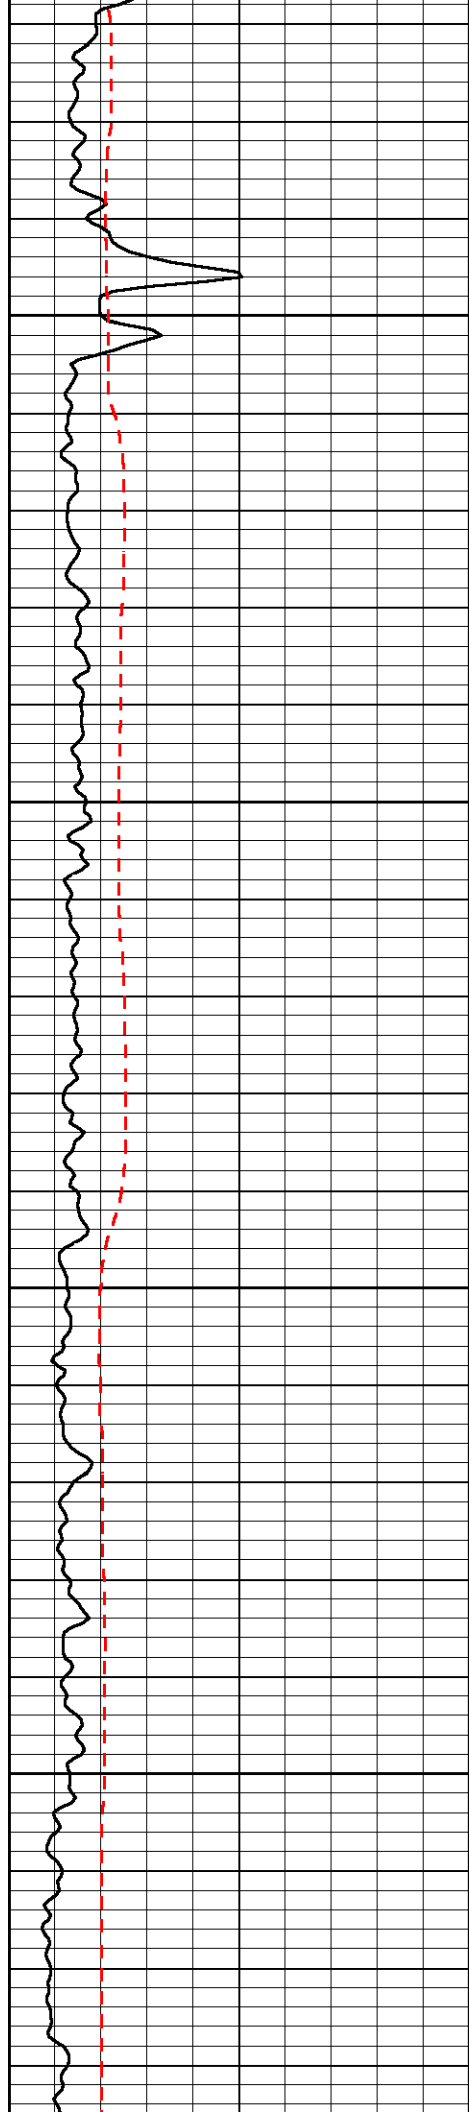

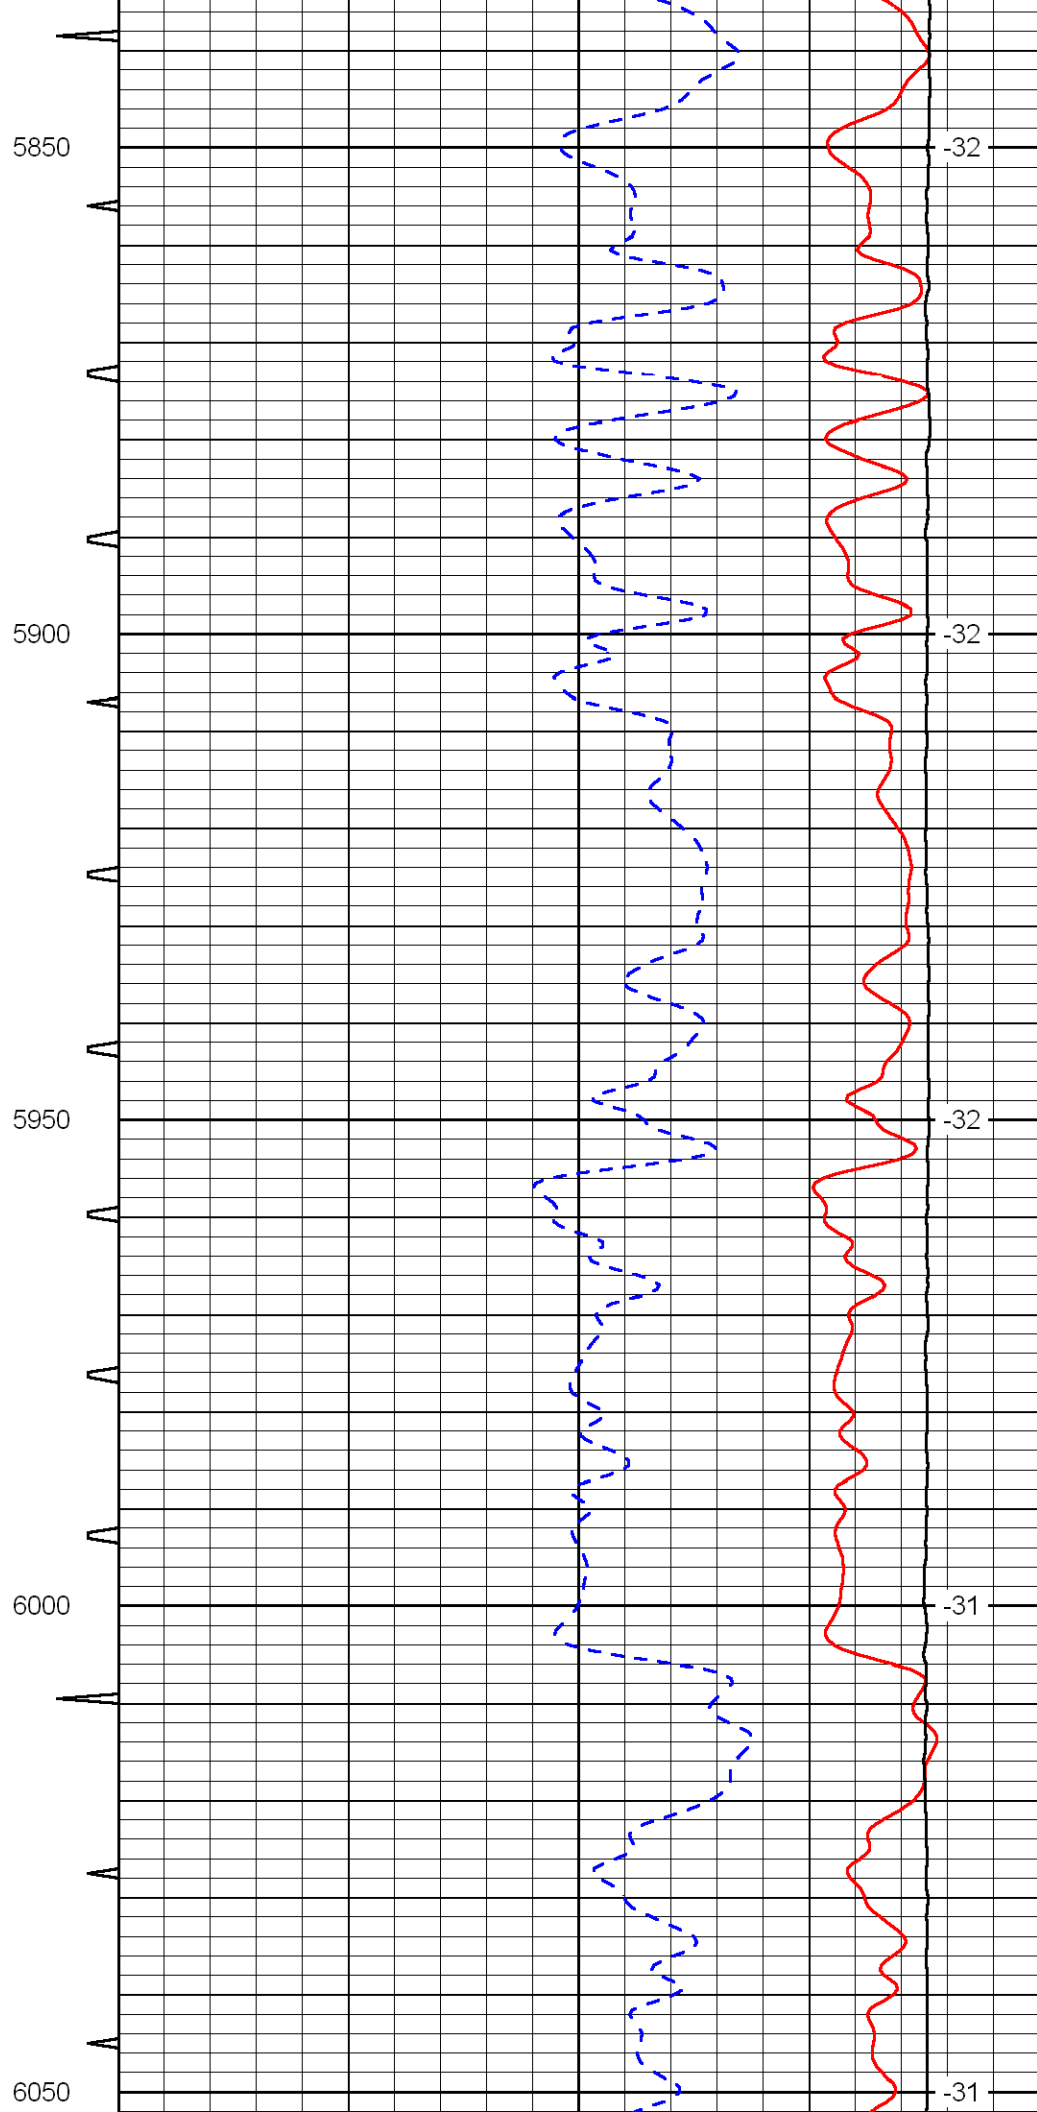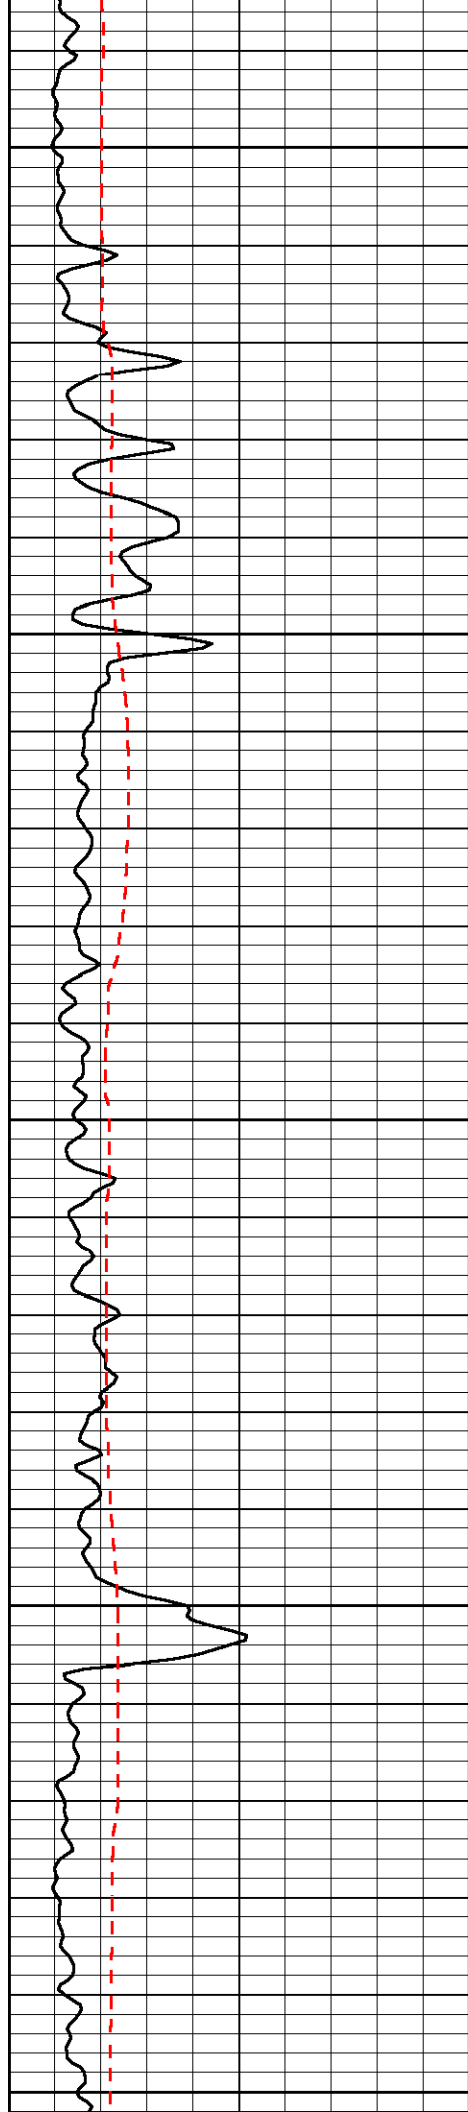

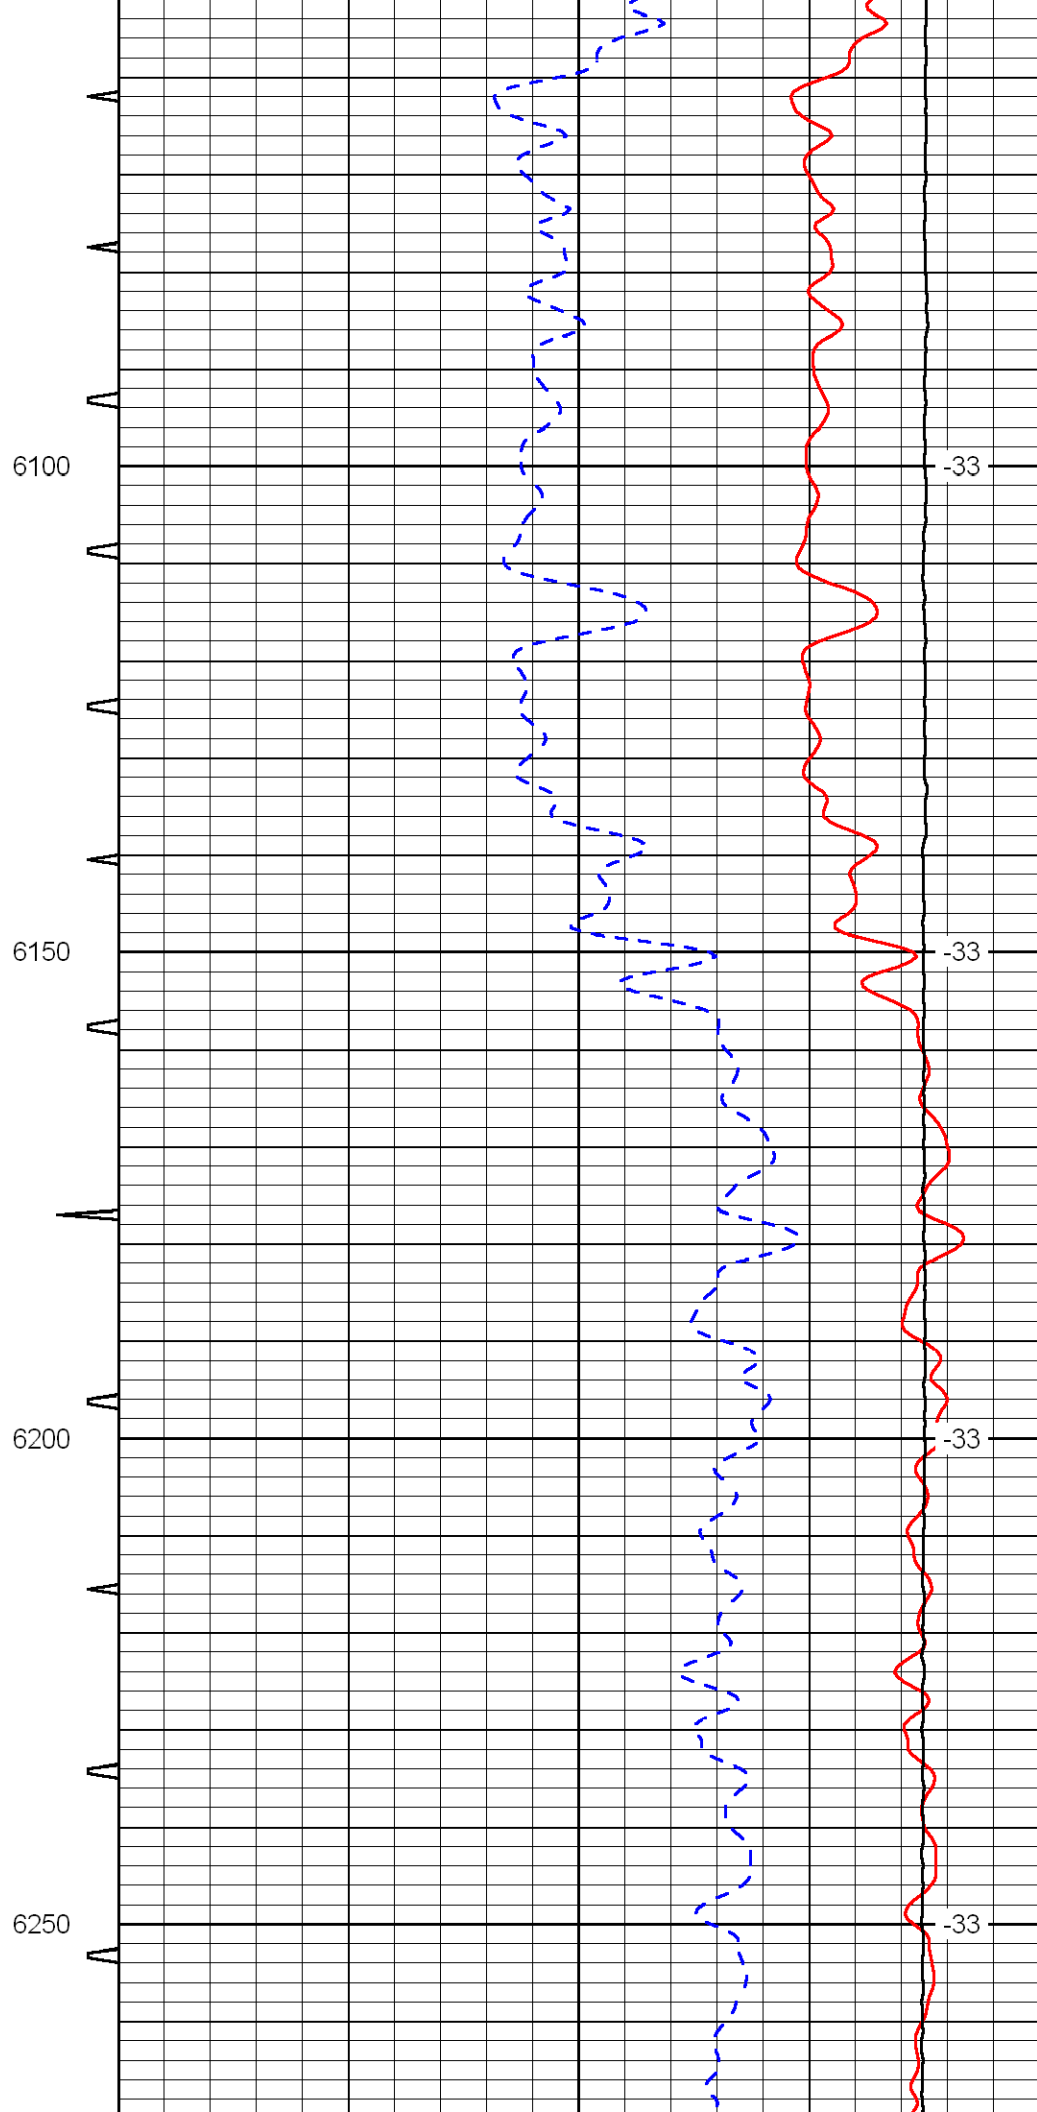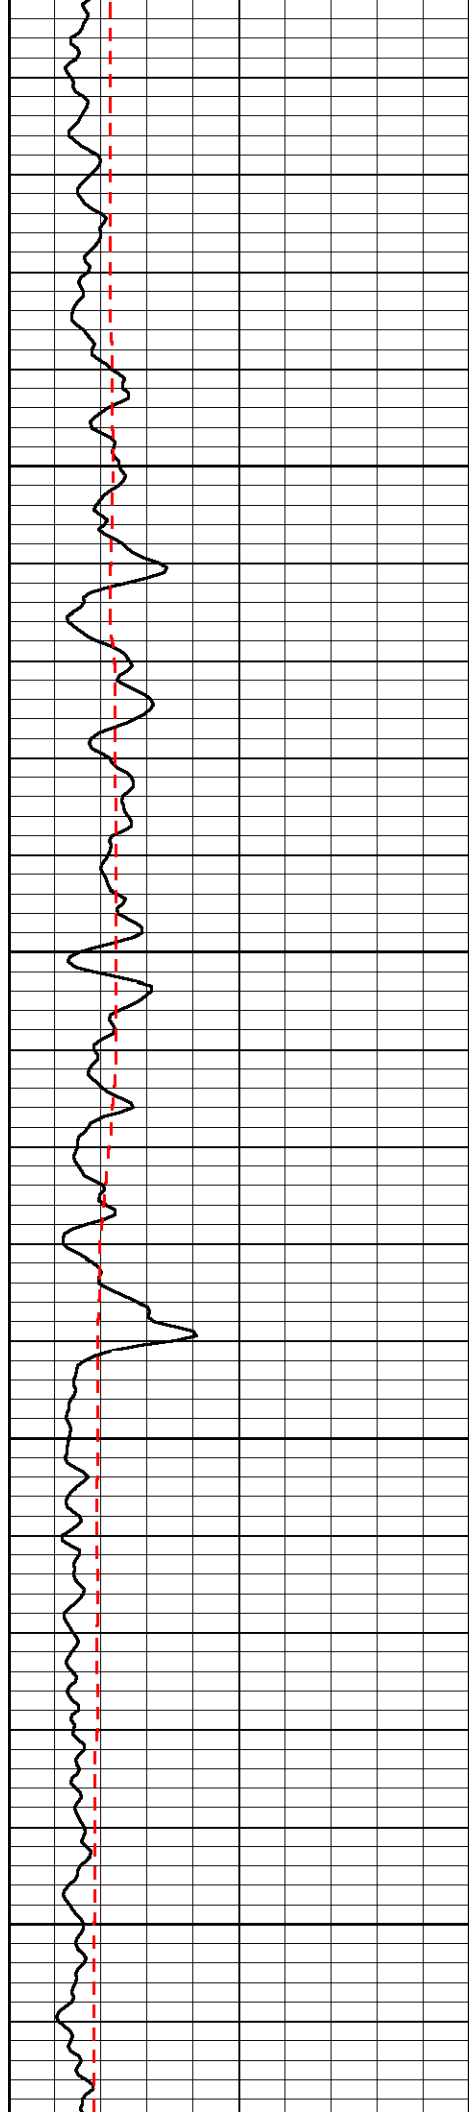

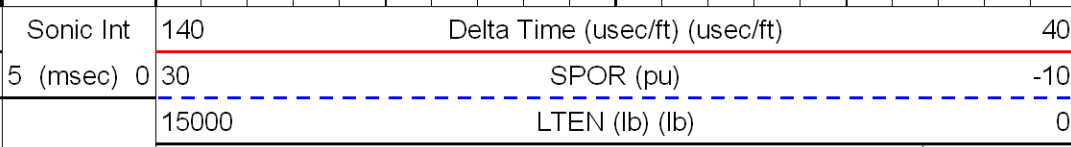LSPD
(ft/min)