

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 119-21124-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 3/2/2004.

Well Operator: MIDCO Exploration, Inc. KCC License #: 5254  
Address: 414 Plaza Drive, Suite 204 (Owner / Company Name) City: Westmont (Operator's)

State: IL Zip Code: 60559 Contact Phone: ( 630 ) 655 - 2198

Lease: Theis B Well #: 2 Sec. 11 Twp. 34 S. R. 26  East  West  
NE - SW - SE Spot Location / QQQQ County: Meade

990 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)  
1650 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: 20 Set at: 30 Cemented with: 40 Sacks  
Surface Casing Size: 8 5/8 Set at: 757 Cemented with: 425 Sacks  
Production Casing Size: 4 1/2 Set at: 2992 Cemented with: 165 Sacks

List (ALL) Perforations and Bridgeplug Sets: two shots per foot 2783' - 2787'

Elevation: 2166 ( G.L. /  K.B.) T.D.: 6000 PBDT: 2934 Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): CIBP within 50' of perfs - spot 2 sacks; pull up to 1200' - 50 sacks; pull up to 30' below surface ( approx. 817') - 50 sacks; pull up to 40' - cement to surface - 10 sacks  
( verbally approved by Dodge City field office )

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No  
If not explain why? \_\_\_\_\_

RECEIVED  
KANSAS CORPORATION COMMISSION  
DEC 28 2004  
CONSERVATION DIVISION  
WICHITA, KS

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: David Mayfield

Phone: ( 620 ) 786 - 9166

Address: 414 Plaza Drive, Suite 204 City / State: Westmont, IL 60559

Plugging Contractor: Lieker Well Service, Inc. KCC License #: 30891

Address: 2710 Jackson Great Bend, Kansas 67530 Phone: ( 620 ) 793 - 5976


Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent  
Date: 12/27/2004 Authorized Operator / Agent: David Mayfield  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

6/05

1/05

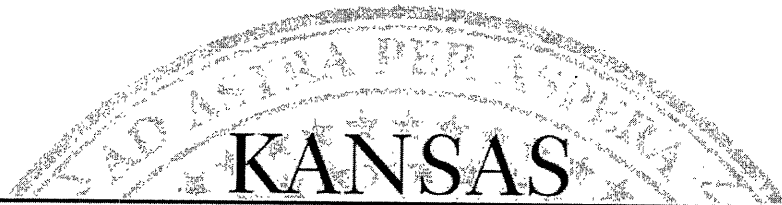

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Midco Exploration, Inc.  
414 Plaza Drive #204  
Westmont, IL 60559

January 03, 2005

Re: THEIS B #2  
API 15-119-21124-00-00  
NESWSE 11-34S-26W, 990 FSL 1650 FEL  
MEADE COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,  


David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888