



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-171-20,734-00-00		
Company	Larson Engineering, Inc.		
Well	Donna No.1-22		
Field	Wildcat		
County	Scott	State	Kansas
Location	750' FNL & 330' FEL		Other Services CNL/CDL DIL
Sec: 22	Twp: 17S	Rge: 31W	

Permanent Datum	Ground Level	Elevation 2919	K.B. 2924 D.F. 2919 G.L. 2919
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	10/25/2009		
Run Number	Two		
Depth Driller	4650		
Depth Logger	4653		
Bottom Logged Interval	4652		
Top Log Interval	3600		
Casing Driller	8.625 @ 263		
Casing Logger	256		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.500		
Density / Viscosity	9.2	49	
pH / Fluid Loss	10.5	6.8	
Source of Sample	Flowline		
Rm @ Meas. Temp	2.2 @ 65		
Rmf @ Meas. Temp	1.65 @ 65		
Rmc @ Meas. Temp	2.97 @ 65		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.15 @ 125		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	125		
Equipment Number	10		
Location	Hays		
Recorded By	Jason Wellbrock		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hwy 4 and Venison rd, 2S, W Into

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

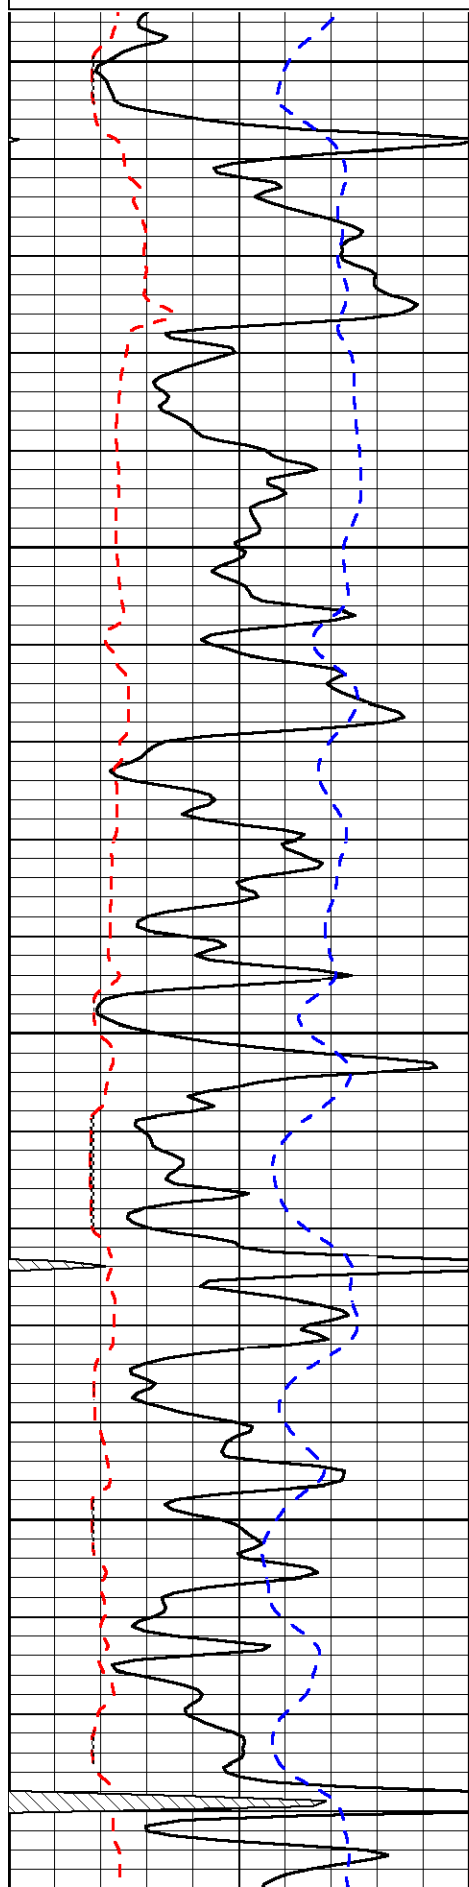

3600


3650


3700

3750

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

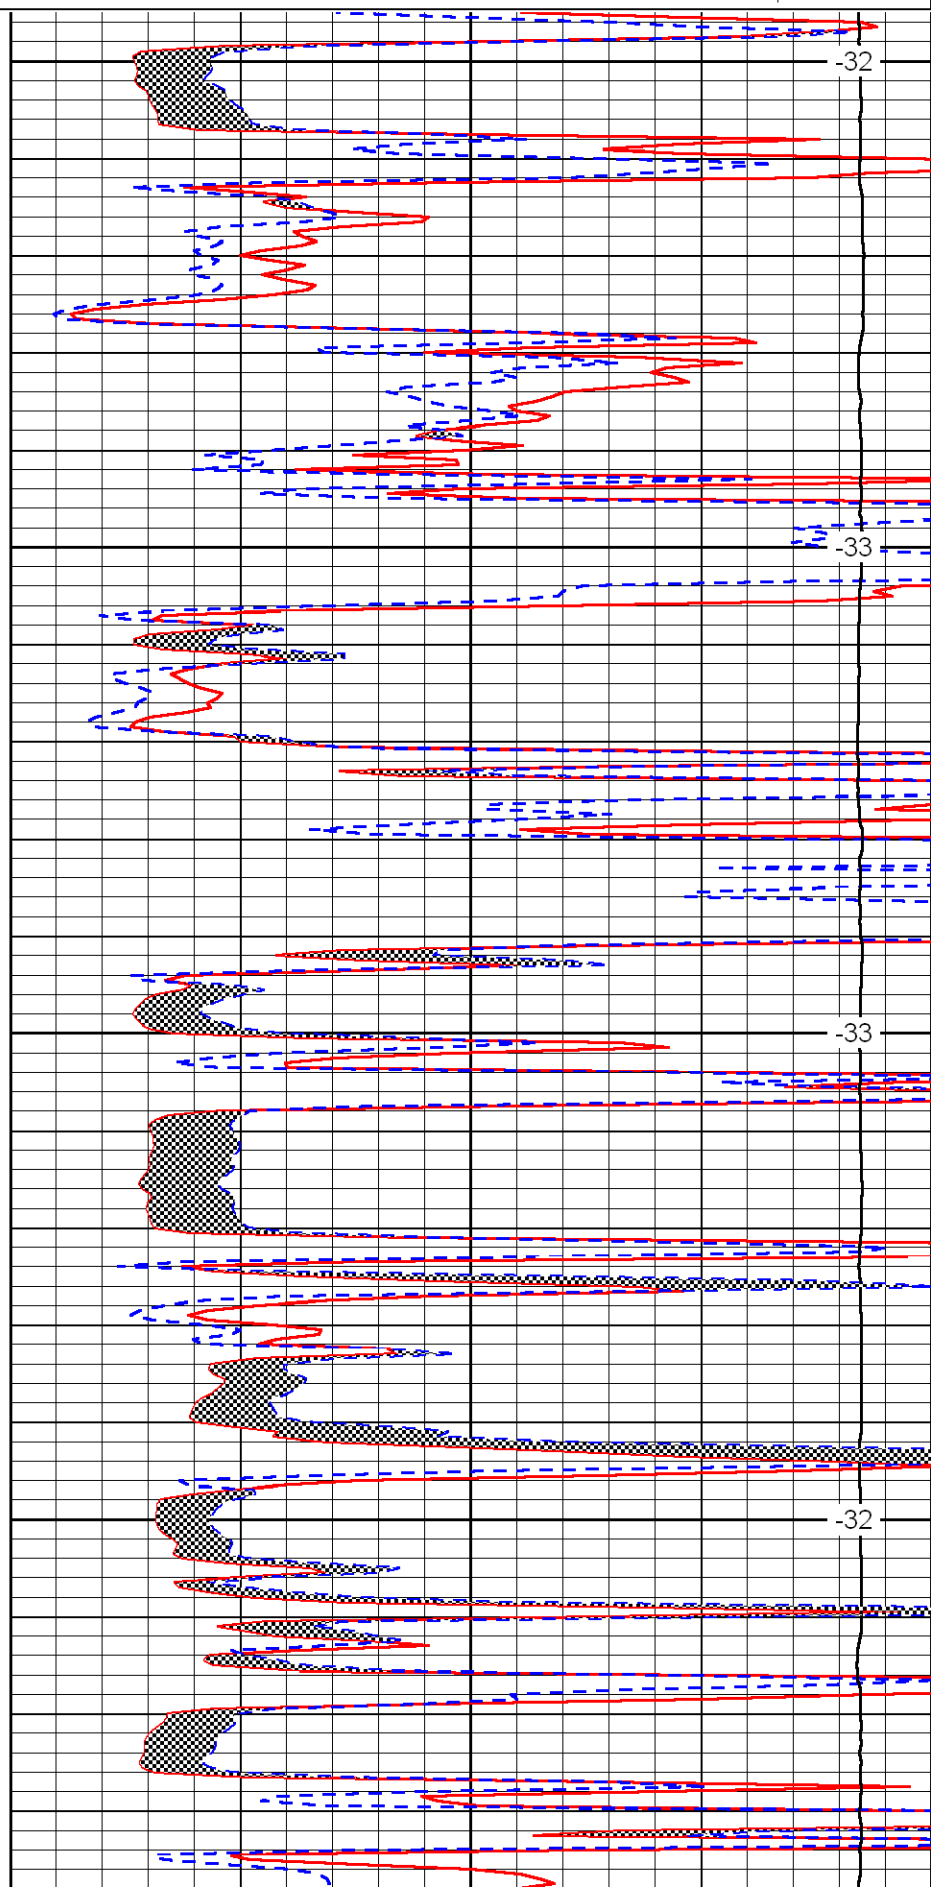

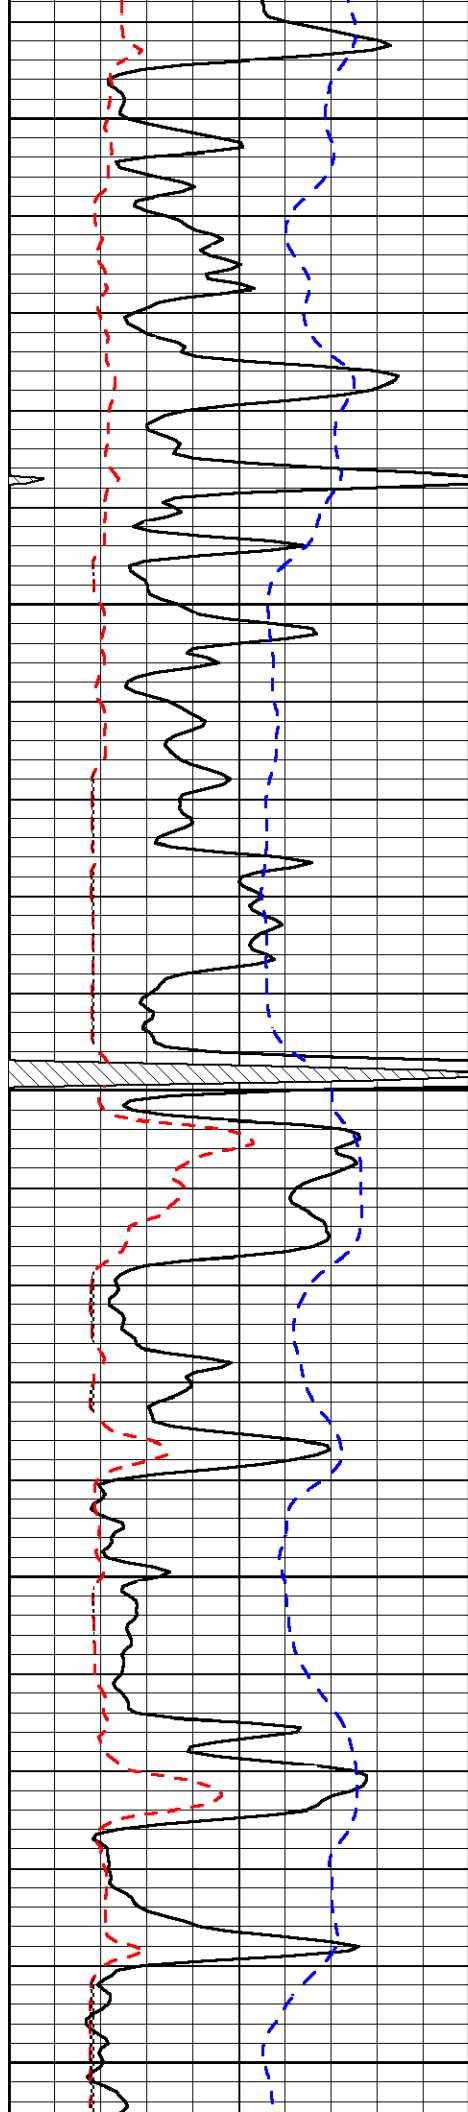


3800

3850

3900

3950

4000

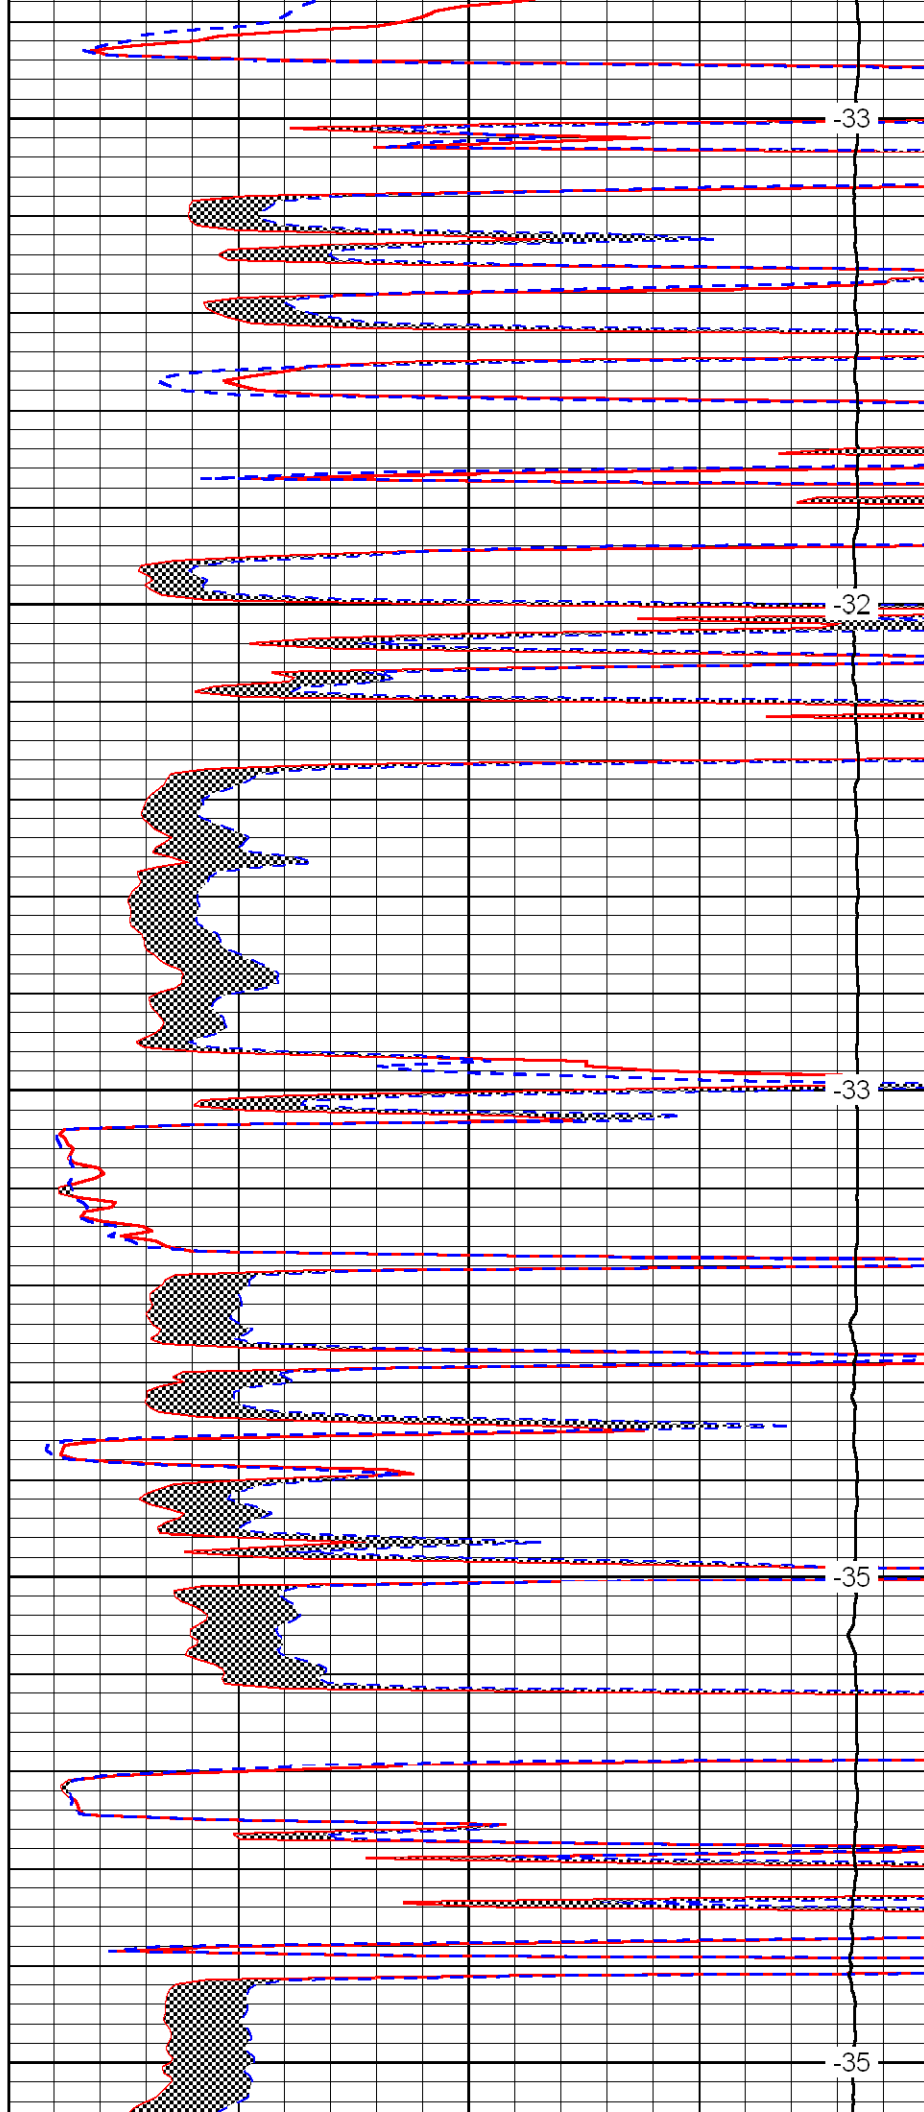


-33

-32

-33

-35

-35

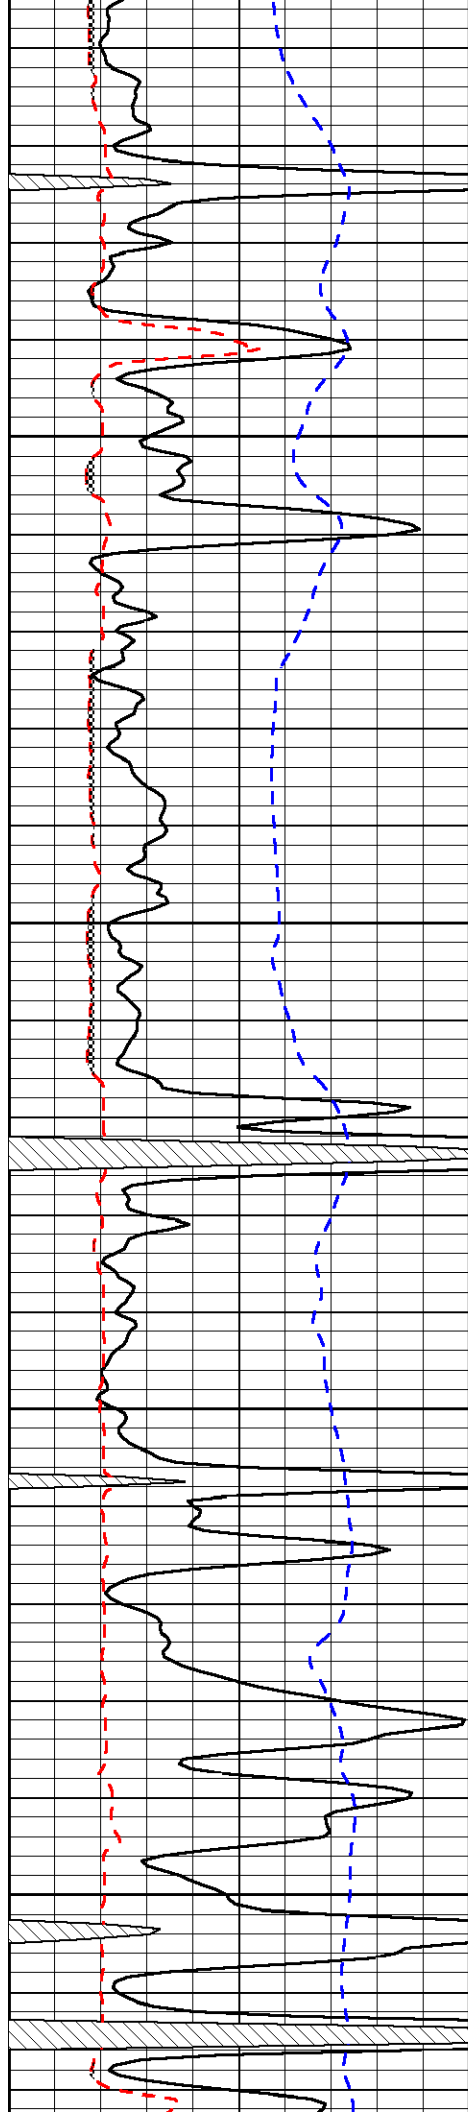



4050

4100

4150

4200

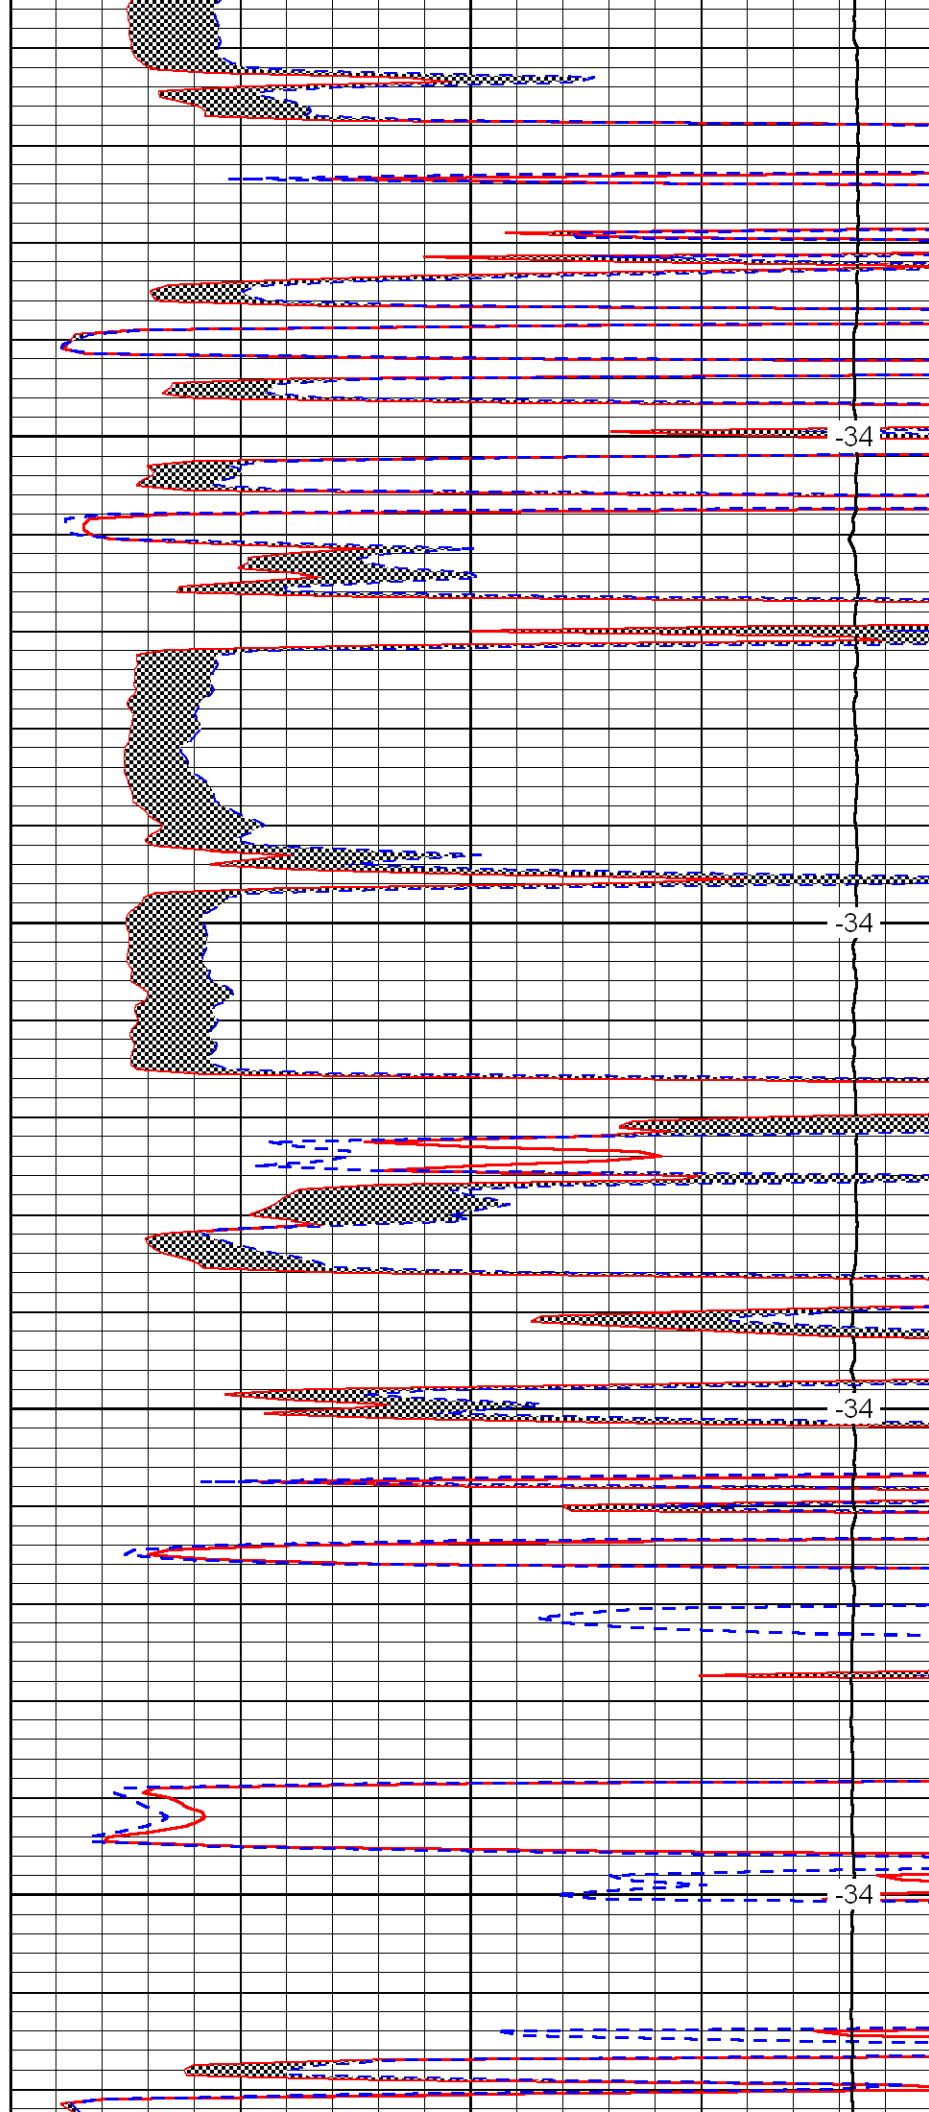

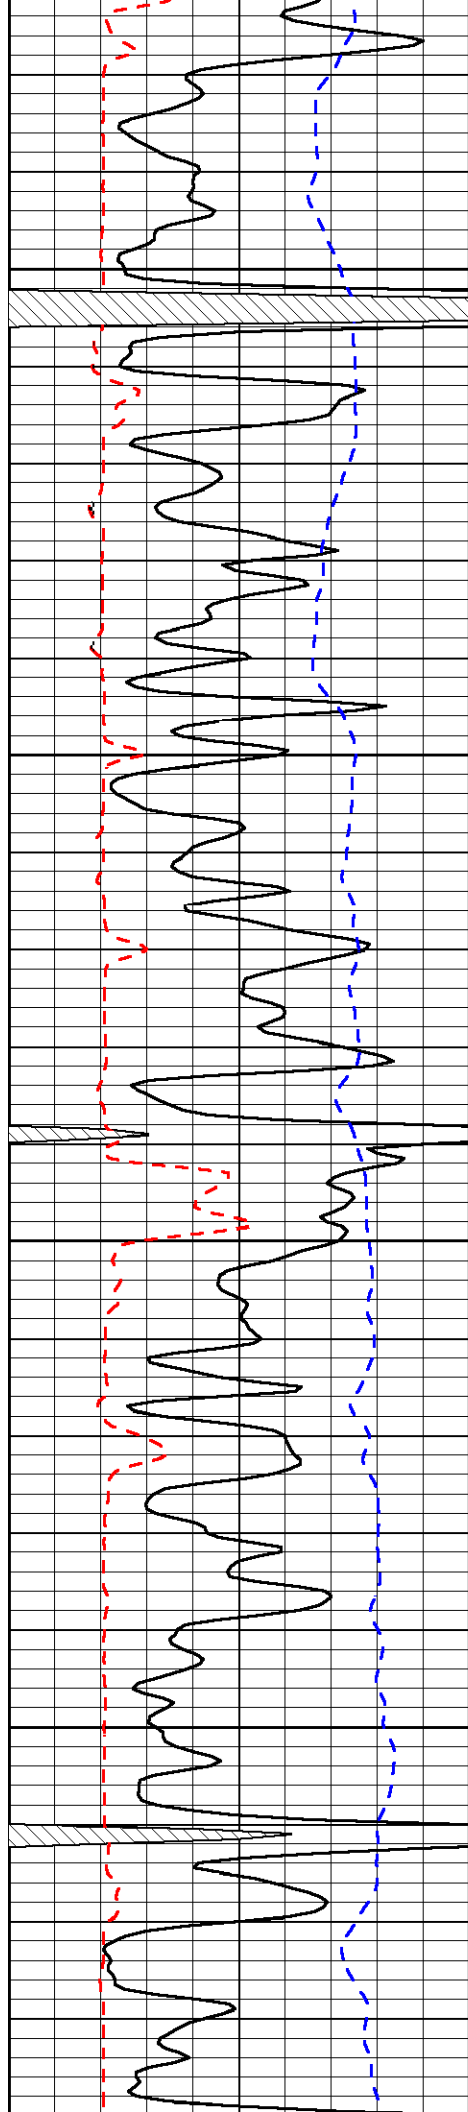



4250

4300

4350

4400

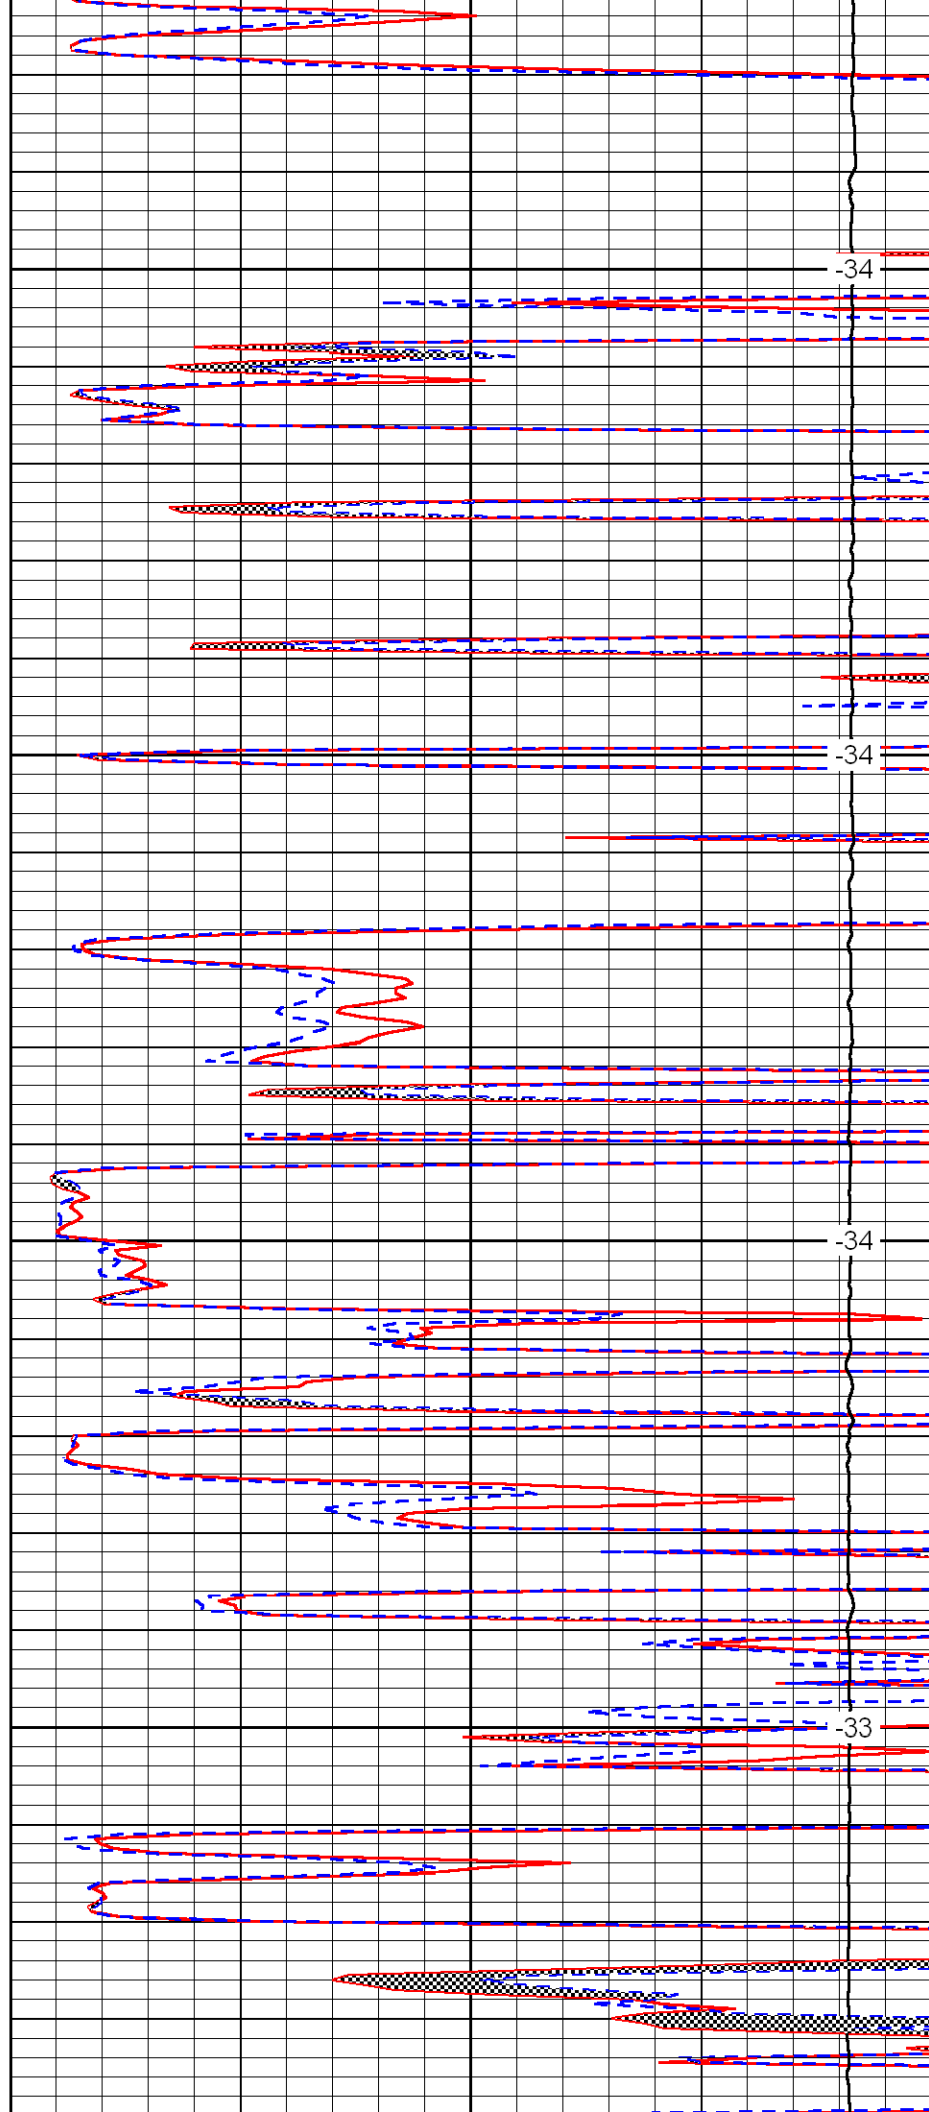

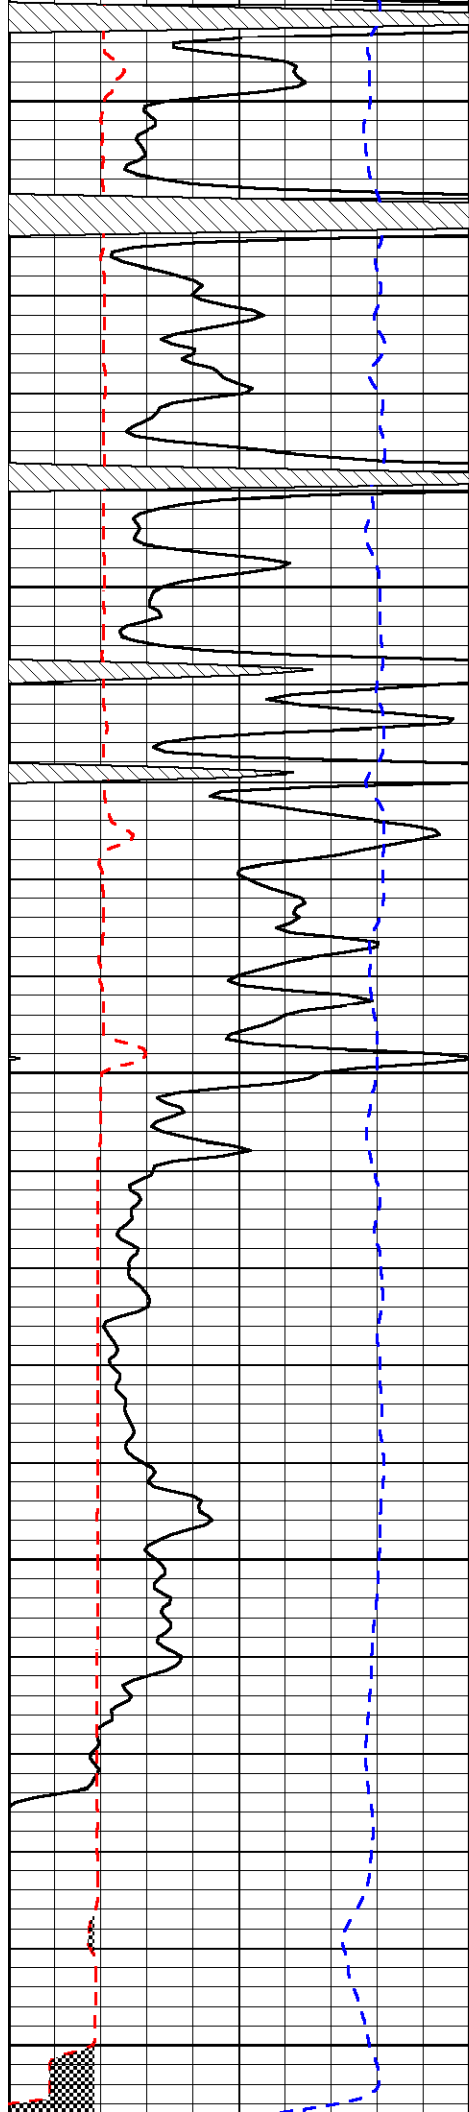


4450

4500

4550

4600

4650

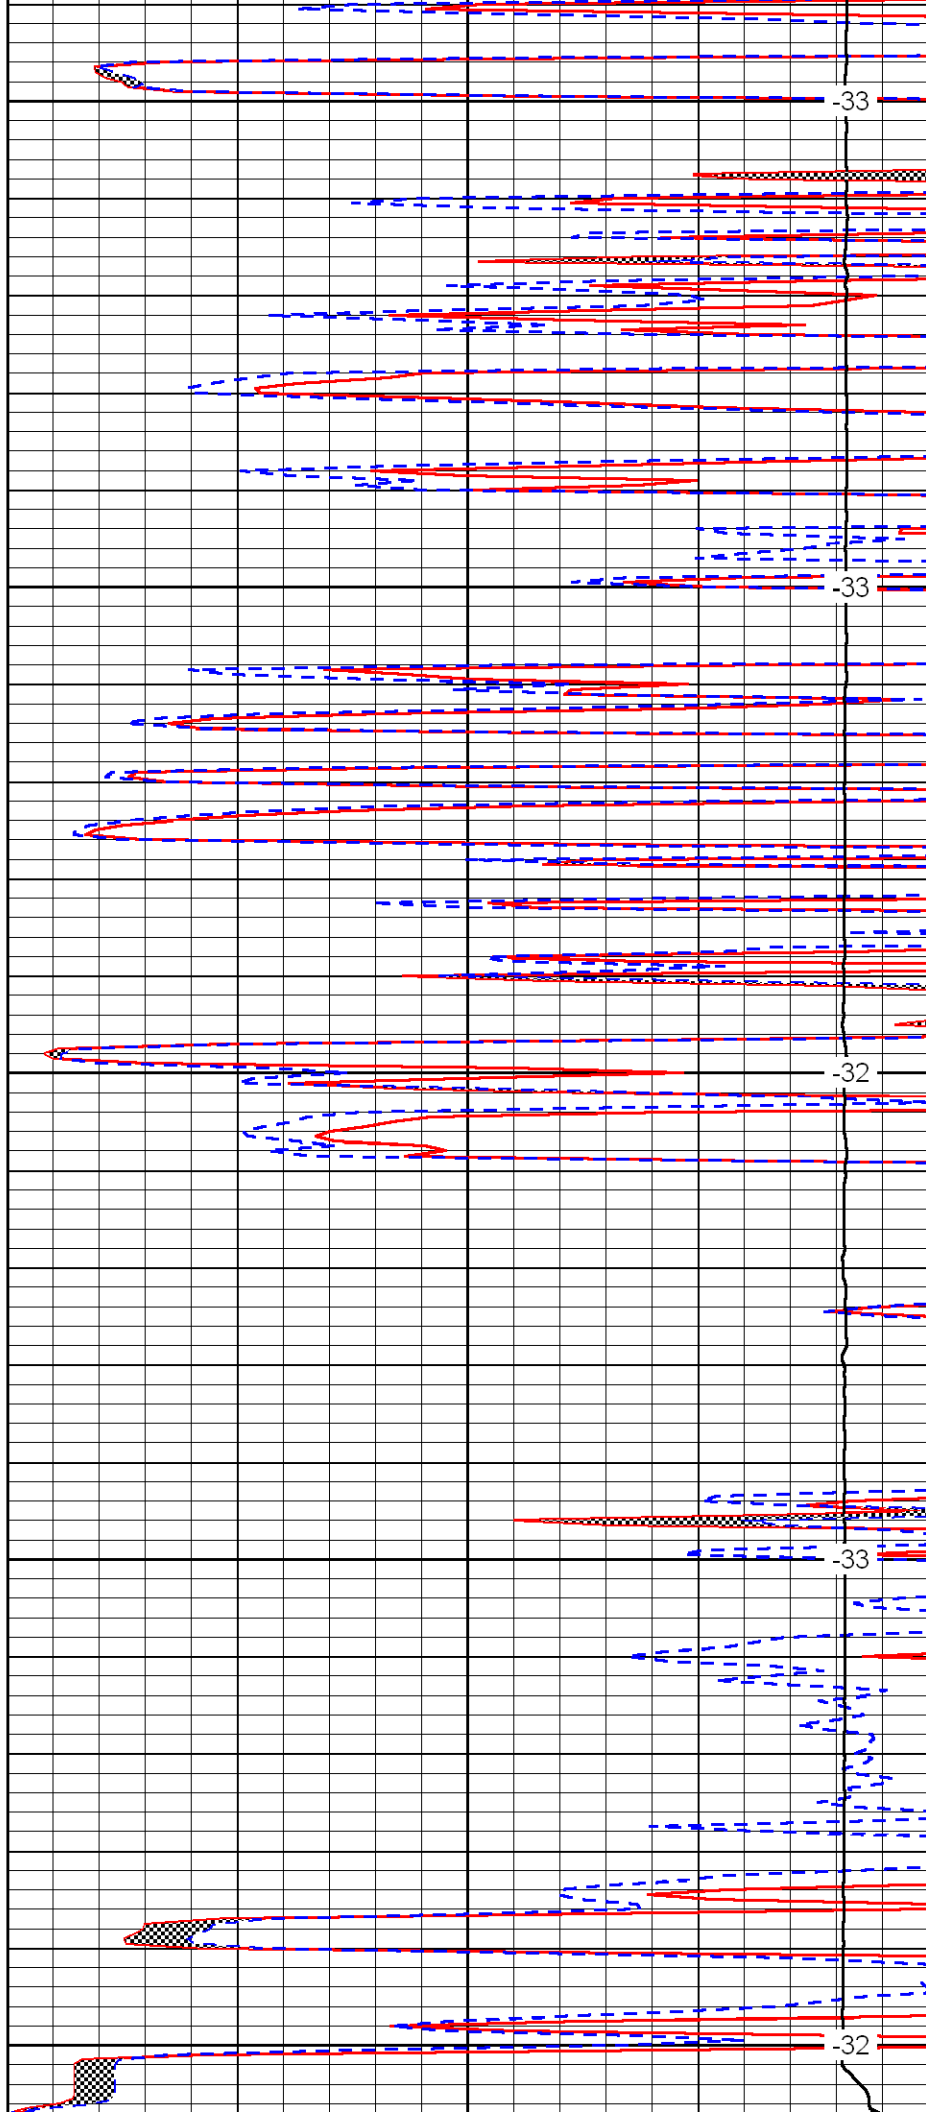

-33

-33

-32

-33

-32

