



SUPERIOR
Hays,
Kansas

SONIC LOG

Company		TETON ENERGY CORPORATION	
Well	OCHS #1-22		
Field	WILDCAT		
County	BARTON		
State	KANSAS		
Location:	API # : 15-009-25221-0000		Other Services DIL/MEL CDL/CNL
	1860'FSL & 1350'FEL		
SEC 22 TWP 17S RGE 13W			
Permanent Datum	GROUND LEVEL	Elevation	1900
Log Measured From	KELLY BUSHING, 9' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	25 JULY 08		
Run Number	ONE		
Depth Driller	3520		
Depth Logger	3518		
Bottom Logged Interval	3507		
Top Log Interval	0		
Casing Driller	8 5/8" @ 900'		
Casing Logger	900		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL	CHLORIDES 8800	
Density / Viscosity	9.25/68		
pH / Fluid Loss	11.5/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.4 @ 75		
Rmf @ Meas. Temp	0.3 @ 75		
Rmc @ Meas. Temp	0.5 @ 75		
Source of Rmf / Rmc	CAL/CAL		
Rm @ BHT	0.2 @ 110		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	0220		
Maximum Recorded Temperature	110		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	DUGAN DENTON		
Witnessed By	ADAM T. KENNEDY		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICES, INC.
HAYS, KS. 785-628-6395


DIRECTIONS: HOISINGTON;2 EAST ON #4 TO RD 20 AVE, 2 1/2 NORTH, WEST INTO
BY TANK BATTERY


Database File: 2408tetonenergy.db
Dataset Pathname: pass13
Presentation Format: _slt
Dataset Creation: Fri Jul 25 07:11:06 2008 by Log Open-Cased 070814

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
			TBHV	0	ITT (msec)	20
			0 (ft3) 10			

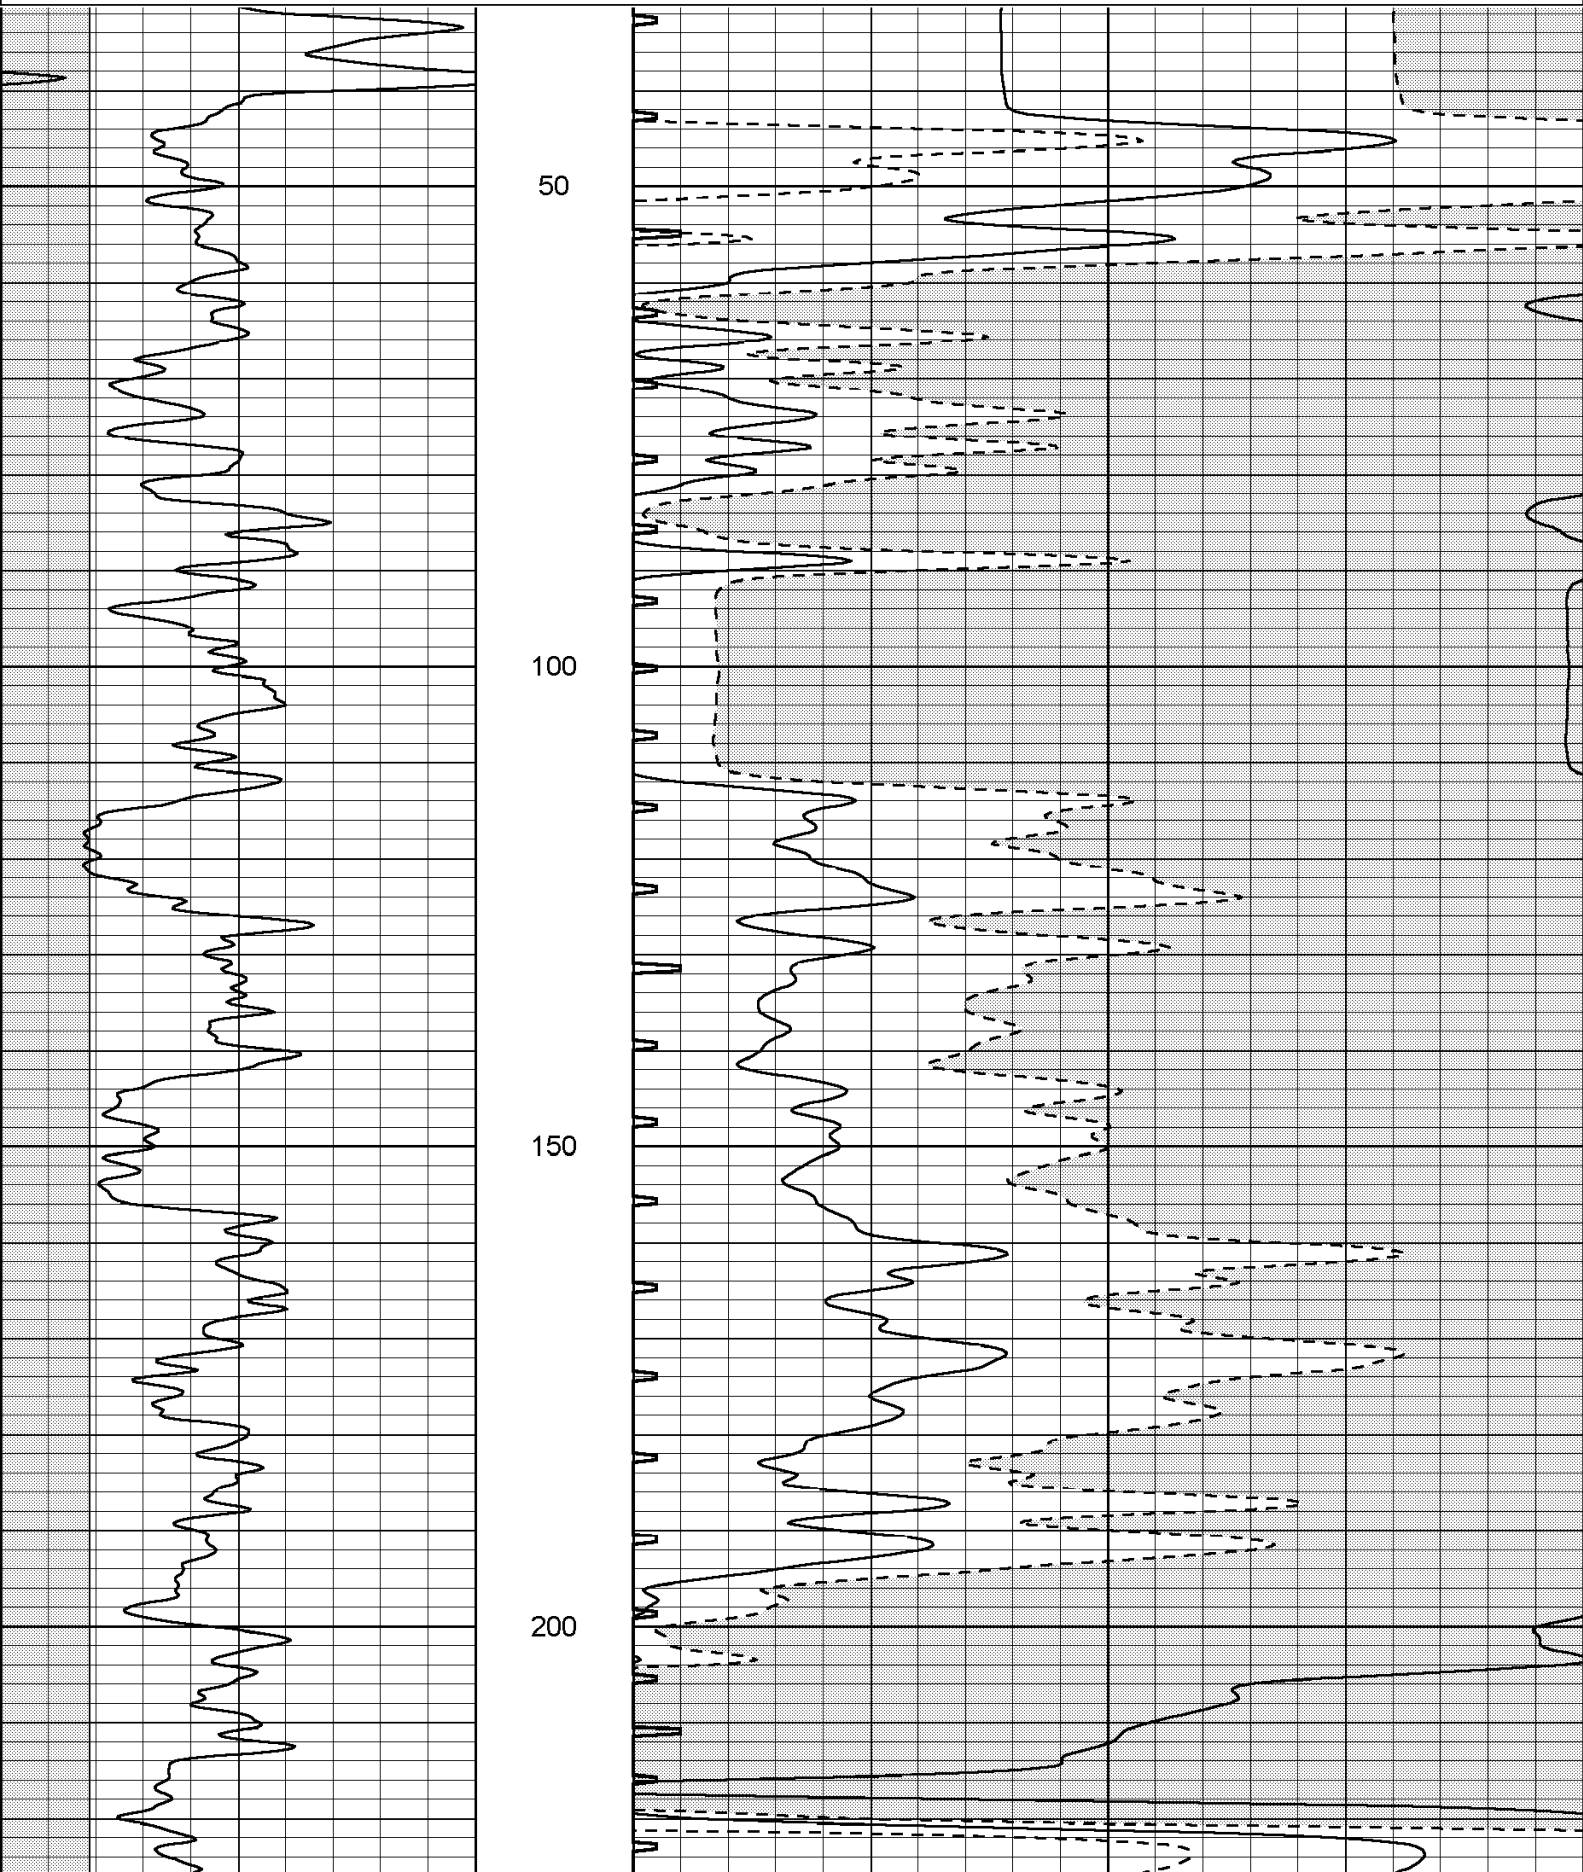

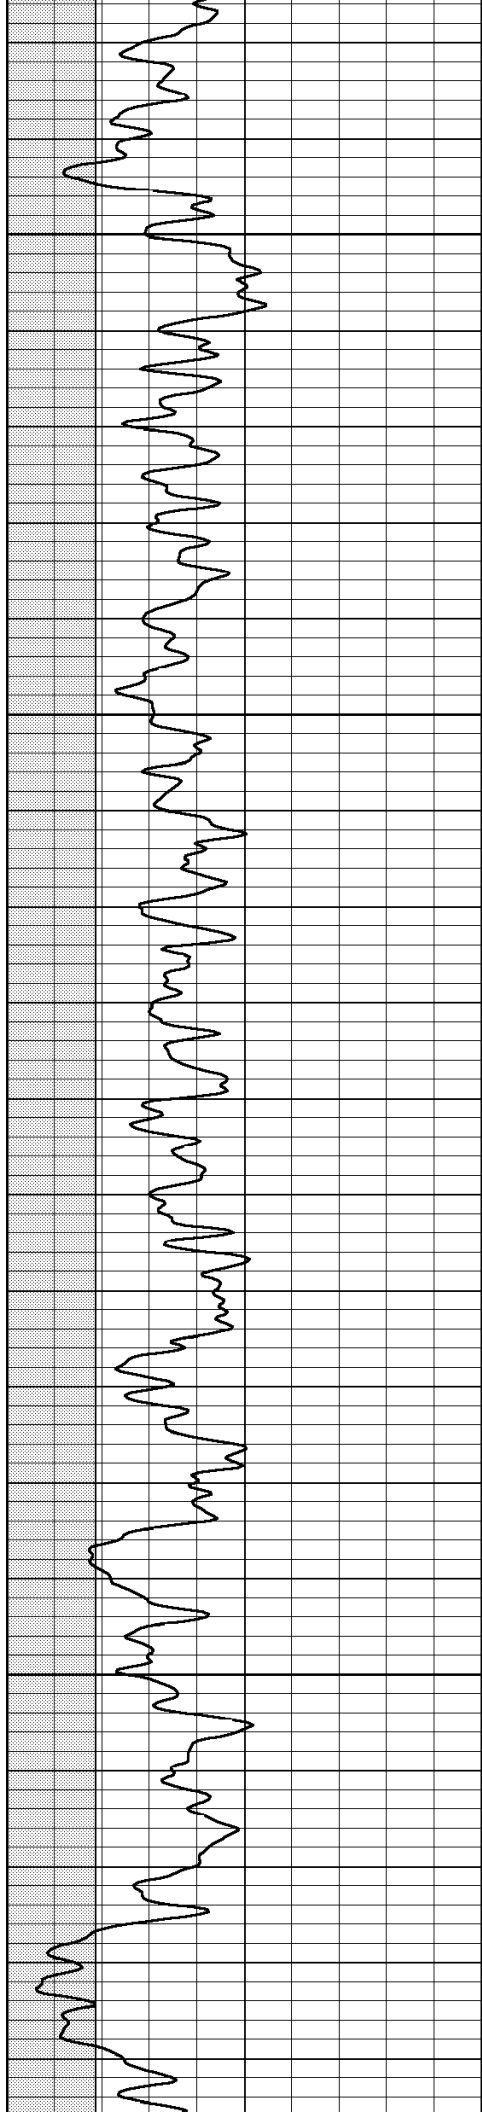



250

300

350

400

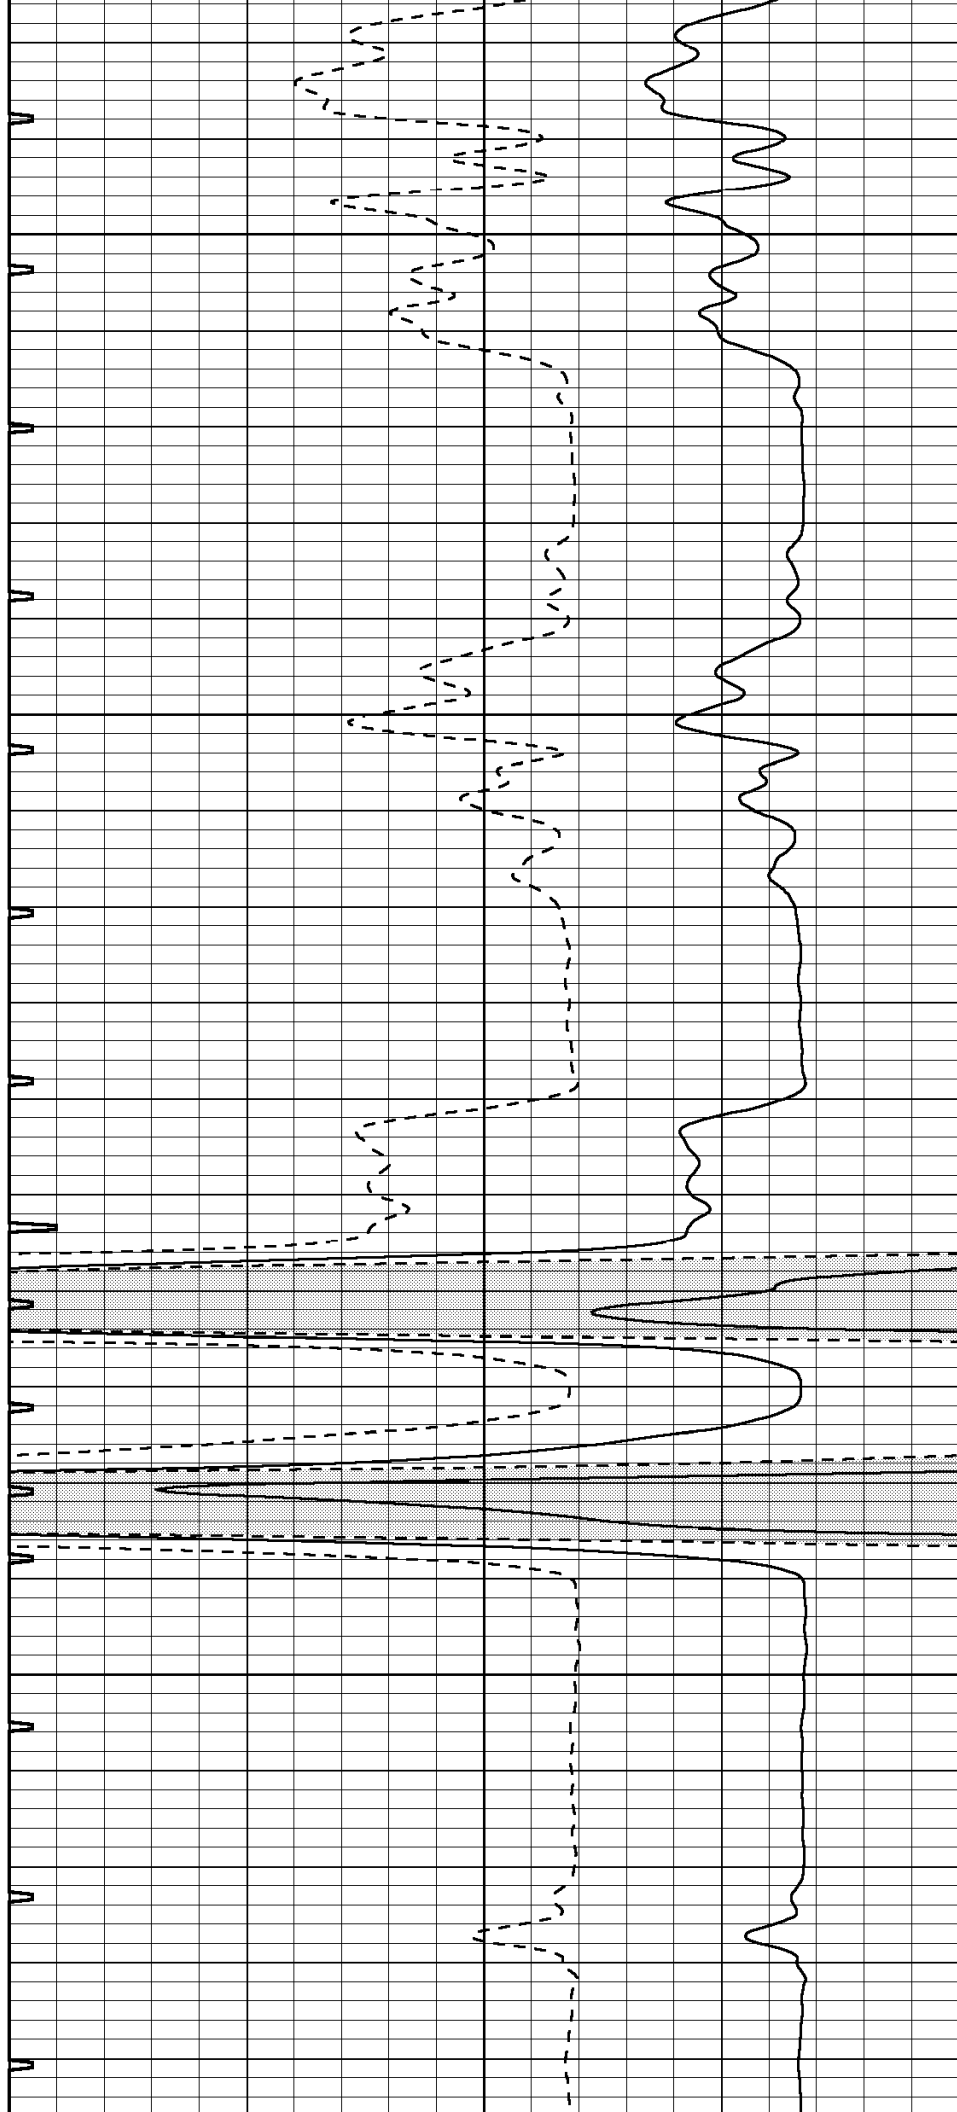

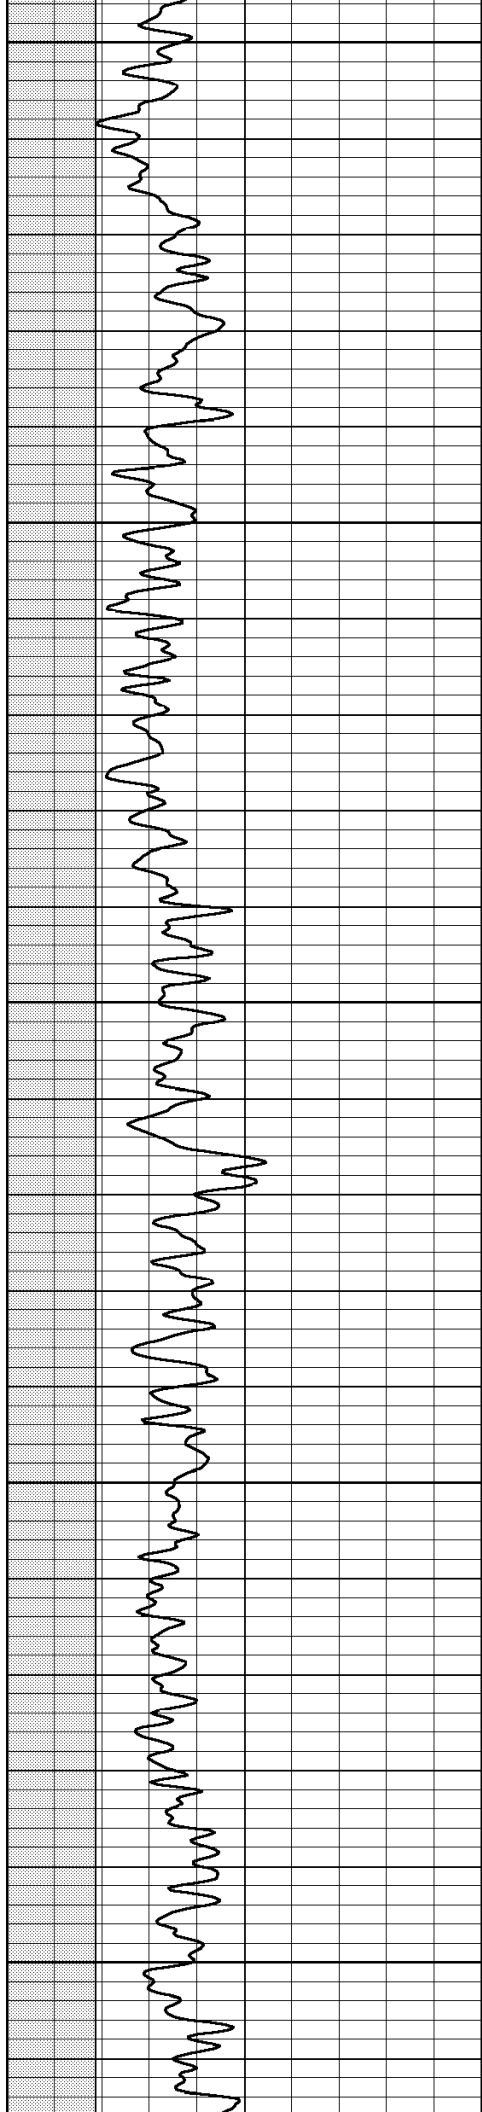


450


500

550

600

650

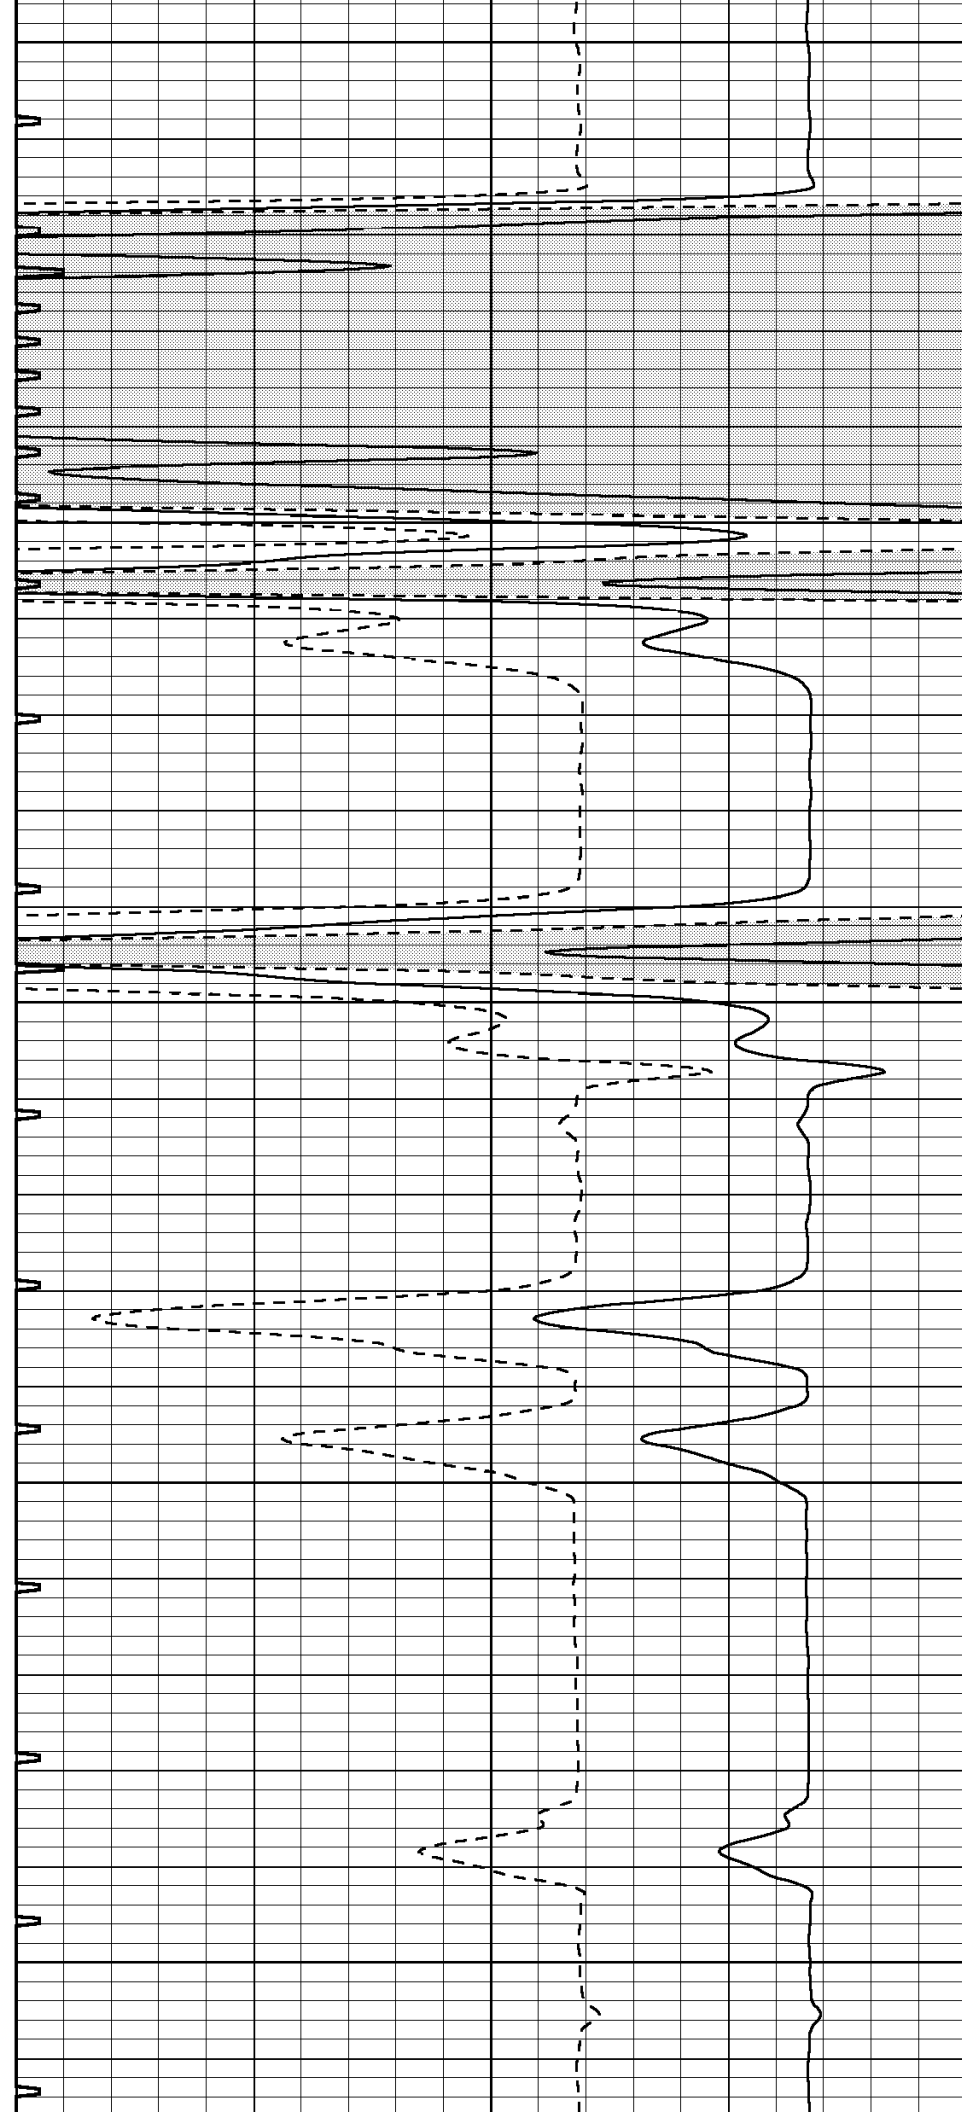

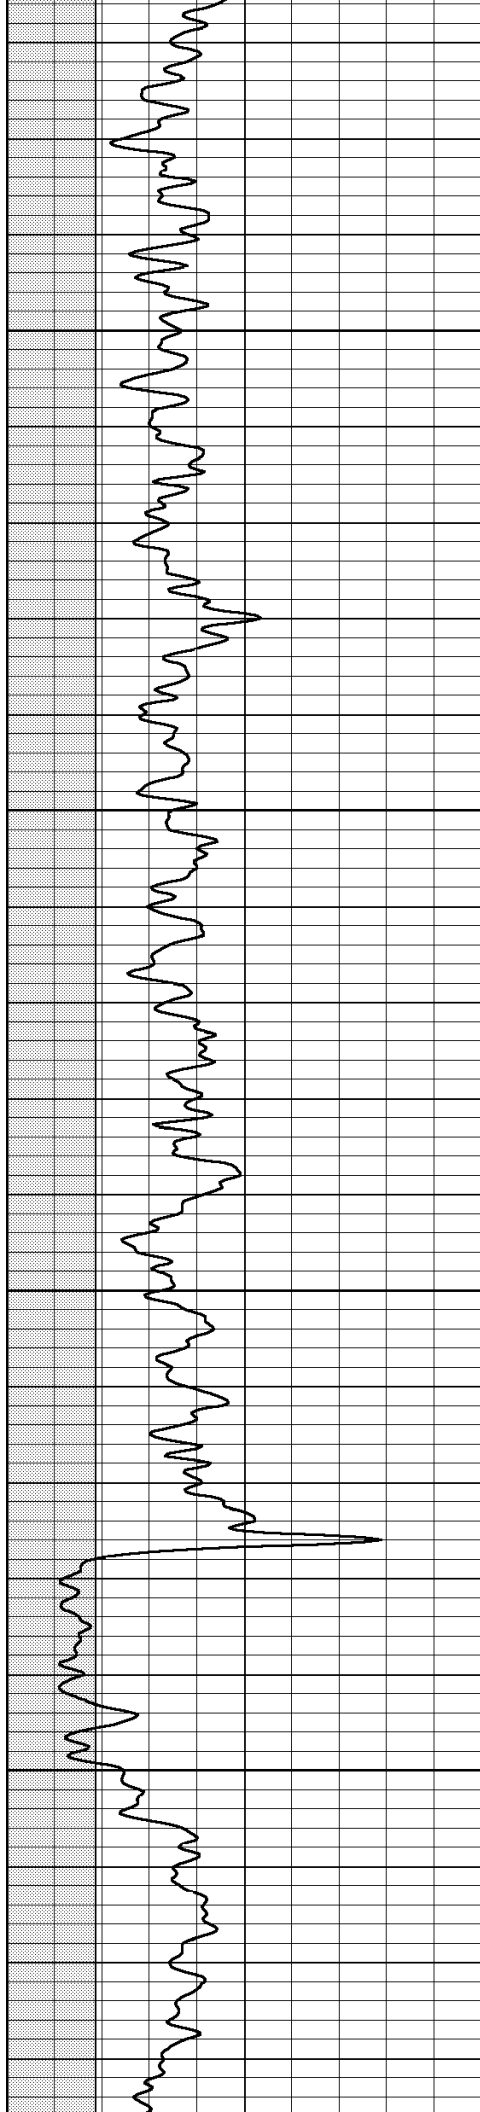



700


750

800

850

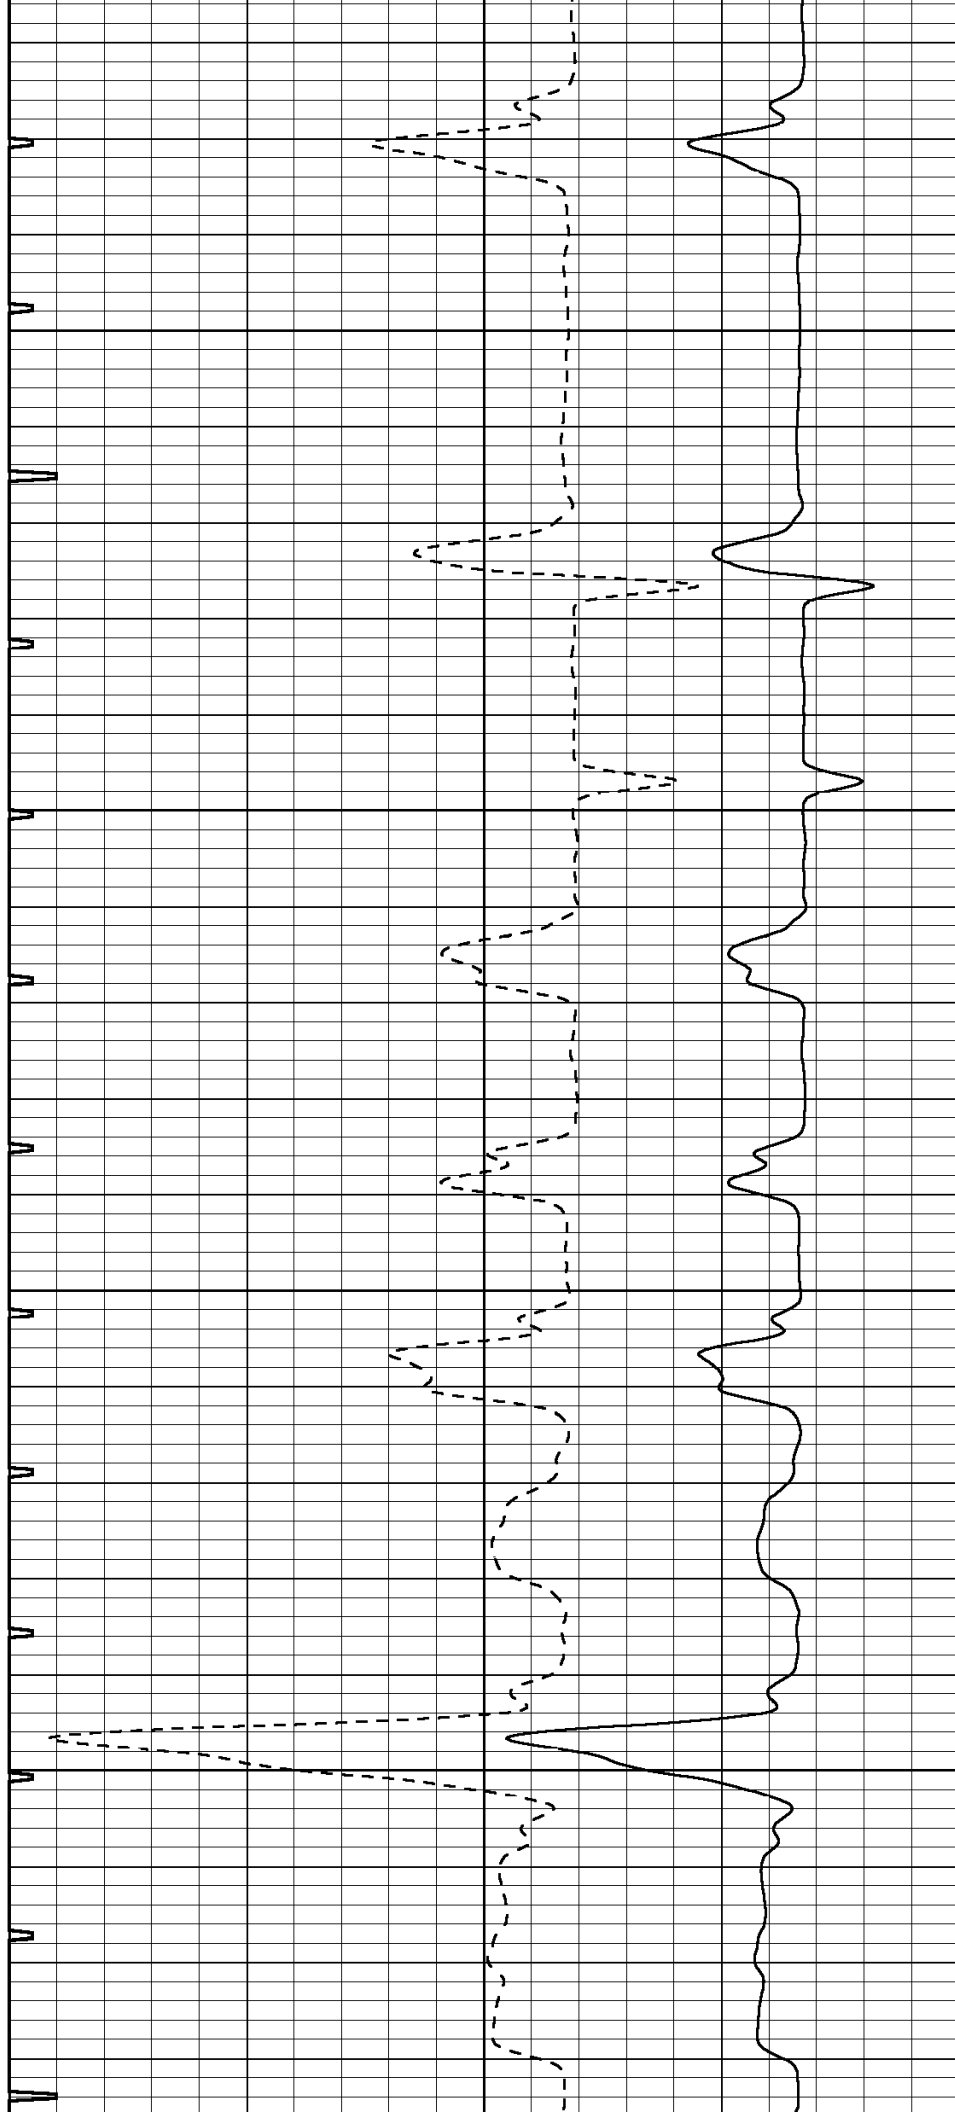

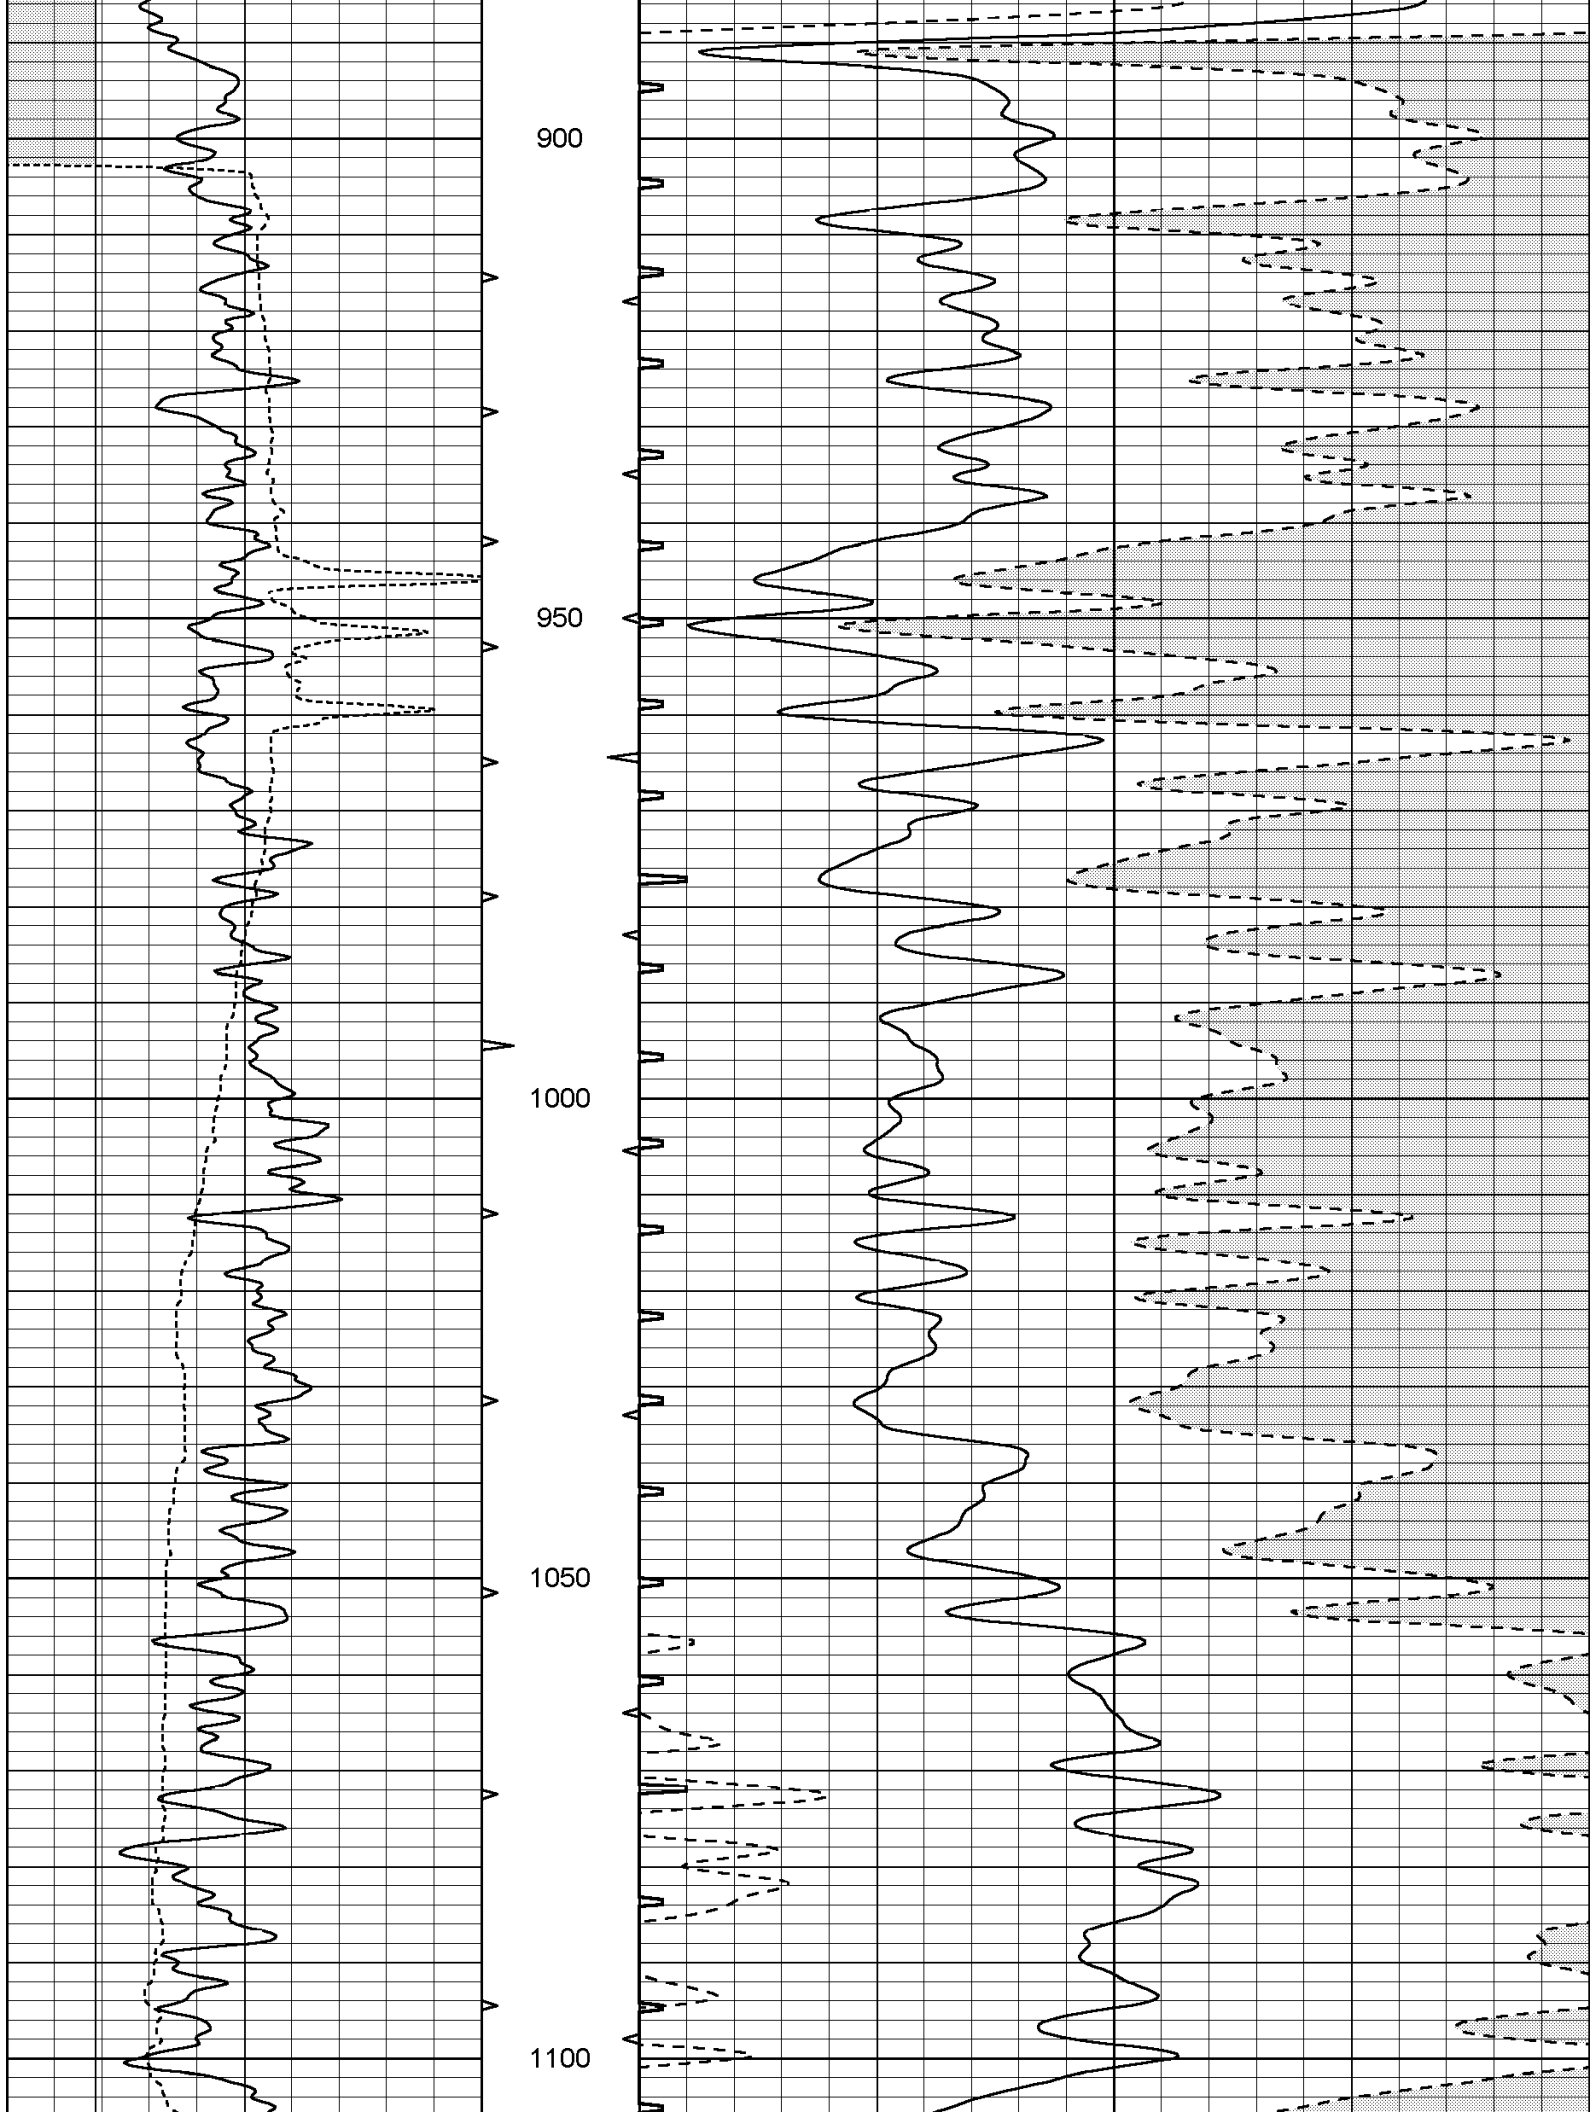

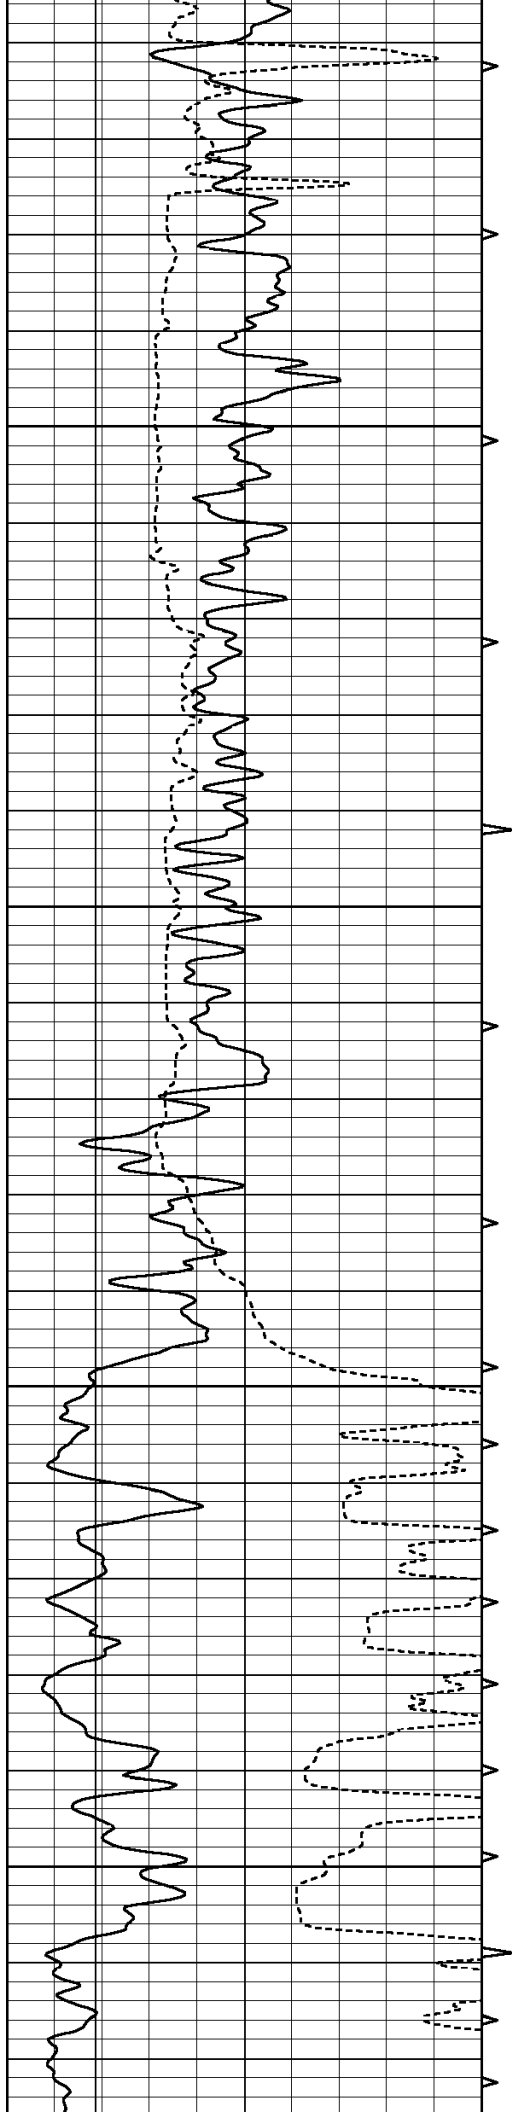



1150


1200


1250

1300

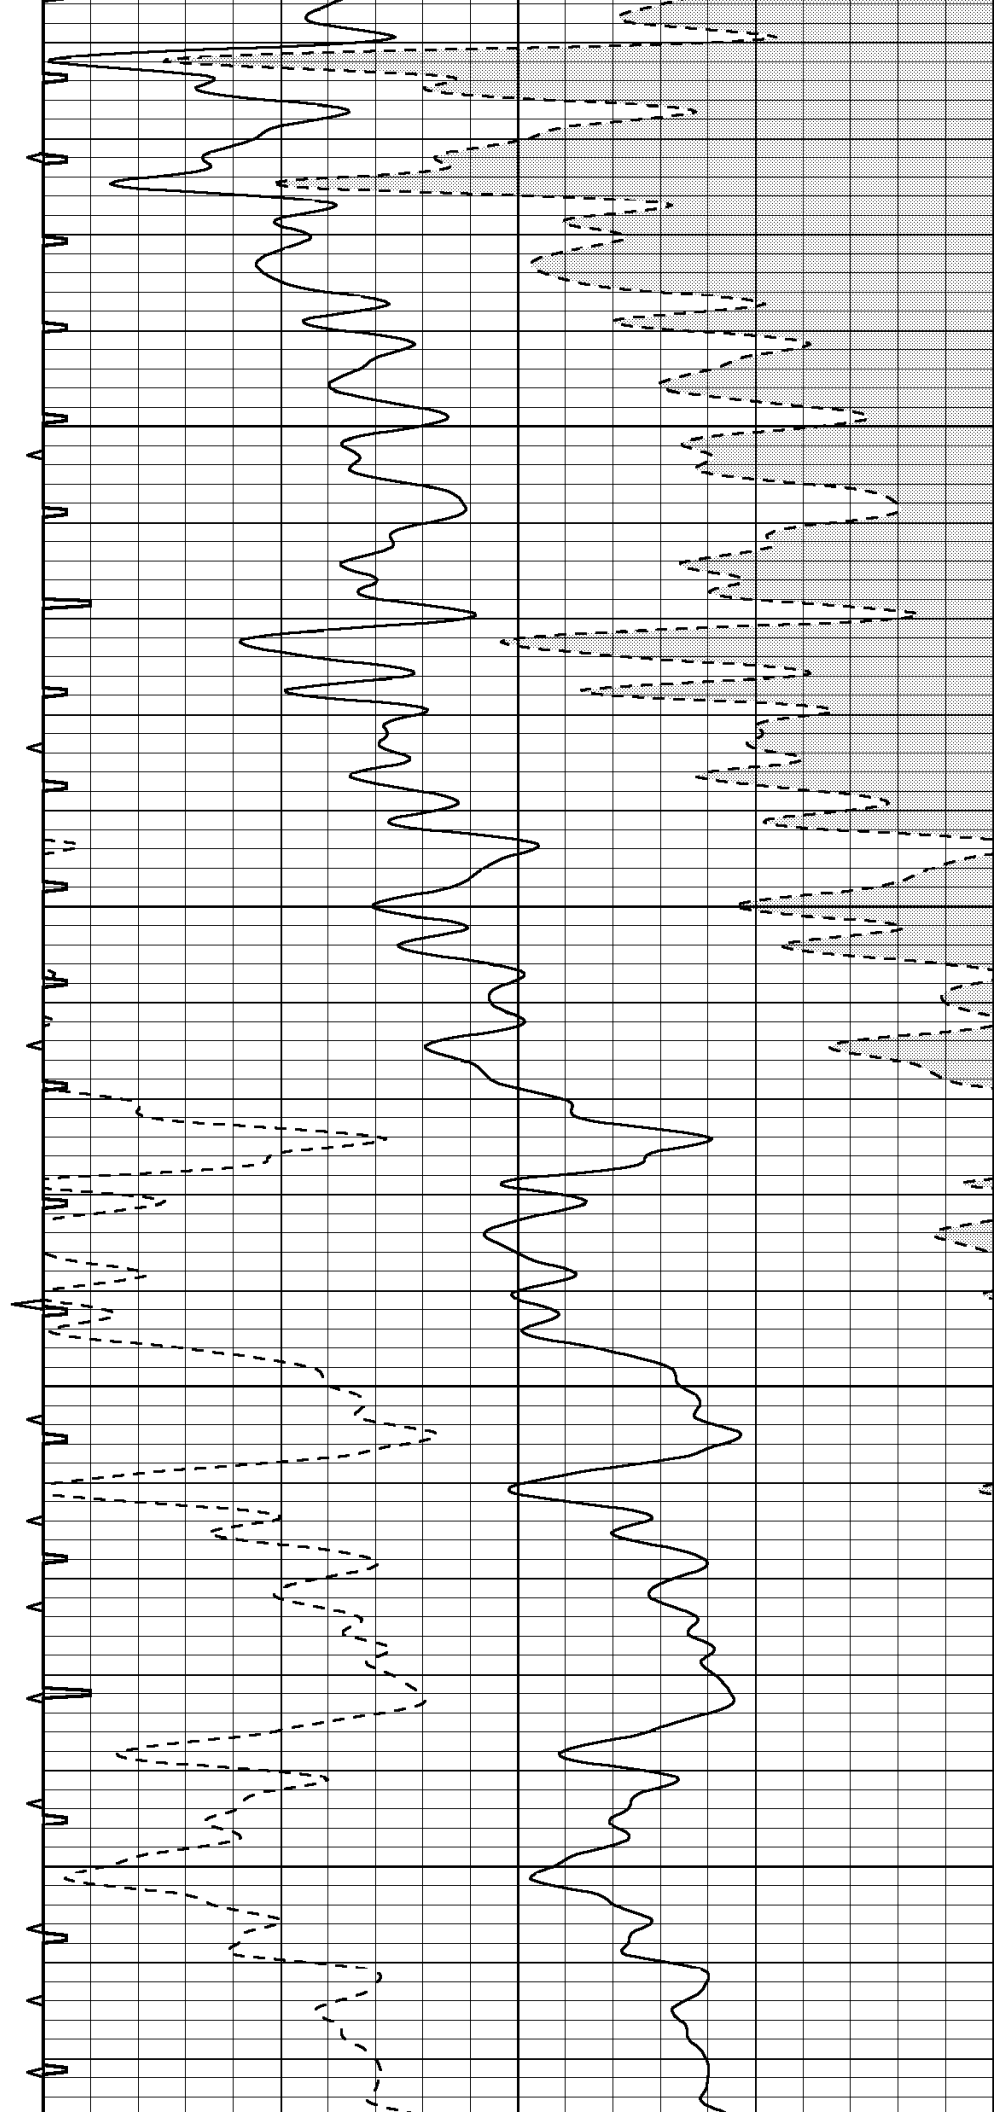

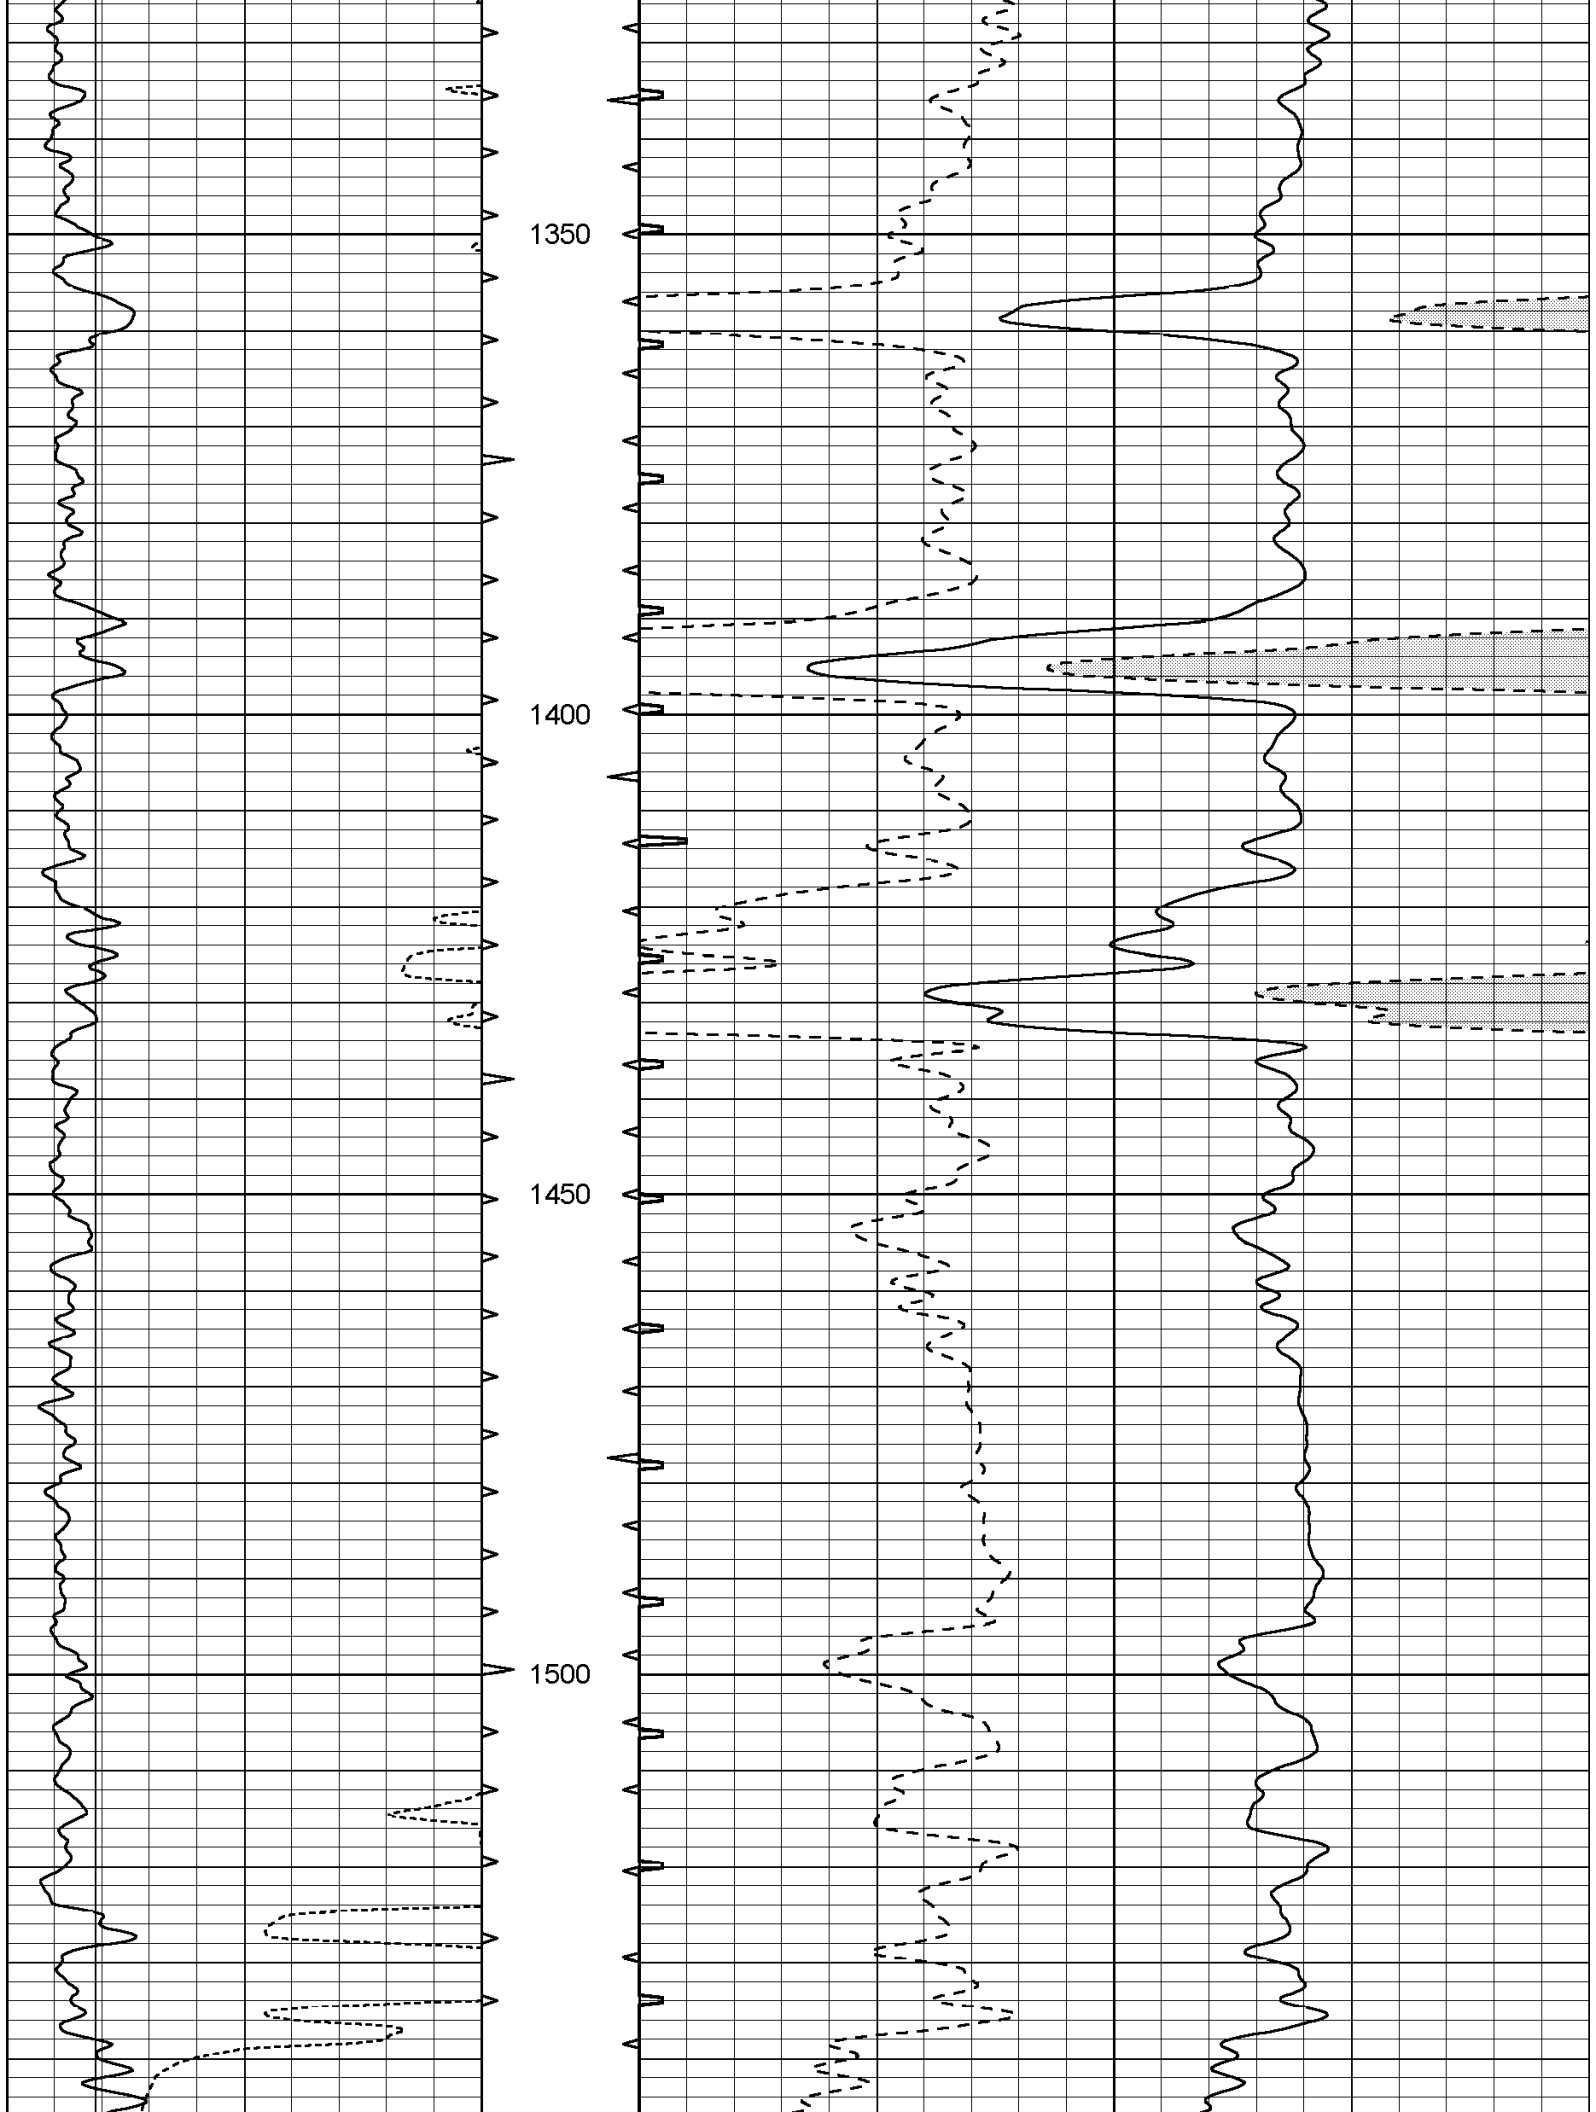

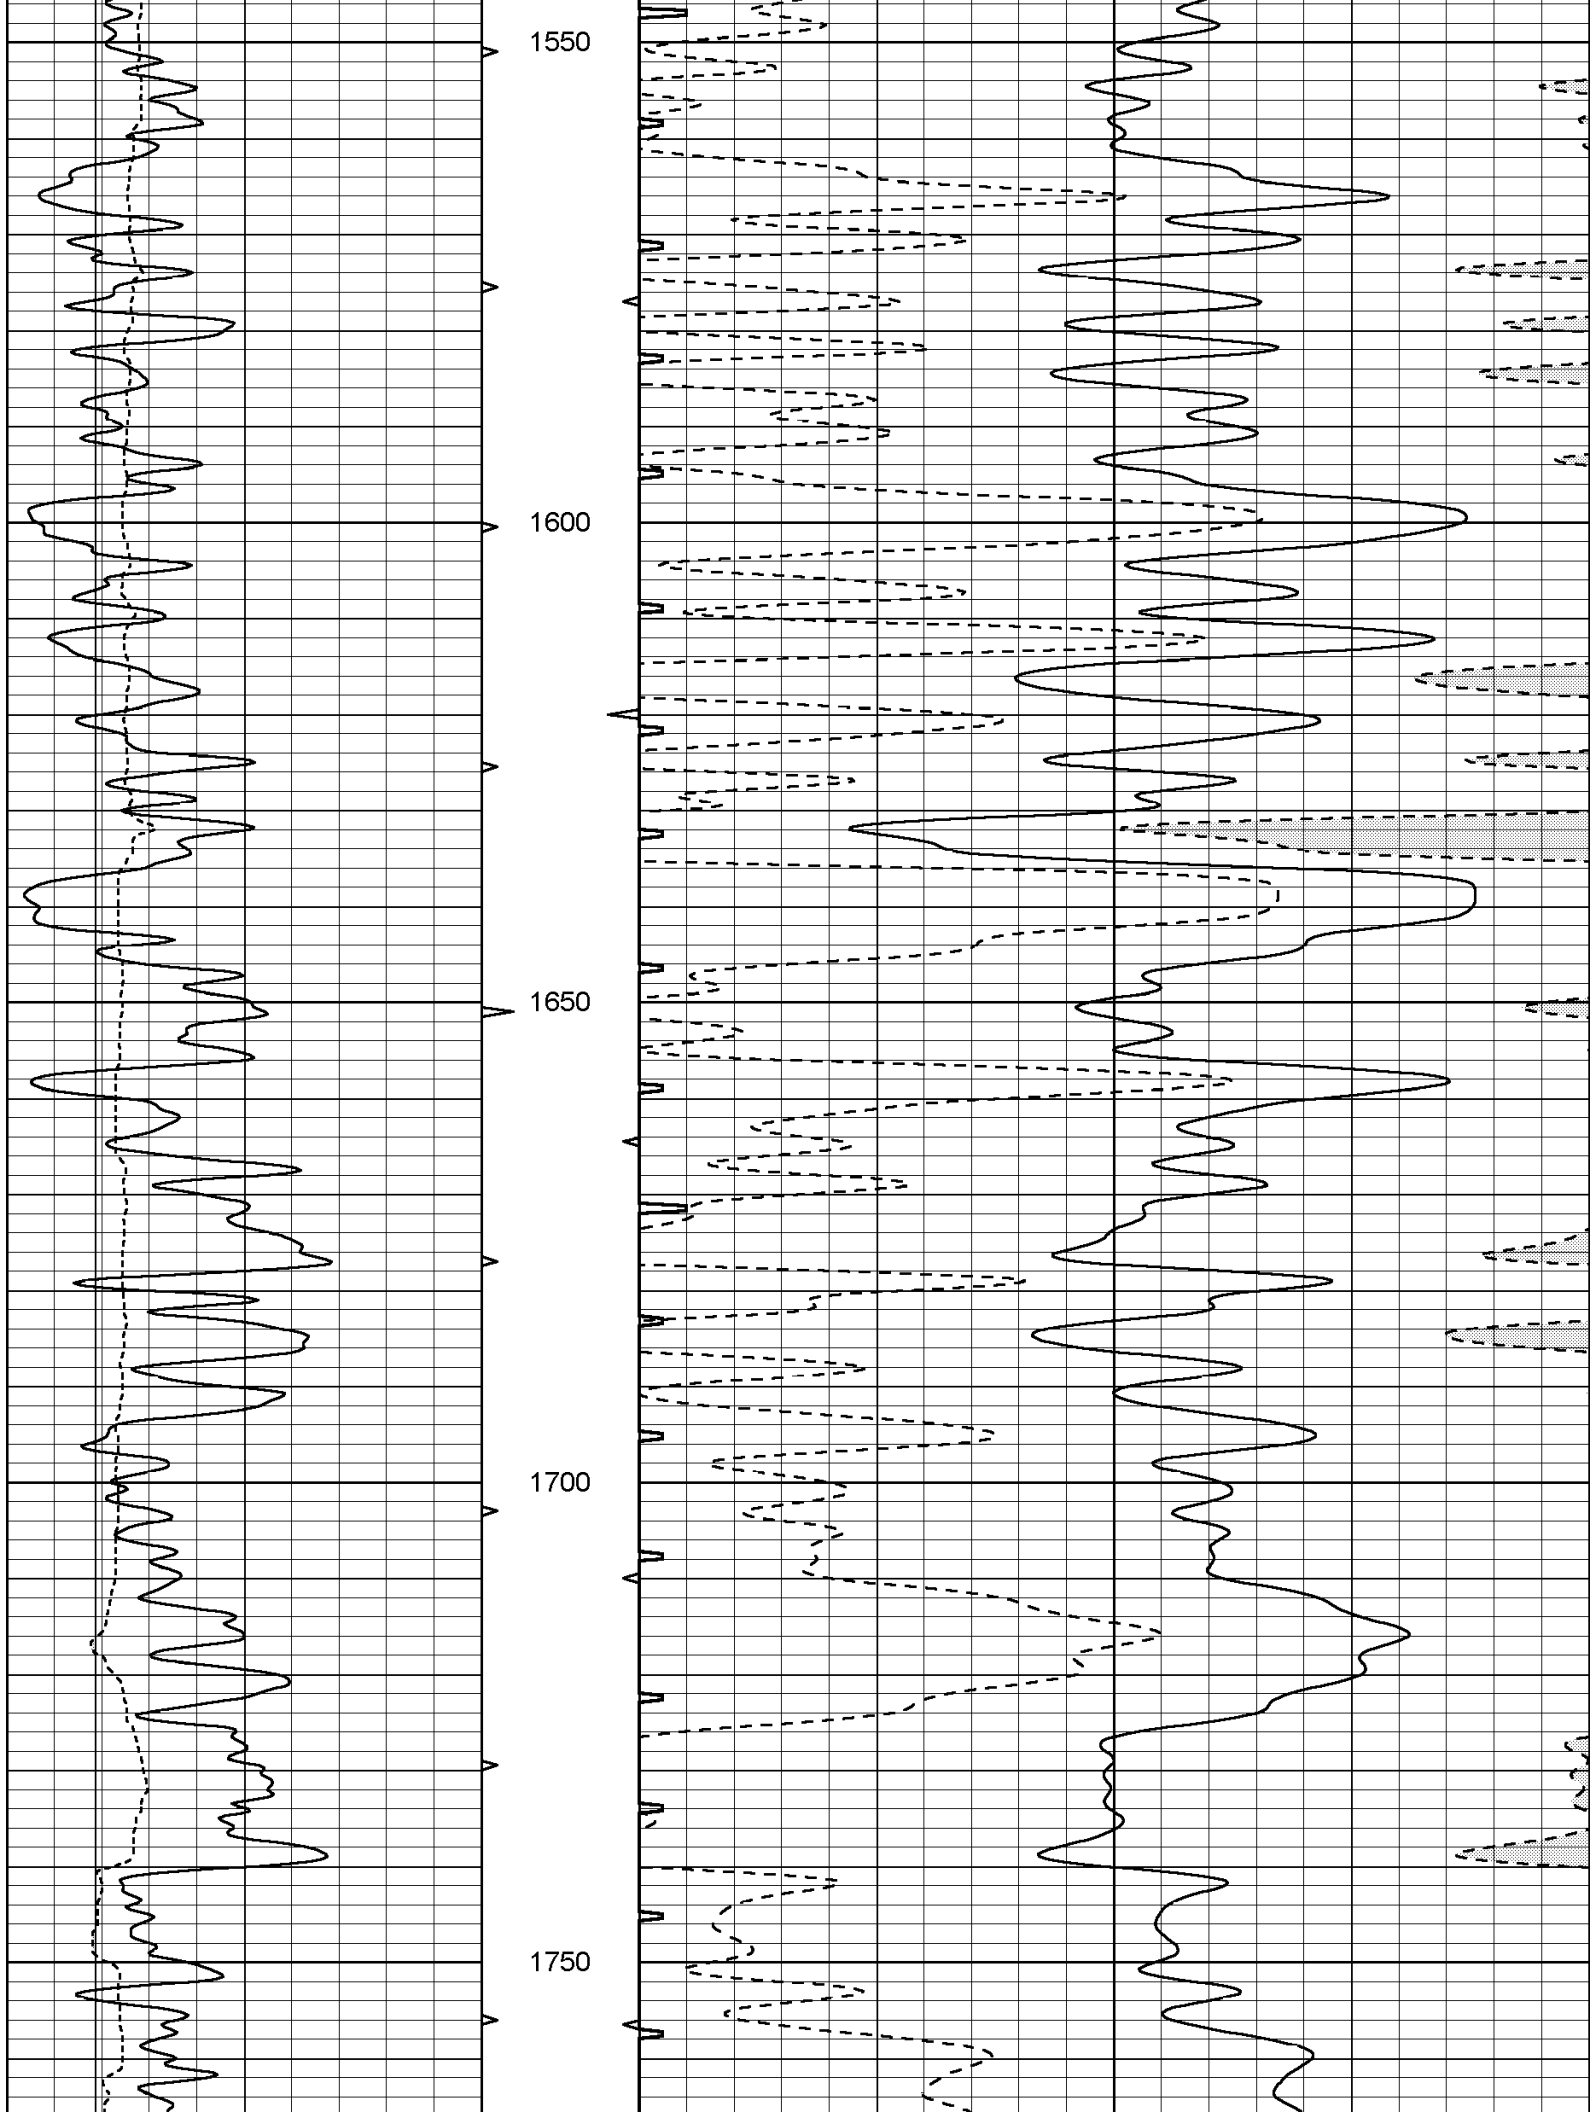

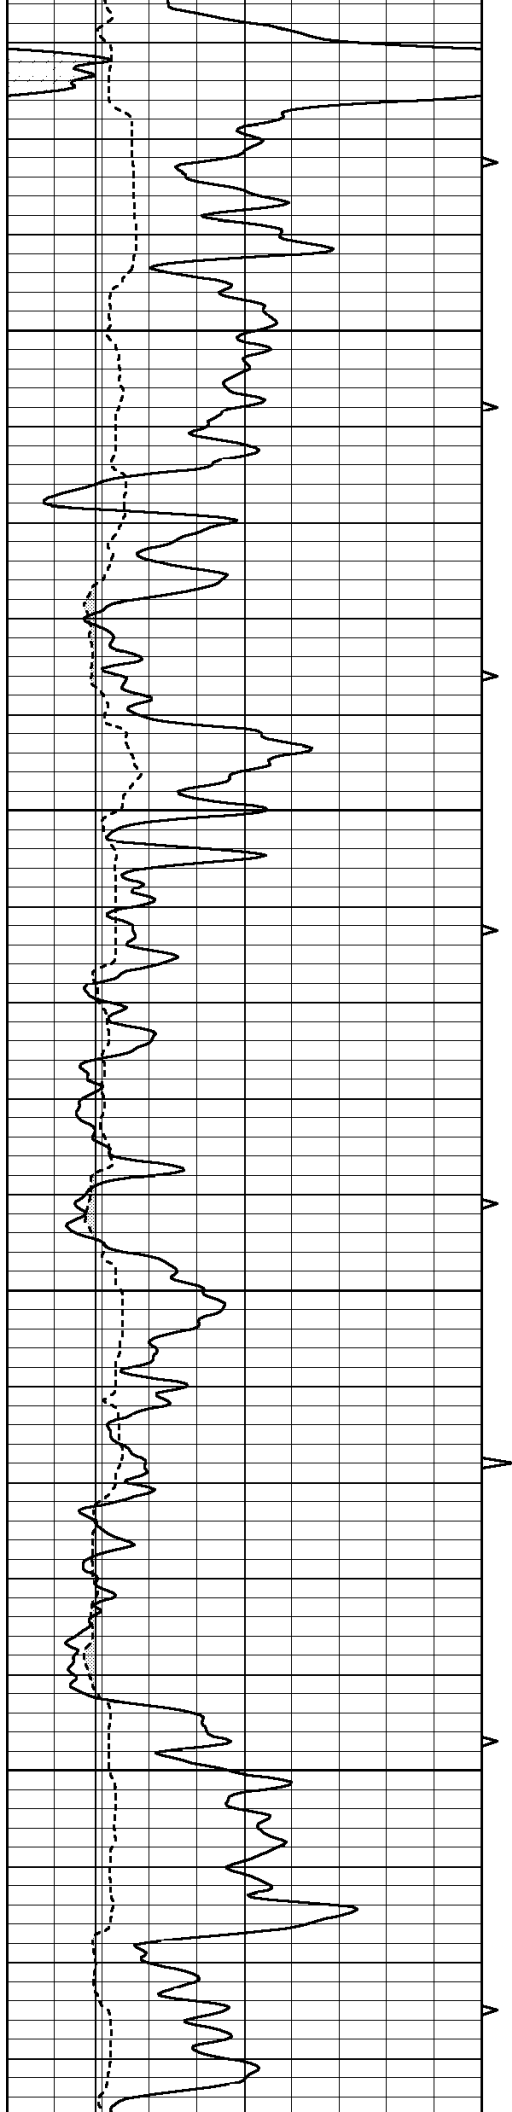




1800


1850

1900

1950

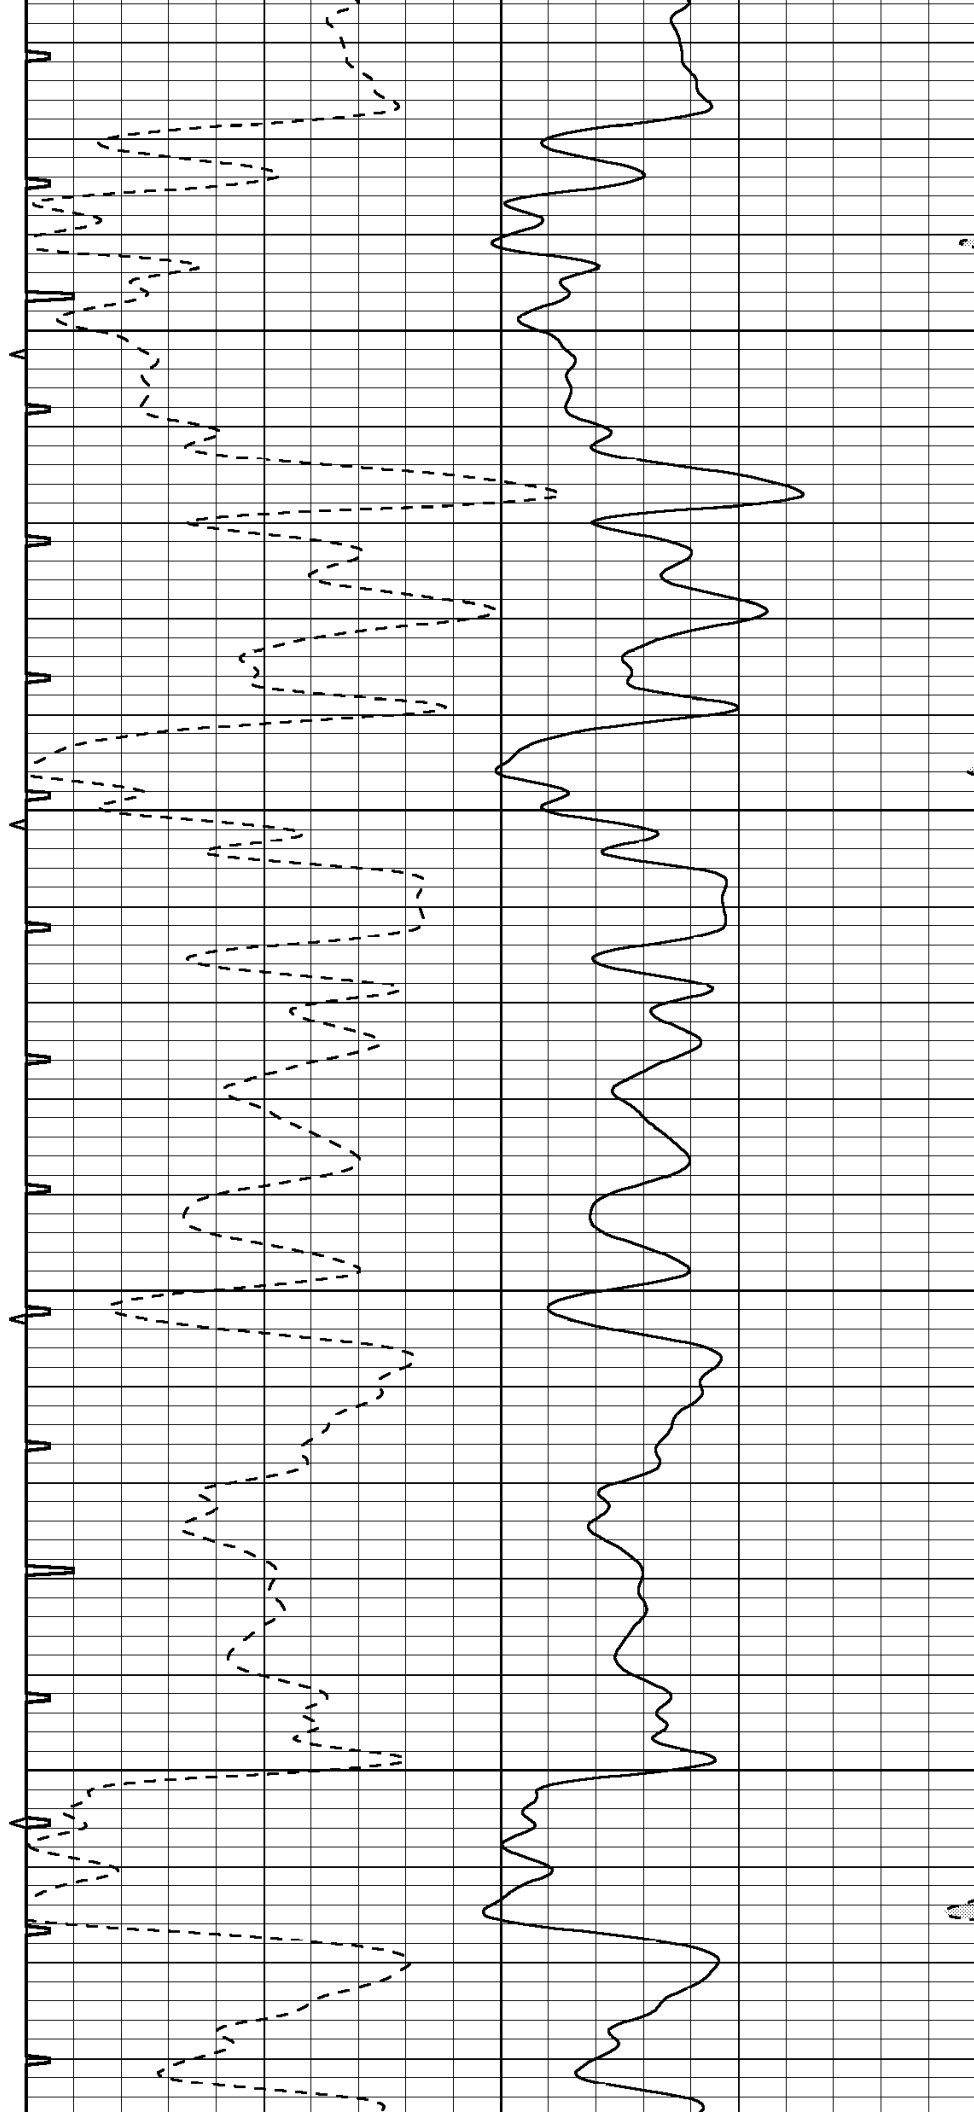

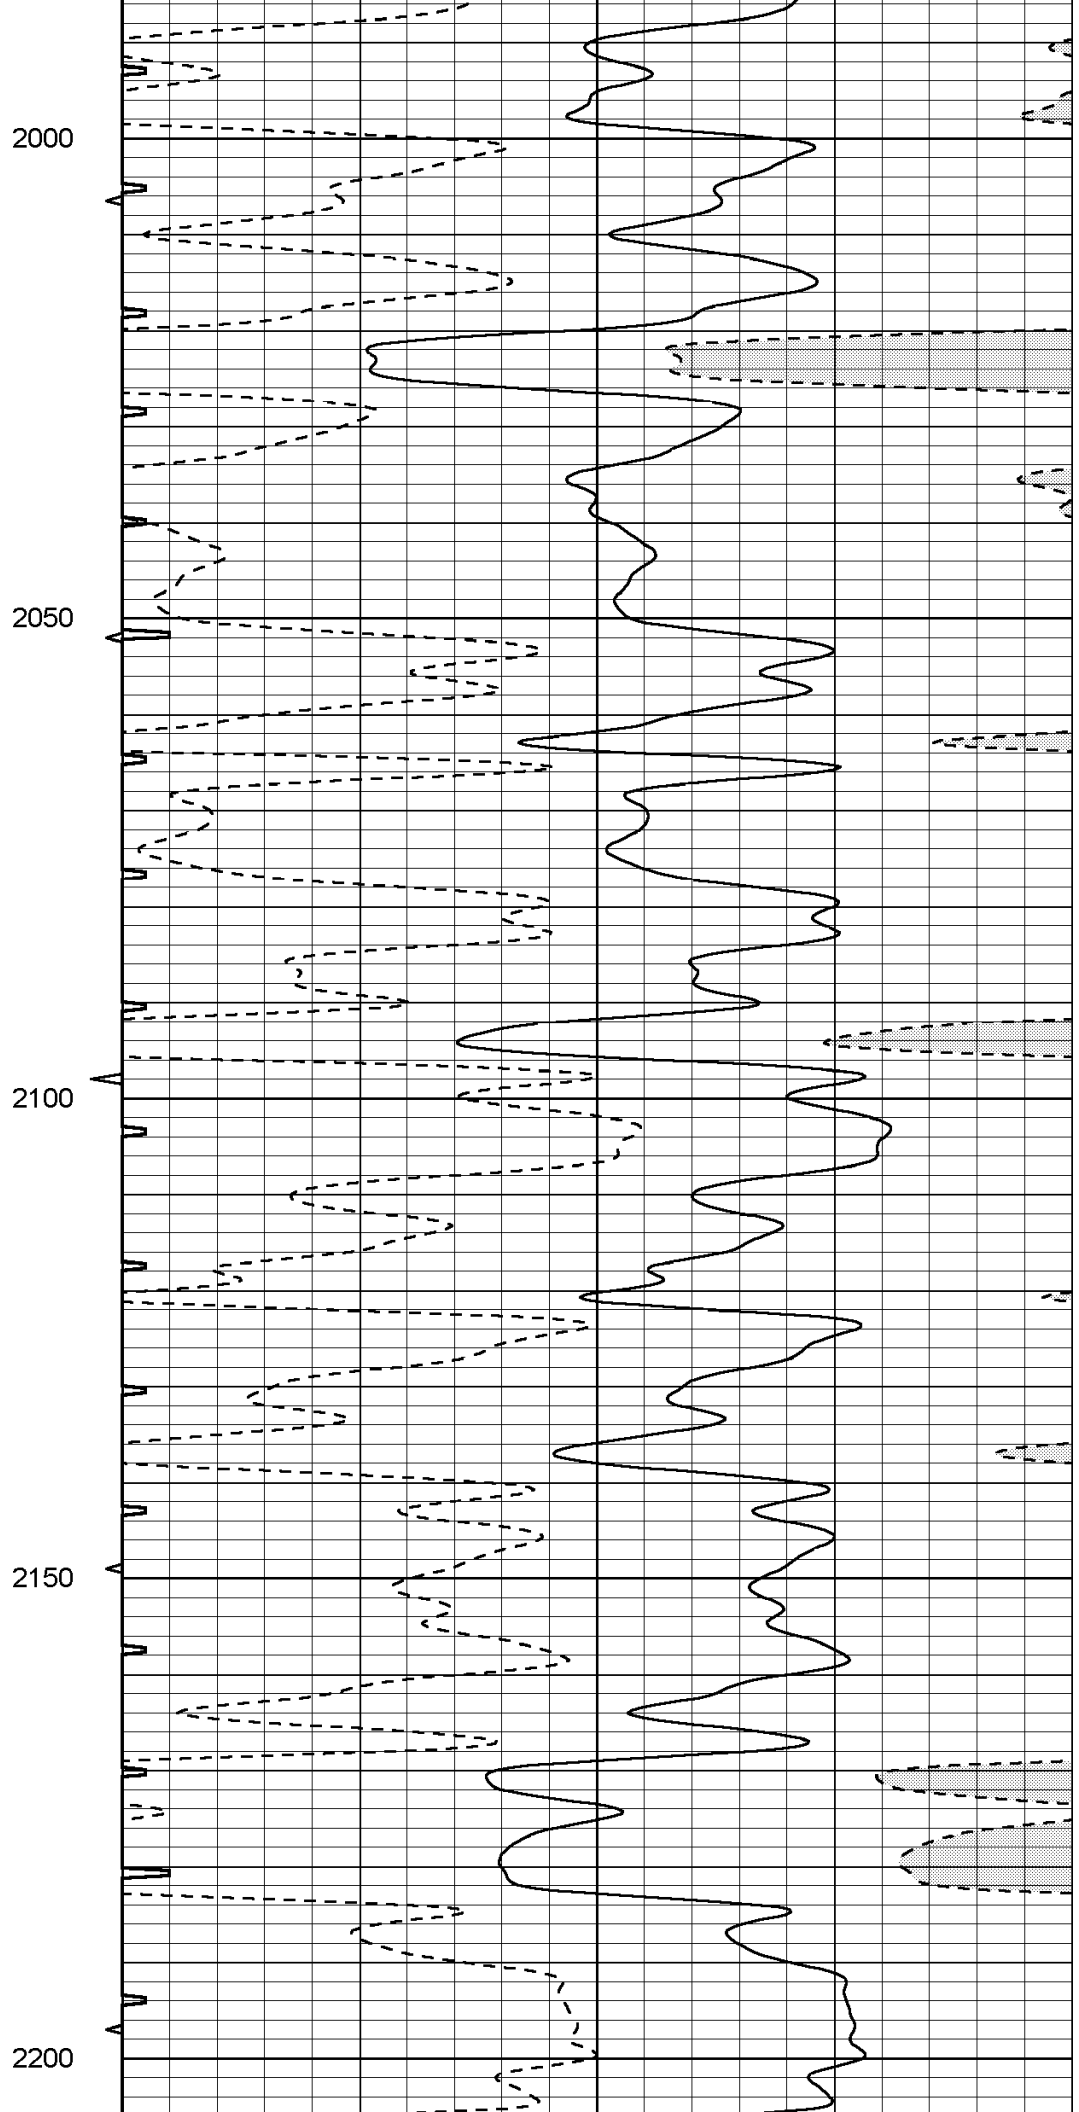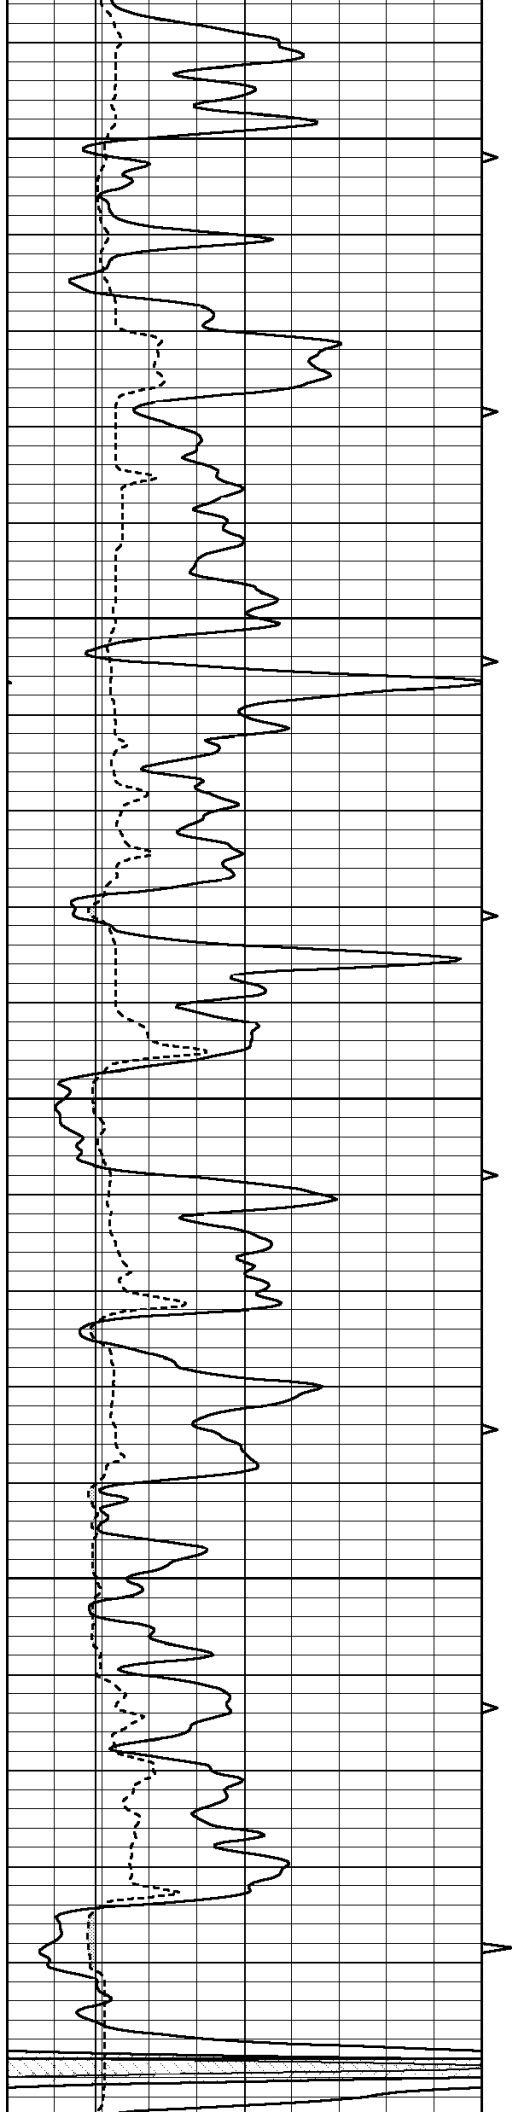

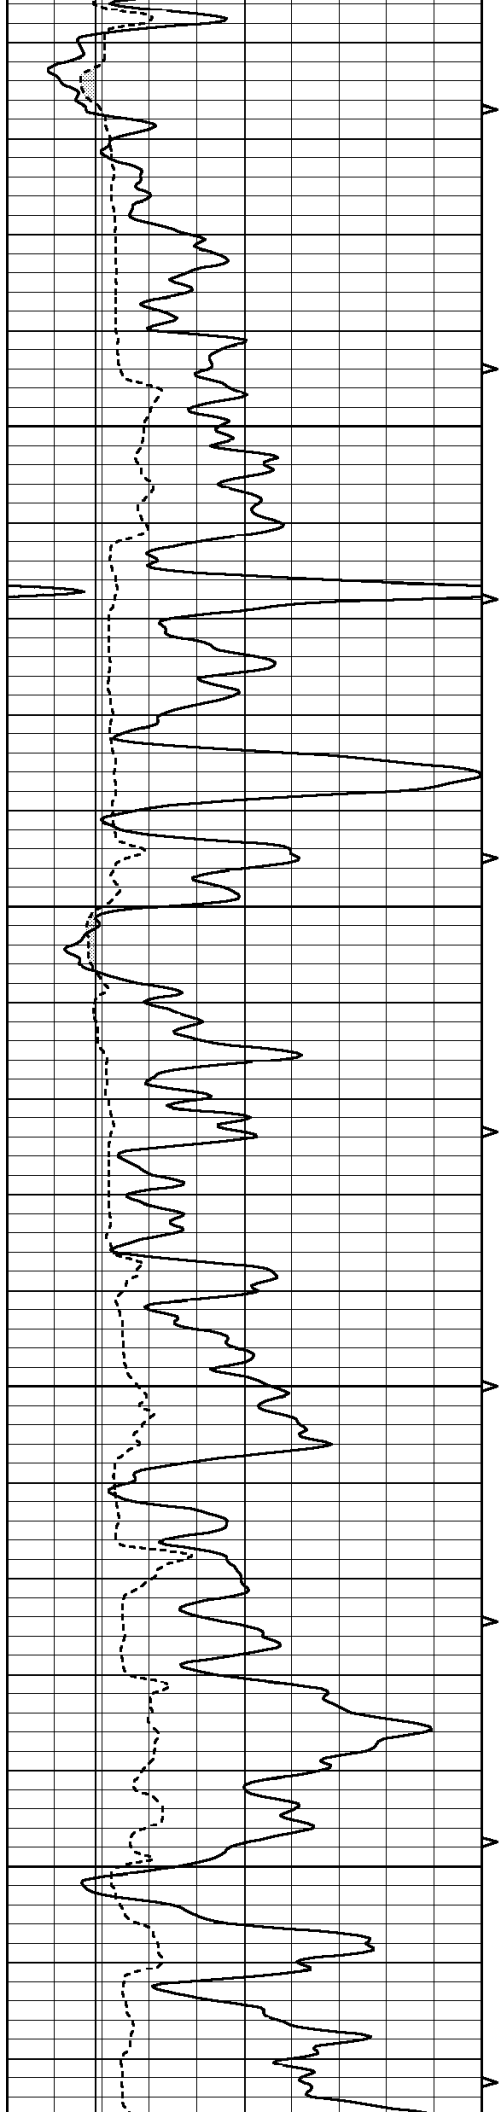




2250


2300


2350


2400

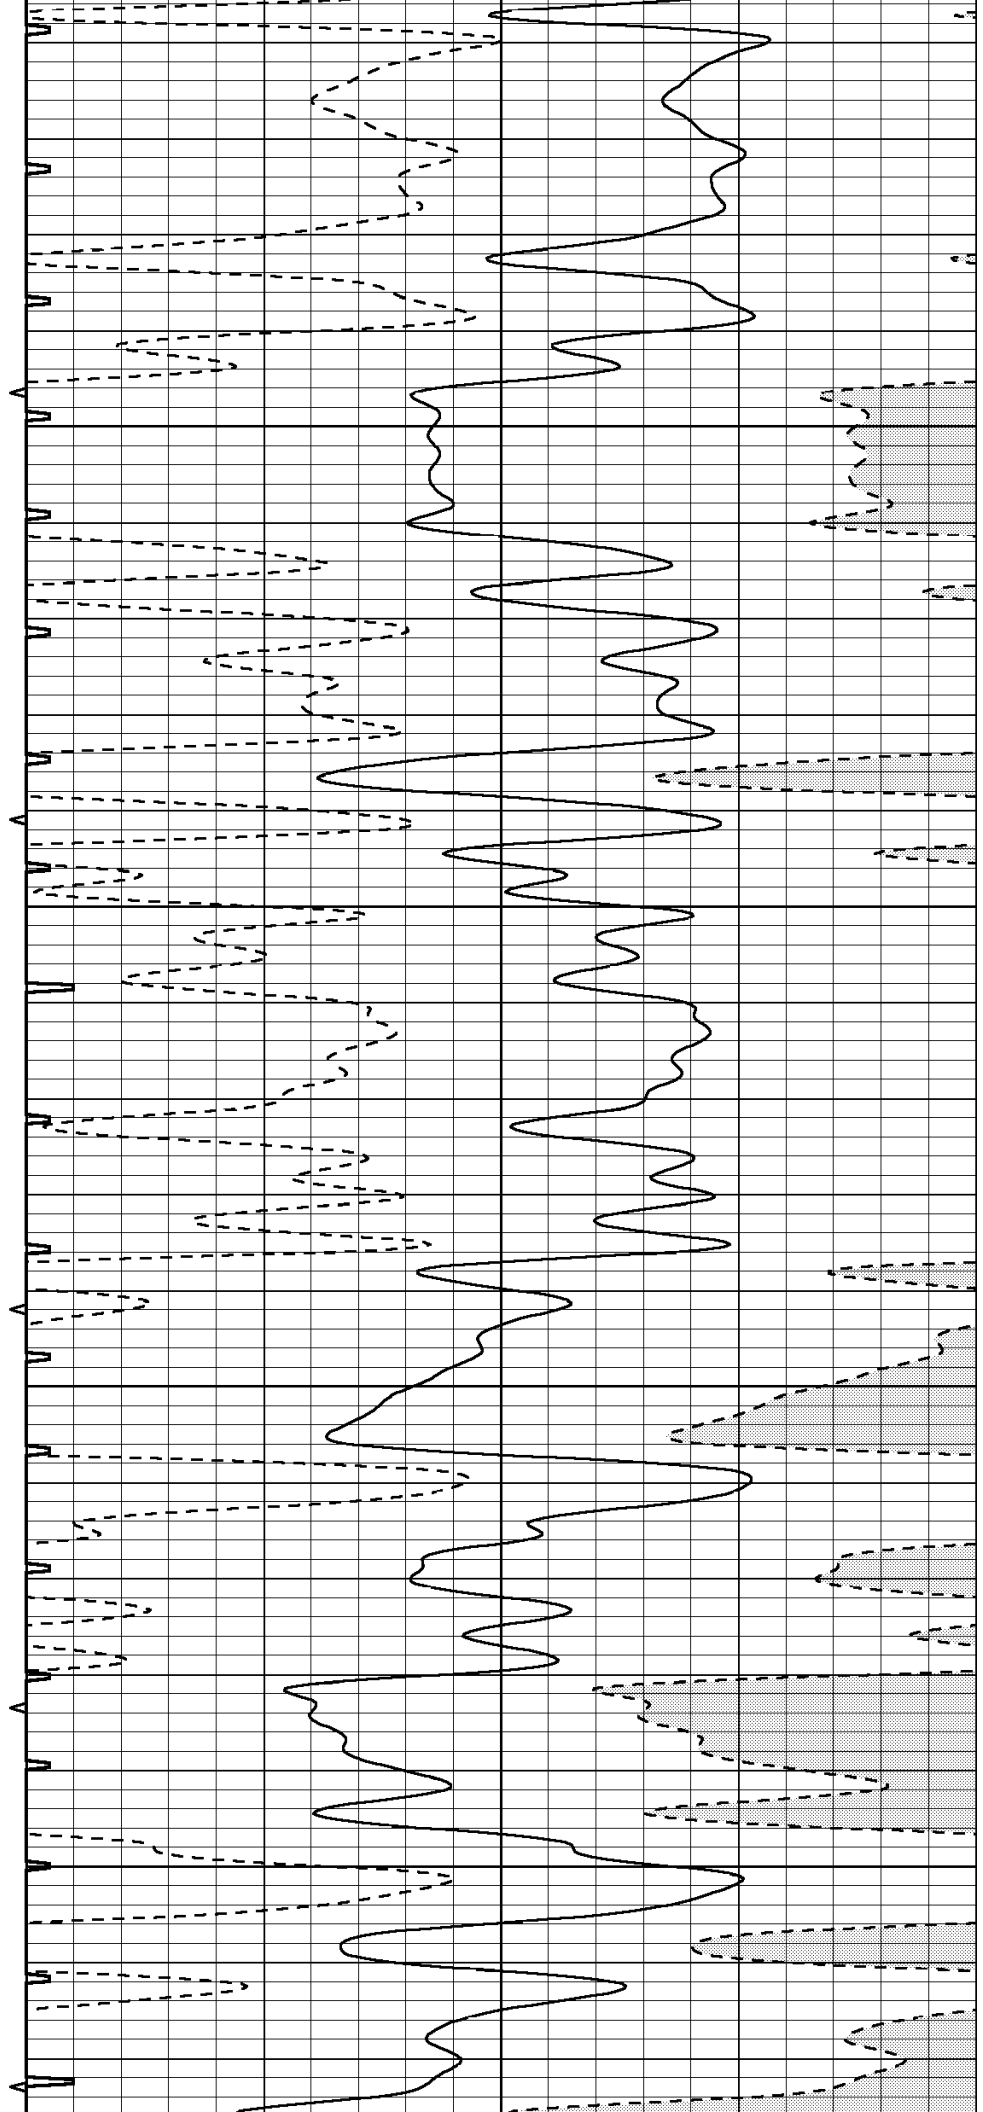


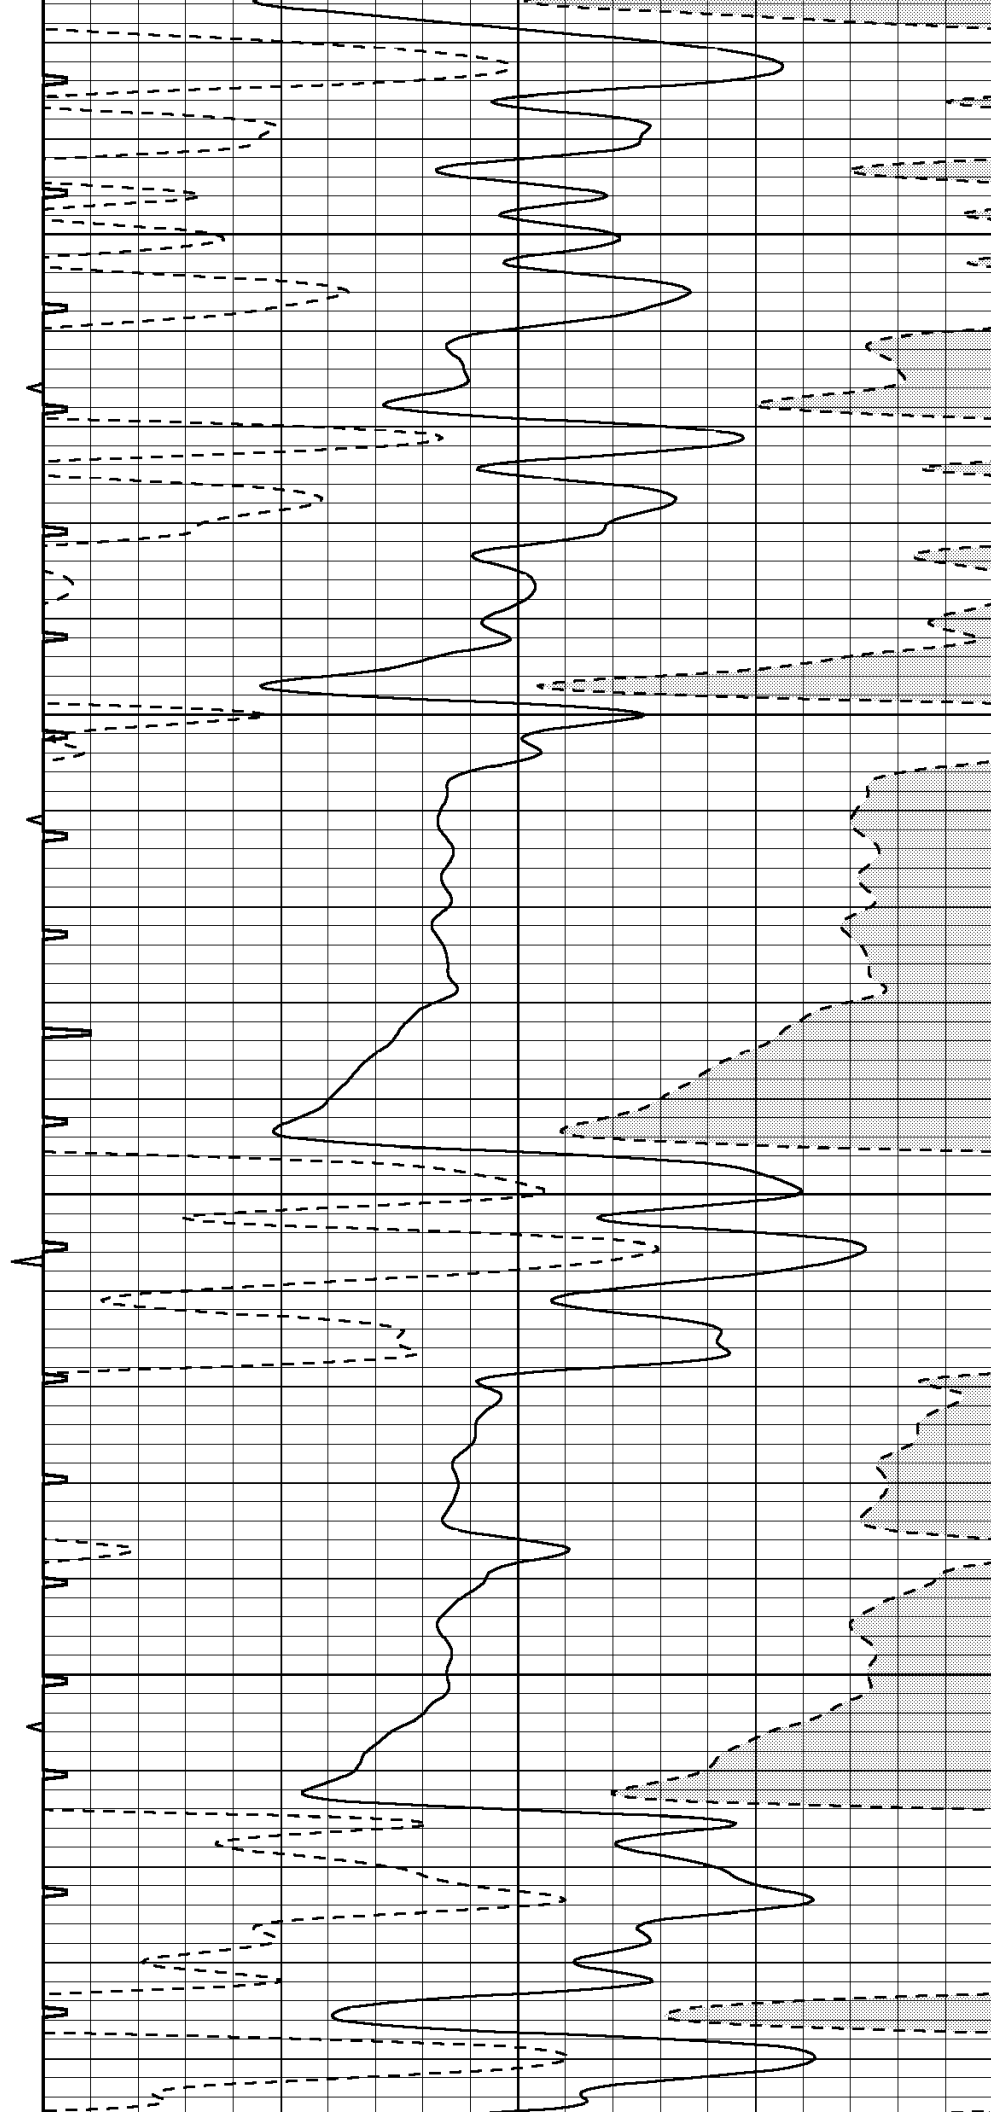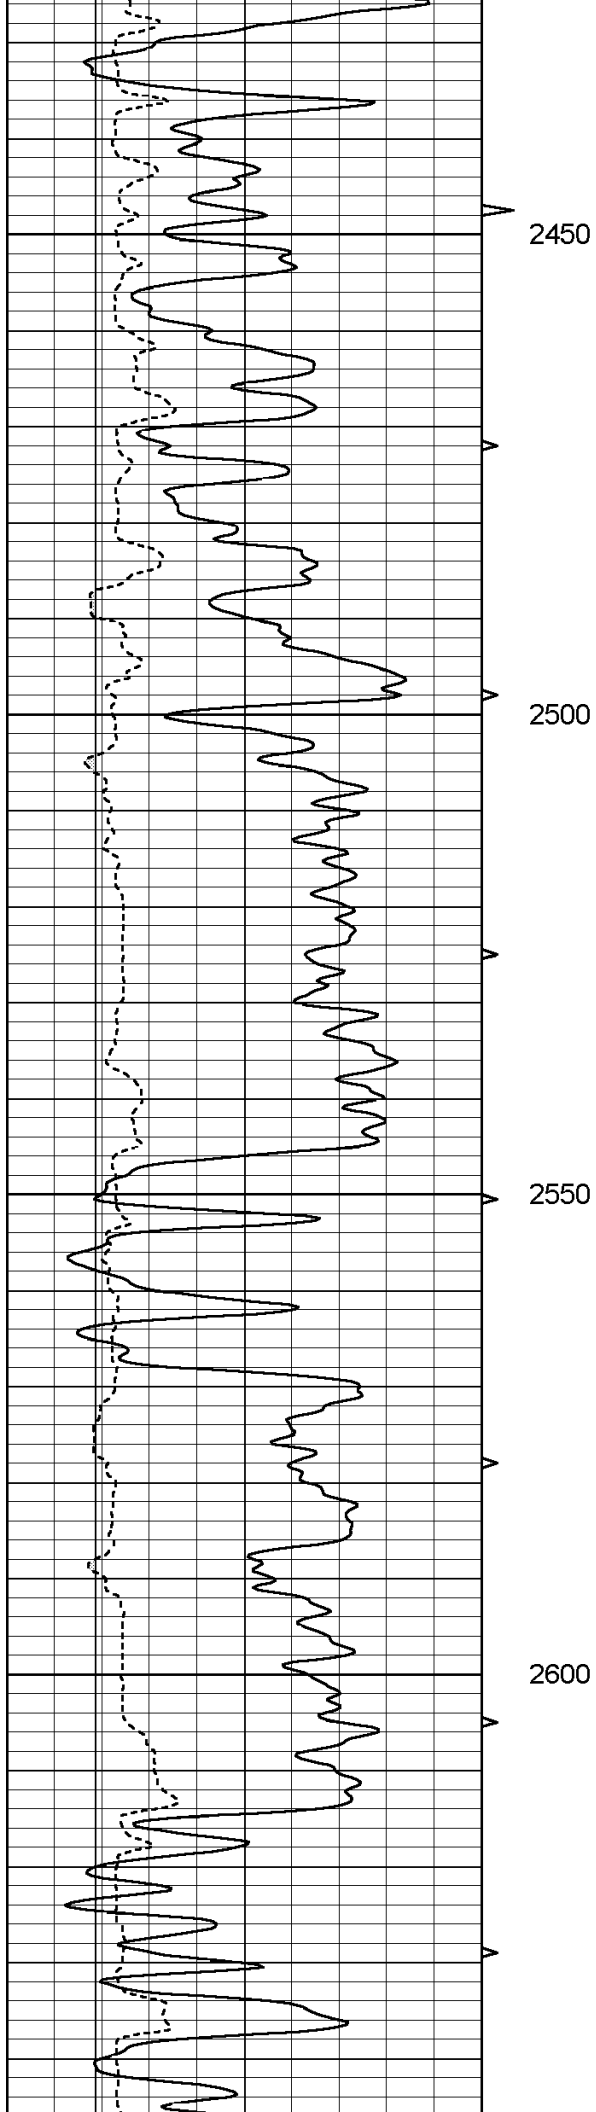

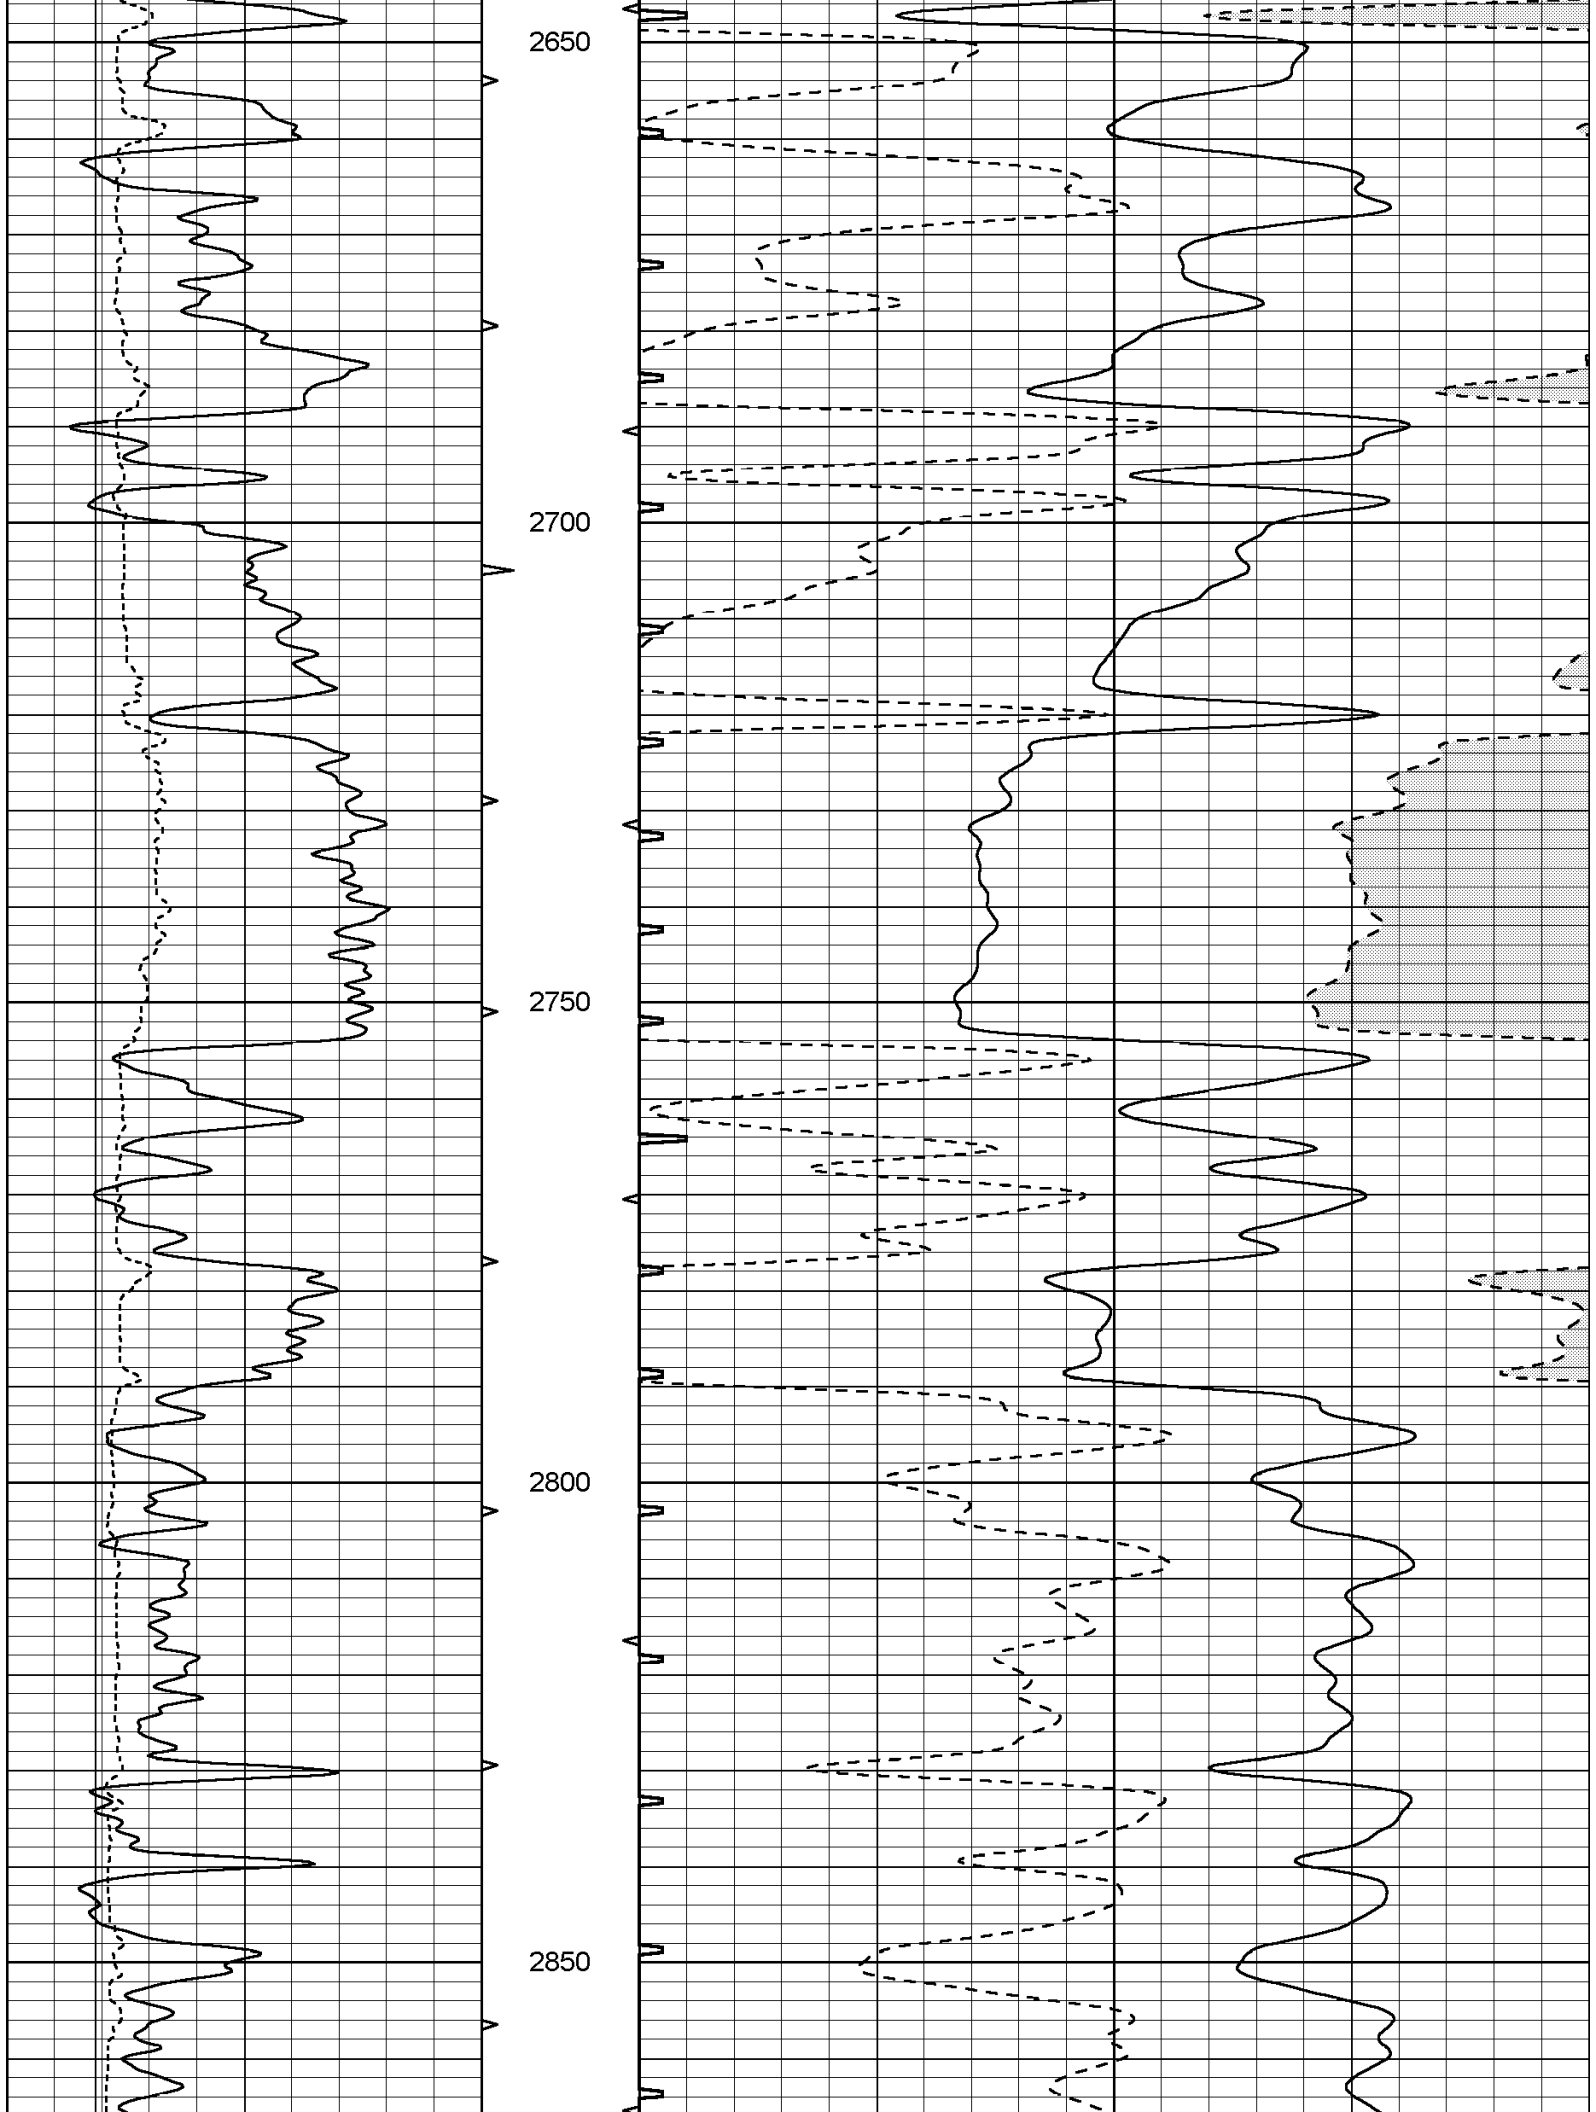

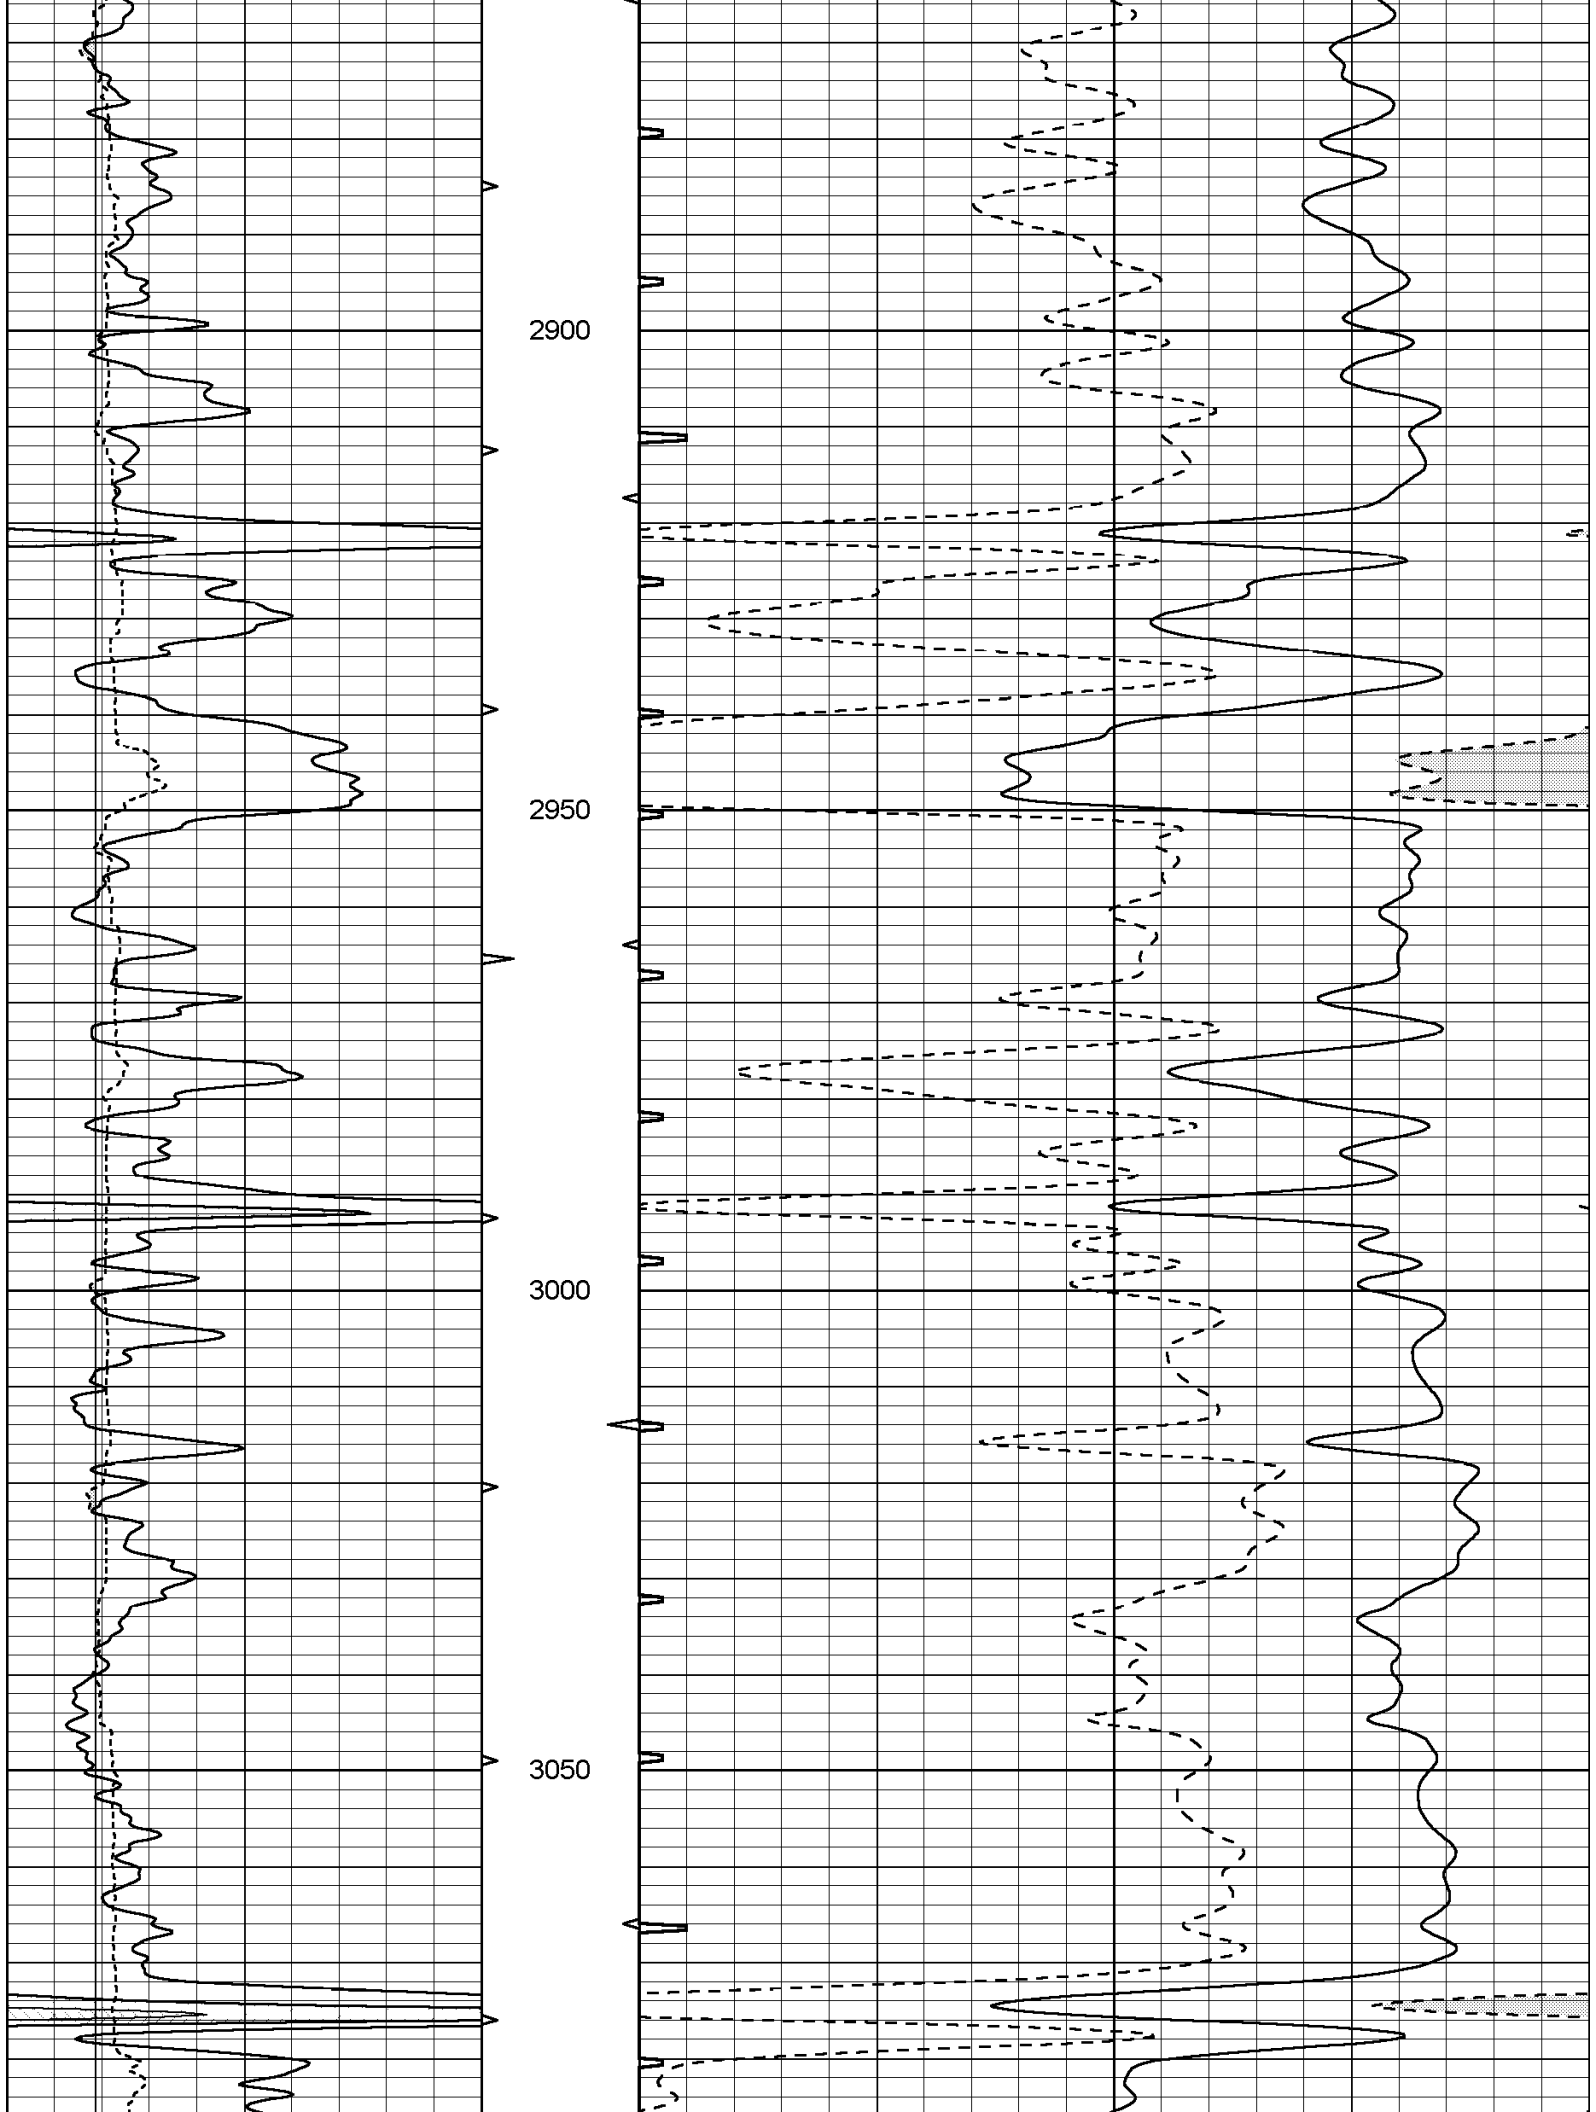

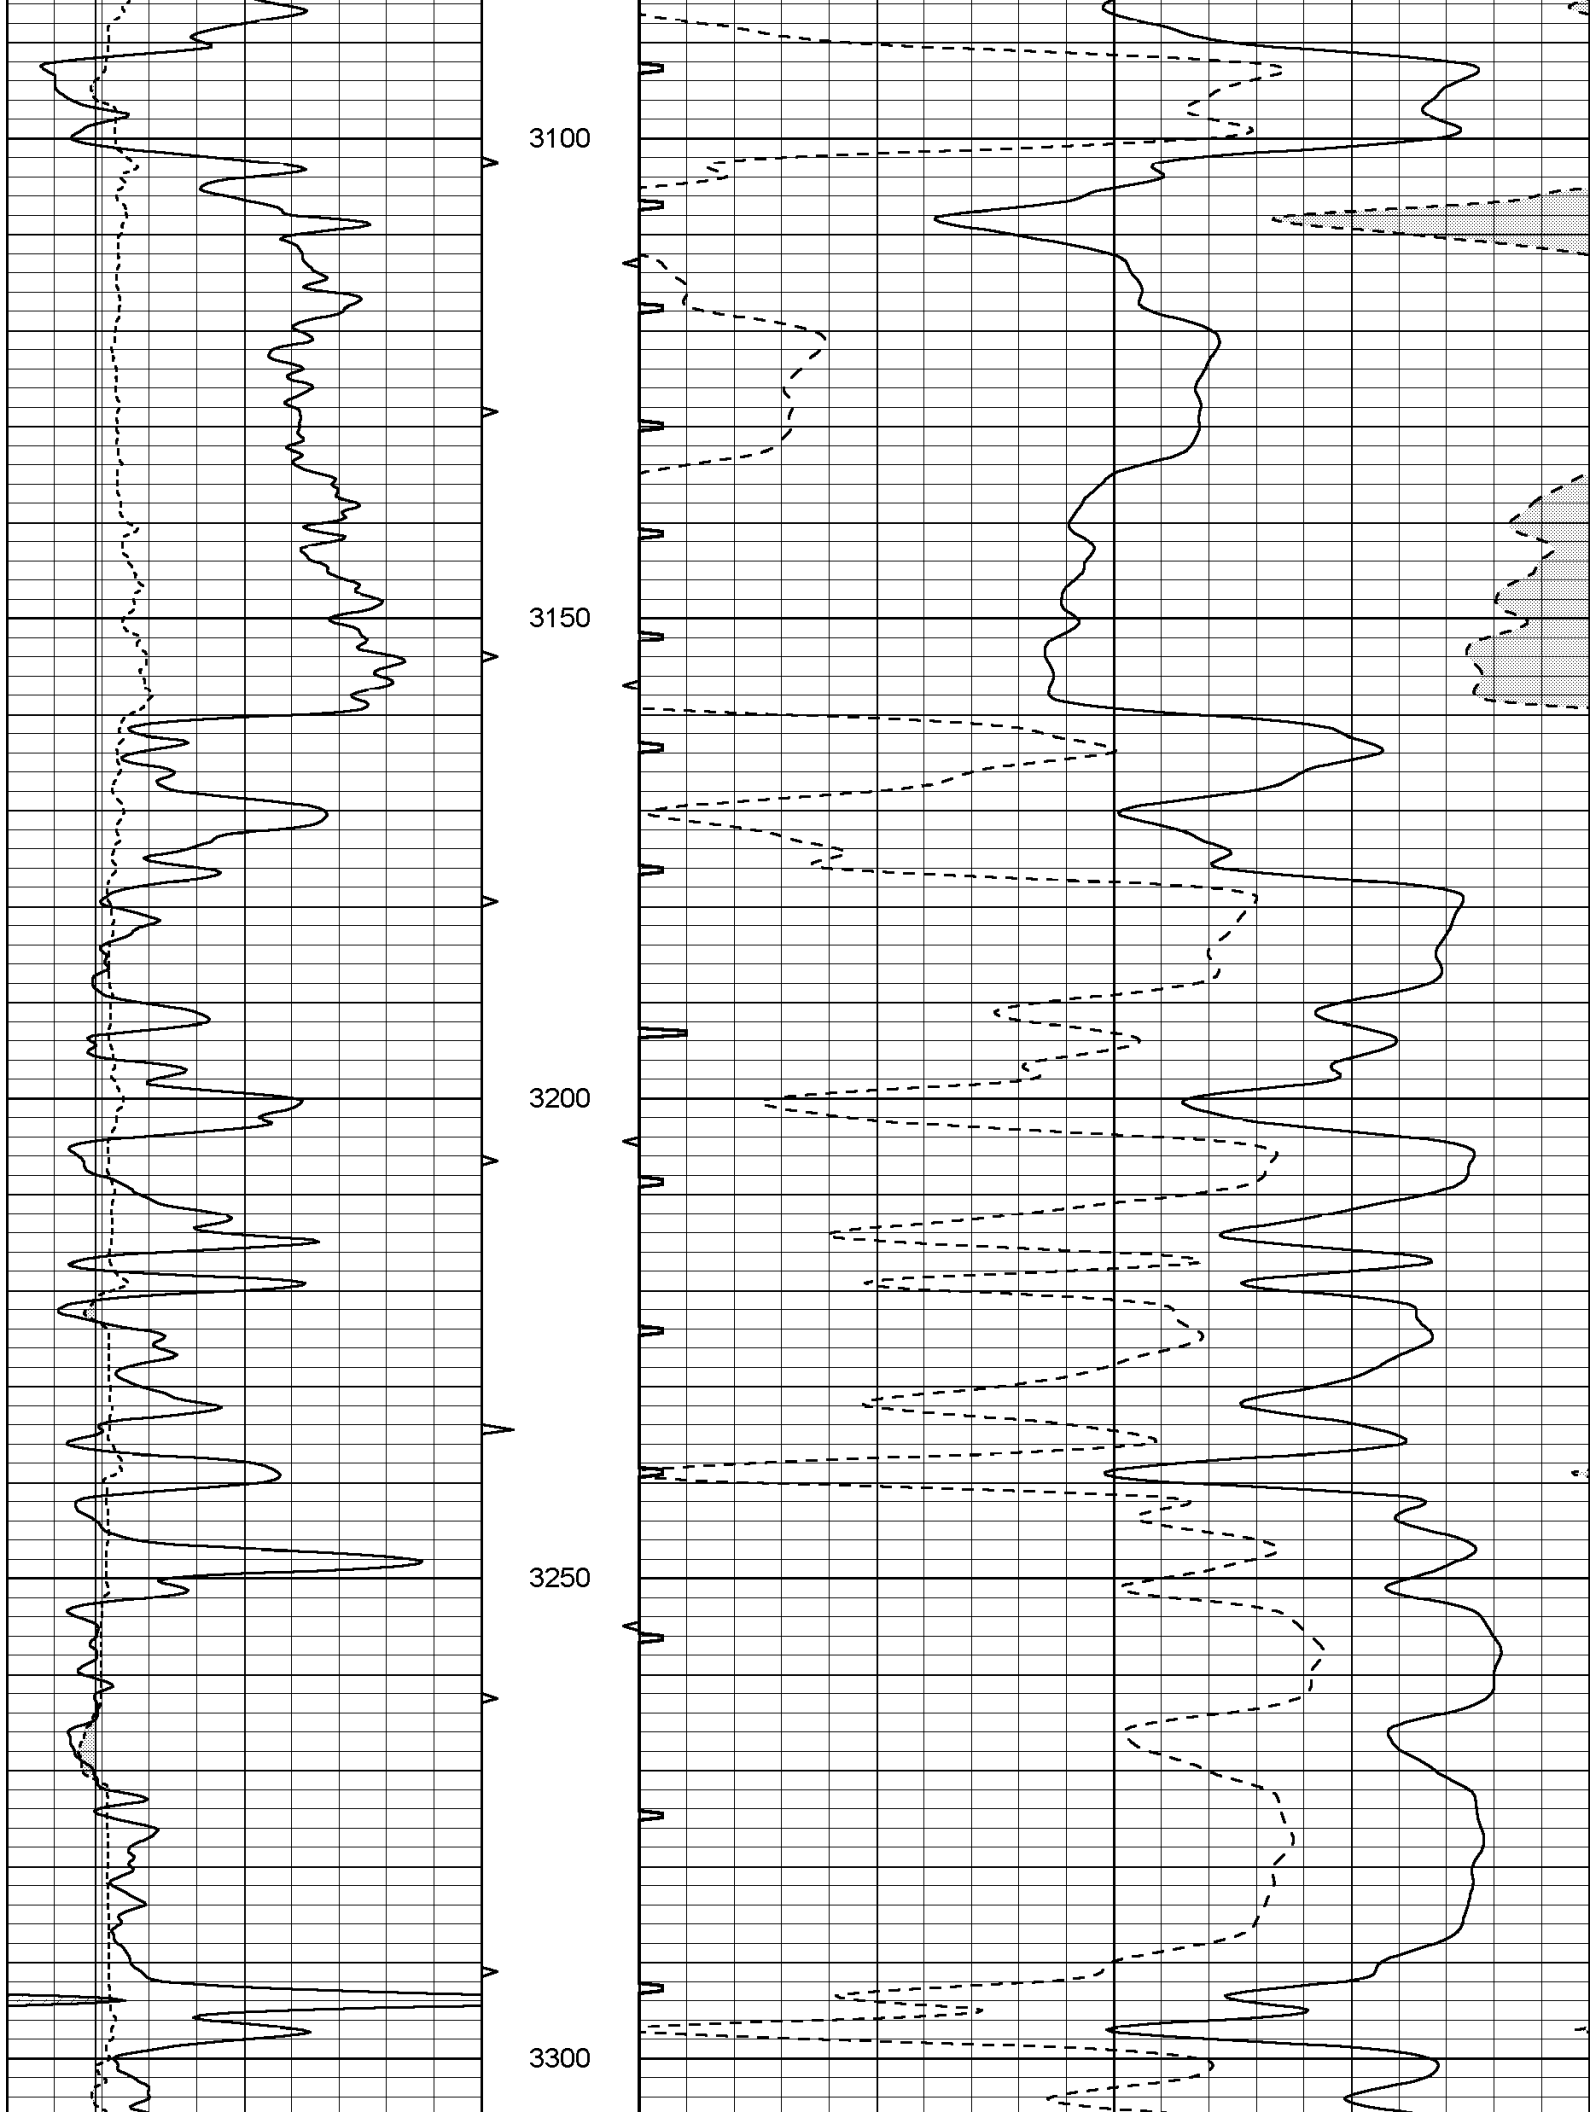

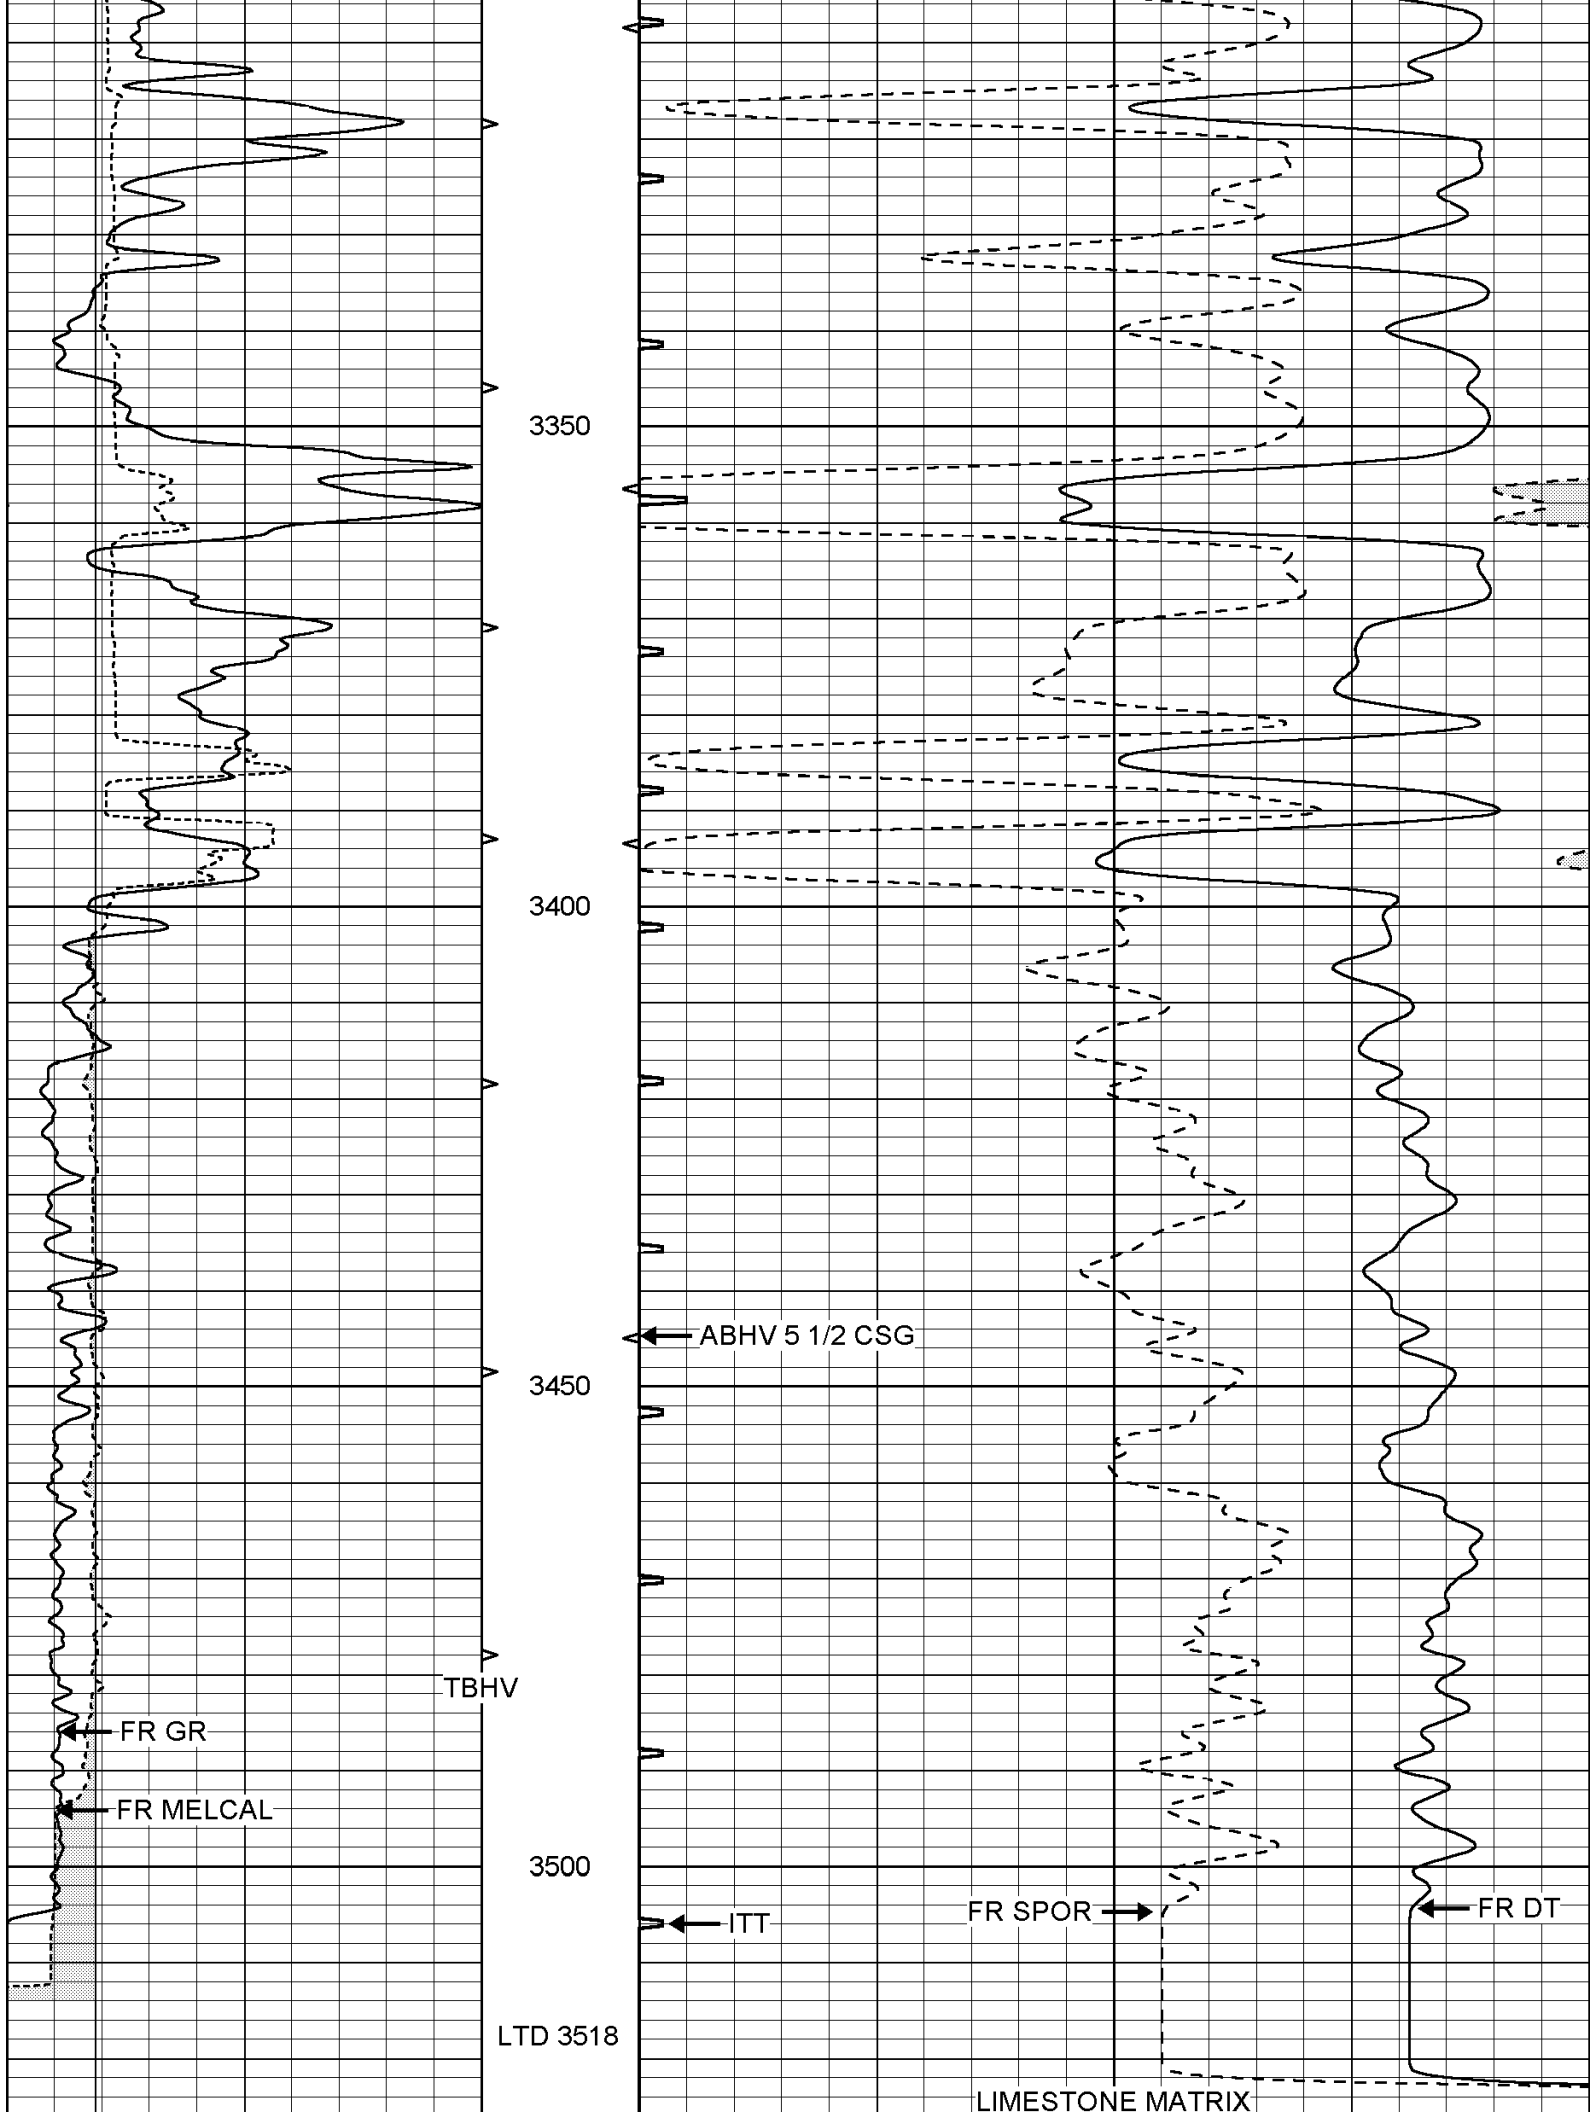

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
			TBHV	0	ITT (msec)	20
			0 (ft3) 10			





SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 2408tetonenergy.db
Dataset Pathname: pass12.1
Presentation Format: _slt
Dataset Creation: Fri Jul 25 07:07:18 2008 by Calc Open-Cased 070814
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
			TBHV	0	ITT (msec)	20
			0 (ft3) 10			

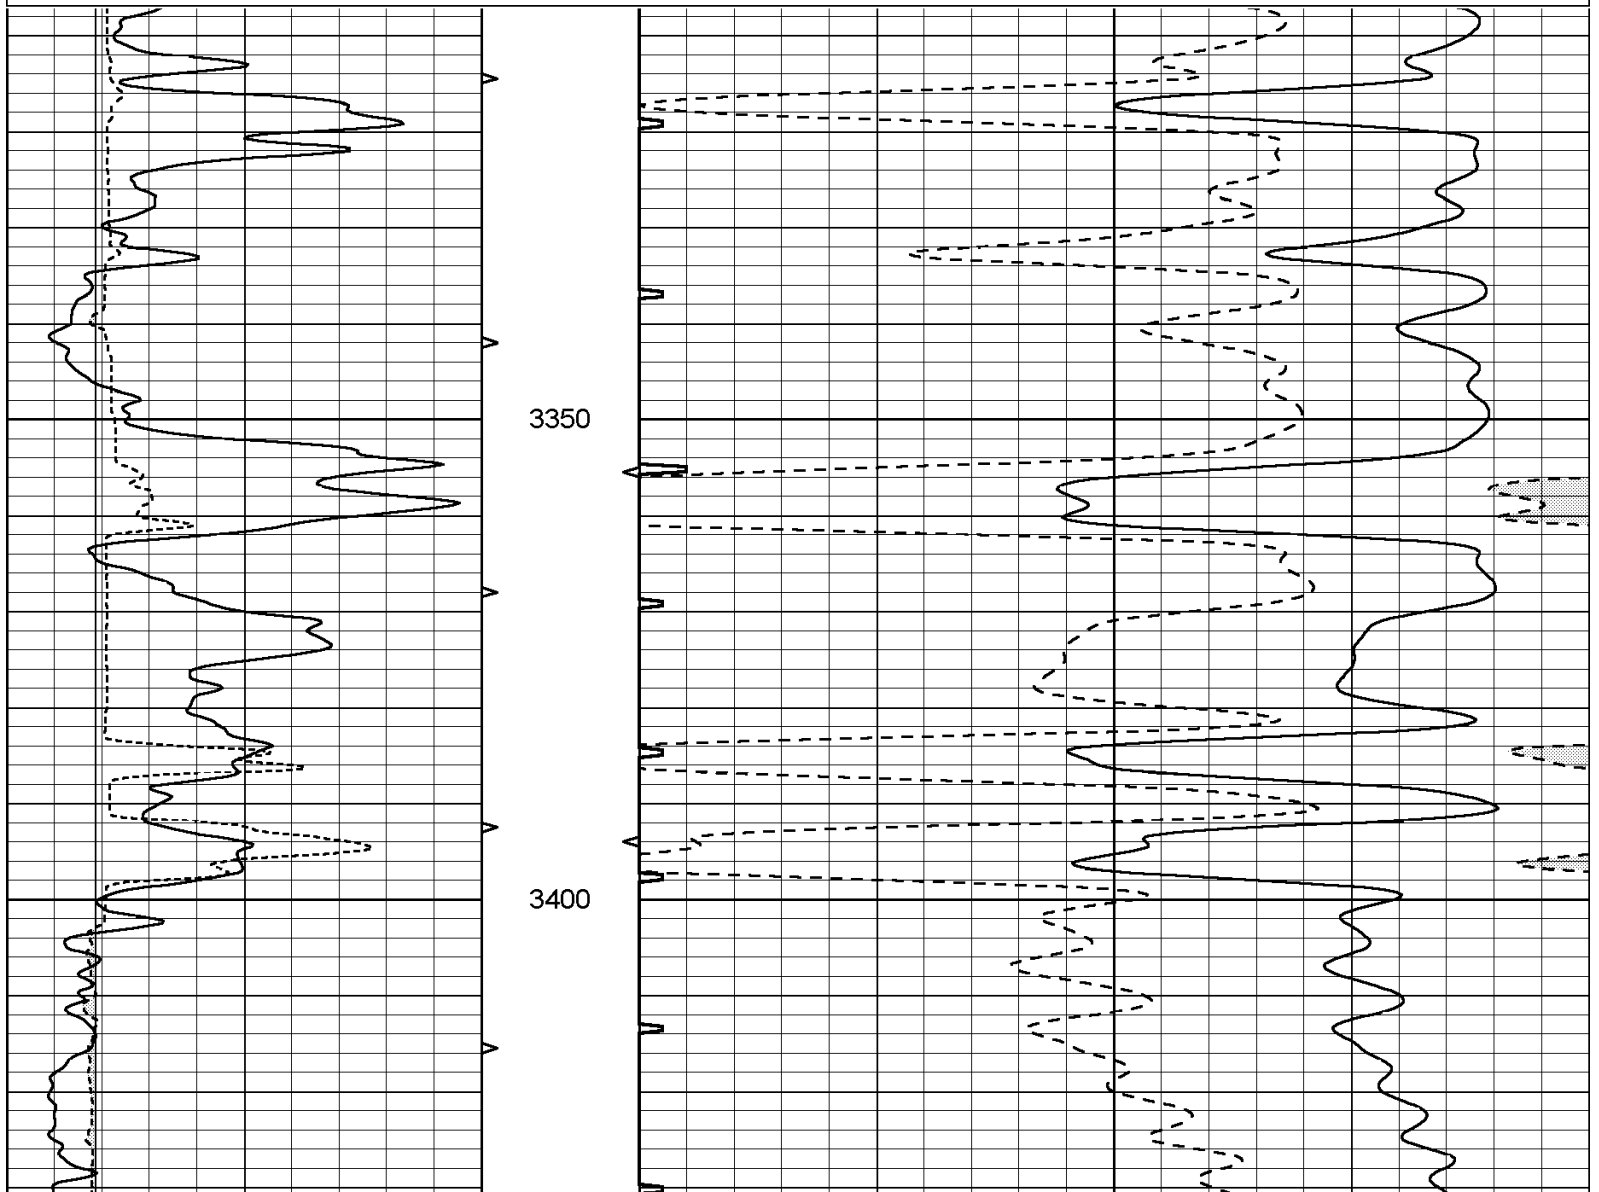

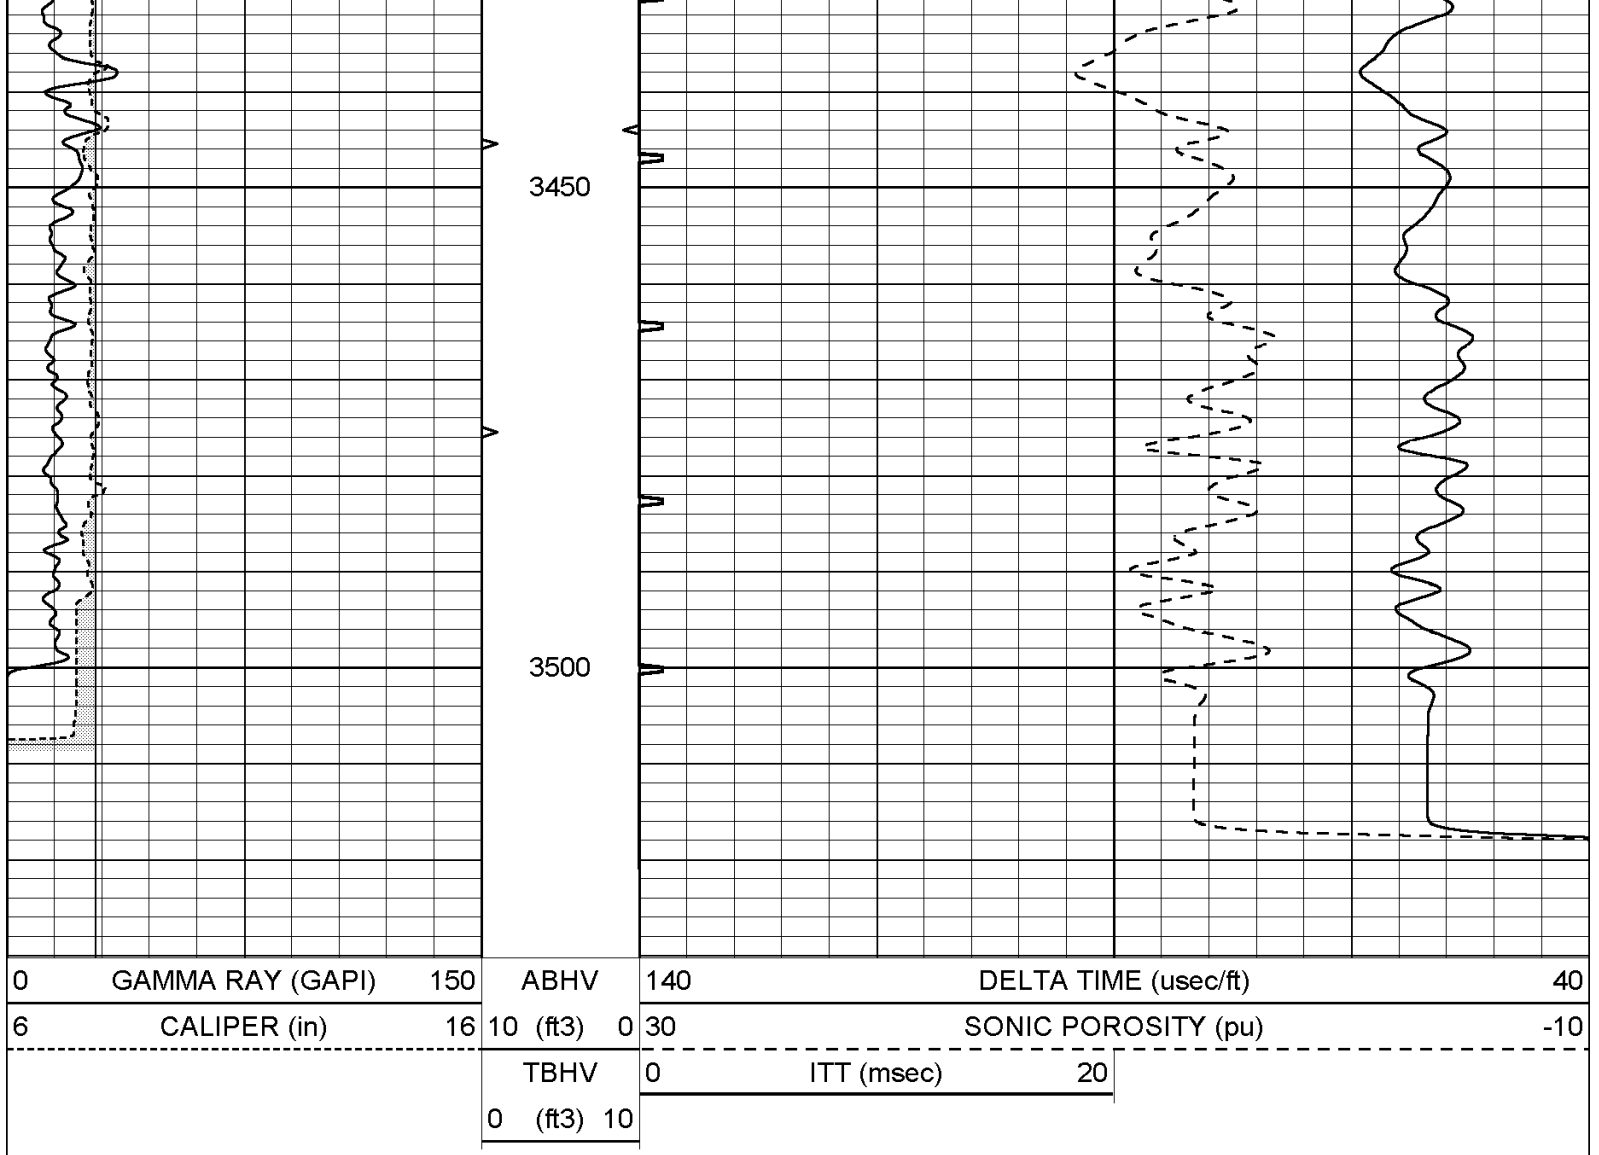

Calibration Report			
Database File:	2408tetonenergy.db		
Dataset Pathname:	pass13		
Dataset Creation:	Fri Jul 25 07:11:06 2008 by Log Open-Cased 070814		
MICRO Calibration Report			
Serial Number:	MICRO3		
Tool Model:	PROBE		
Performed:	Fri Jul 25 07:10:58 2008		
Caliper Calibration:	Gain=3.907	Offset=-6.815	
References	Low Cal	High Cal	
Readings	7.400	14.250	
	3.613	5.366	
1.5" Calibration:	Gain=100.503	Offset=1.005	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	-0.009	0.190	
2" Calibration:	Gain=116.007	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	0.172	

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Thu Jan 24 17:24:37 2008	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	350.0	cps
Sensitivity:	0.5586	GAPI/cps