



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-009-25,219

Company Teton North America, LLC

Well Patton Trust #2-36

Field Boyd

County

Barton

State

Kansas

Location

C NE NE
630' FNL & 1110' FEL

Sec: 36

Twp: 17S

Rge: 14W

Elevation

Other Services
CNL / CDL
DIL / BHCS

Permanent Datum Ground Level Elevation 1865
Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1865
D.F. 1857
G.L. 1857

Date 9/20/2008

Run Number Two

Depth Driller 3410

Depth Logger 3421

Bottom Logged Interval 3420

Top Log Interval 2600

Casing Driller 8.625 @ 814

Casing Logger 811

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 9.000

Density / Viscosity 8.9 56

pH / Fluid Loss 11.5 11.2

Source of Sample Flowline

Rm @ Meas. Temp .6 @ 58

Rmf @ Meas. Temp .45 @ 58

Rmc @ Meas. Temp .81 @ 58

Source of Rmf / Rmc Charts

Rm @ BHT 1.14 @ 110

Operating Rig Time 4 Hours

Max Rec. Temp. F 110

Equipment Number 15

Location Hays

Recorded By T. Martin

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hoisington, 2 W, S and W into


Database File: tetonhd.db
Dataset Pathname: dil/tetonstk
Presentation Format: micro
Dataset Creation: Sat Sep 20 03:10:51 2008
Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

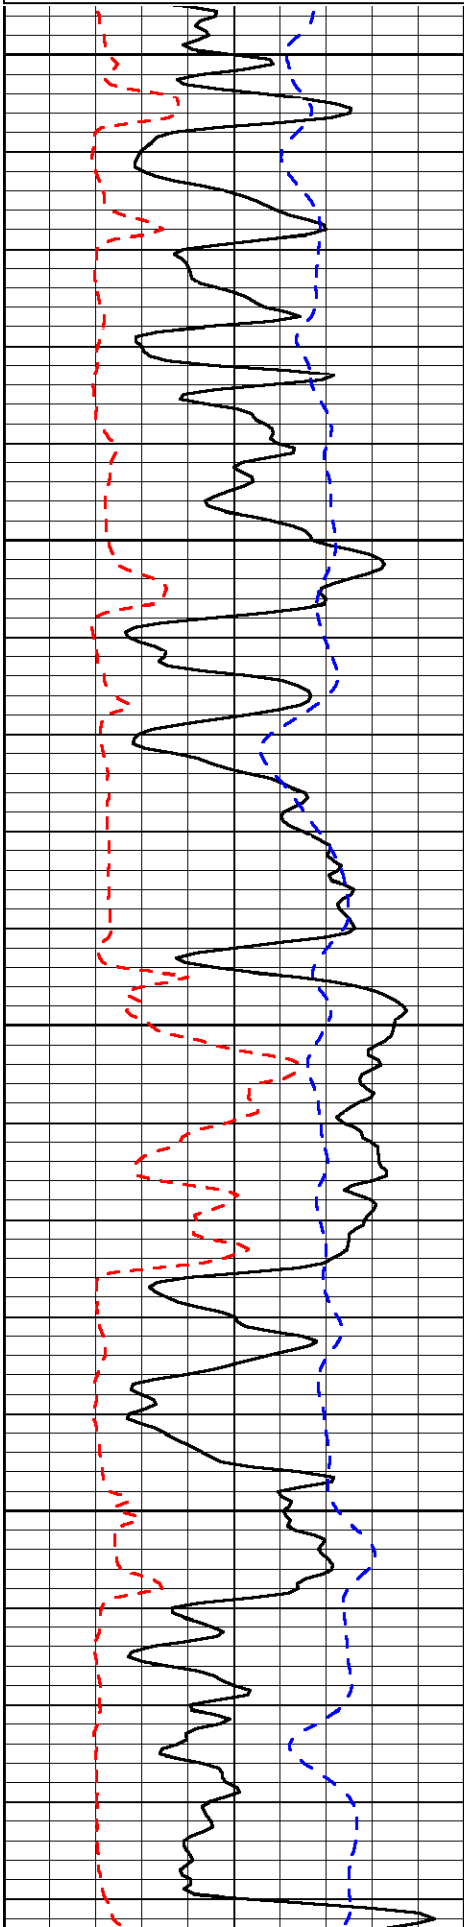

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

	LSPD
--	------

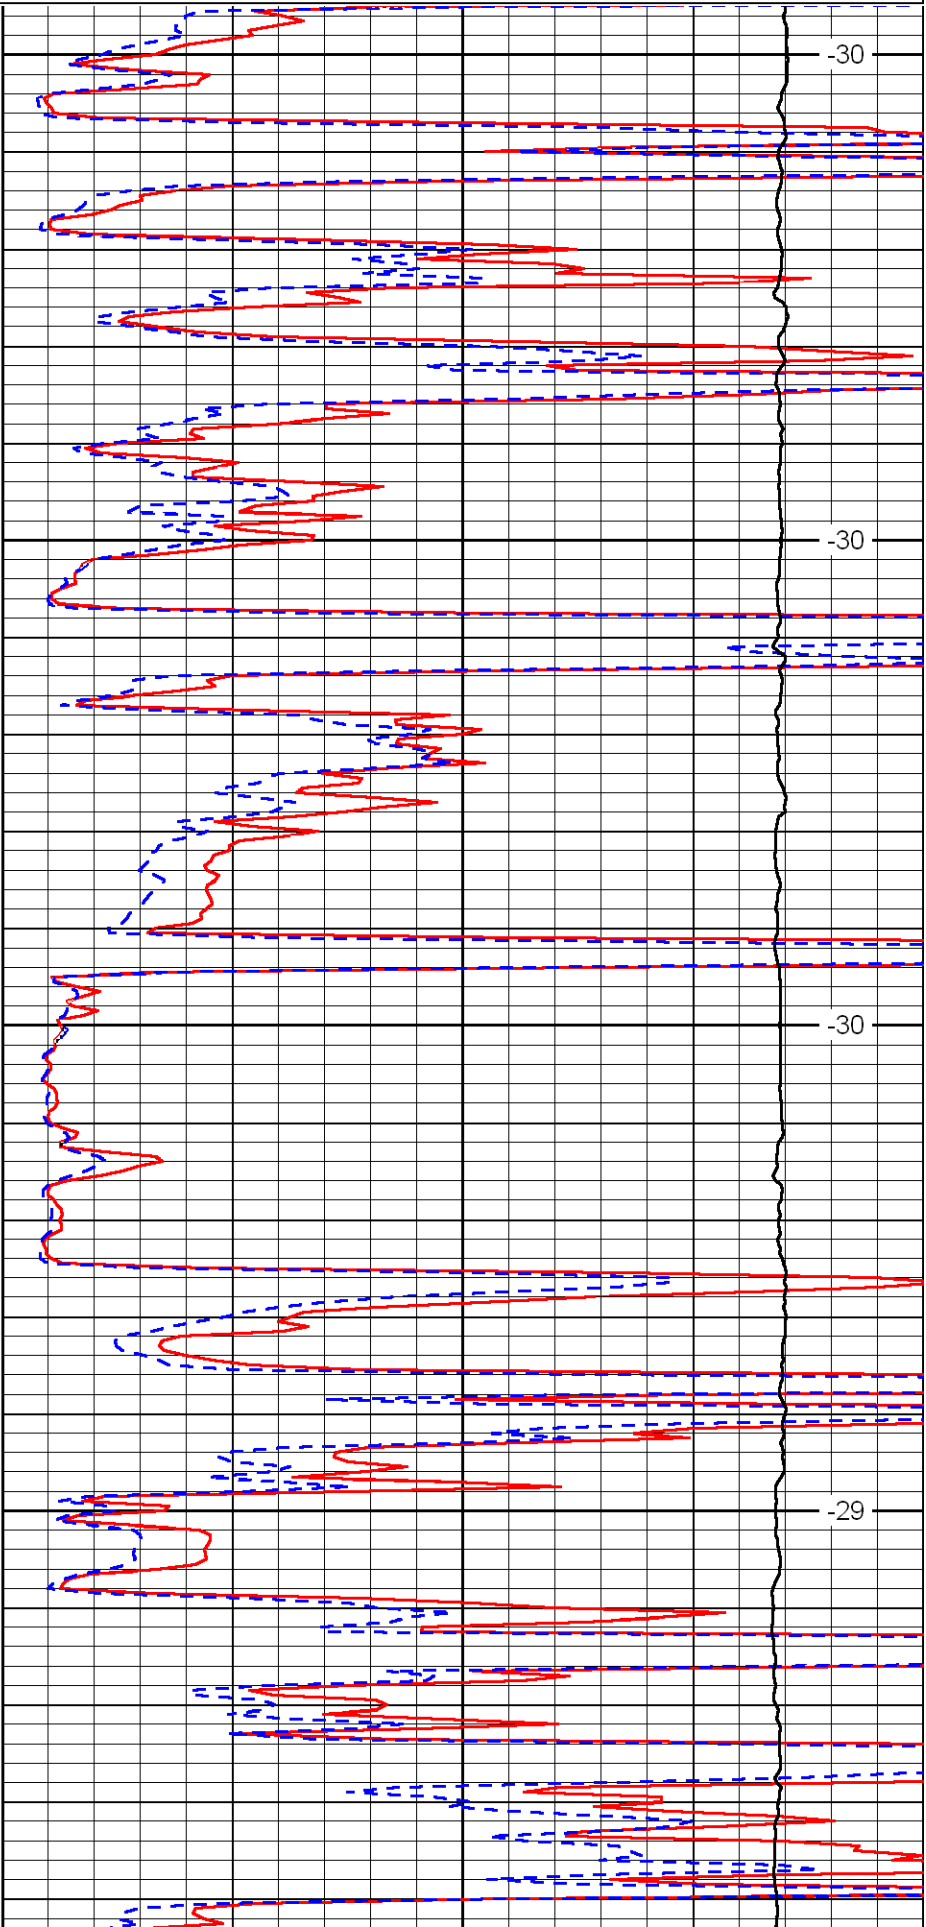

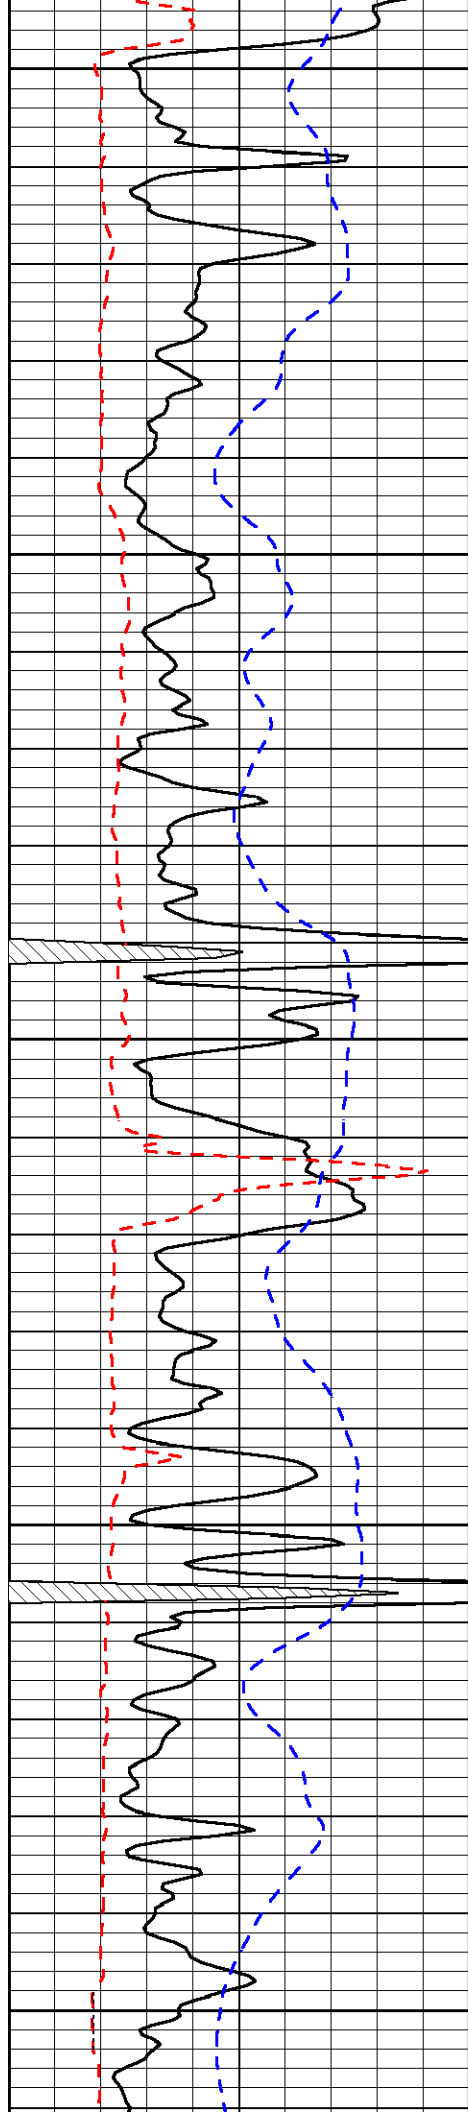


2800


2850

2900

2950

3000

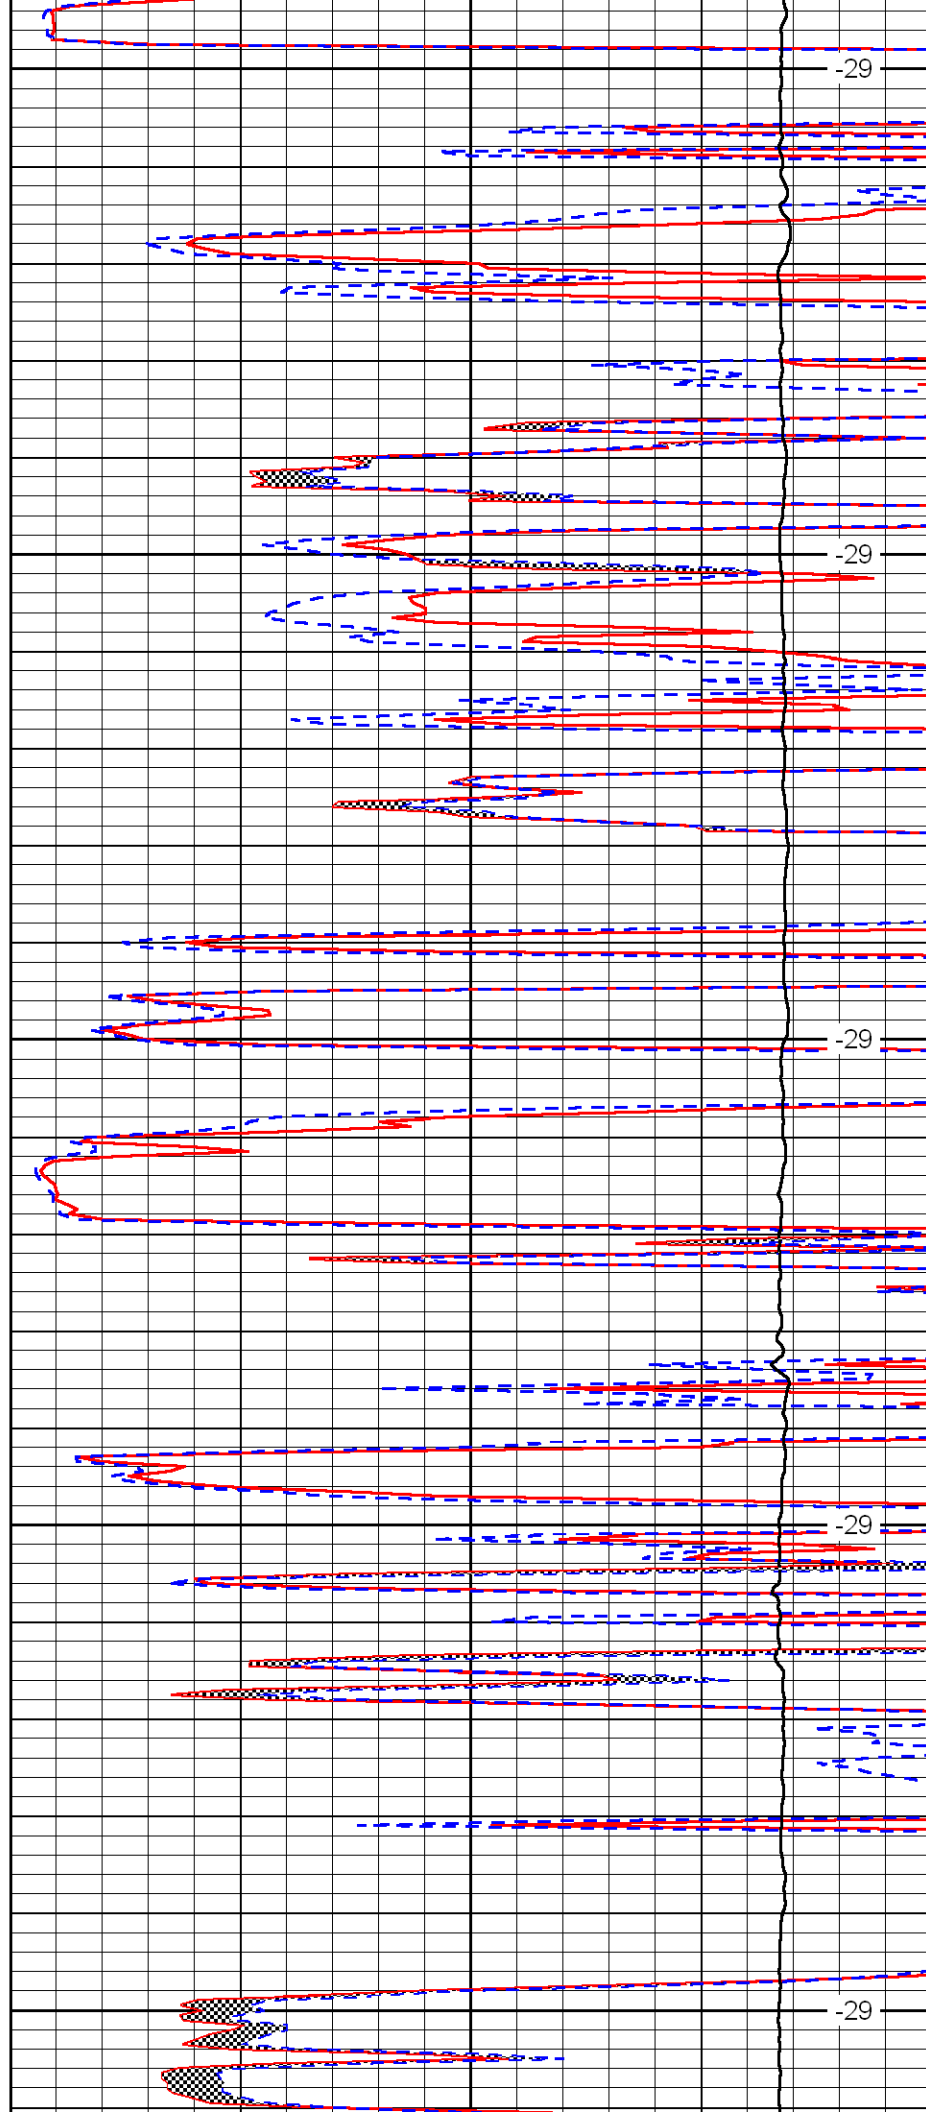

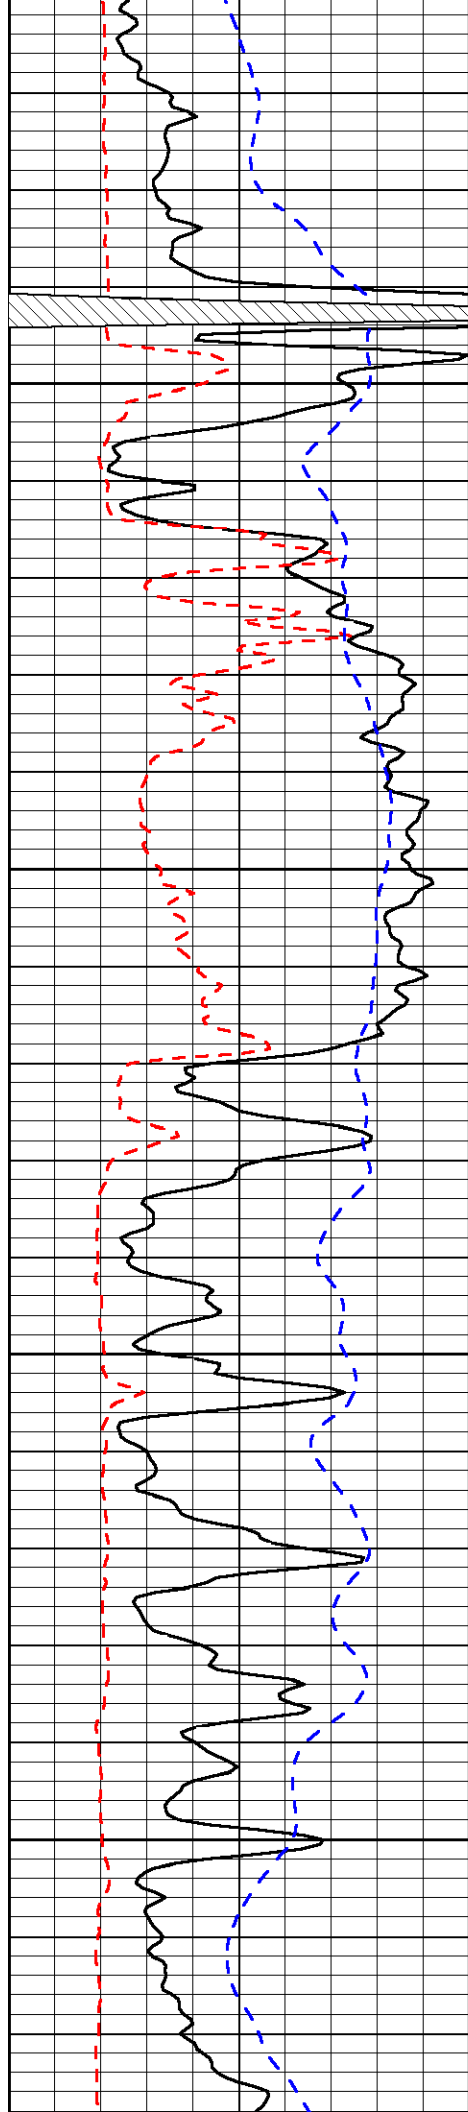


3050

3100

3150

3200

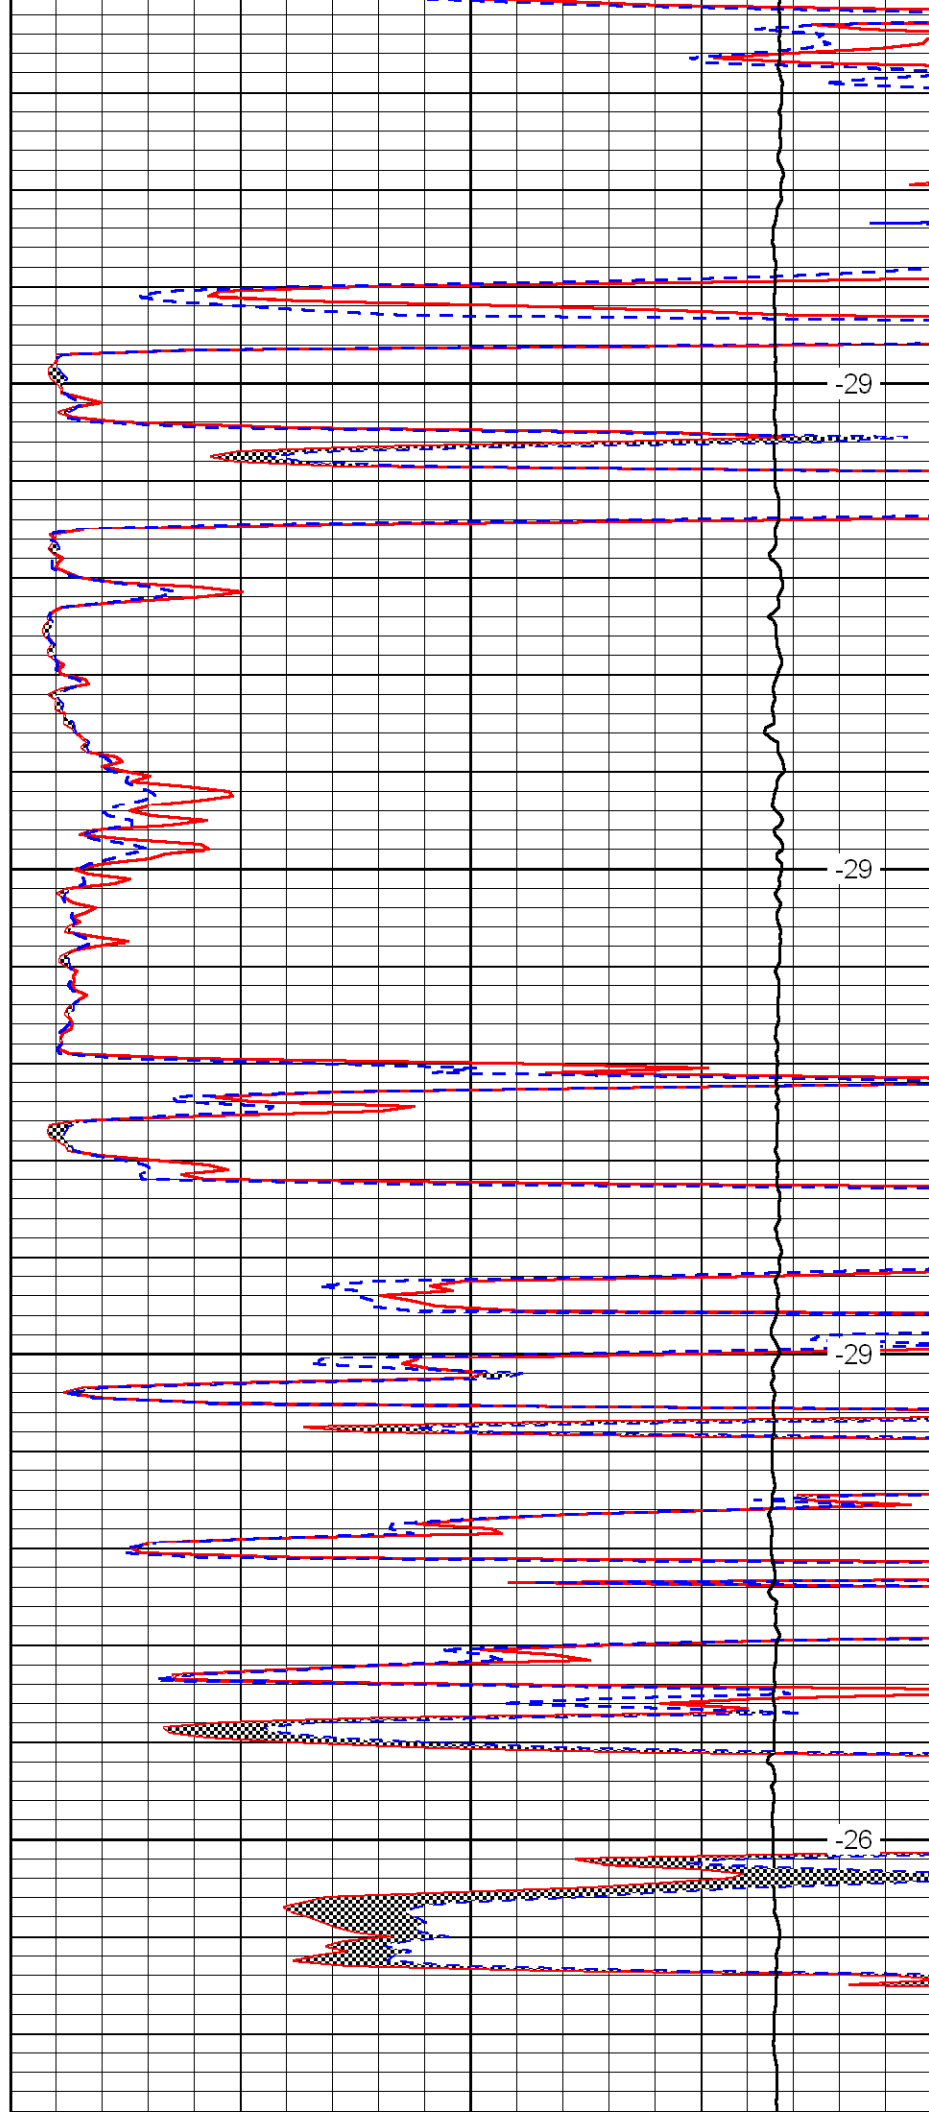

-29

-29

-29

-26

