



# Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-195-22,602-00-00

Company Ohio Kentucky Oil Corporation

Well Theo Wiedeman No.4

Field Hackberry

County Trego

State

Kansas

Location

NW NE SW NW  
1435' FNL & 815' FWL

Other Services  
CNL/CDL  
DIL

Sec: 19

Twp: 14S

Rge: 24W

Elevation

Permanent Datum Ground Level Elevation 2303  
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum  
Drilling Measured From Kelly Bushing

K.B. 2308  
D.F.  
G.L. 2303

Date 2/13/2009

Run Number Two

Depth Driller 4289

Depth Logger 4292

Bottom Logged Interval 4291

Top Log Interval 3200

Casing Driller 8.625 @ 207

Casing Logger 207

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 3,200

Density / Viscosity 9.4 57

pH / Fluid Loss 9.5 10.0

Source of Sample Flowline

Rm @ Meas. Temp .6 @ 52

Rmf @ Meas. Temp .45 @ 52

Rmc @ Meas. Temp .81 @ 52

Source of Rmf / Rmc Charts

Rm @ BHT .26 @ 121

Operating Rig Time 4 Hours

Max Rec. Temp. F 121

Equipment Number 17

Location Hays

Recorded By C. Desaire

Witnessed By Jim Hall

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


## Comments

Thank you for using Log-Tech, Inc.  
(785) 625-3858

Wakeeney, 13S, 7W to T,  
W Into on Chalk Rd


Database File: ohio-kenhd.db  
Dataset Pathname: dil/ohioknstk2  
Presentation Format: micro  
Dataset Creation: Fri Feb 13 12:59:19 2009  
Charted by: Depth in Feet scaled 1:240


|      |                          |     |
|------|--------------------------|-----|
| 0    | Gamma Ray                | 150 |
| 6    | Micro Log Caliper (GAPI) | 16  |
| -200 | SP                       | 0   |

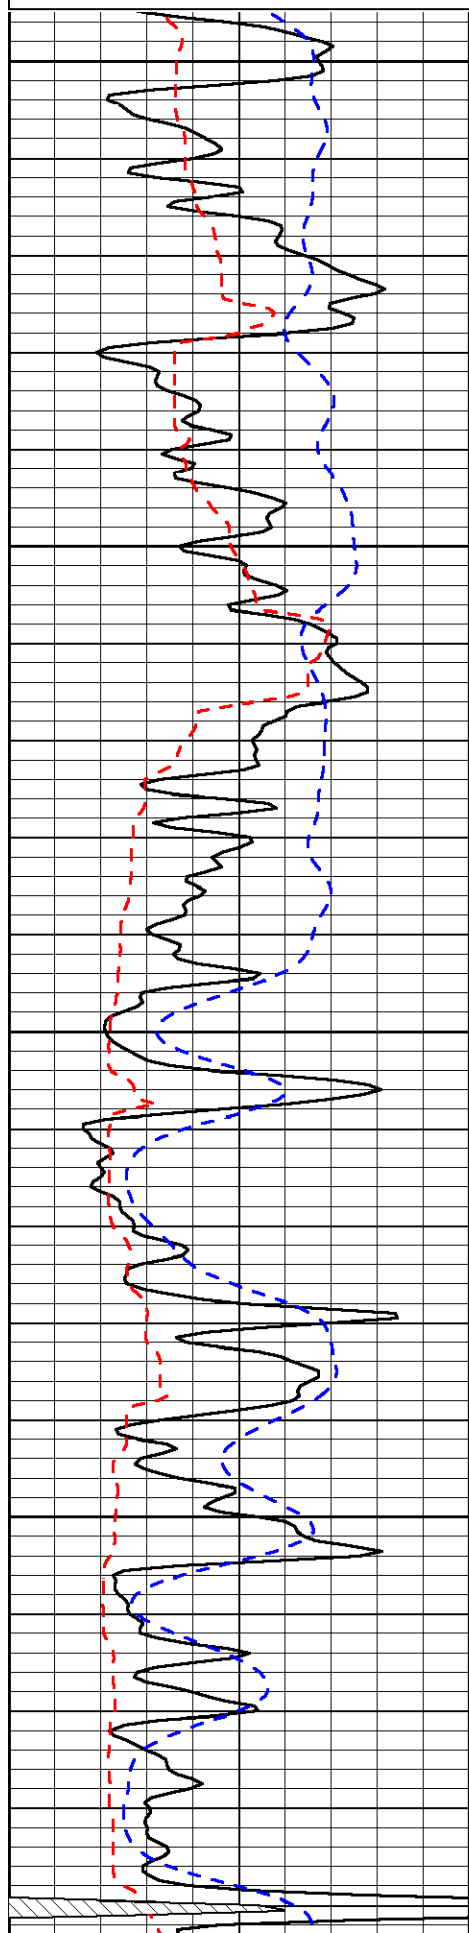

|       |                     |    |
|-------|---------------------|----|
| 0     | Micro Inverse 1 X 1 | 40 |
| 0     | Micro Normal 2"     | 40 |
| 10000 | Line Weight         | 0  |

LSPD

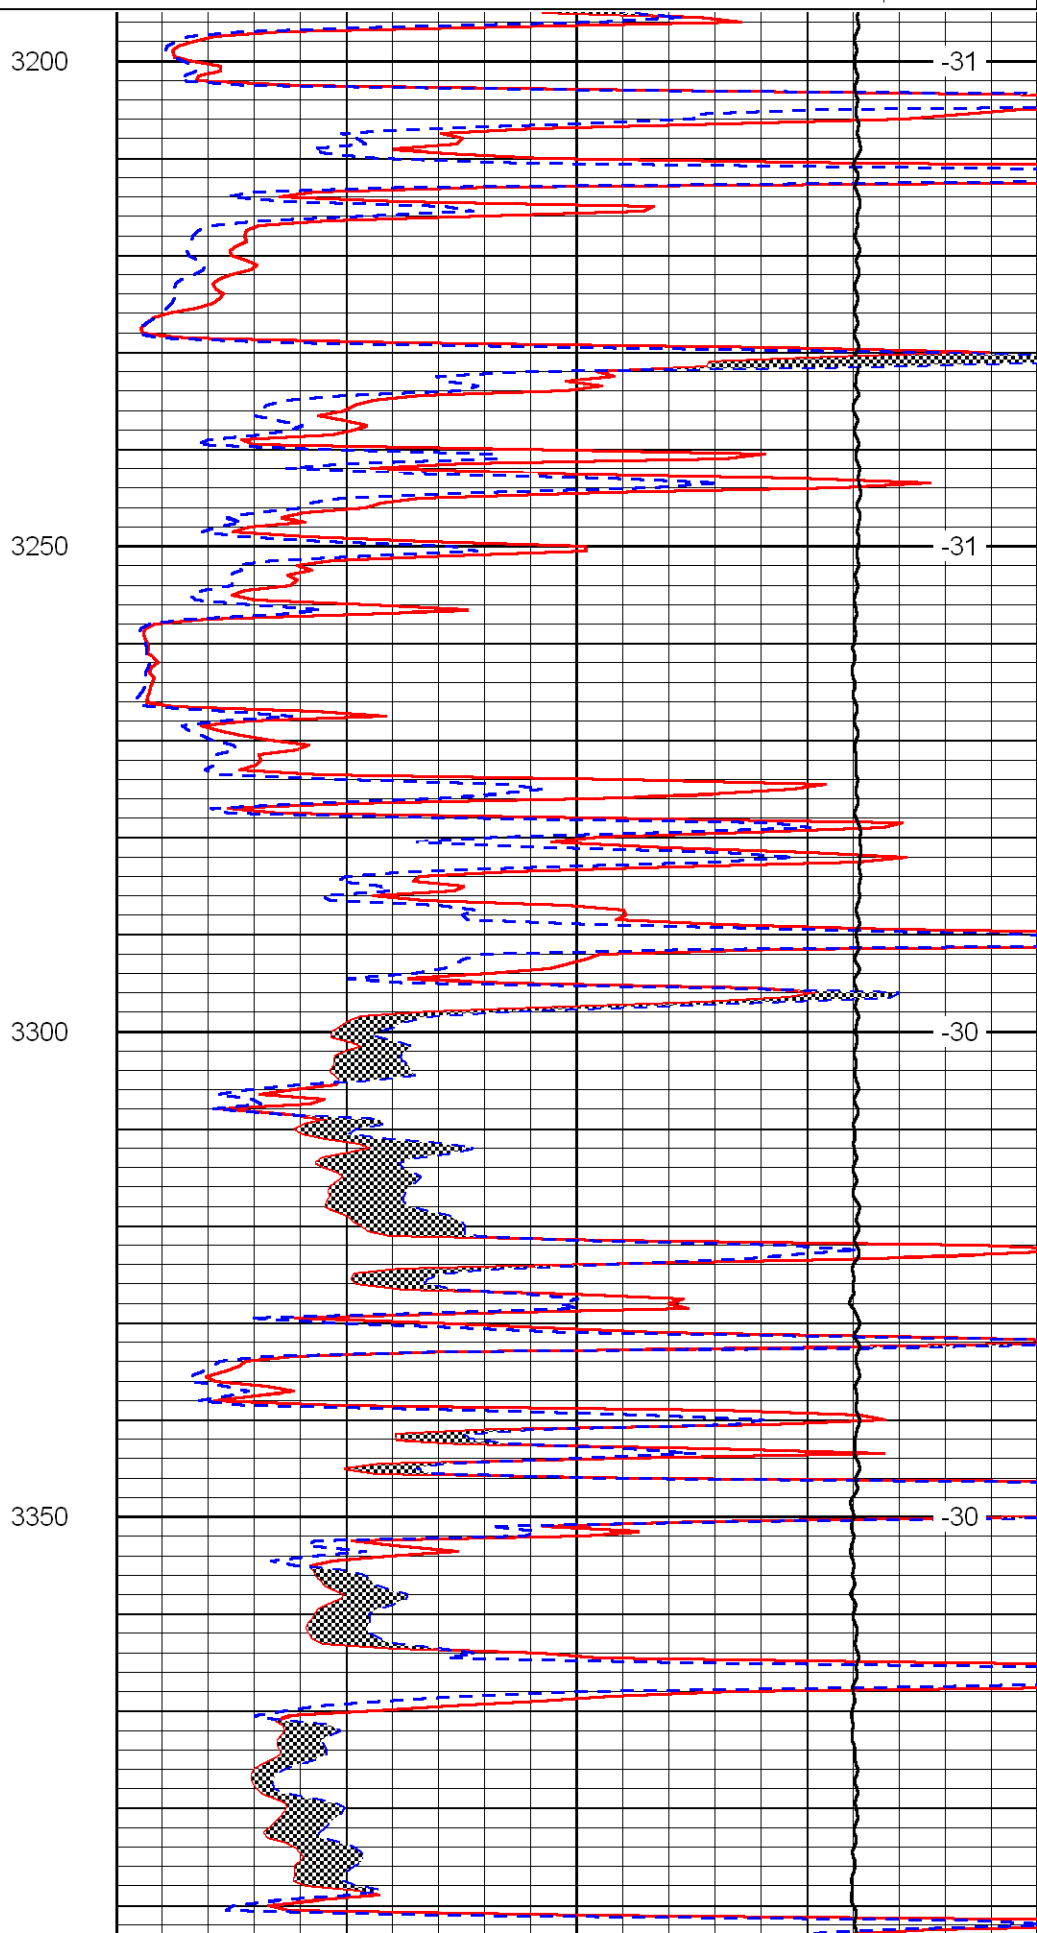

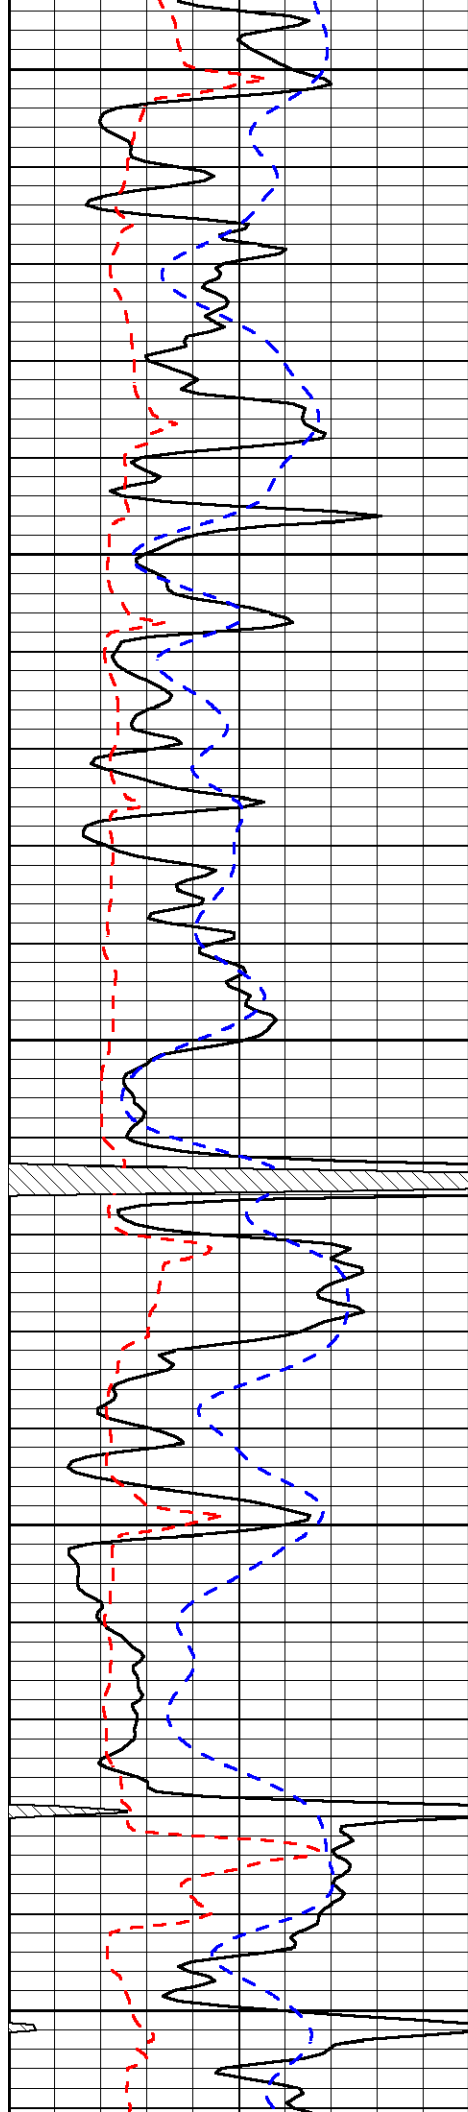


3400

3450

3500

3550

3600

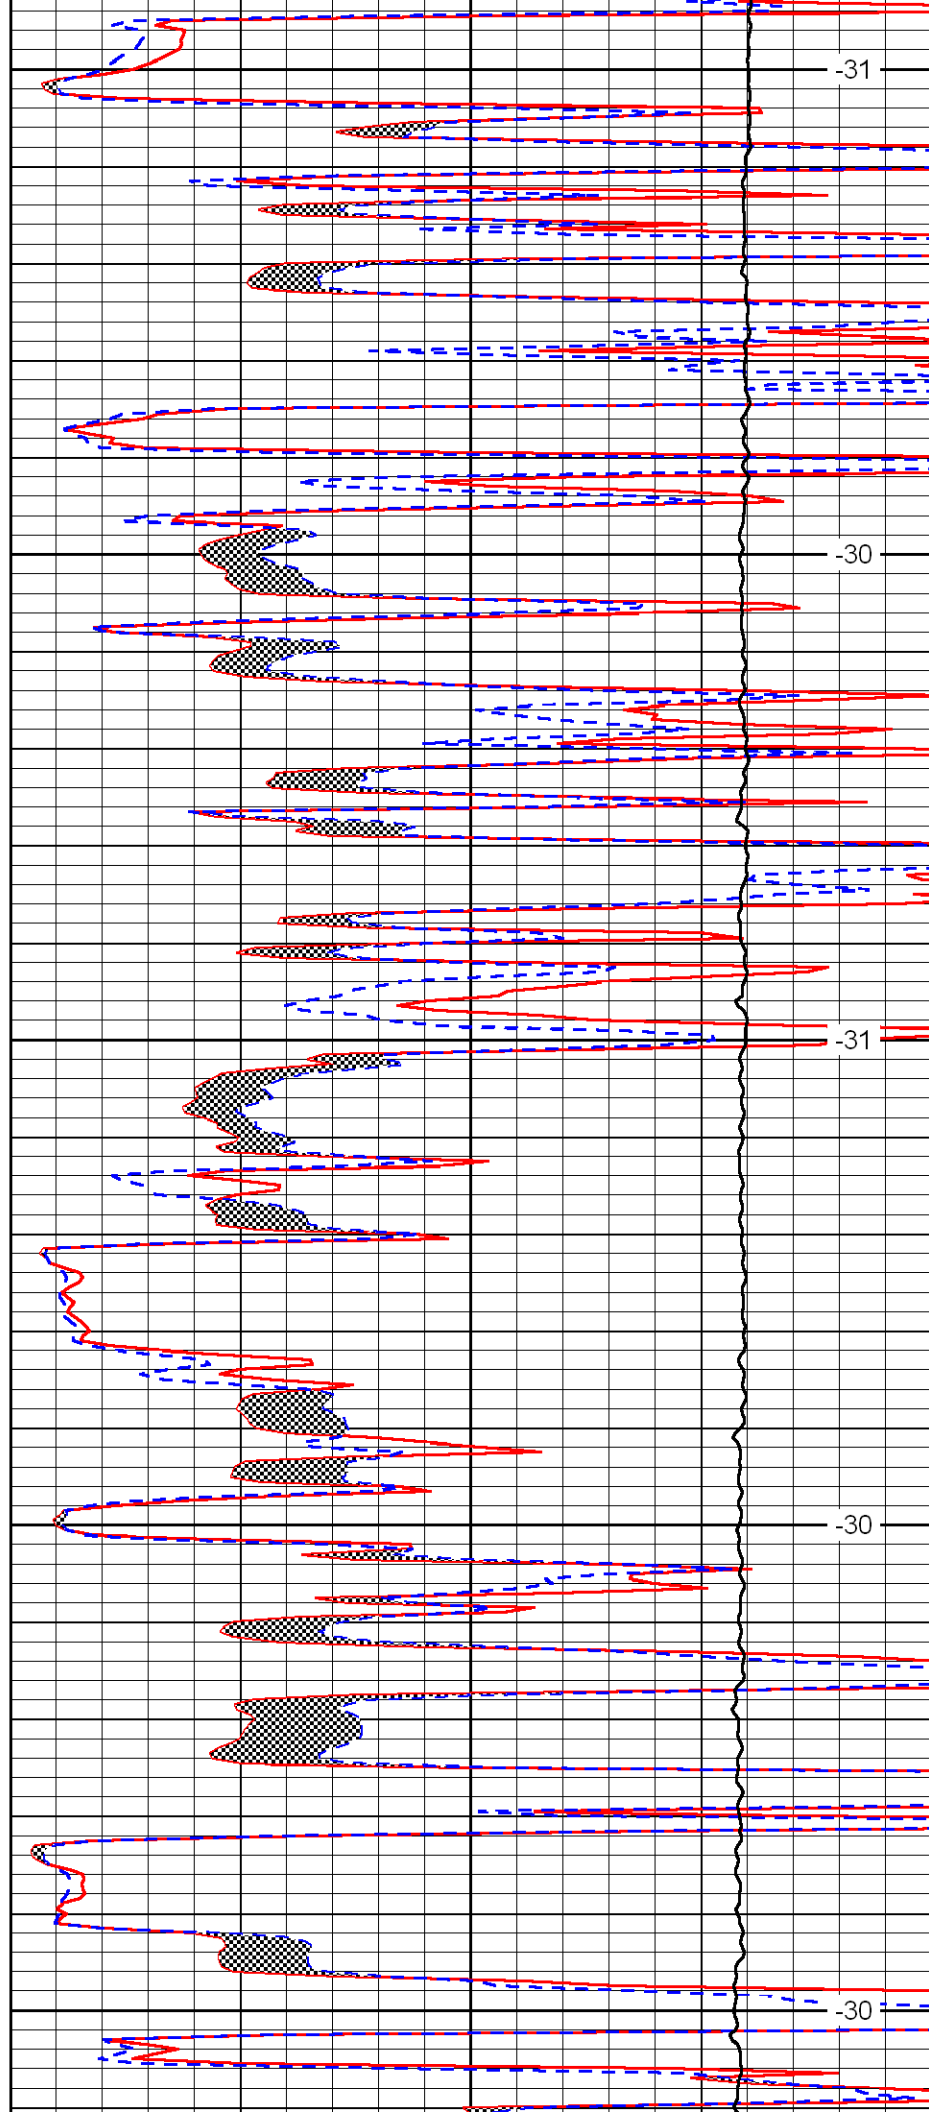


-31

-30

-31

-30

-30

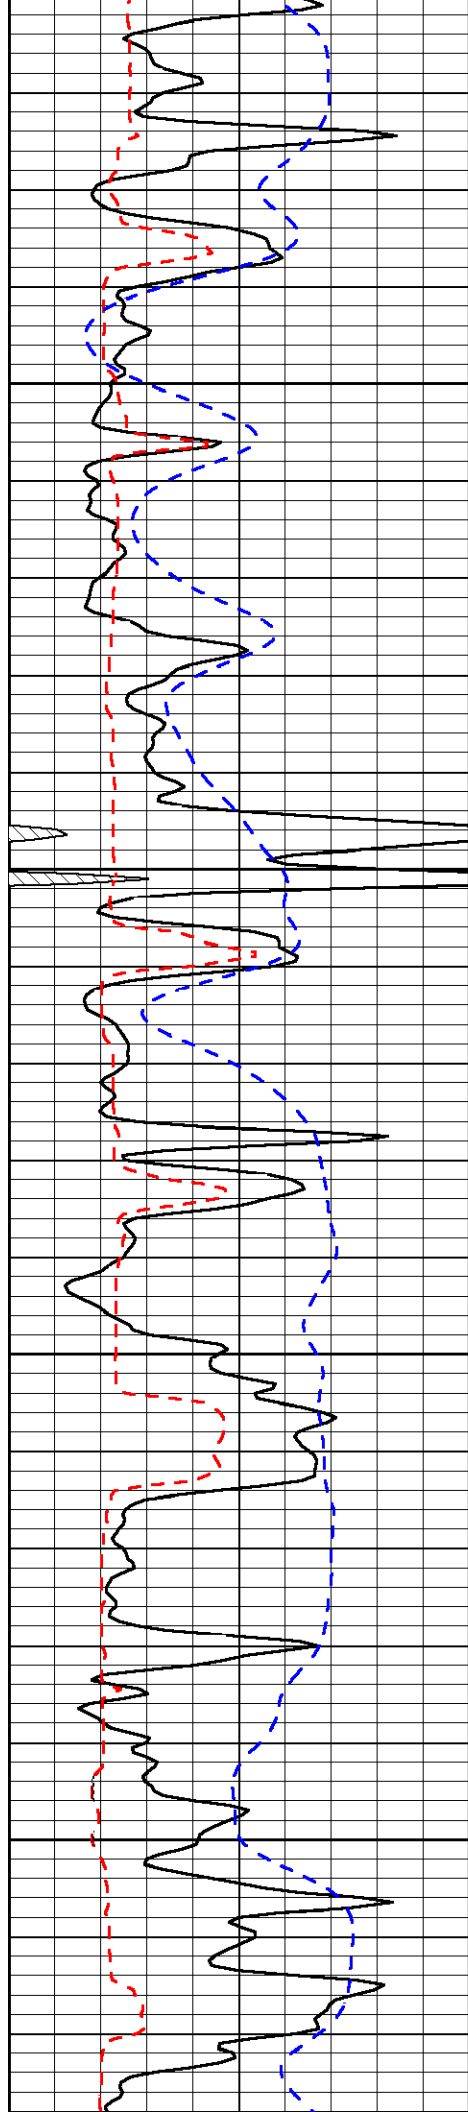


3650

3700

3750

3800

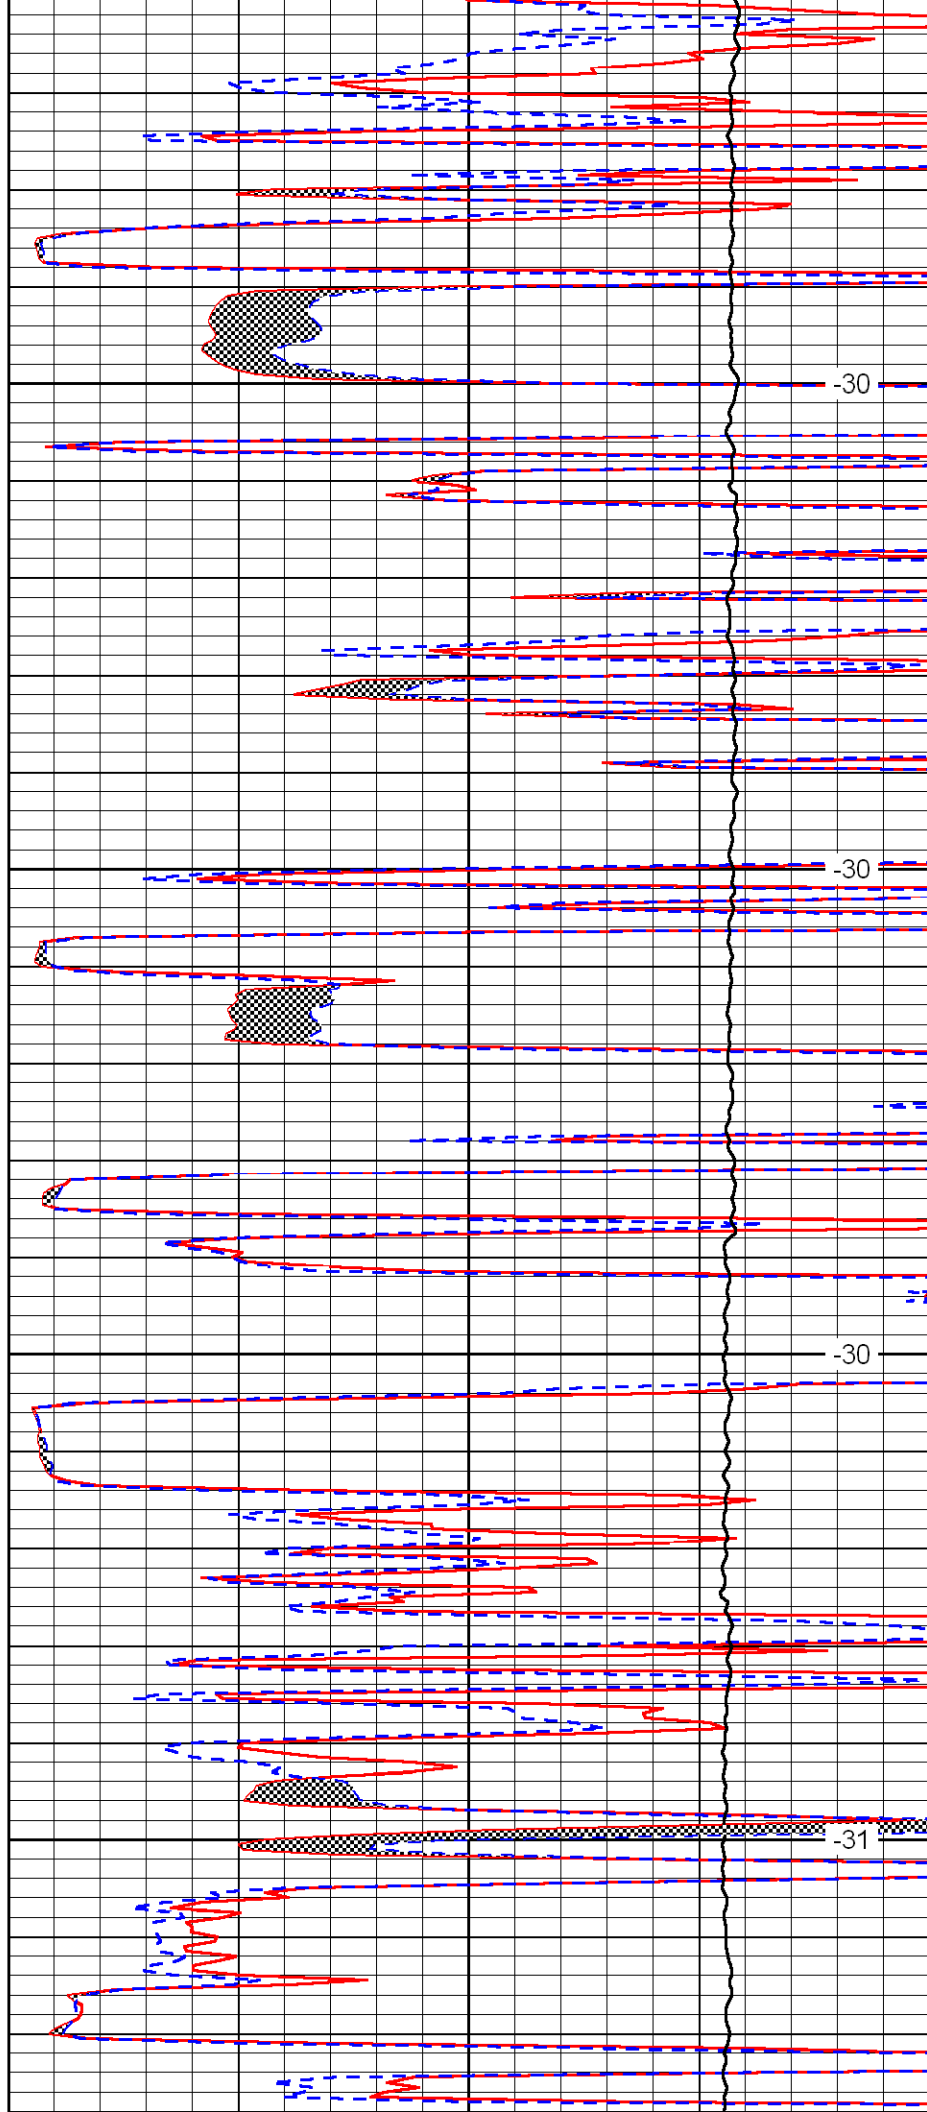


-30

-30

-30

-31

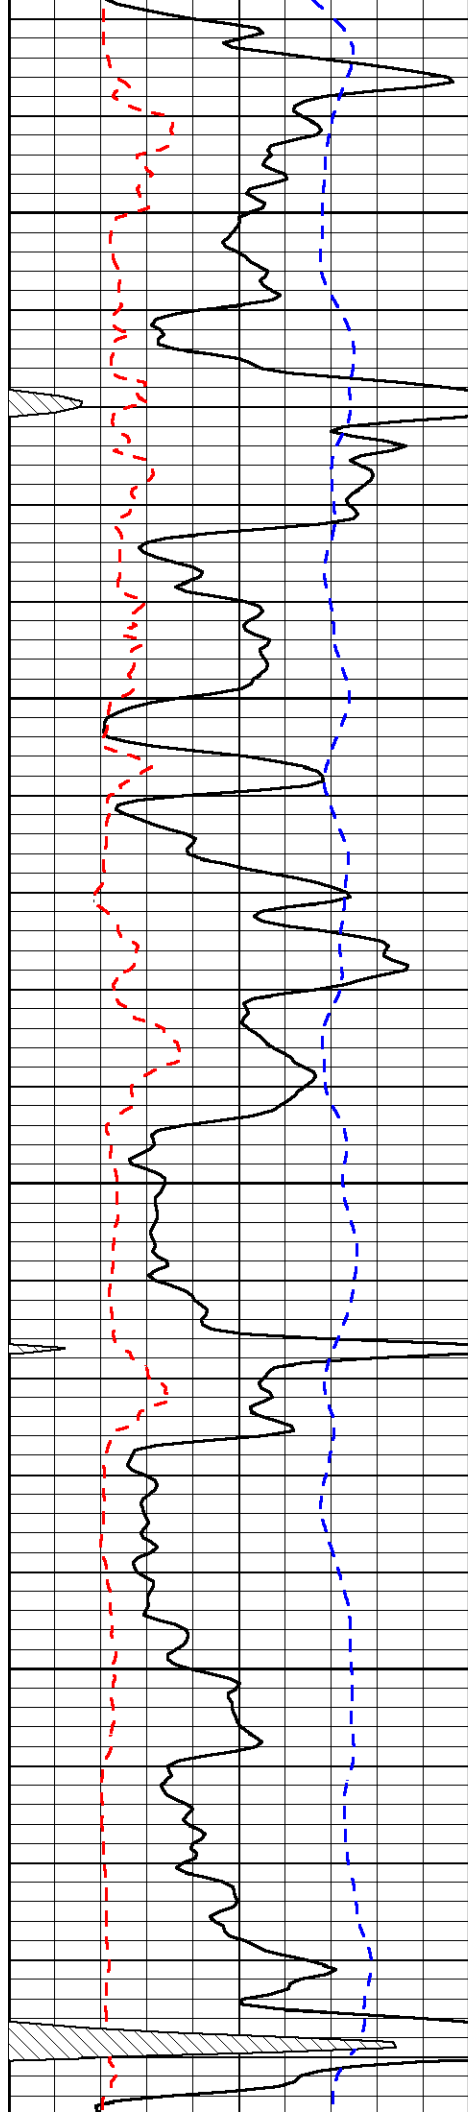



3850

3900

3950

4000

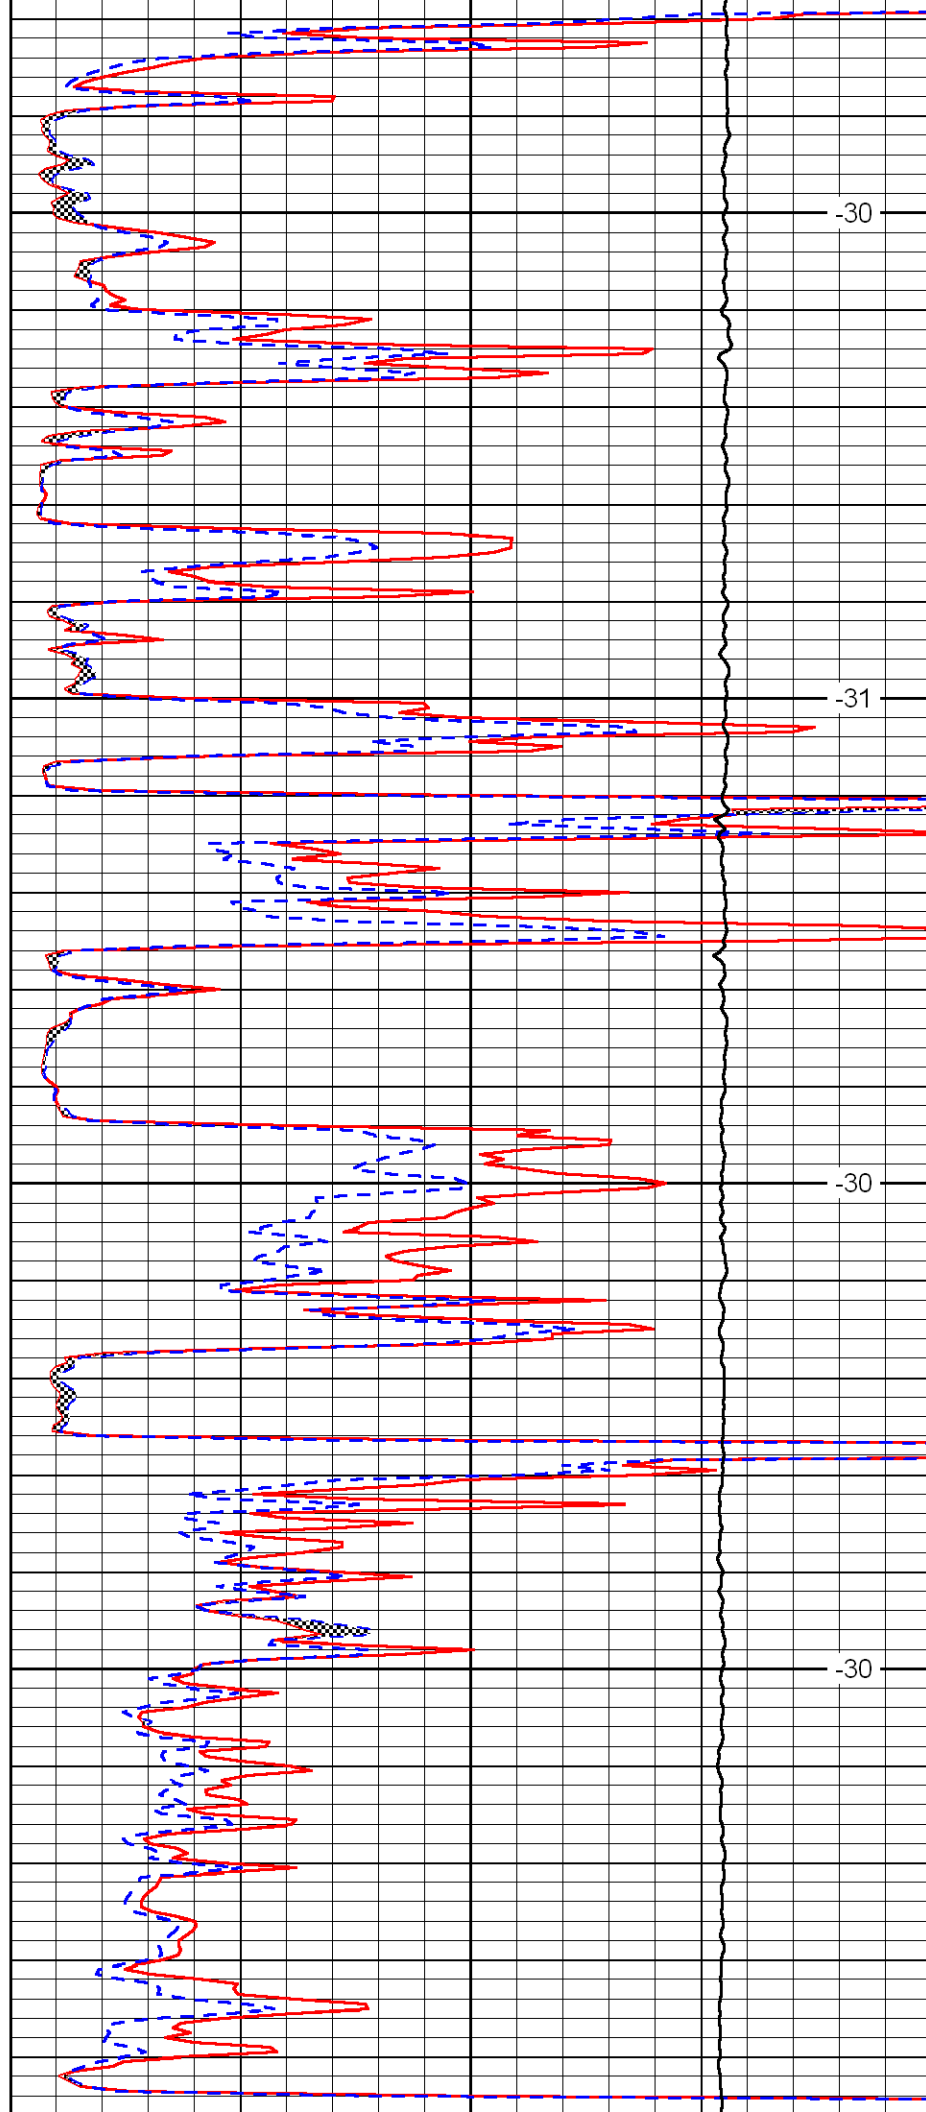

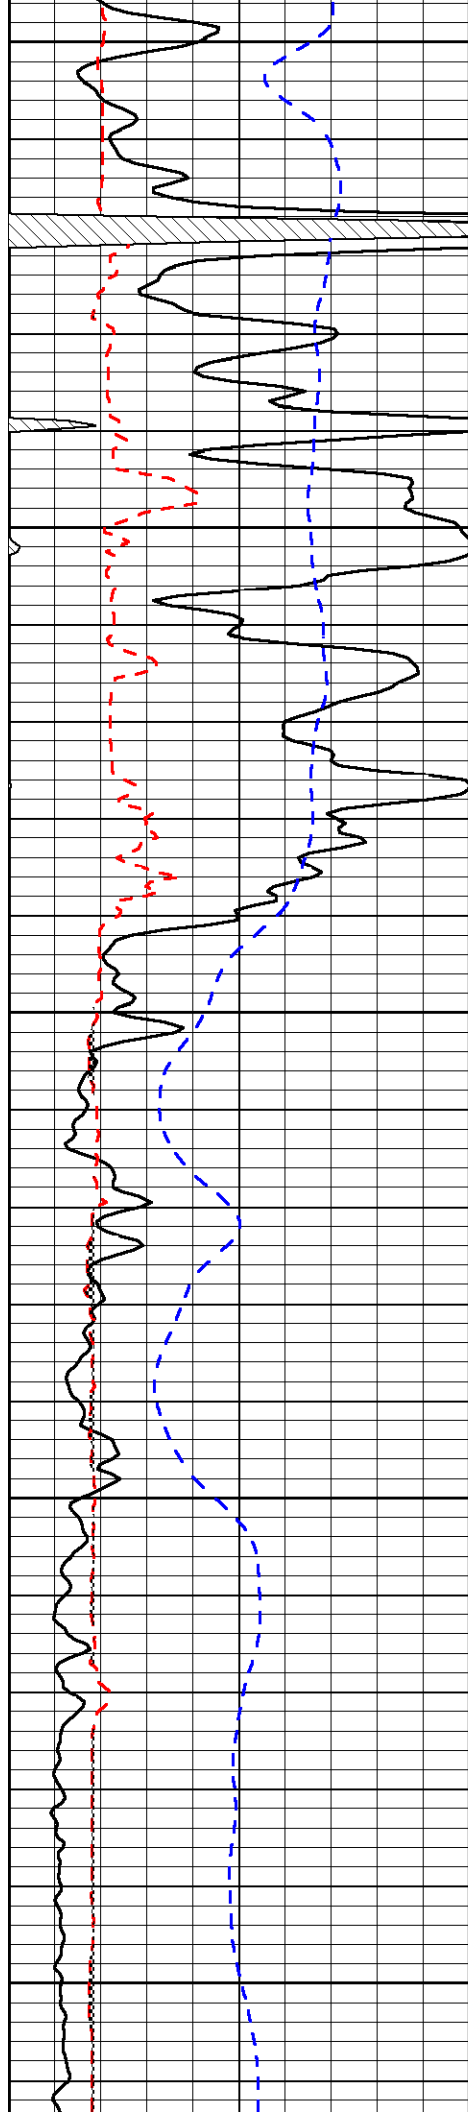


4050

4100

4150

4200

4250

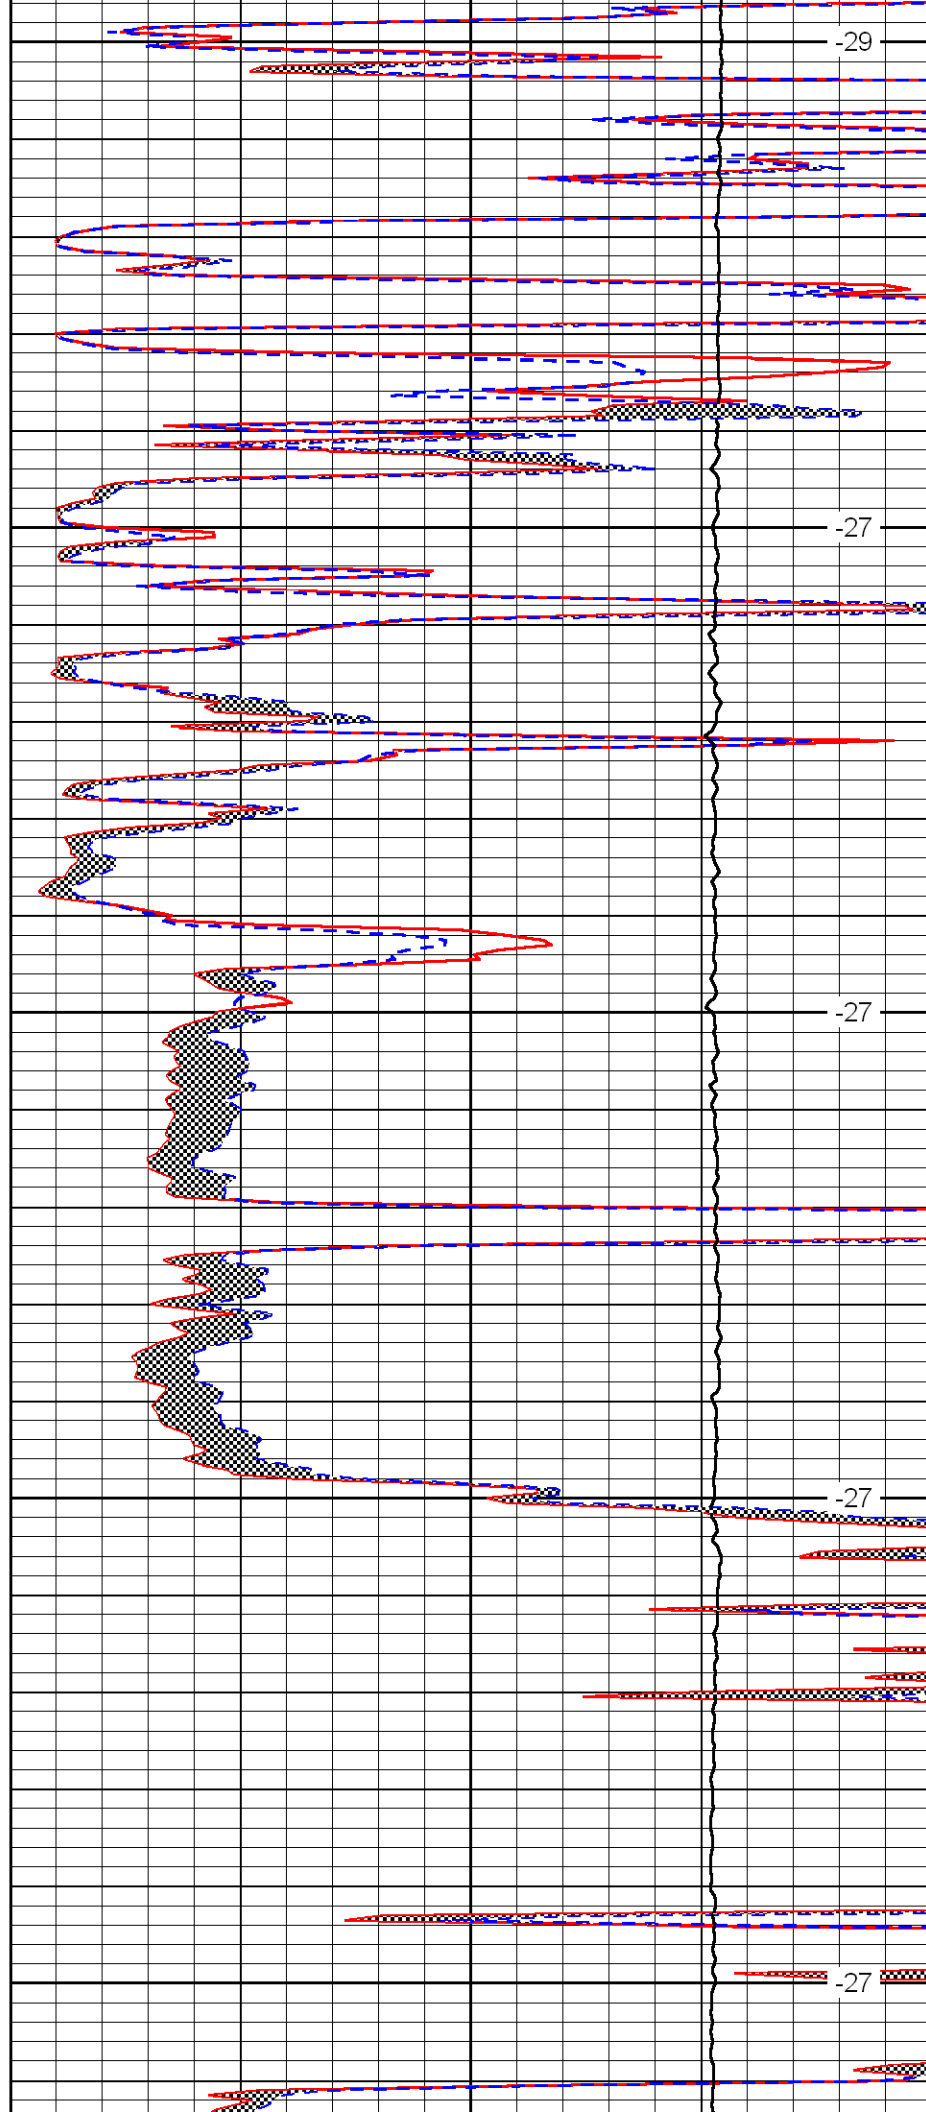


-29

-27


-27

-27

-27

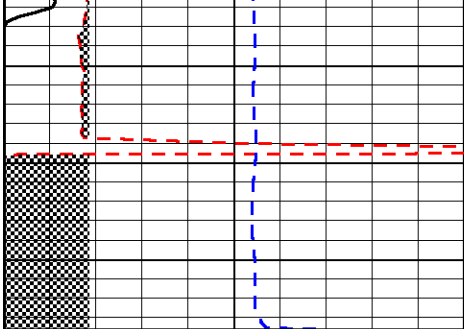

|      |                          |     |
|------|--------------------------|-----|
| 0    | Gamma Ray                | 150 |
| 6    | Micro Log Caliper (GAPI) | 16  |
| -200 | SP                       | 0   |

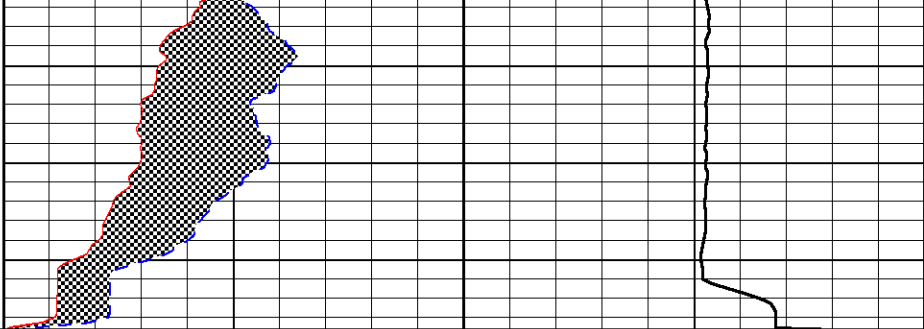

|       |                      |    |
|-------|----------------------|----|
| 0     | Micro Inverese 1 X 1 | 40 |
| 0     | Micro Normal 2"      | 40 |
| 10000 | Line Weight          | 0  |

LSPD