



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-053-21,228-00-00		
Company	Fox Petroleum, Inc.		
Well	Wire No.4		
Field	Geneseo		
County	Ellsworth	State	Kansas
Location	660' FSL & 3850' FEL		
Sec: 34	Twp: 17S	Rge: 8W	
Permanent Datum	Ground Level	Elevation	1780
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
		Other Services	CNL/CDL DIL
		Elevation	K.B. 1787 D.F. 1780 G.L. 1780

Date	10/29/2008
Run Number	Two
Depth Driller	3250
Depth Logger	3245
Bottom Logged Interval	3244
Top Log Interval	2600
Casing Driller	8.625 @ 295
Casing Logger	286
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	3,000
Density / Viscosity	9.2 50
pH / Fluid Loss	9.5 8.8
Source of Sample	Flowline
Rm @ Meas. Temp	.75 @ 68
Rmf @ Meas. Temp	.56 @ 68
Rmc @ Meas. Temp	1.01 @ 68
Source of Rmf / Rmc	Charts
Rm @ BHT	.47 @ 108
Operating Rig Time	4 Hours
Max Rec. Temp. F	108
Equipment Number	17
Location	Hays
Recorded By	C. Desaire
Witnessed By	Jim Musgrave

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Hwy 4 & Hwy 14 Jct,
1/2 N, 1/2 E, N & W Into

Database File: foxhd.db
 Dataset Pathname: dil/foxstk
 Presentation Format: micro
 Dataset Creation: Wed Oct 29 18:41:49 2008
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

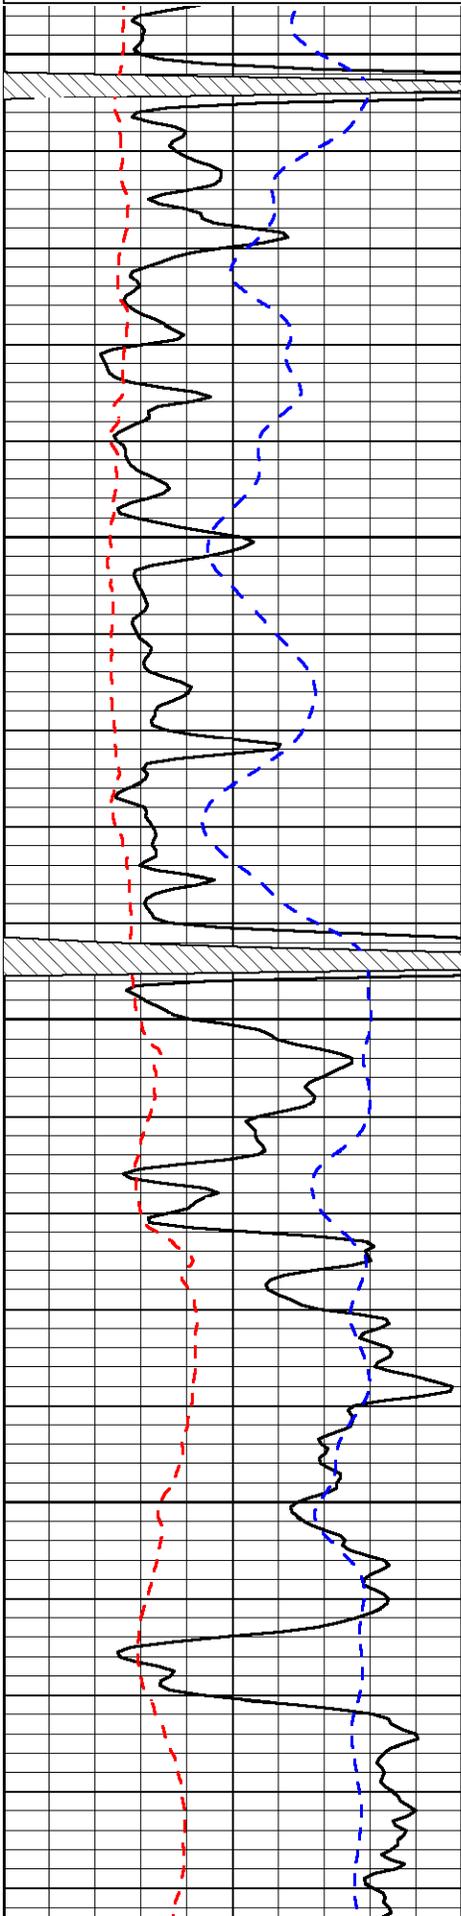


2600

2650

2700

2750

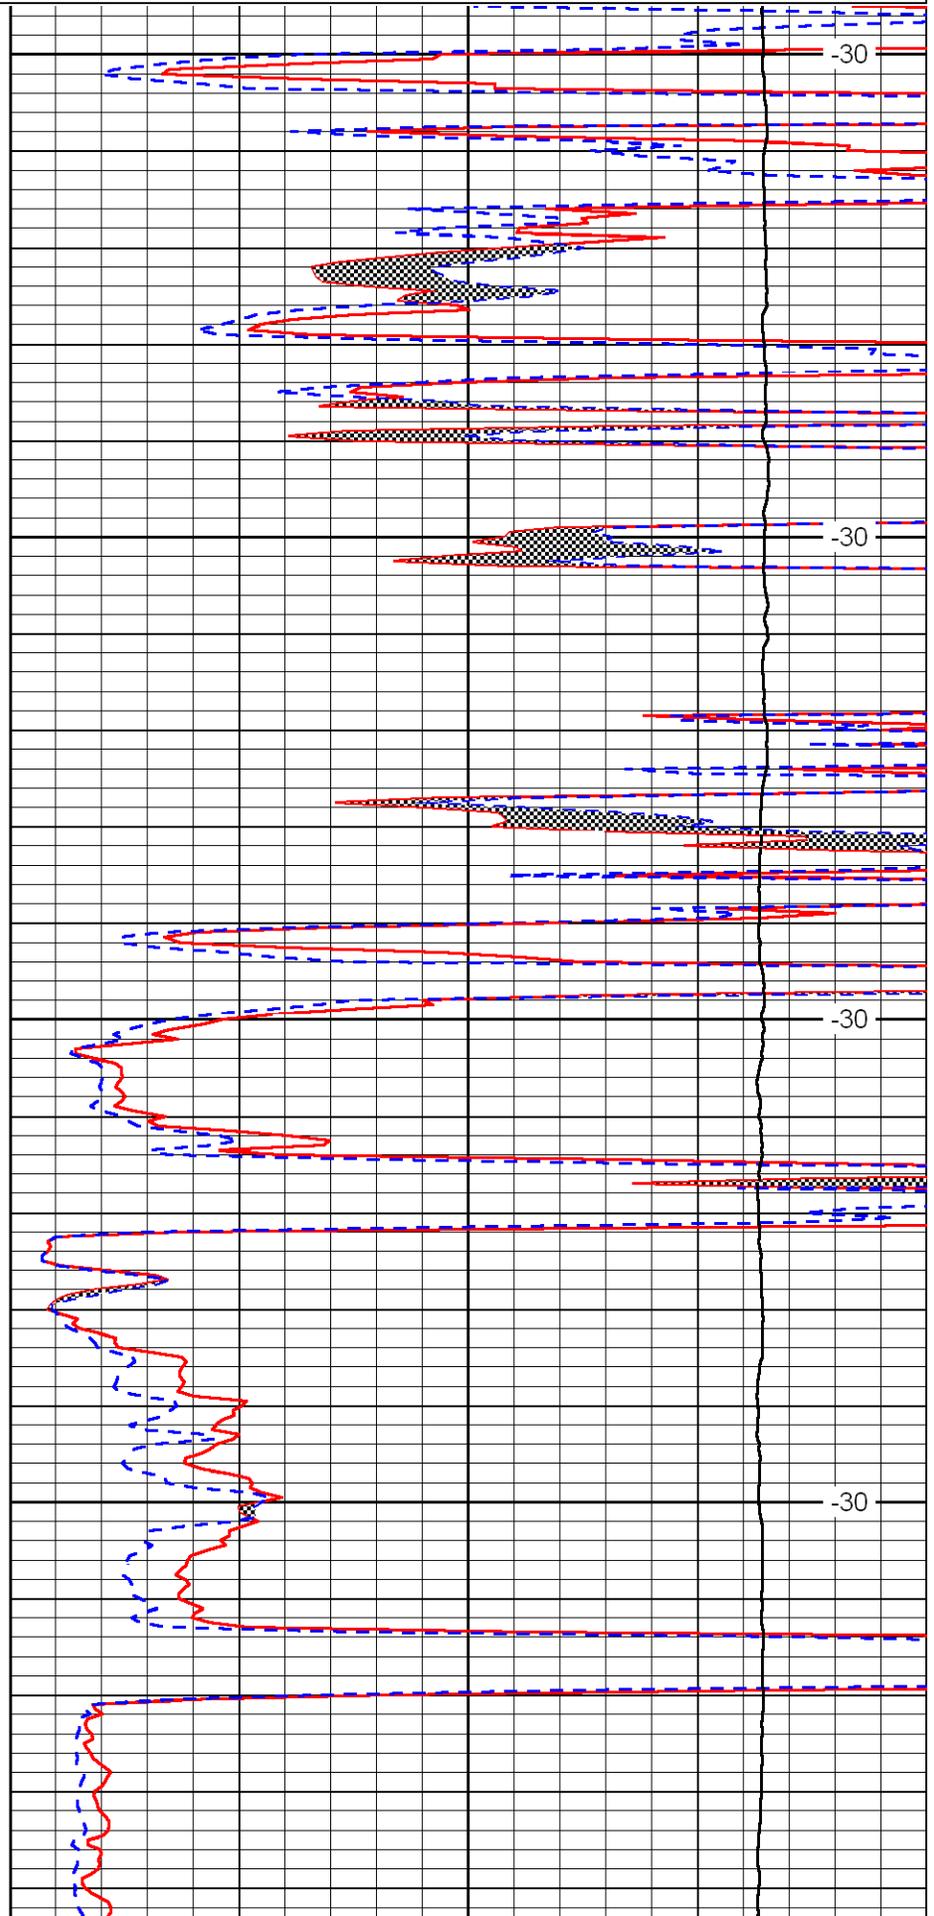


-30

-30

-30

-30

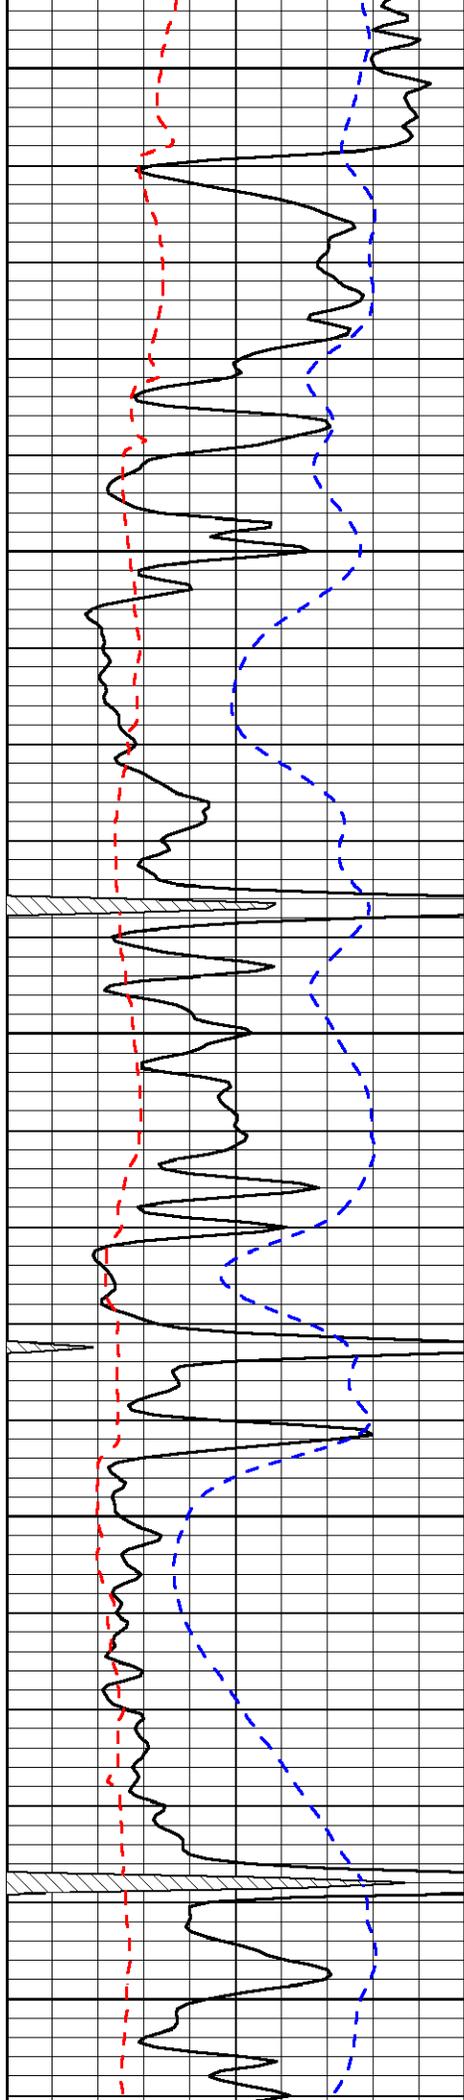


2800

2850

2900

2950

3000

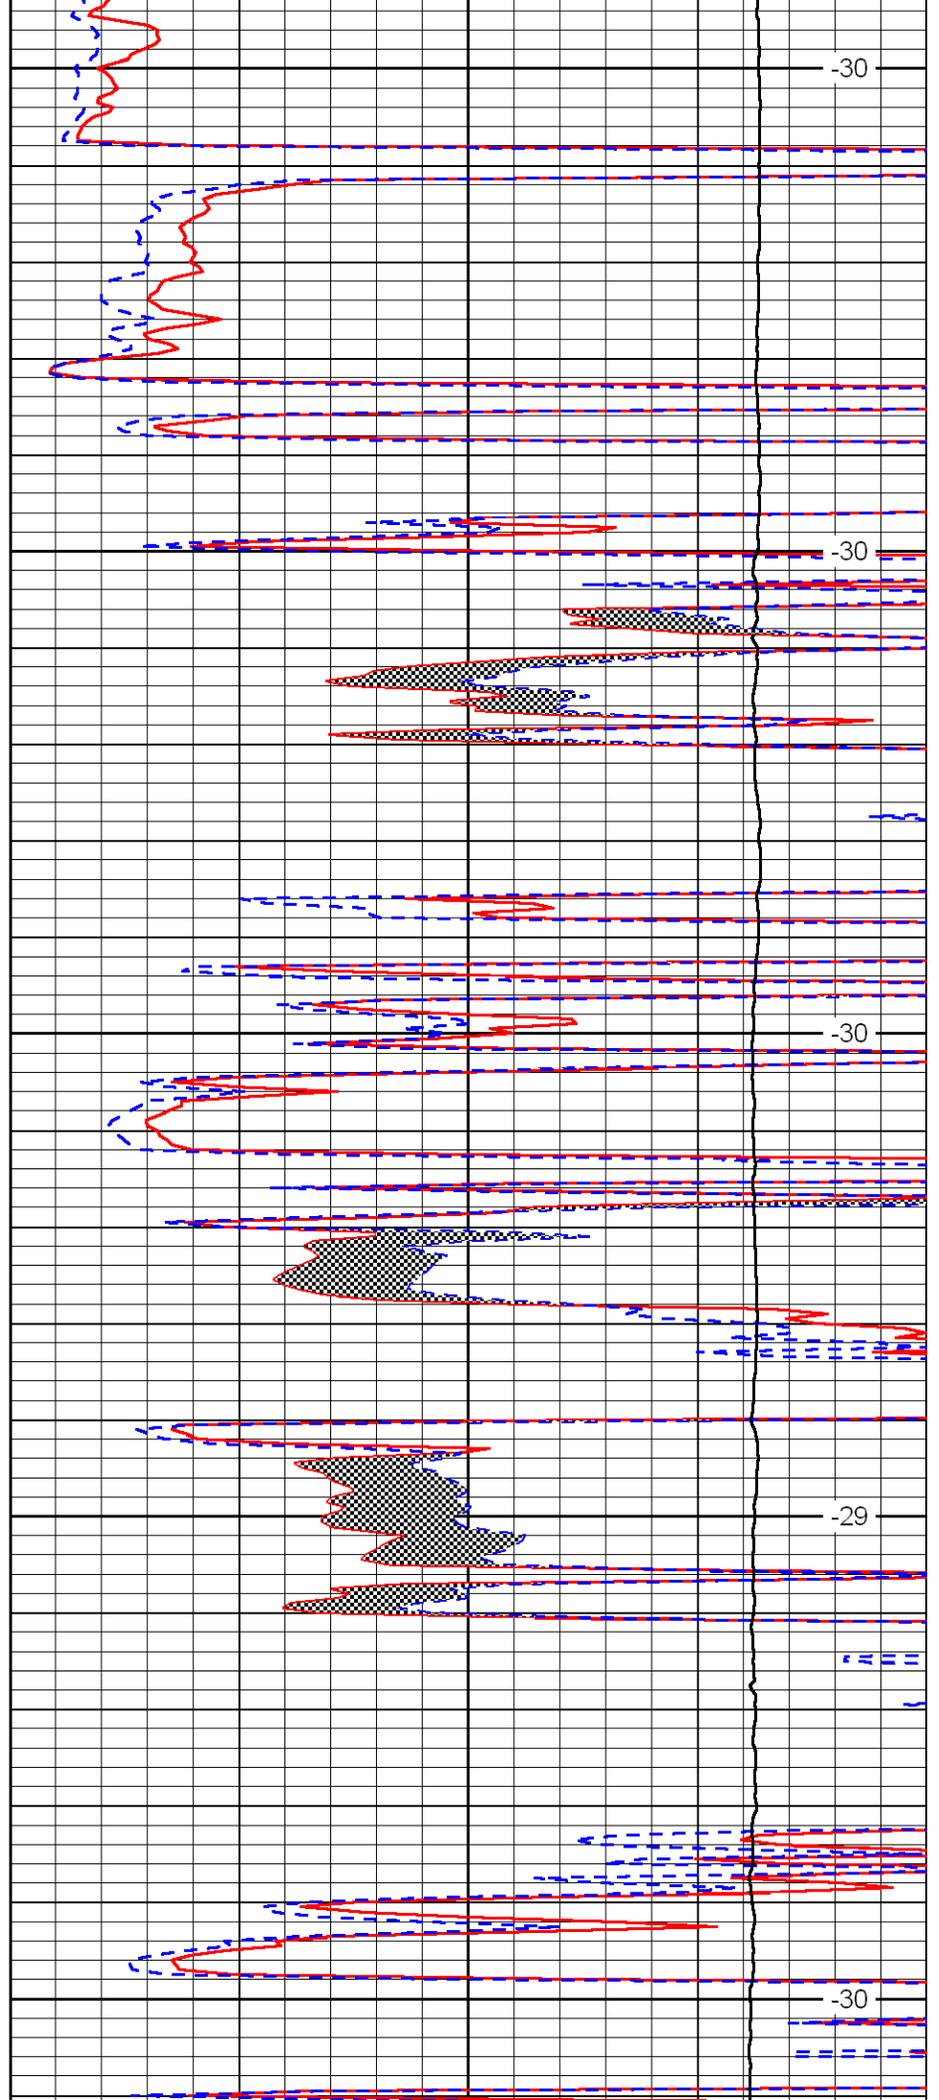


-30

-30

-30

-29

-30

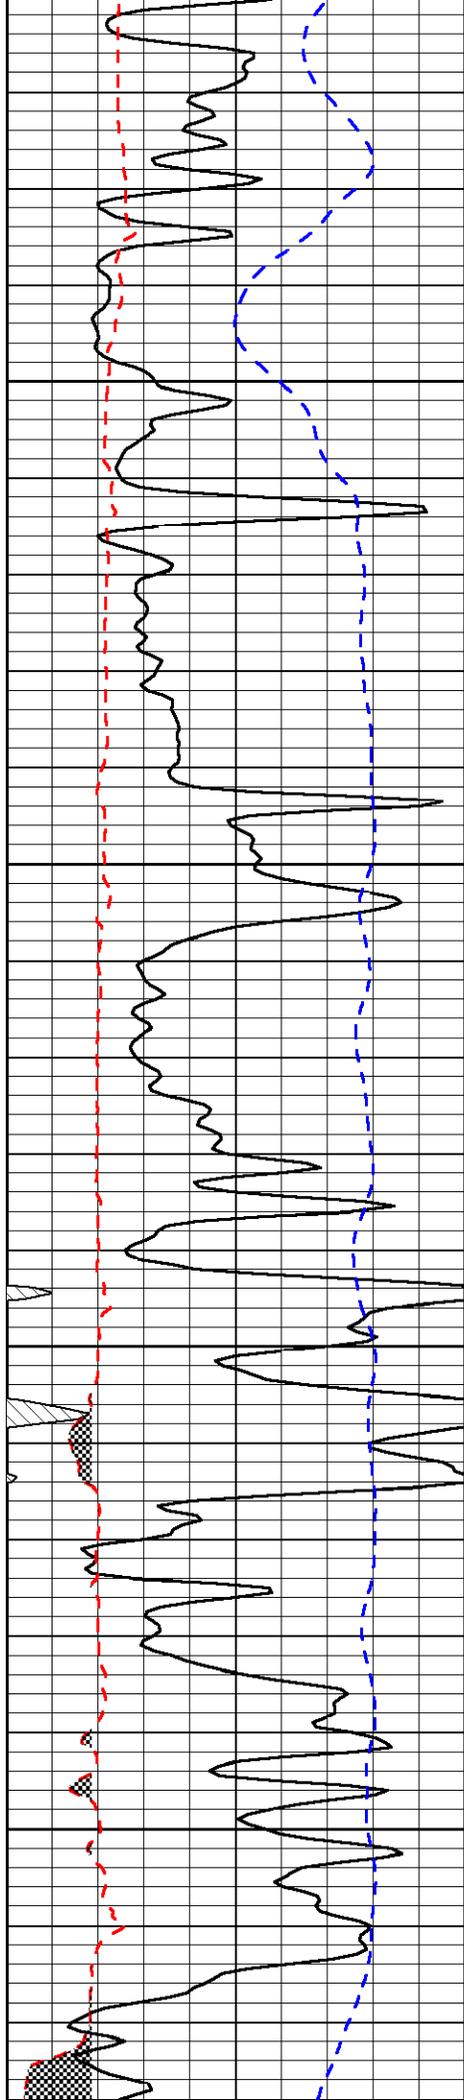


3050

3100

3150

3200

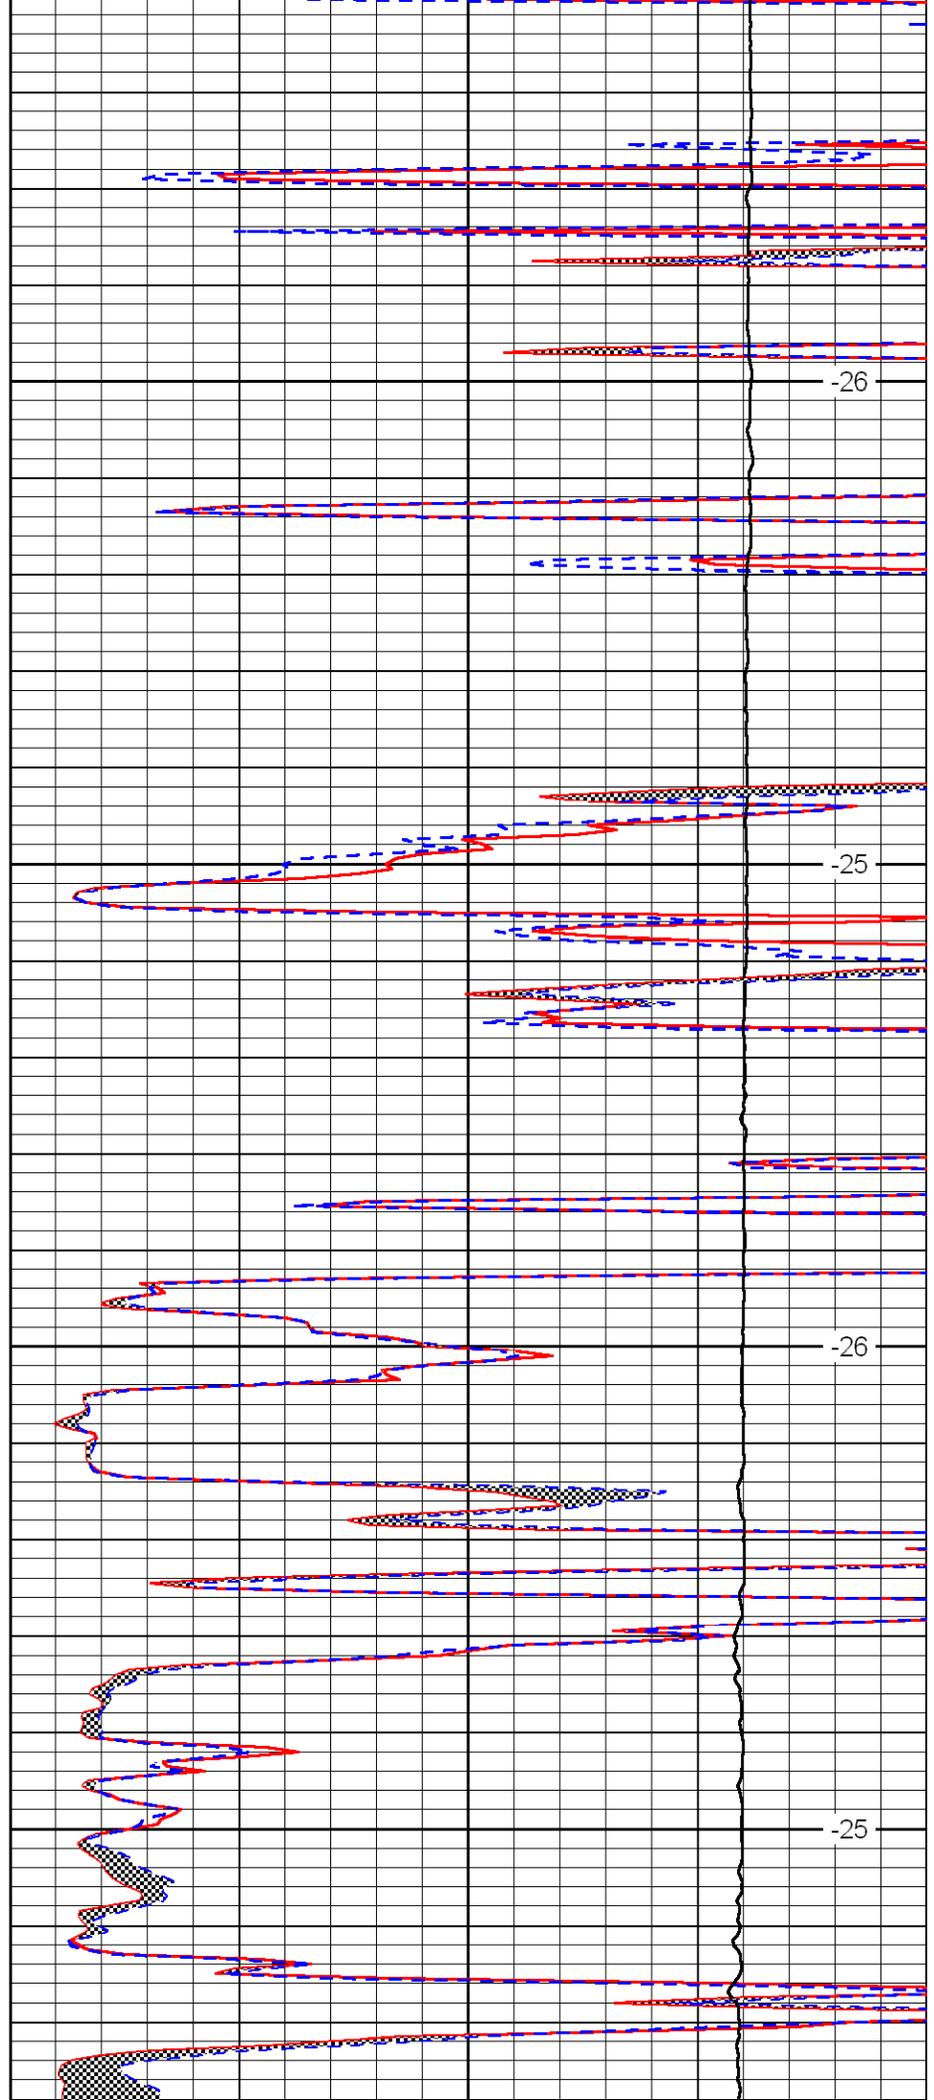


-26

-25


-26

-25

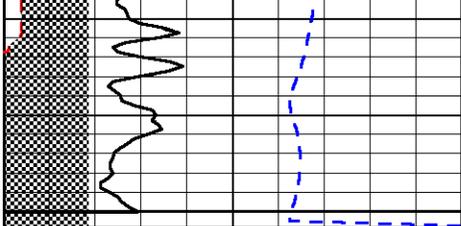

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP	0

3250

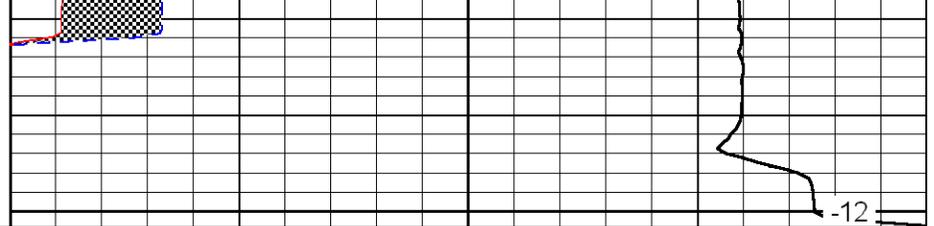

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

-12

LSPD