



SUPERIOR
Hays,
Kansas

COMPENSATED
DENSITY
NEUTRON LOG

Company REILLY OIL COMPANY, INC.
Well COFFIN - EASON UNIT #1-6
Field WILDCAT
County GRAHAM
State KANSAS

Company REILLY OIL COMPANY, INC.
Well COFFIN - EASON UNIT #1-6
Field WILDCAT
County GRAHAM State KANSAS

Location: API #: 15-065-23533
170' FSL & 2190' FWL
SEC 6 TWP 7S RGE 23W
Permanent Datum GROUND LEVEL Elevation 2452
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
DIL
MICRO
Elevation
K.B. 2457
D.F.
G.L. 2452

Date	3-2-09		
Run Number	ONE		
Depth Driller	3965		
Depth Logger	3964		
Bottom Logged Interval	3940		
Top Log Interval	3400		
Casing Driller	262		
Casing Logger	NA		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3 / 55		
pH / Fluid Loss	11.5 / 7.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.10 @ 60F		
Rinf @ Meas. Temp	0.83 @ 60F		
Rmc @ Meas. Temp	1.32 @ 60F		
Source of Rinf / Rmc	MEASURED		
Rim @ BHT	.580 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	0860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	RICHARD BELL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: HILL CITY, N TO RD. "Y", 4 1/2W, 1 1/2S INTO.





SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File: 003235ddn.db
Dataset Pathname: pass4.1
Presentation Format: den_neu
Dataset Creation: Mon Mar 02 07:49:26 2009 by Calc Open-Cased 051020
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

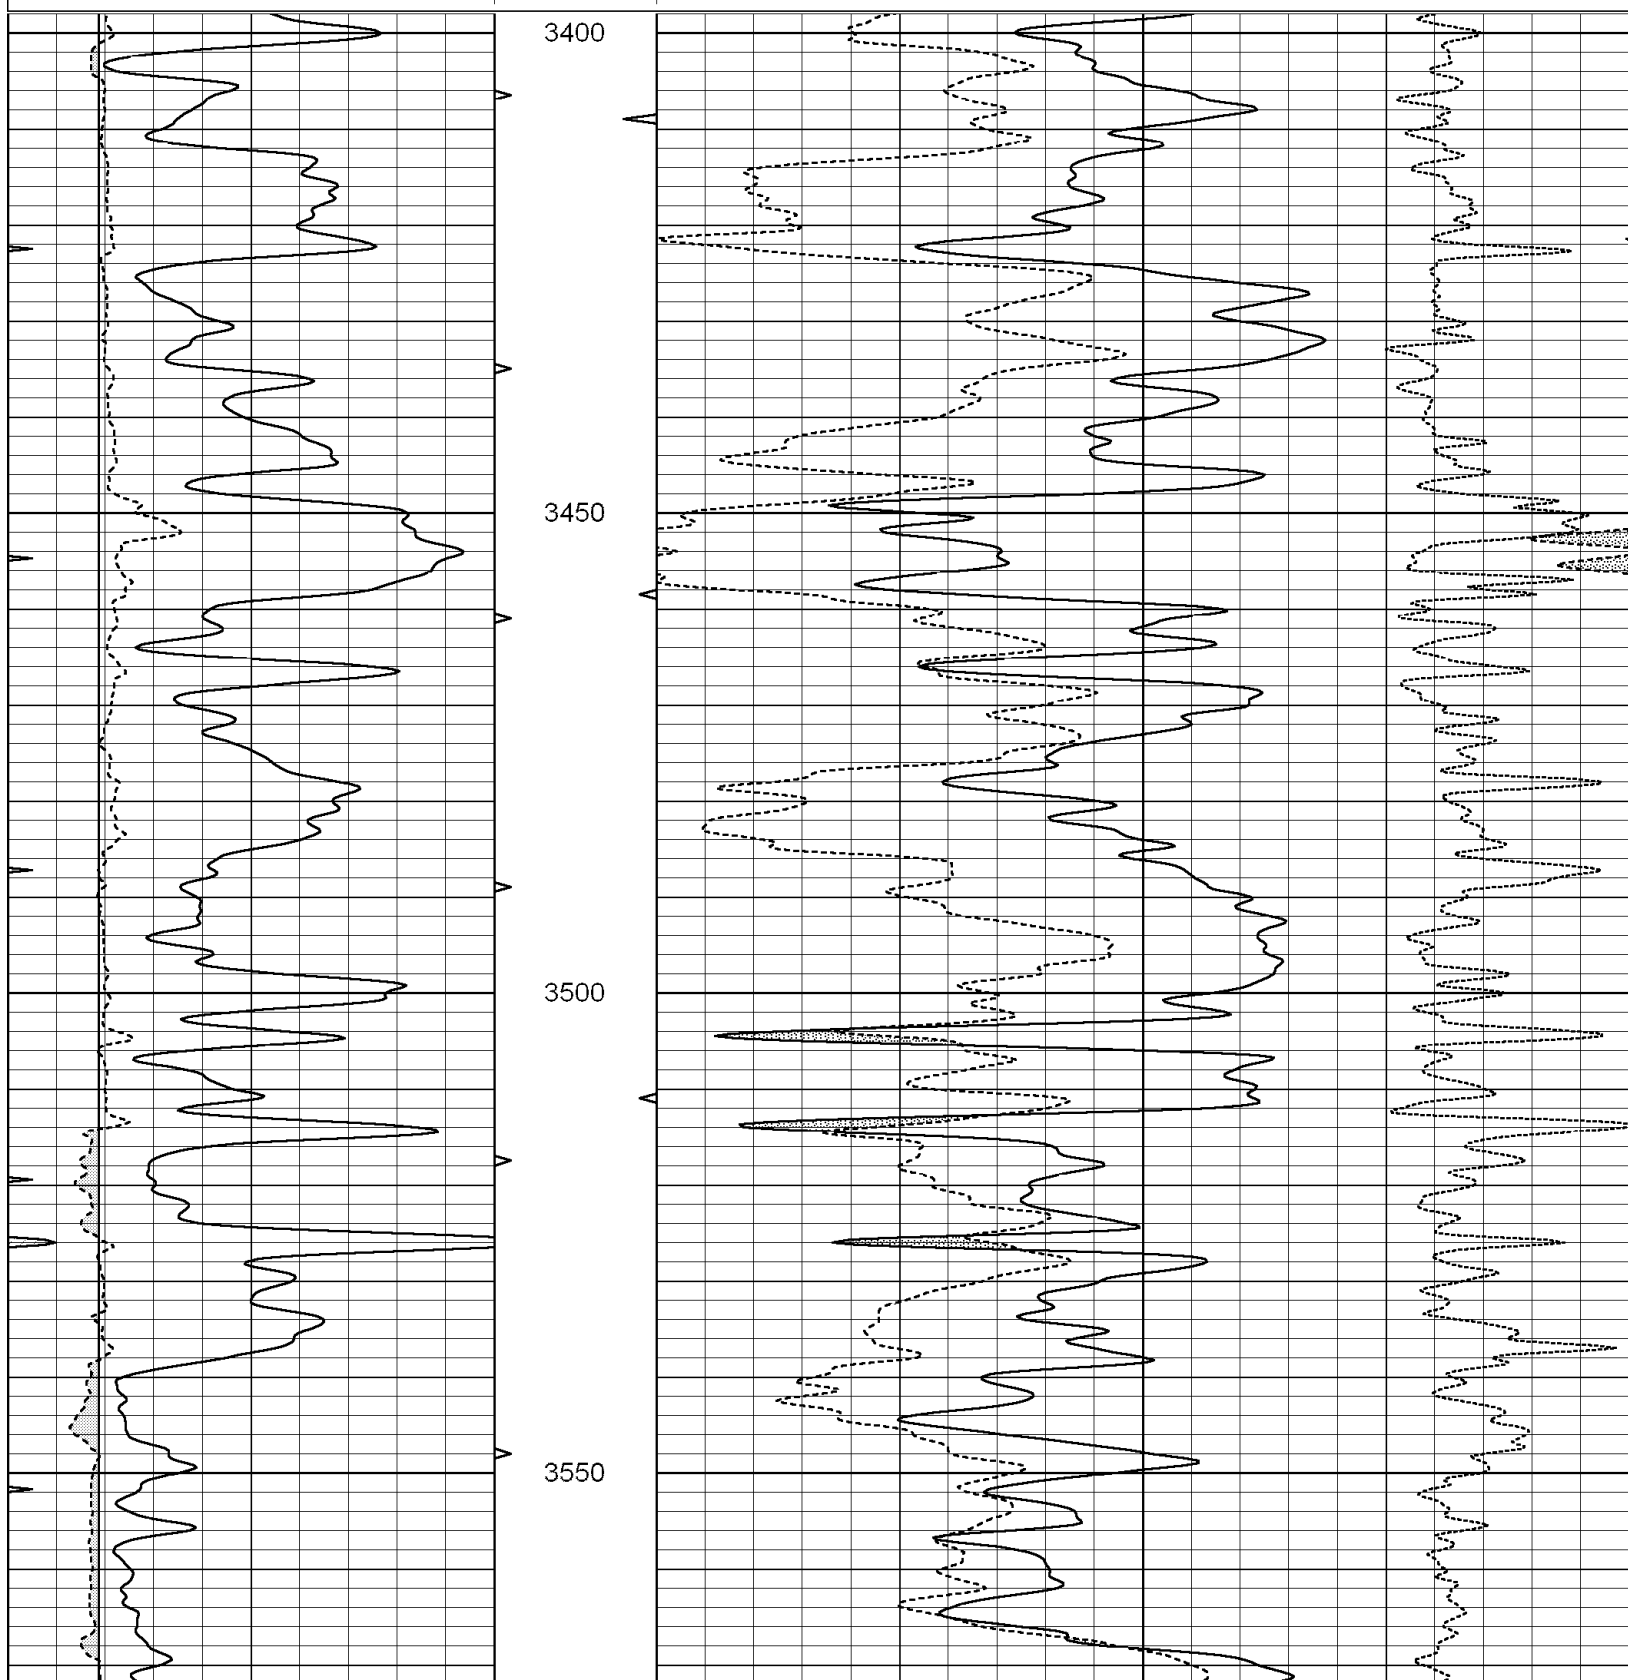


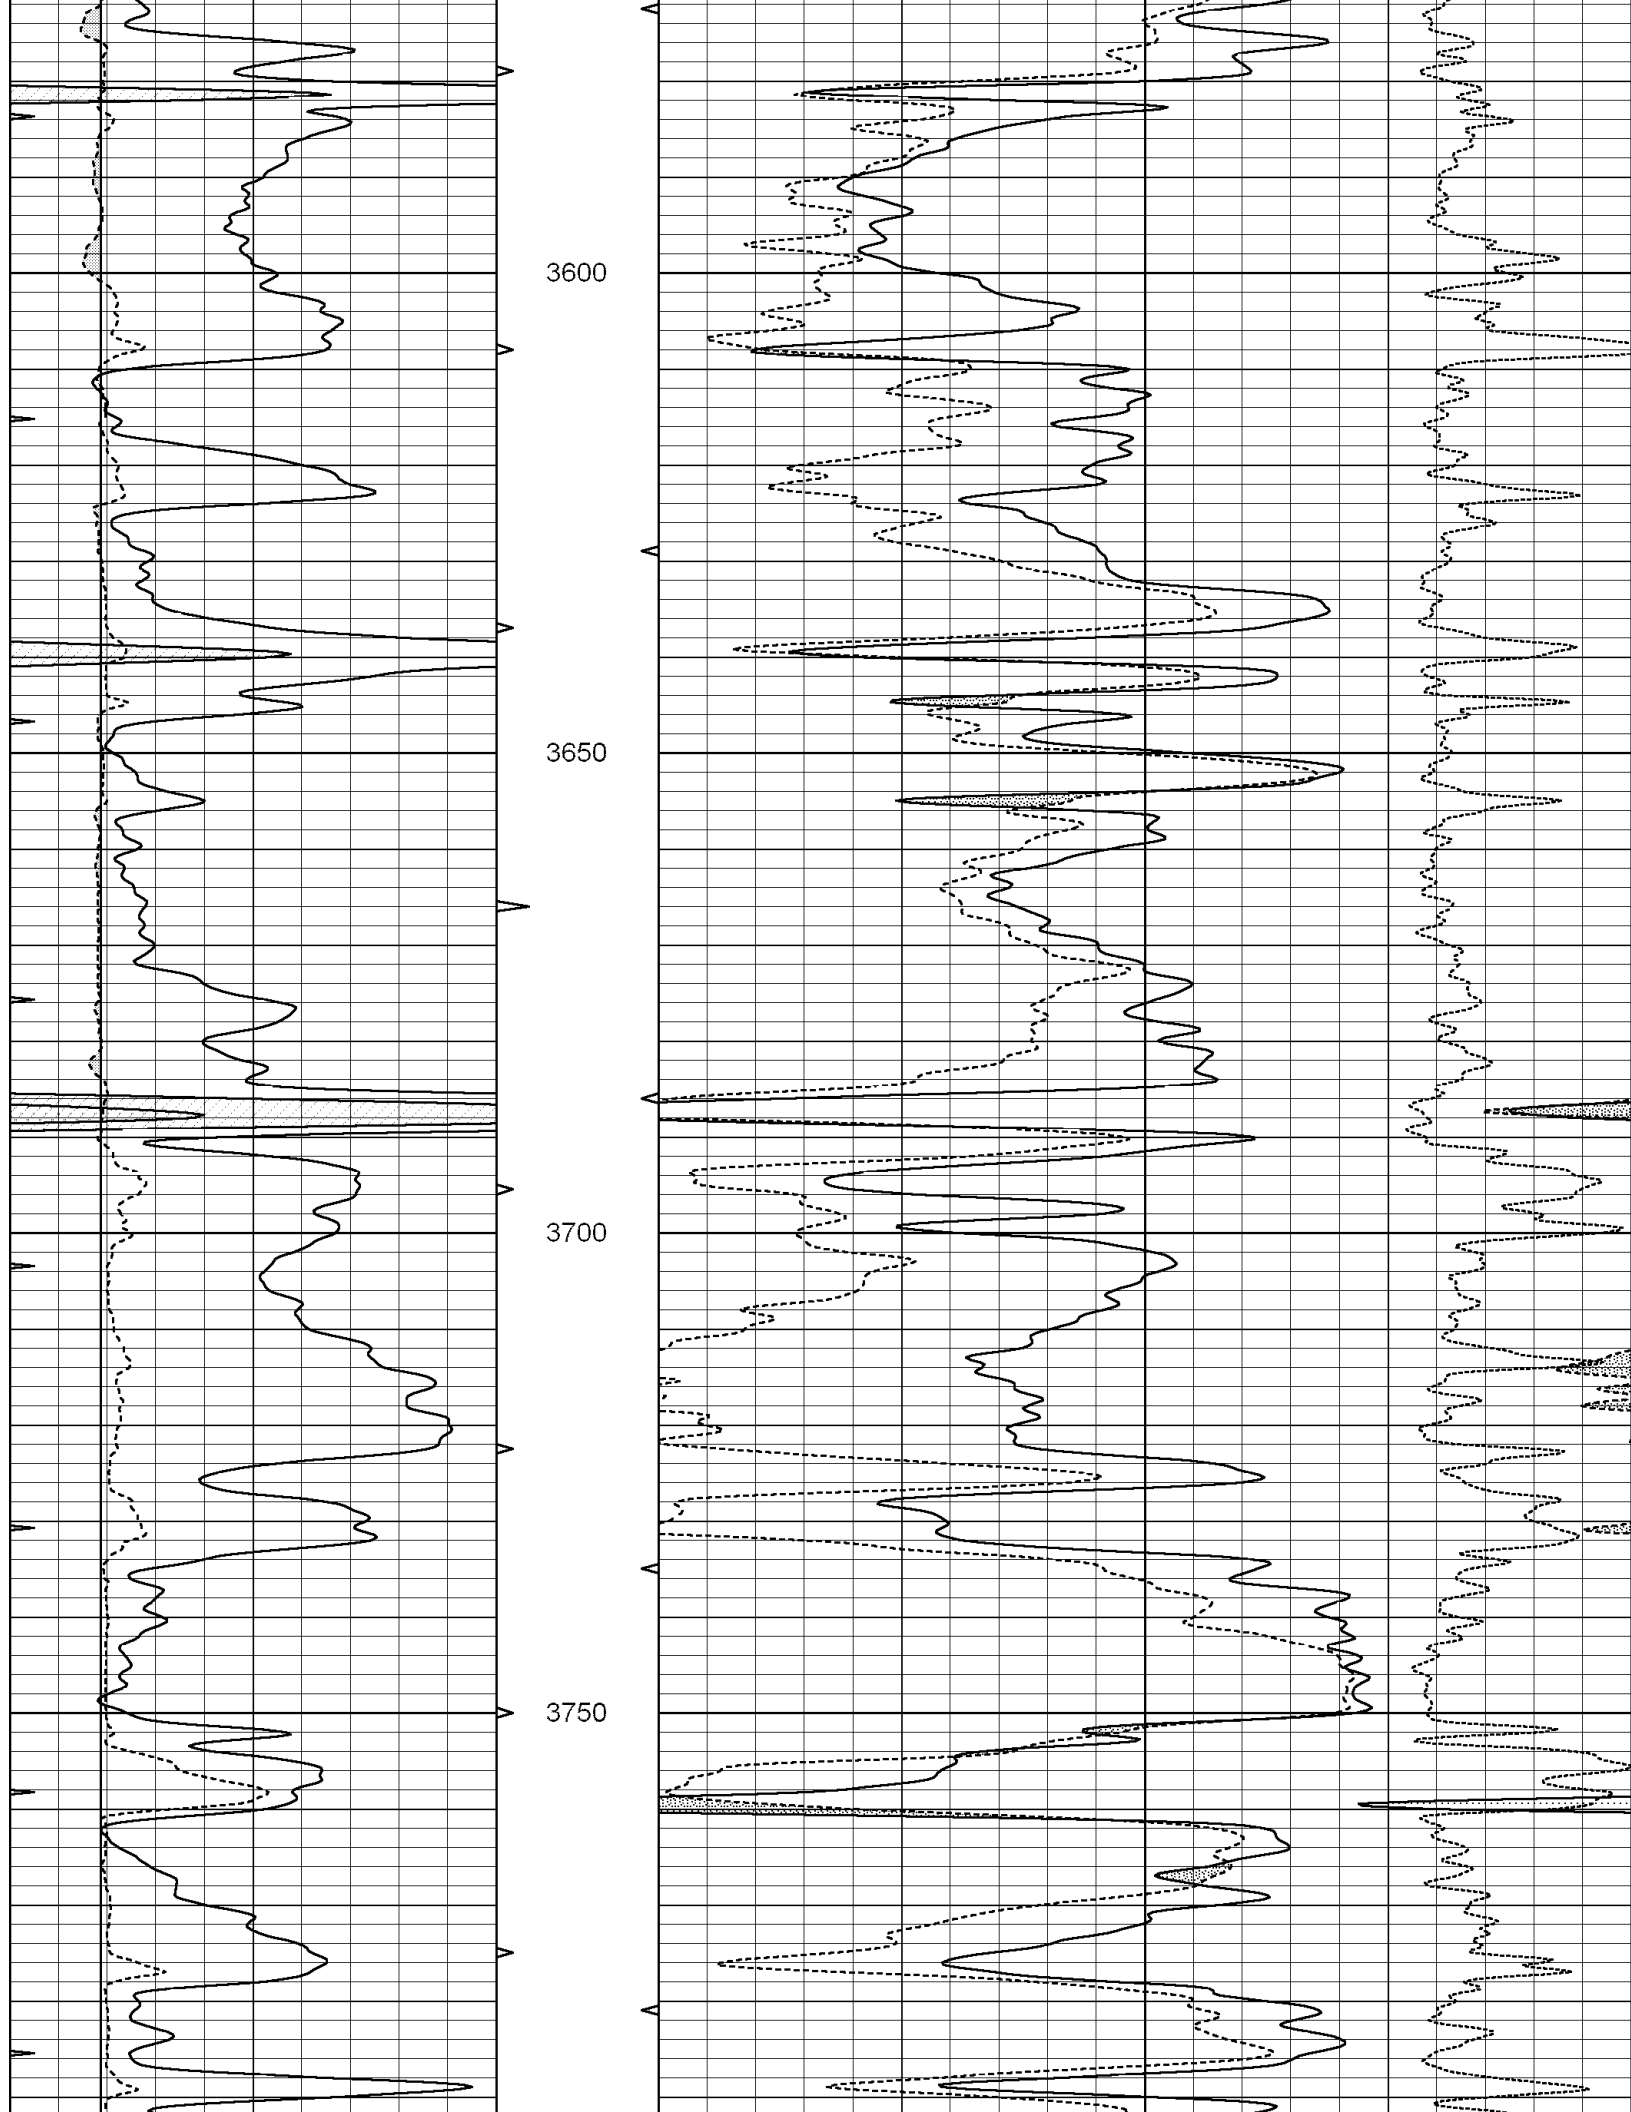


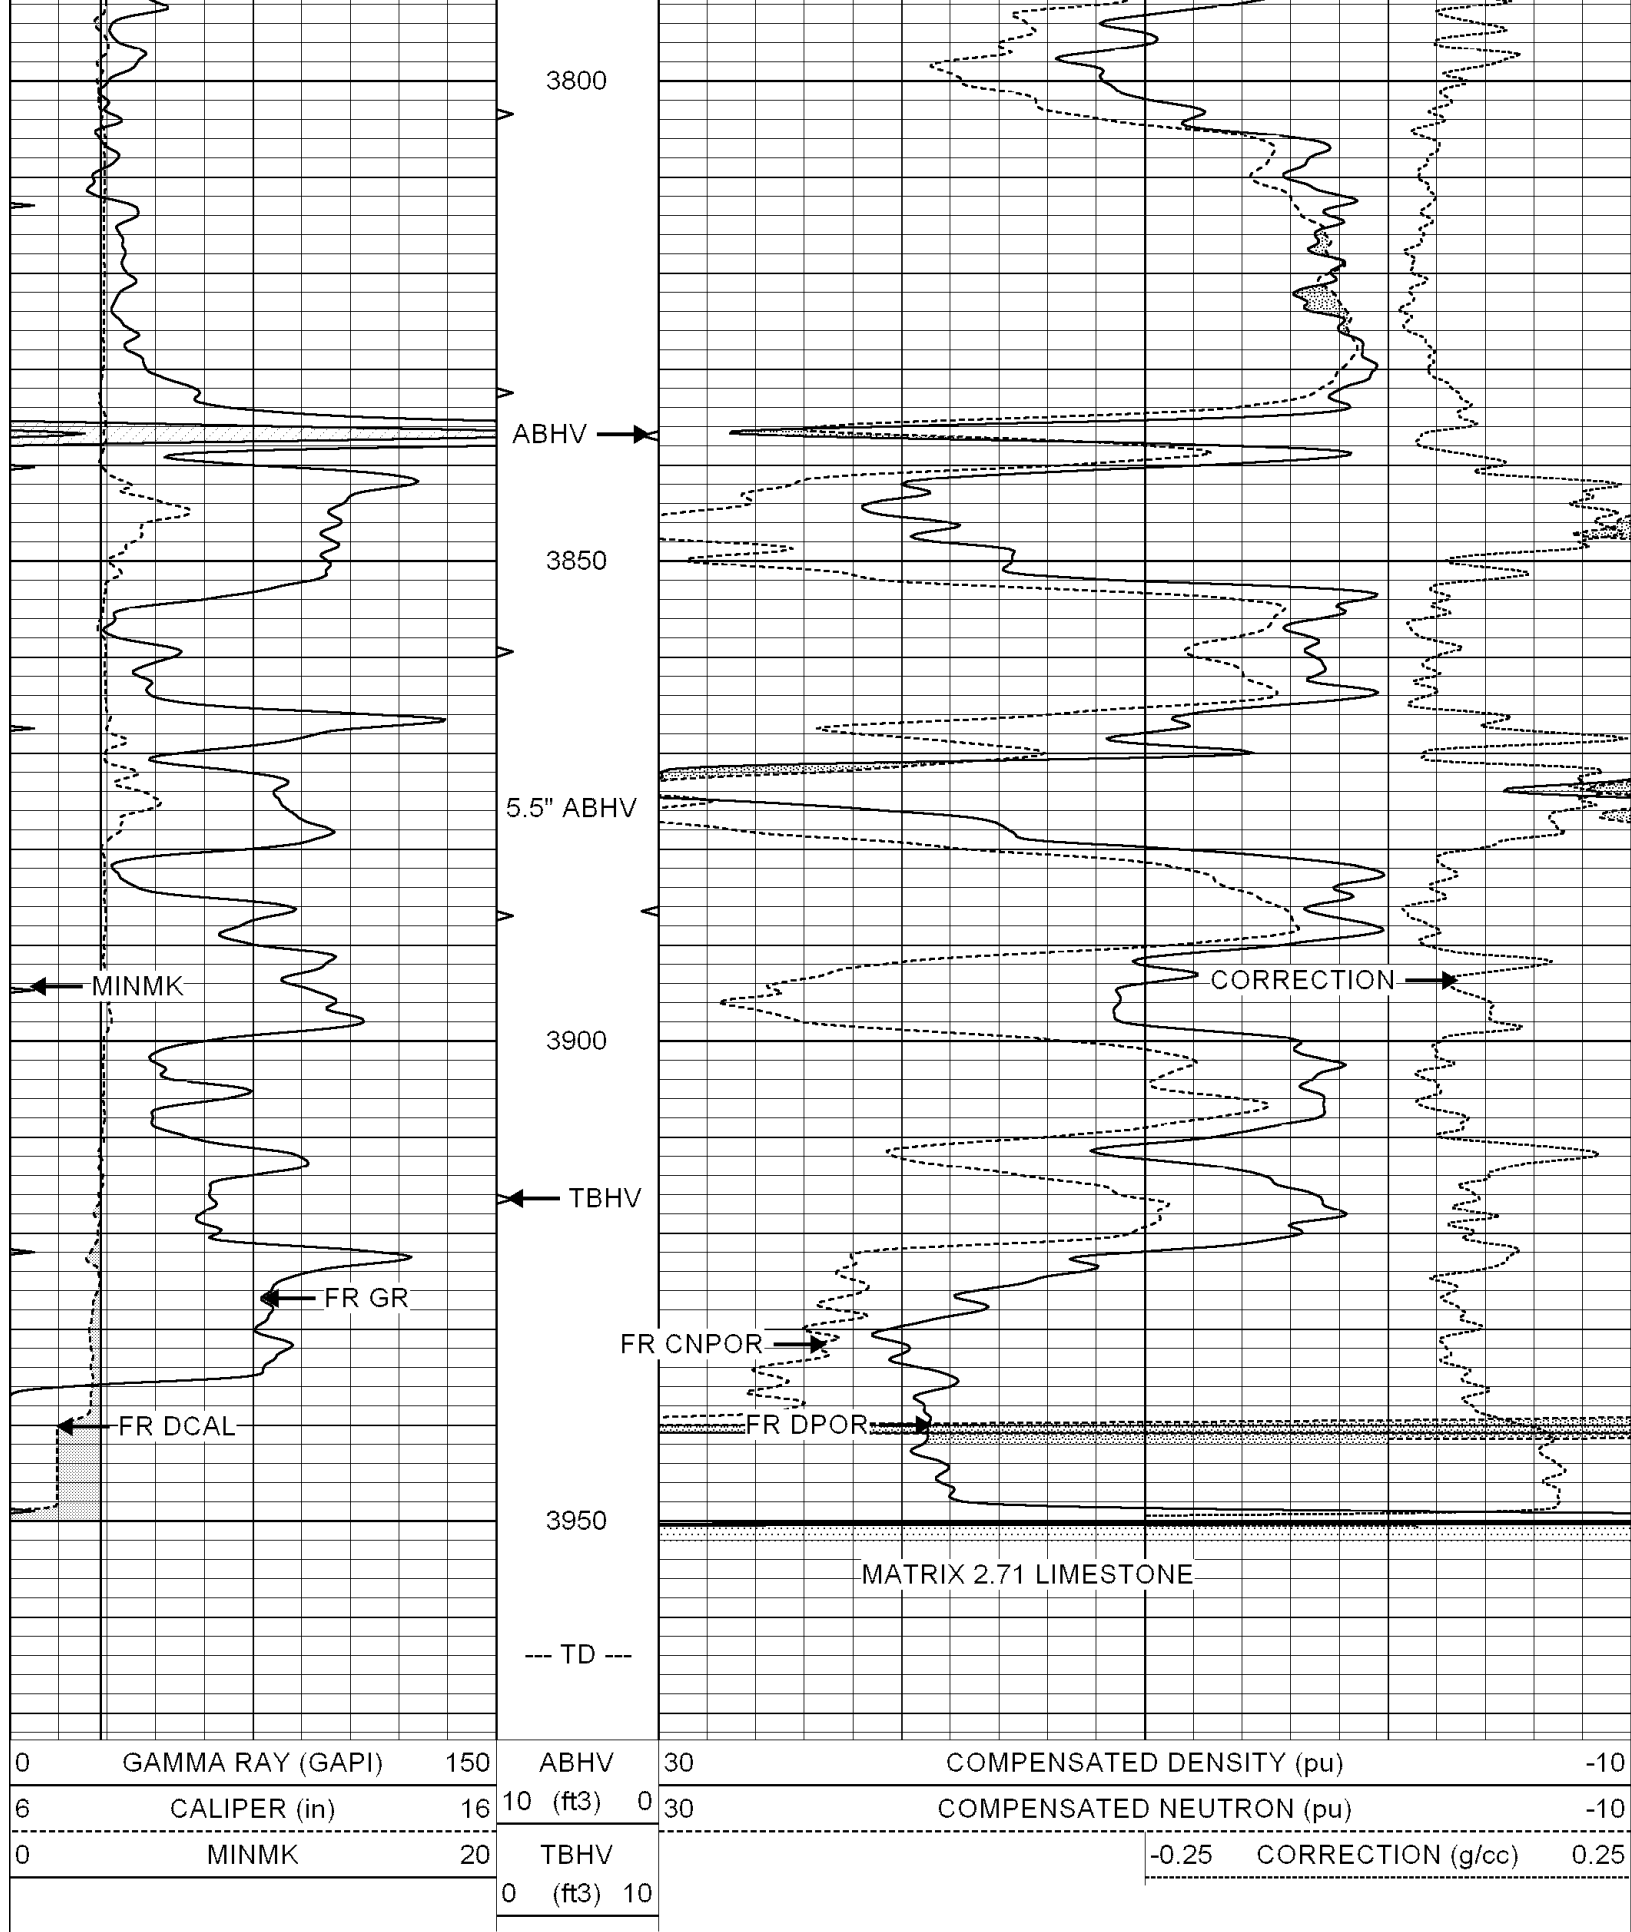

Database File: 003235ddn.db
Dataset Pathname: pass3.A
Presentation Format: den_neu
Dataset Creation: Mon Mar 02 08:20:43 2009
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

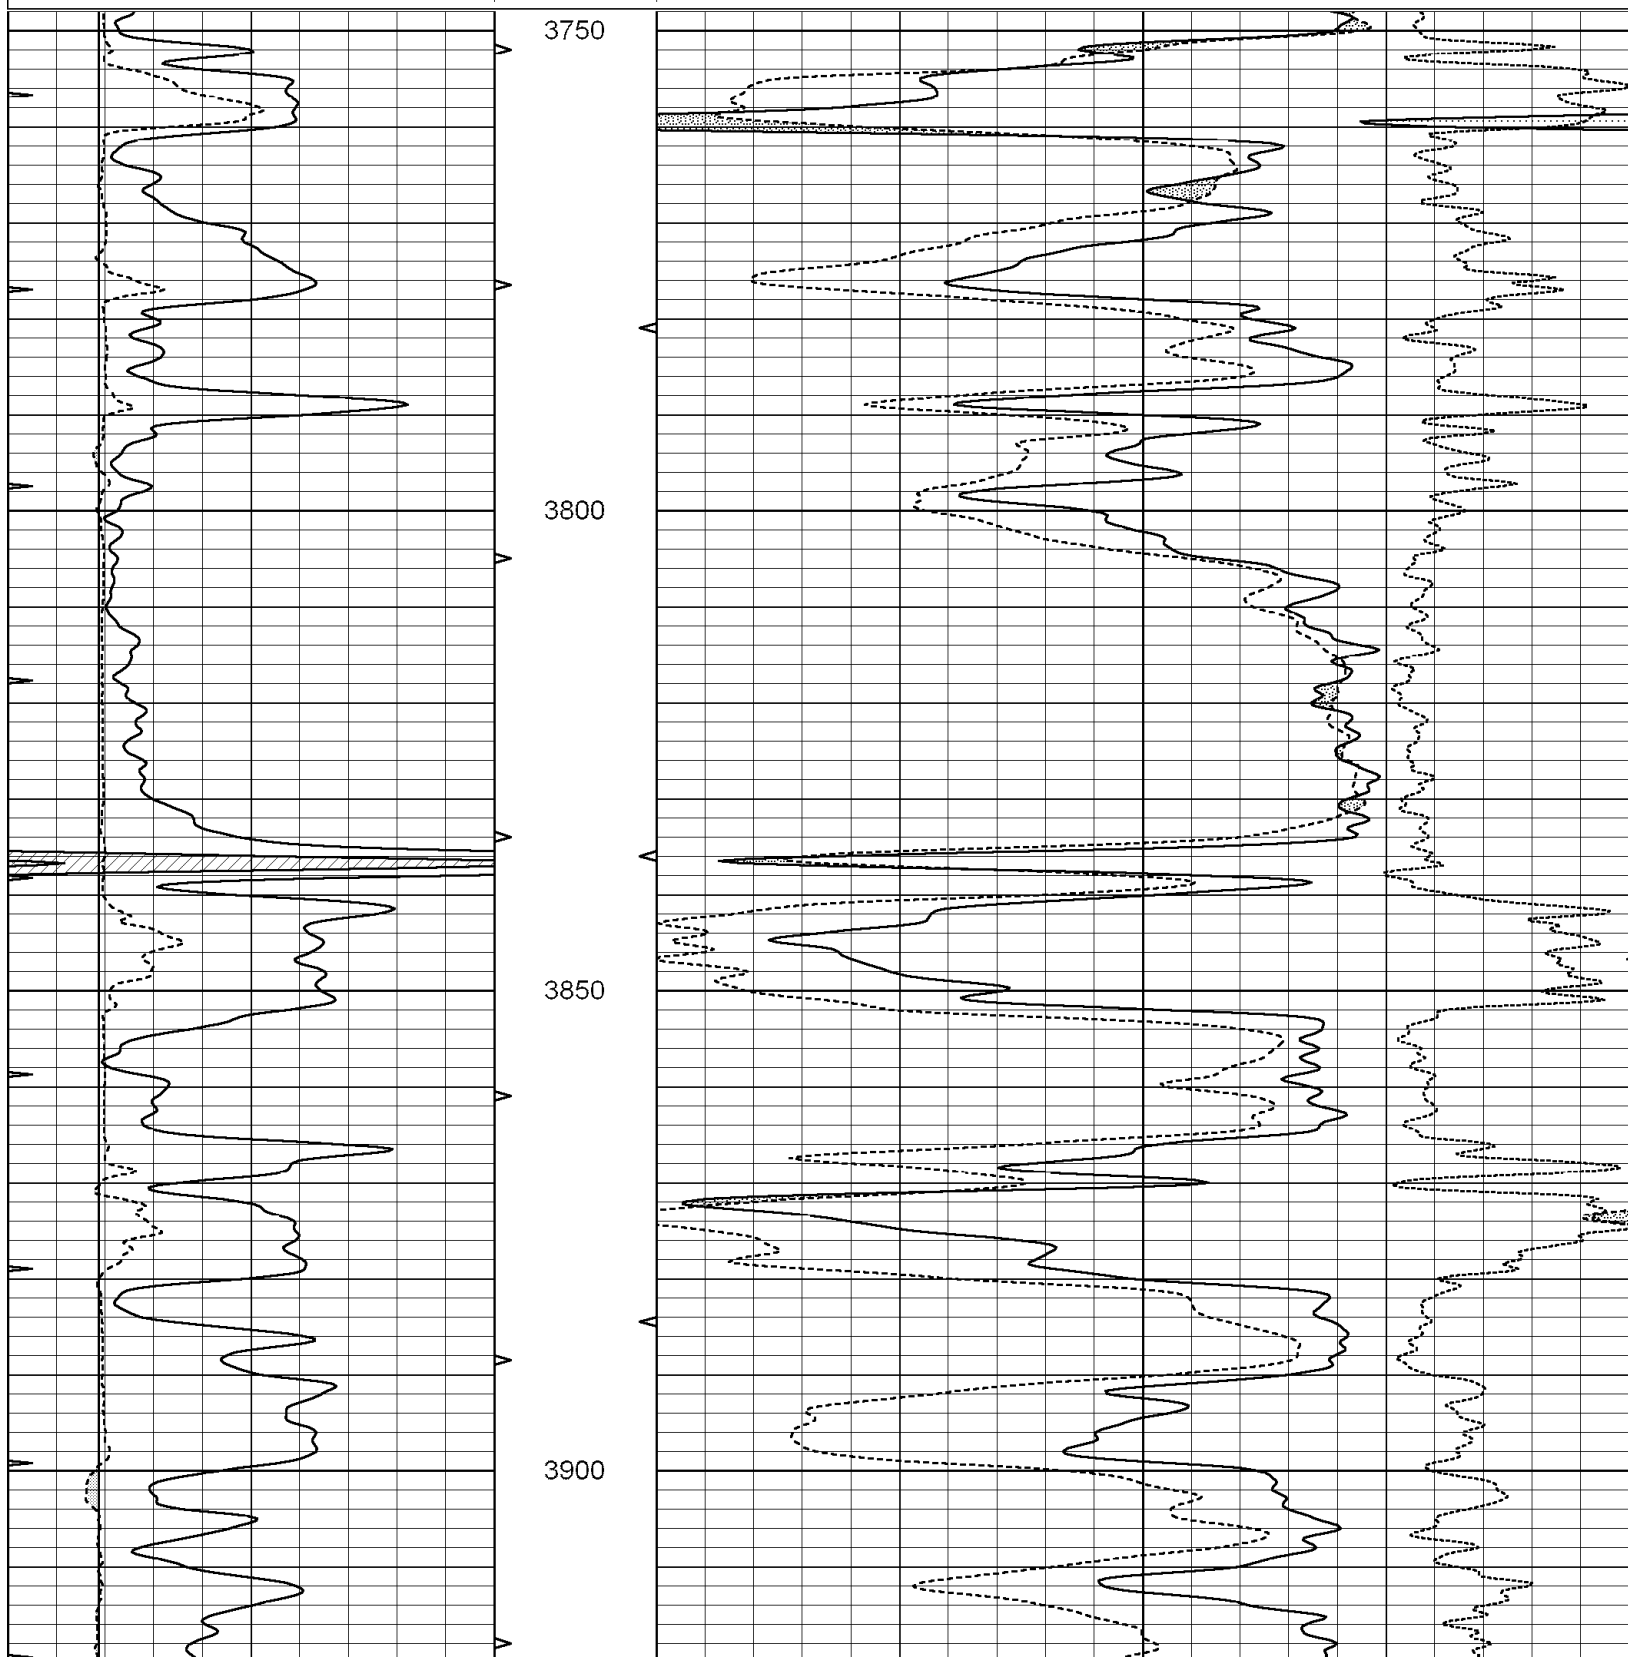

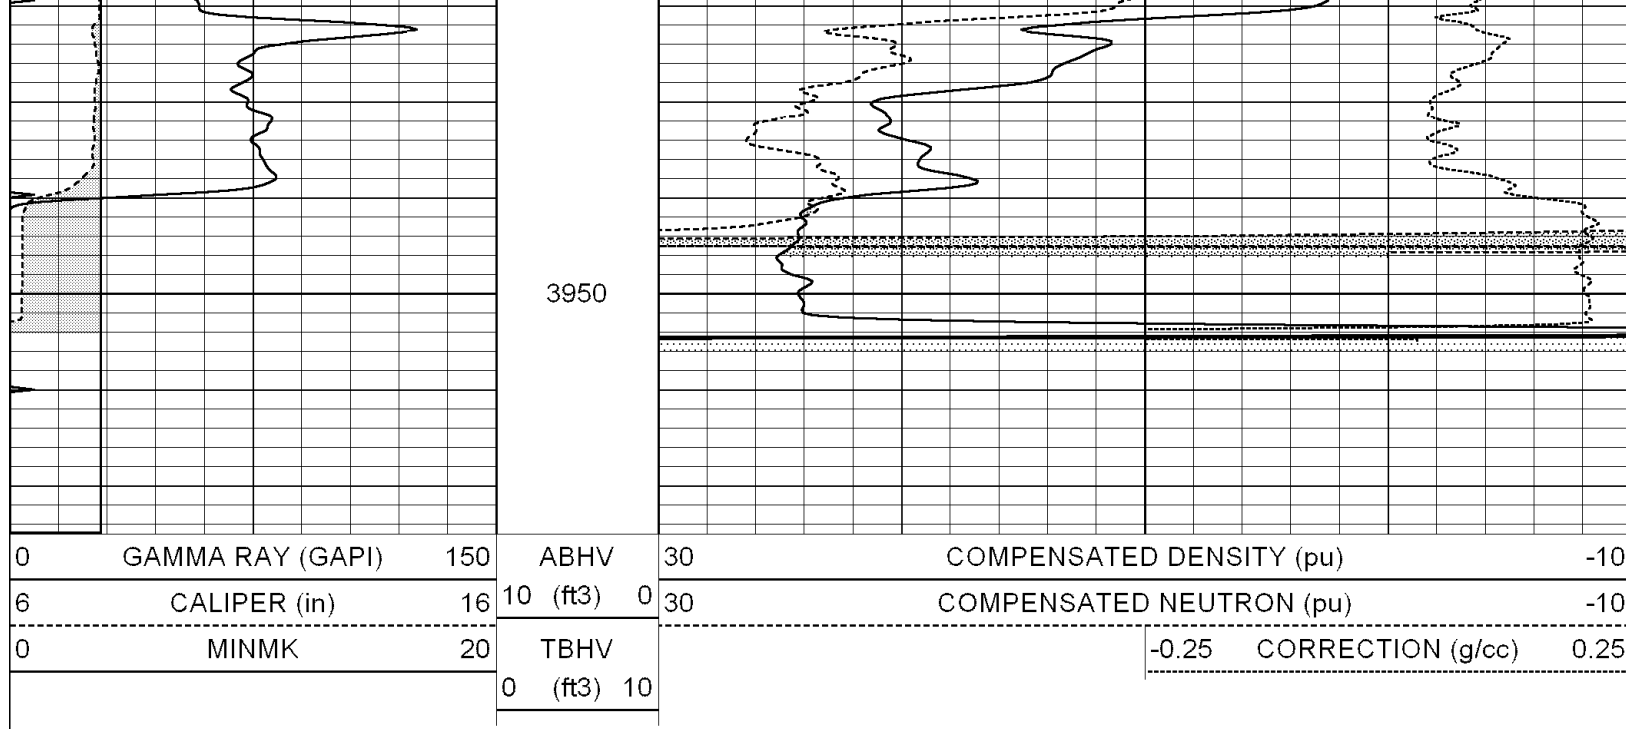

Calibration Report

Database File: 003235ddn.db
Dataset Pathname: pass4.1
Dataset Creation: Mon Mar 02 07:49:26 2009 by Calc Open-Cased 051020

Dual Induction Calibration Report								
Serial-Model: Performed:			DIL5-GEAR Mon Mar 02 06:11:32 2009					
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.004	0.654	V	0.000	400.000	mmho-m	530.000	-5.000
Medium	-0.005	0.737	V	0.000	462.500	mmho-m	510.000	-7.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.006	0.655	V	0.000	400.000	mmho-m	615.668	-3.483
Medium	0.010	0.747	V	0.000	462.500	mmho-m	627.607	-6.064

Compensated Density Calibration Report

Serial-Model: GEAR1-GEARHART
Source / Verifier: 147 / 147
Master Calibration Performed: Mon Mar 02 06:23:06 2009

Master Calibration					
	Density		Far Detector		Near Detector
Magnesium	1.710	g/cc	1006.91	528.07	cps
Aluminum	2.590	g/cc	233.49	355.80	cps
Spine Angle = 74.88			Density/Spine Ratio = 0.581		
	Size		Reading		
Small Ring	7.60	in	2.87	V	
Large Ring	14.00	in	5.71	V	

Compensated Neutron Calibration Report

Serial Number: NEU_11
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

Gamma Ray Calibration Report

Serial Number: GR5
Tool Model: OPEN
Performed: Mon Jan 19 16:45:44 2009

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.5000 GAPI/cps