

15-039-00090-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Deatur County, Sec. 6 Twp. 5 Rge. 26 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NE/SE/NW
Lease Owner R. W. Shields
Lease Name Feely "C" #1 Well No. 1
Office Address 666 Fourth Nat'l. Bank Bldg.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed February 17, 1973
Application for plugging approved 19
Plugging commenced February 19, 1973
Plugging completed February 21, 1973
Reason for abandonment of well or producing formation Depleted

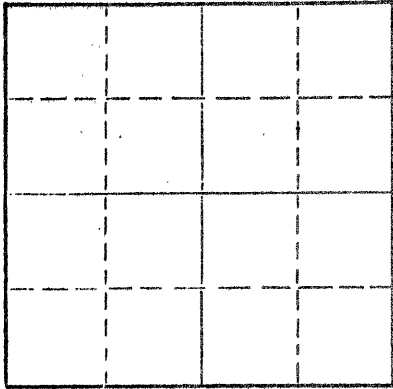

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 3980 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	231	None
				5 1/2	3740	1,019.87'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured T. D. at 3600 ft. Dumped sand to 3500' and 5 sacks cement.
Shot casing at 2000, 1200, 1100 and 1020 ft. Pulled a total of 32 joints
of 5 1/2" casing. Sun squeezed well with 5 sacks hulls, 30 sacks gel and
150 cubic feet 50/50 Pozmix with 6% added gel.

RECEIVED
STATE CORPORATION COMMISSION

RECEIVED
STATE CORPORATION COMMISSION

FEB 23 1973

FEB 23

CONSERVATION DIVISION
Wichita, Kansas

CONSERVATION DIVISION
Wichita, Kansas

8-23-73

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
JAMES W. ROCKHOLD (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)


James W. Rockhold

Box 698, Great Bend, Ks. 67530 James W. Rockhold

(Address)

February 22, 1973

Cathy Miller
Cathy Miller Notary Public

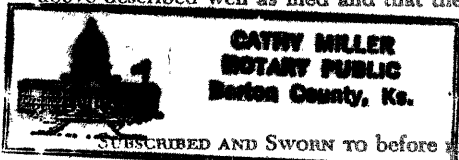

SUBSCRIBED AND SWORN to before me this 22nd day of February, 1973

My commission expires September 30, 1975