

15-039-30102-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

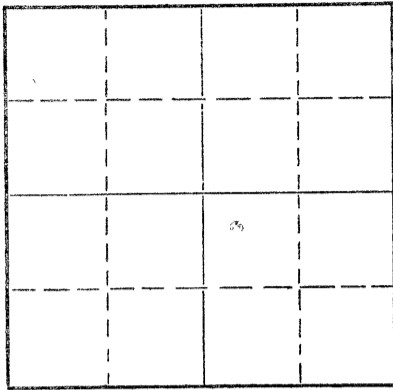

Locate well correctly on above  
Section Plat

Decatur County, Sec. 27 Twp. 5 Rge. 26 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines SW NE NW  
Lease Owner Zenith Drilling Corporation  
Lease Name Noone Well No. 1  
Office Address 300 West Douglas Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19\_\_\_\_  
Application for plugging filed 11-19-69 19\_\_\_\_  
Application for plugging approved 11-20-69 19\_\_\_\_  
Plugging commenced 1-3-70 19\_\_\_\_  
Plugging completed 1-10-70 19\_\_\_\_  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3876 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7	2 1/8	None
				1 1/2	None	1059'.51
RECEIVED STATE CORPORATION COMMISSION JAN 28 1970 CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1-26-70

Moved unit into location and put up pole. Set plug at 3625' and dumped 25 gallons of sand on the plug.

Dumped 3 sacks of cement on bottom at 3600' with the dump bailer. Ray La Rue Tank Truck loaded the hole with water. Dug out the cellar and rigged up. Shot pipe at 1490' - 1395' and 1295'. The pipe was still stuck with 11" of stretch at 1,600 psi or 69,000 lbs.

Shot pipe at 1190' and 1095'. Worked pipe loose at 1095'. Pulled 34 joints of pipe. Loaded out trailer. Tore down unit and got ready to move rig. Took braden head off 7" surface pipe.

Tallied pipe and moved off location.

Squeezed well with 3 sacks of hulls, 6 sacks of mud and 70 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
P. O. Box 221 Great Bend, Kansas (Address)

Subscribed and Sworn to before me this 23 day of January, 19 70

My commission expires May 27, 1973

Notary Public.

