

15-153-20018-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

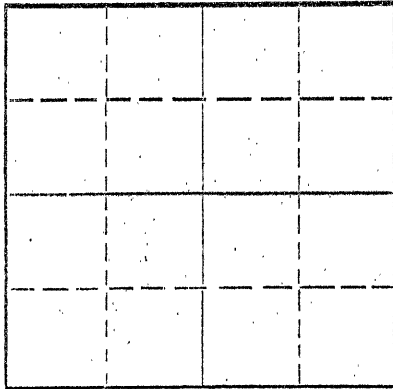

Locate well correctly on above
Section Plat

Rawlins

County, Sec. 2 Twp. 5S Rge. 31 (E) (W) X

Location as "NE/CNW/SE" or footage from lines C SW SE

Lease Owner Mull Drilling Company, Inc.

Lease Name Brown Well No. 1

Office Address P. O. Box 349 Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 11-25-70 19

Application for plugging approved 11-26-70 19

Plugging commenced 12-9-70 19

Plugging completed 12-22-70 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation Depth to top Bottom Total Depth of Well 4280 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	204	None
				4 1/2	4093	1477'.56

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed a plug to 3940'; dumped 20 gallons of sand and 4 sacks of cement. Had 14" tension at 1600 psi. Shot casing at 3264'. Globe Cementing spotted 70 barrels of oil behind 4 1/2" casing. Working casing. Shot casing at 1800' and 1504'. Laid down 46 joints. Globe Cementing squeezed well with 15 sacks of gel and 190 sacks of cement, 20 sacks of gel and 25 sacks of cement, 4 sacks of gel and 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
JAN 4 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc. 1-4-71
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.

James W. Rockhold

(employee of owner) or (owner or operator) of the above-described well, being duly sworn, on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James W. Rockhold

P. O. Box 221 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 30 day of December, 19 70

Notary Public

My commission expires May 27, 1973

Notary Public