



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company MAK-J Energy Kansas, LLC		
	Well B. H. Huck No. 14-6		
	Field Wildcat		
	County Logan	State	Kansas
15-109-20879-00-00	Location	3355' FEL & 330' FSL	
	Sec: 6	Twp: 14 S	Rge: 32 W
	Permanent Datum	Ground Level	Elevation 2866
	Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum
	Drilling Measured From	From Kelly Bushing	K.B. 2876 D.F. 2866 G.L. 2866
Date		4/10/2010	
Run Number		Two	
Depth Driller		4600	
Depth Logger		4601	
Bottom Logged Interval		4600	
Top Log Interval		3400	
Casing Driller		8.625 @ 309	
Casing Logger		309	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		6.000	
Density / Viscosity		9.2 54	
pH / Fluid Loss		10.5 7.2	
Source of Sample		Flowline	
Rm @ Meas. Temp		.37 @ 54	
Rmf @ Meas. Temp		.28 @ 54	
Rmc @ Meas. Temp		.50 @ 54	
Source of Rmf / Rmc		Charts	
Rm @ BHT		.16 @ 124	
Operating Rig Time		4 1/2 Hrs	
Max Rec. Temp. F		124	
Equipment Number		17	
Location		Hays	
Recorded By		Mike Garrison	
Witnessed By		Steve Murphy	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Oakley Ks.,
S to Mustang Rd.,
3 W, 1S, 1/2 W Into

Database File: c:\warrior\data\mak-j_b. h. huck no. 14-6\mak-jhd.db
Dataset Pathname: dil\makjstk
Presentation Format: micro
Dataset Creation: Sat Apr 10 07:07:49 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1.2 is		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

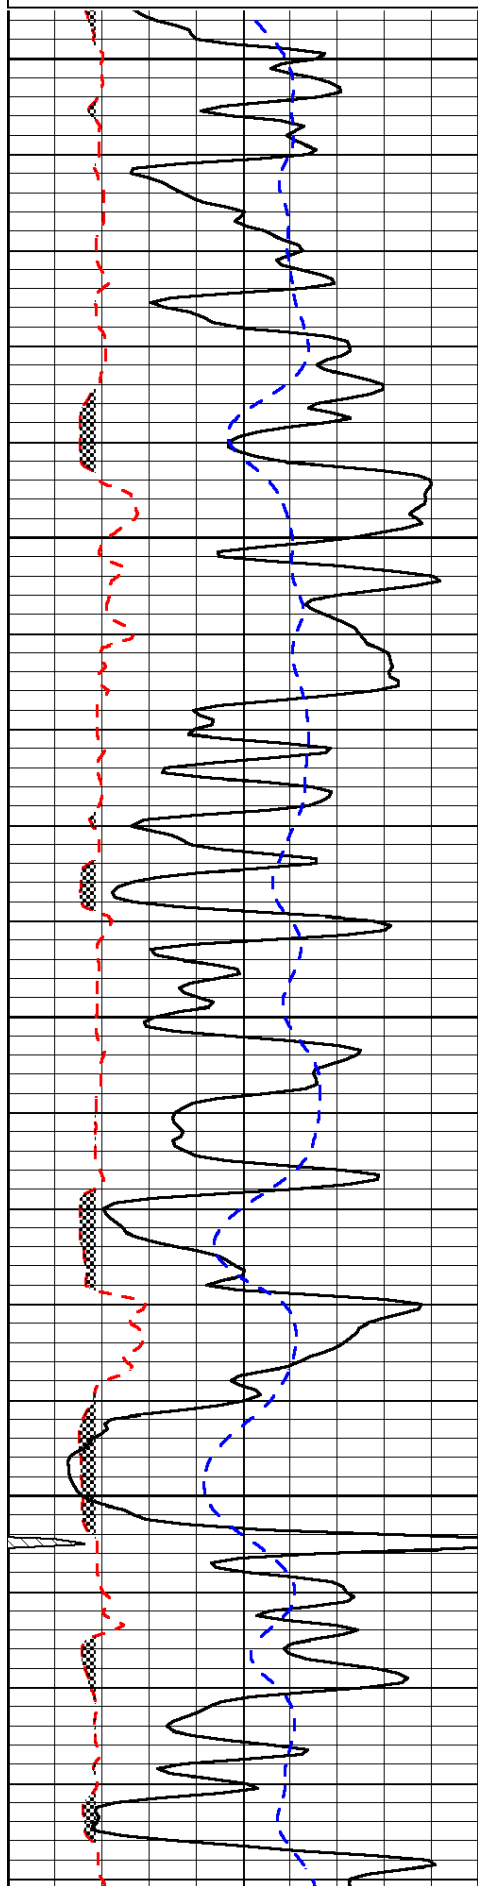

3400


3450

3500

3550

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


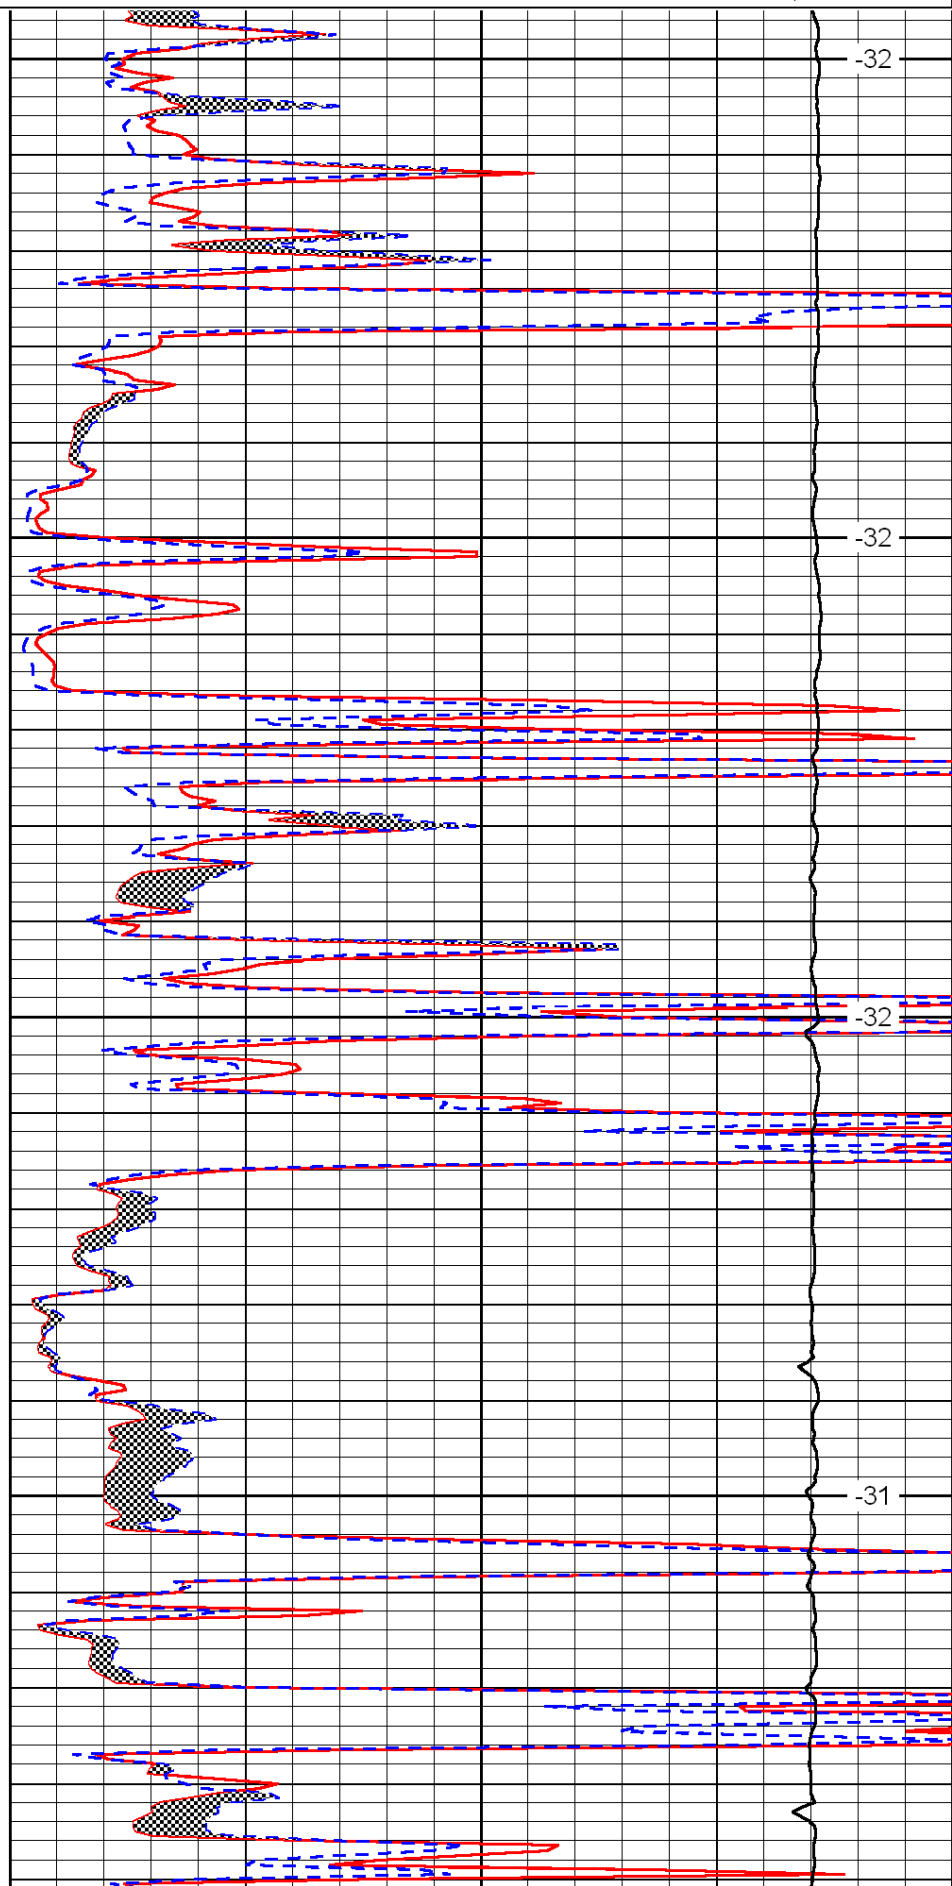



-32

-32

-32

-31

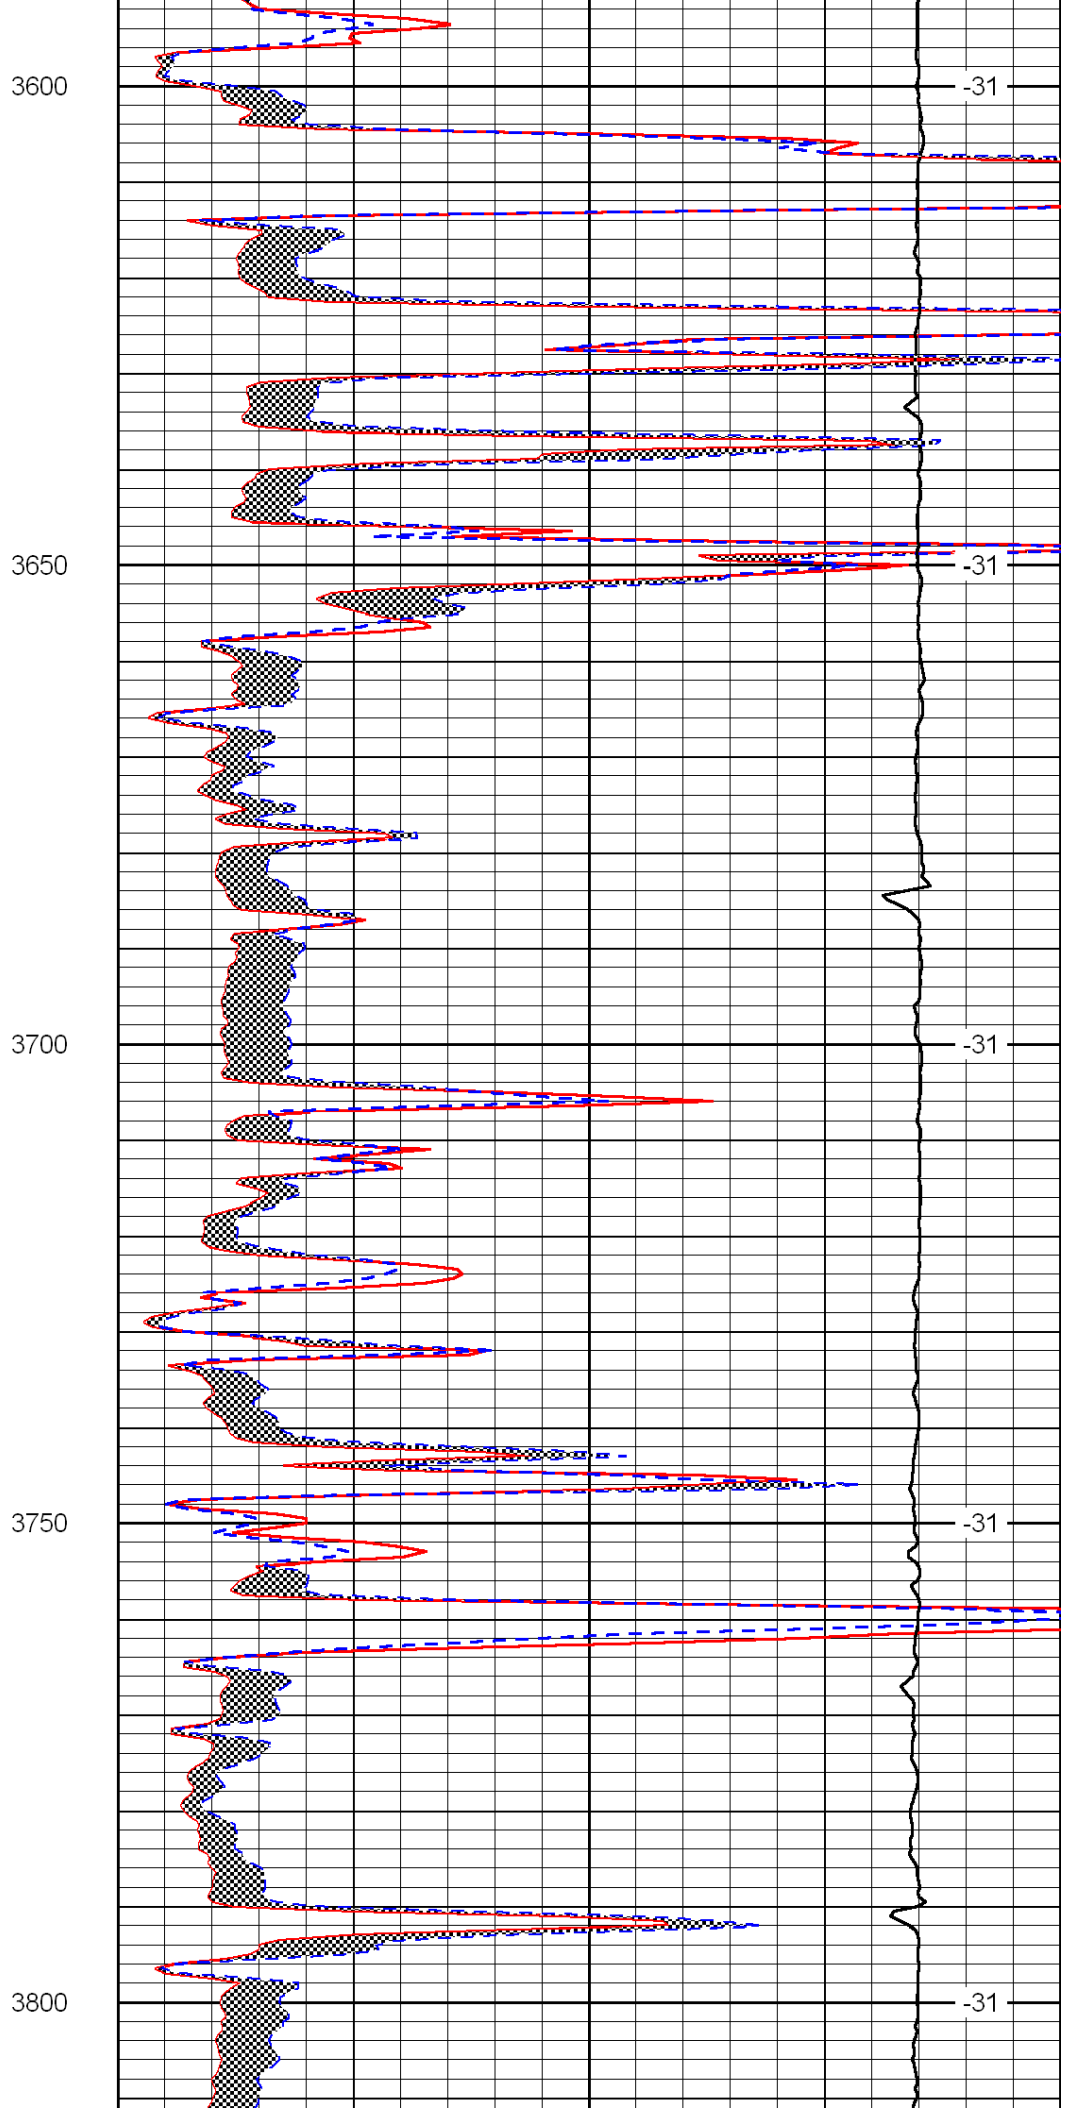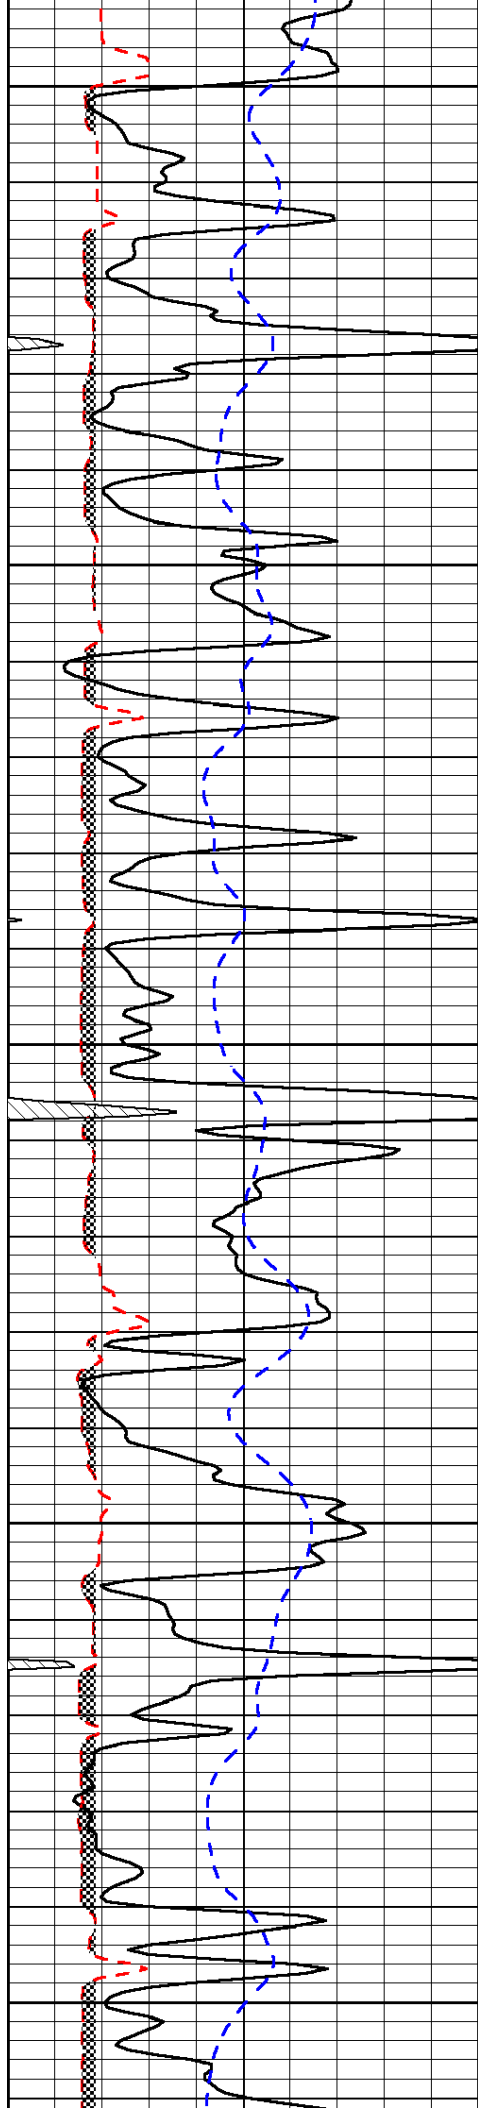

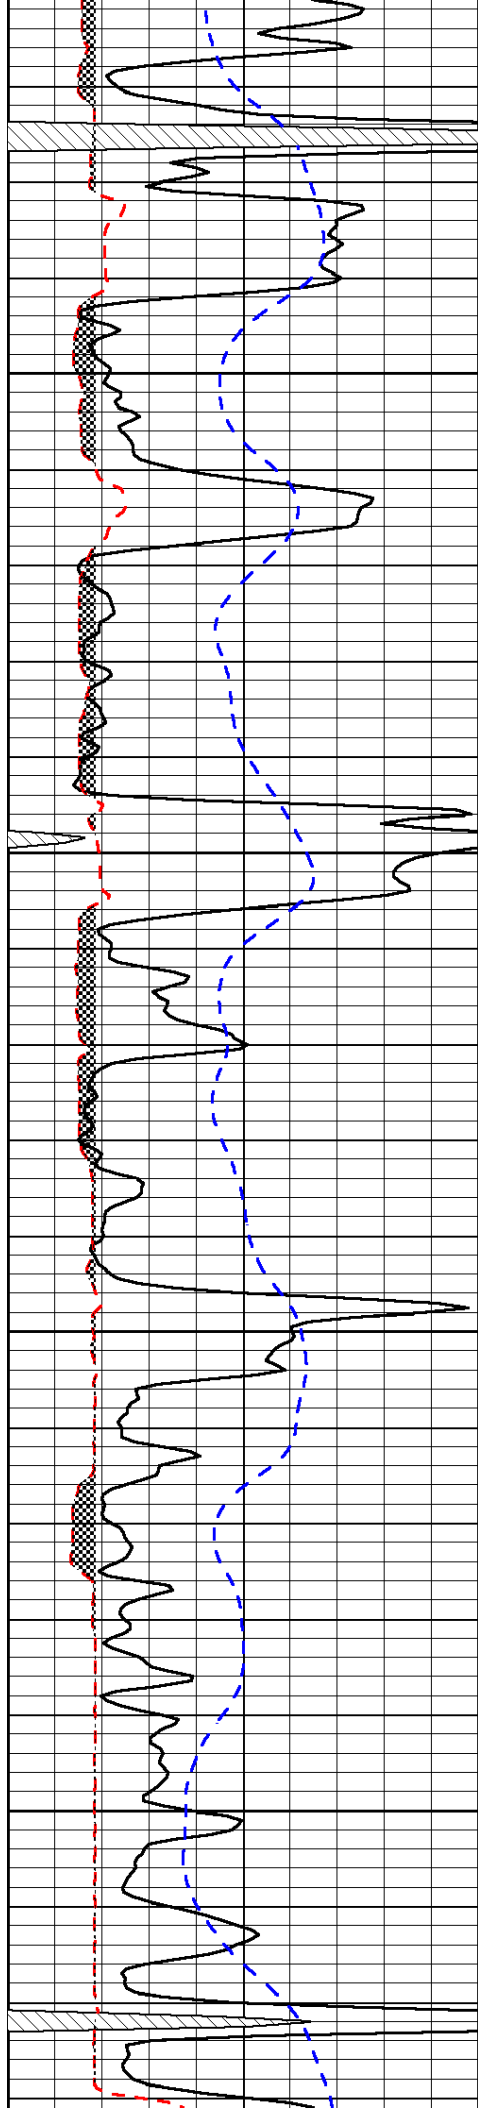



3850

3900

3950

4000

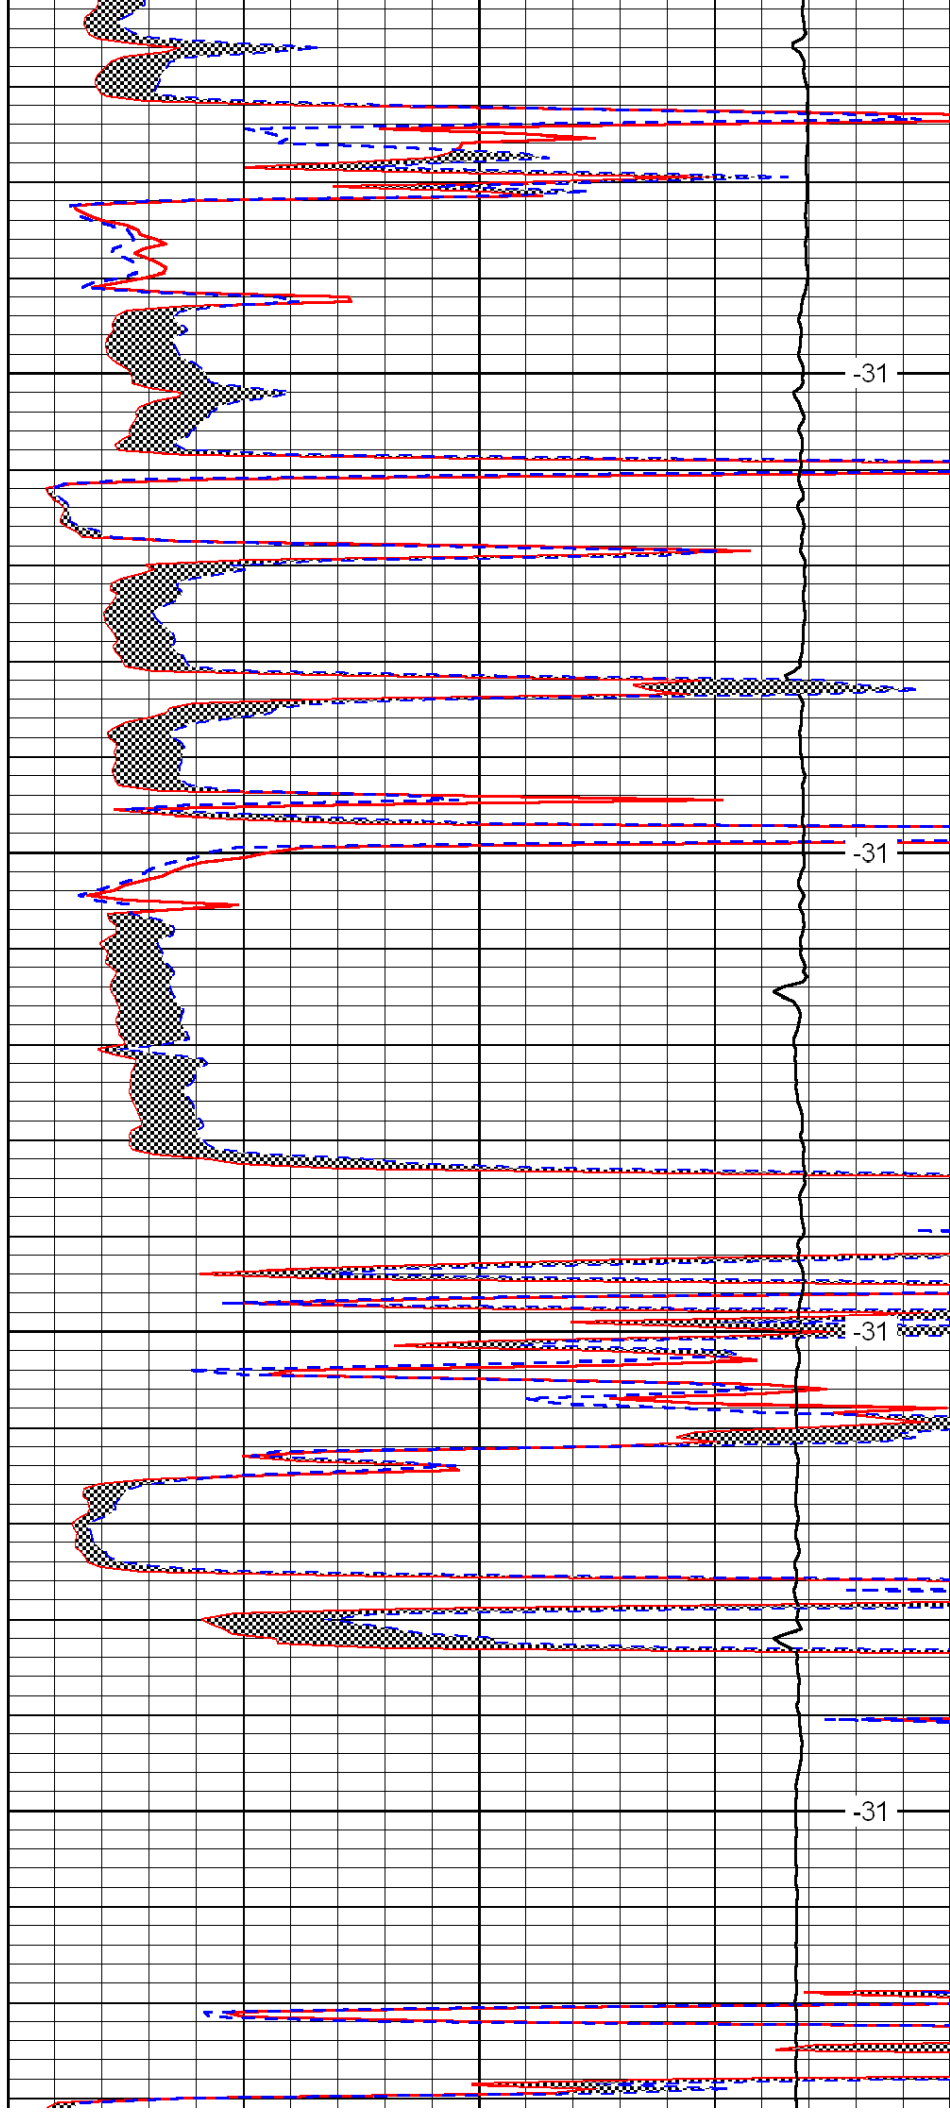

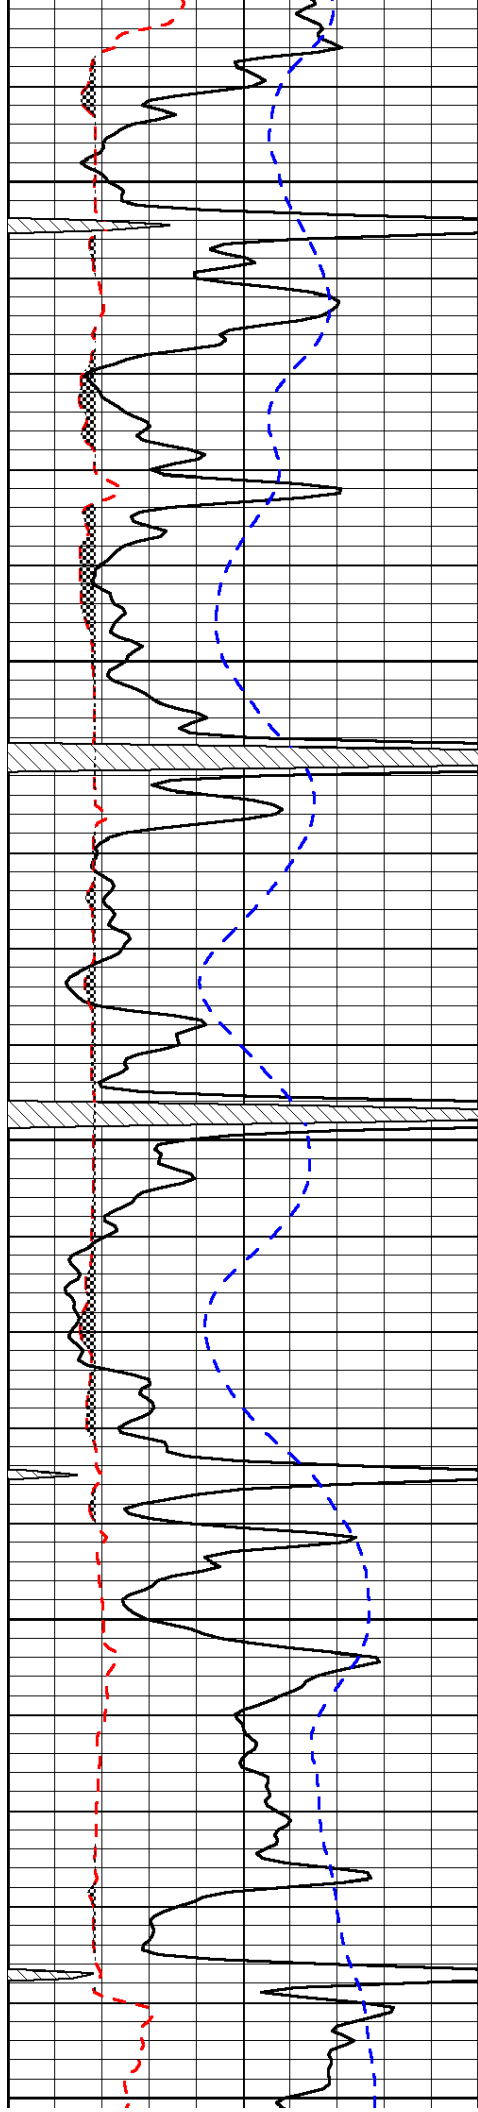


4050


4100

4150

4200

4250

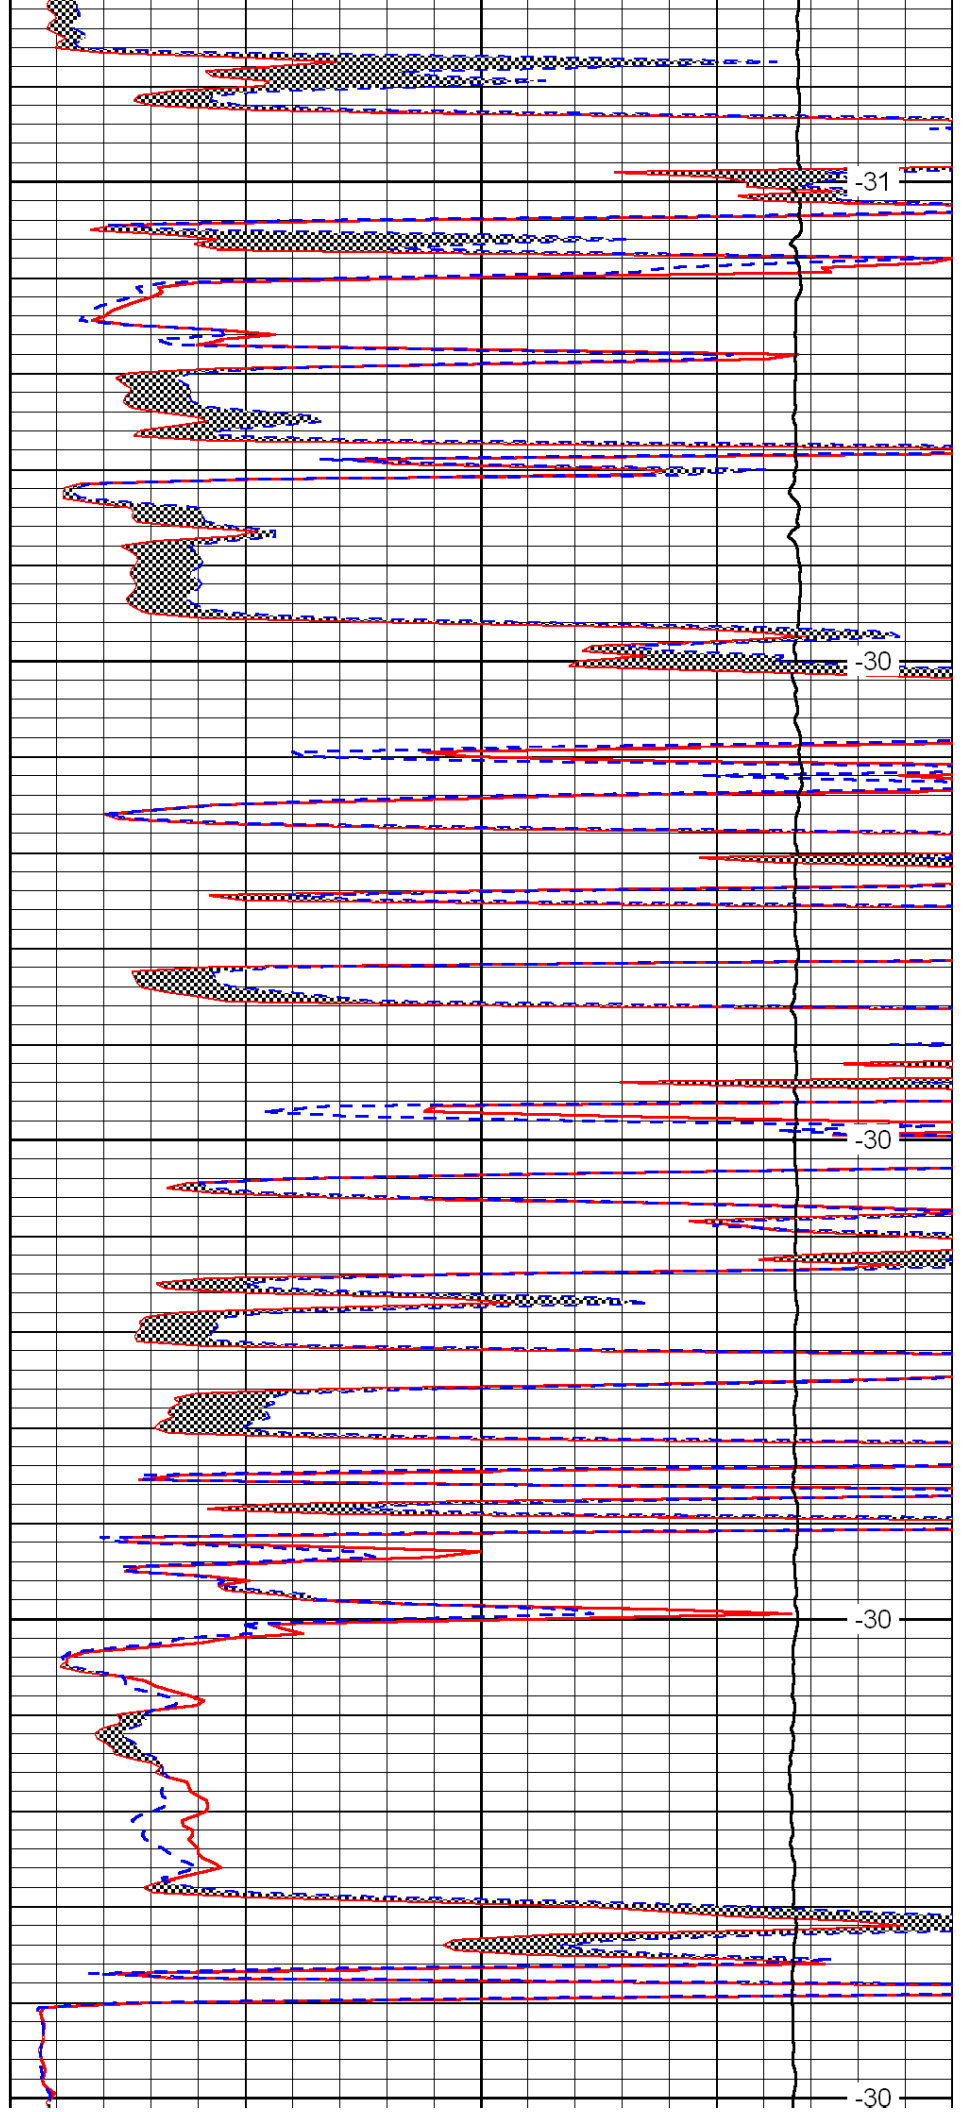

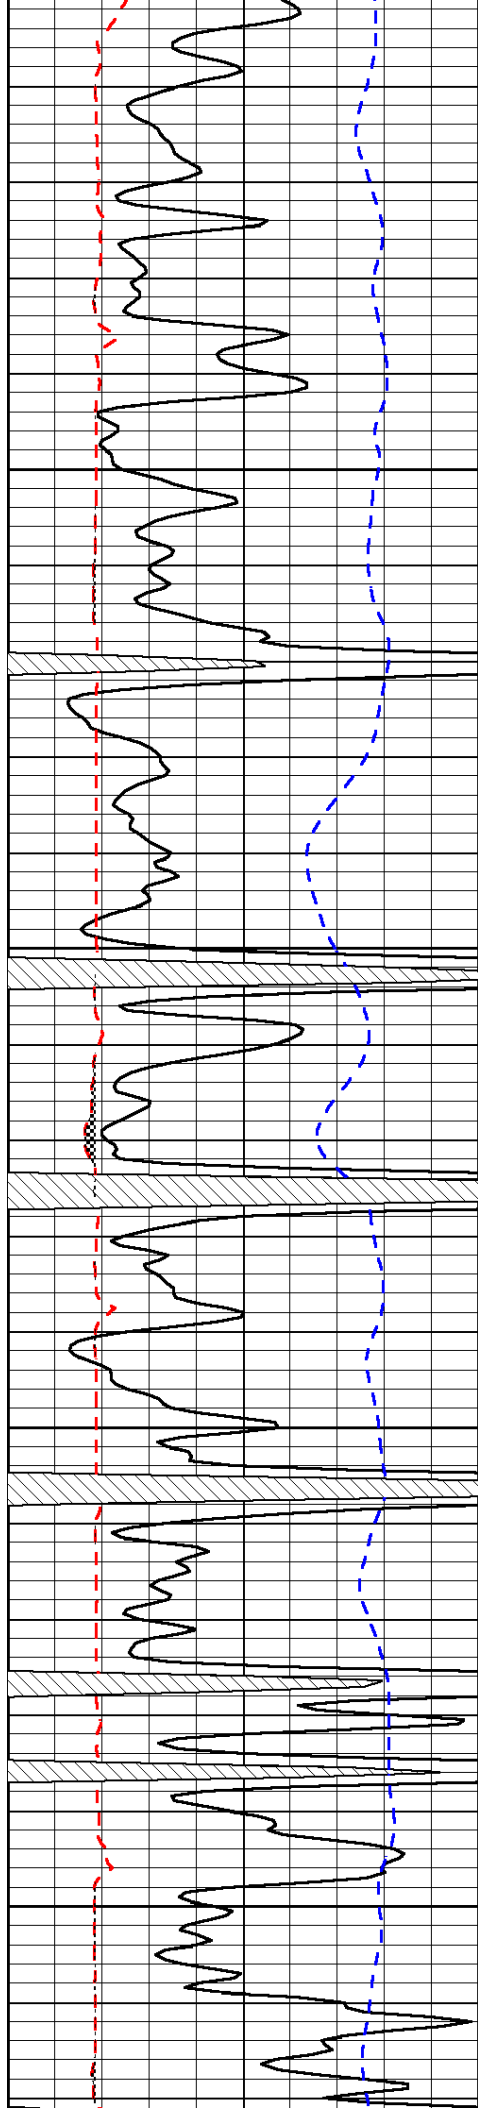



4300

4350

4400

4450

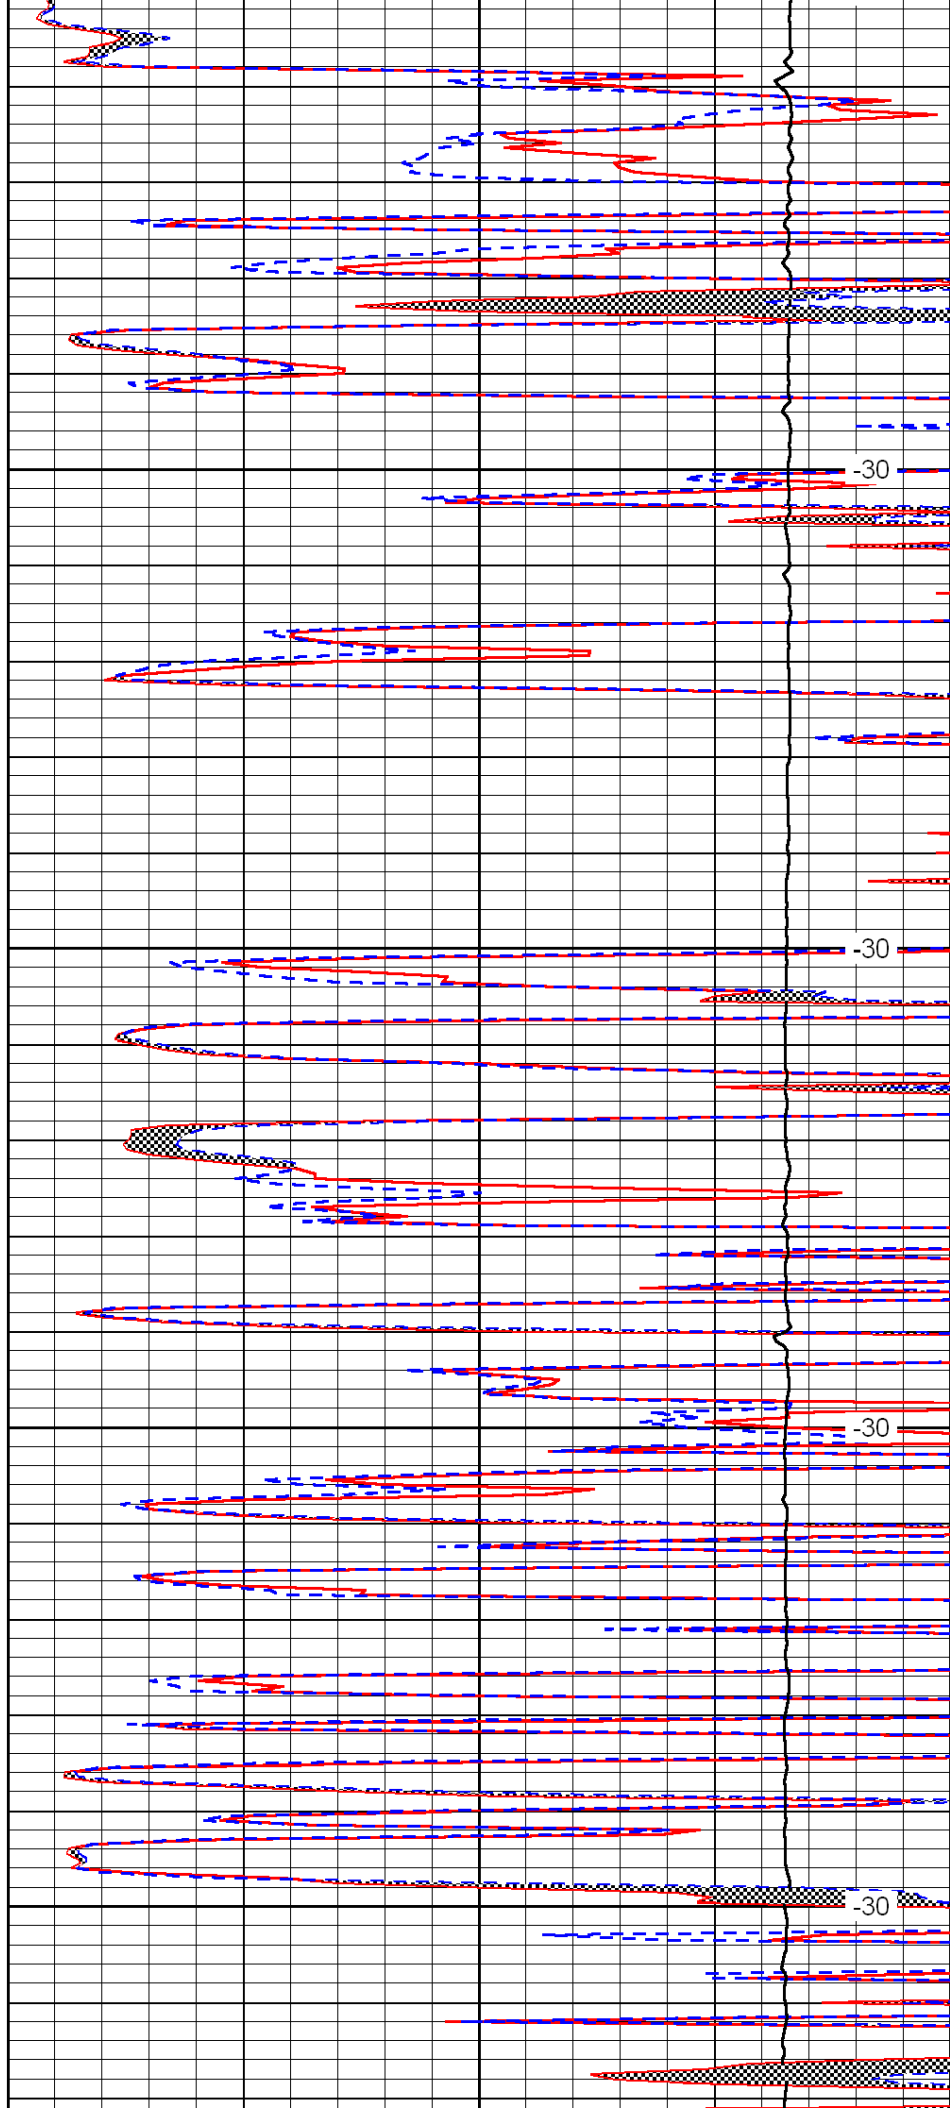

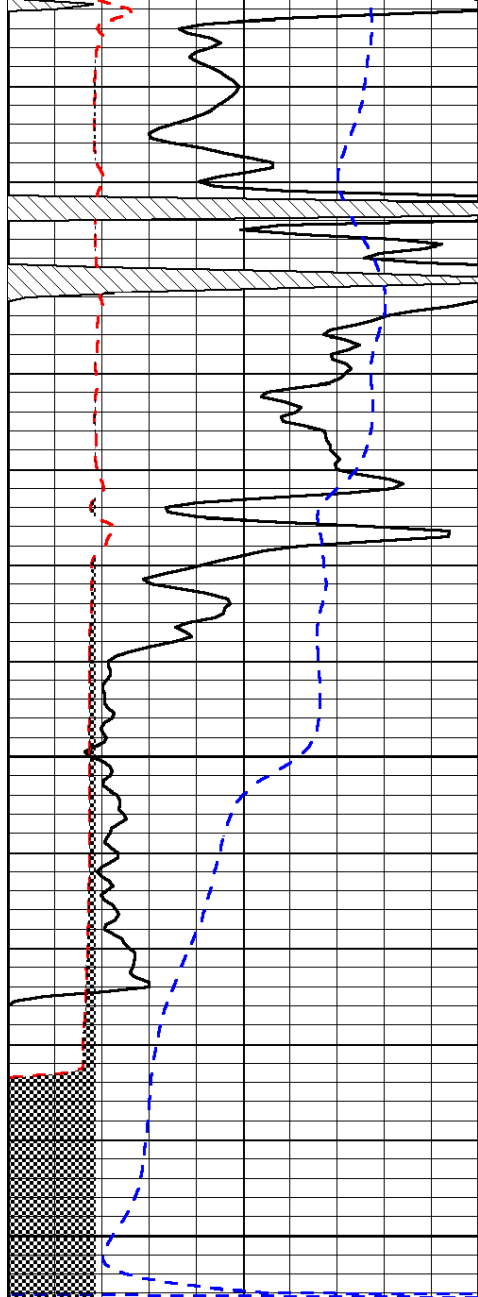


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4500

4550

4600

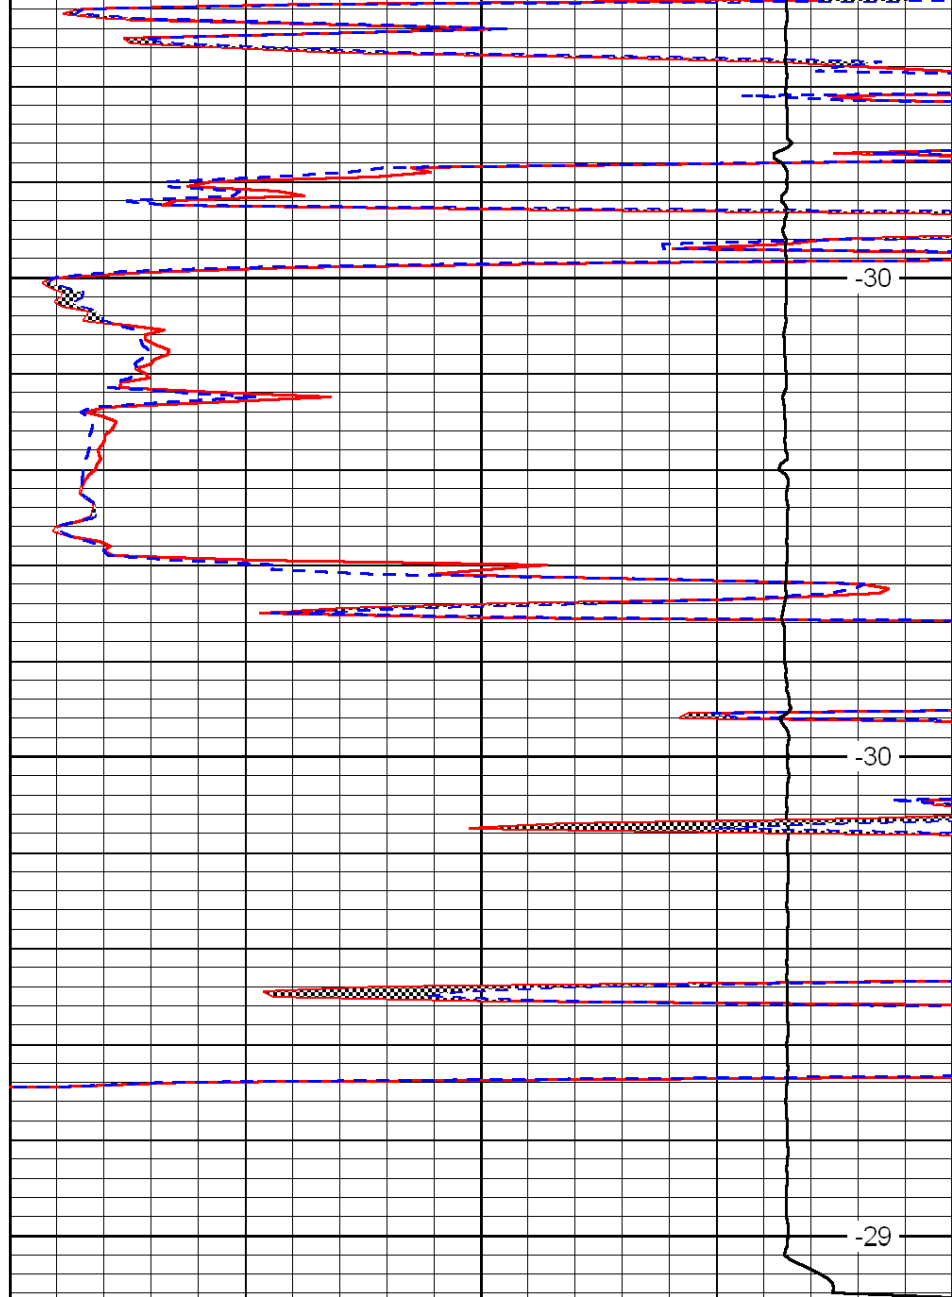

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD