



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-047-21,590-00-00		Company McCoy Petroleum Corporation	
Well Sturgeon 'A' No. 2-20		Field Case	
County Edwards		State Kansas	
Location W/2 SE NW 1980' FNL & 1650' FWL		Other Services CNL/CDL DIL	
Sec: 20 Twp: 26 S Rge: 18 W		Elevation K.B. 2206 D.F. 2193 G.L. 2193	
Permanent Datum Ground Level		Elevation 2193	
Log Measured From Kelly Bushing		13 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			
Date	3/24/2010		
Run Number	Two		
Depth Driller	4443		
Depth Logger	4446		
Bottom Logged Interval	4445		
Top Log Interval	2400		
Casing Driller	8.625 @ 310		
Casing Logger	309		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	5.800		
Density / Viscosity	9.05 41		
pH / Fluid Loss	11.0 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.3 @ 55		
Rmf @ Meas. Temp	.23 @ 55		
Rmc @ Meas. Temp	.41 @ 55		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.13 @ 122		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	122		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Tim Priest		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Kinsley, S through correction curves, 1 S to blacktop, 1/2 E, S into

0	Gamma Ray	150
6	Micro Log Caliper	16
-200	SP (MV)	0

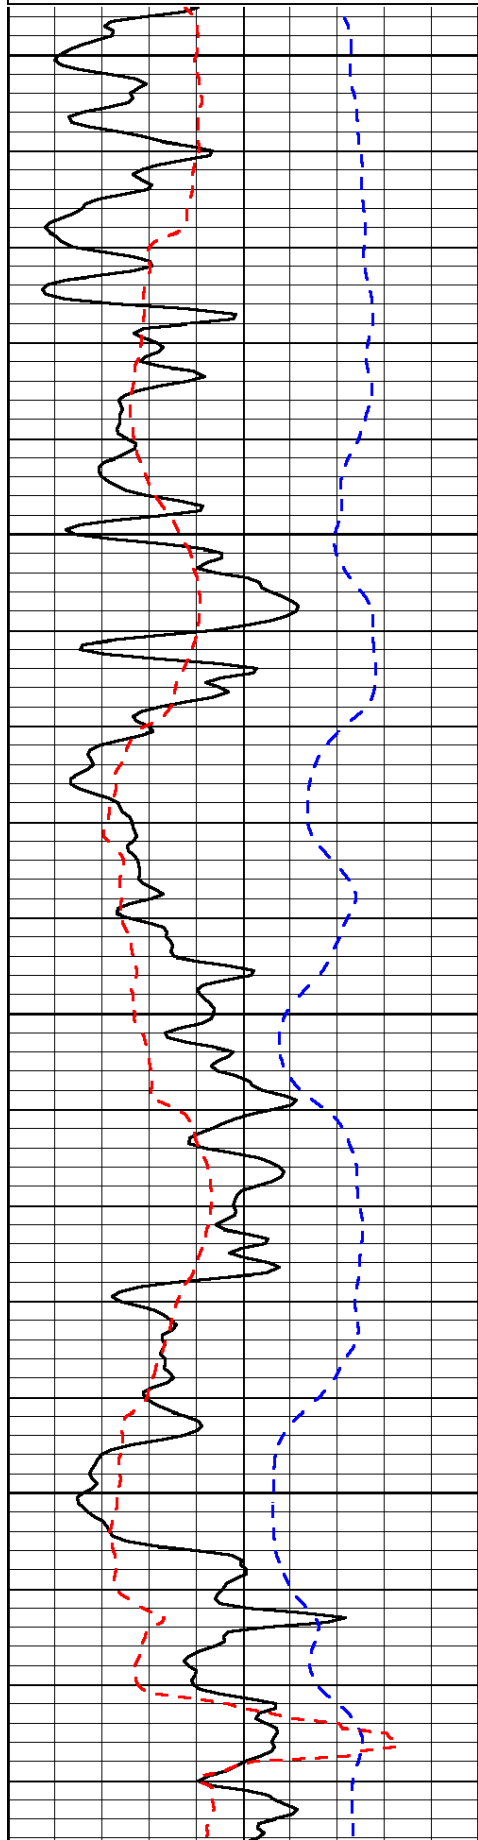

2400


2450

2500

2550

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

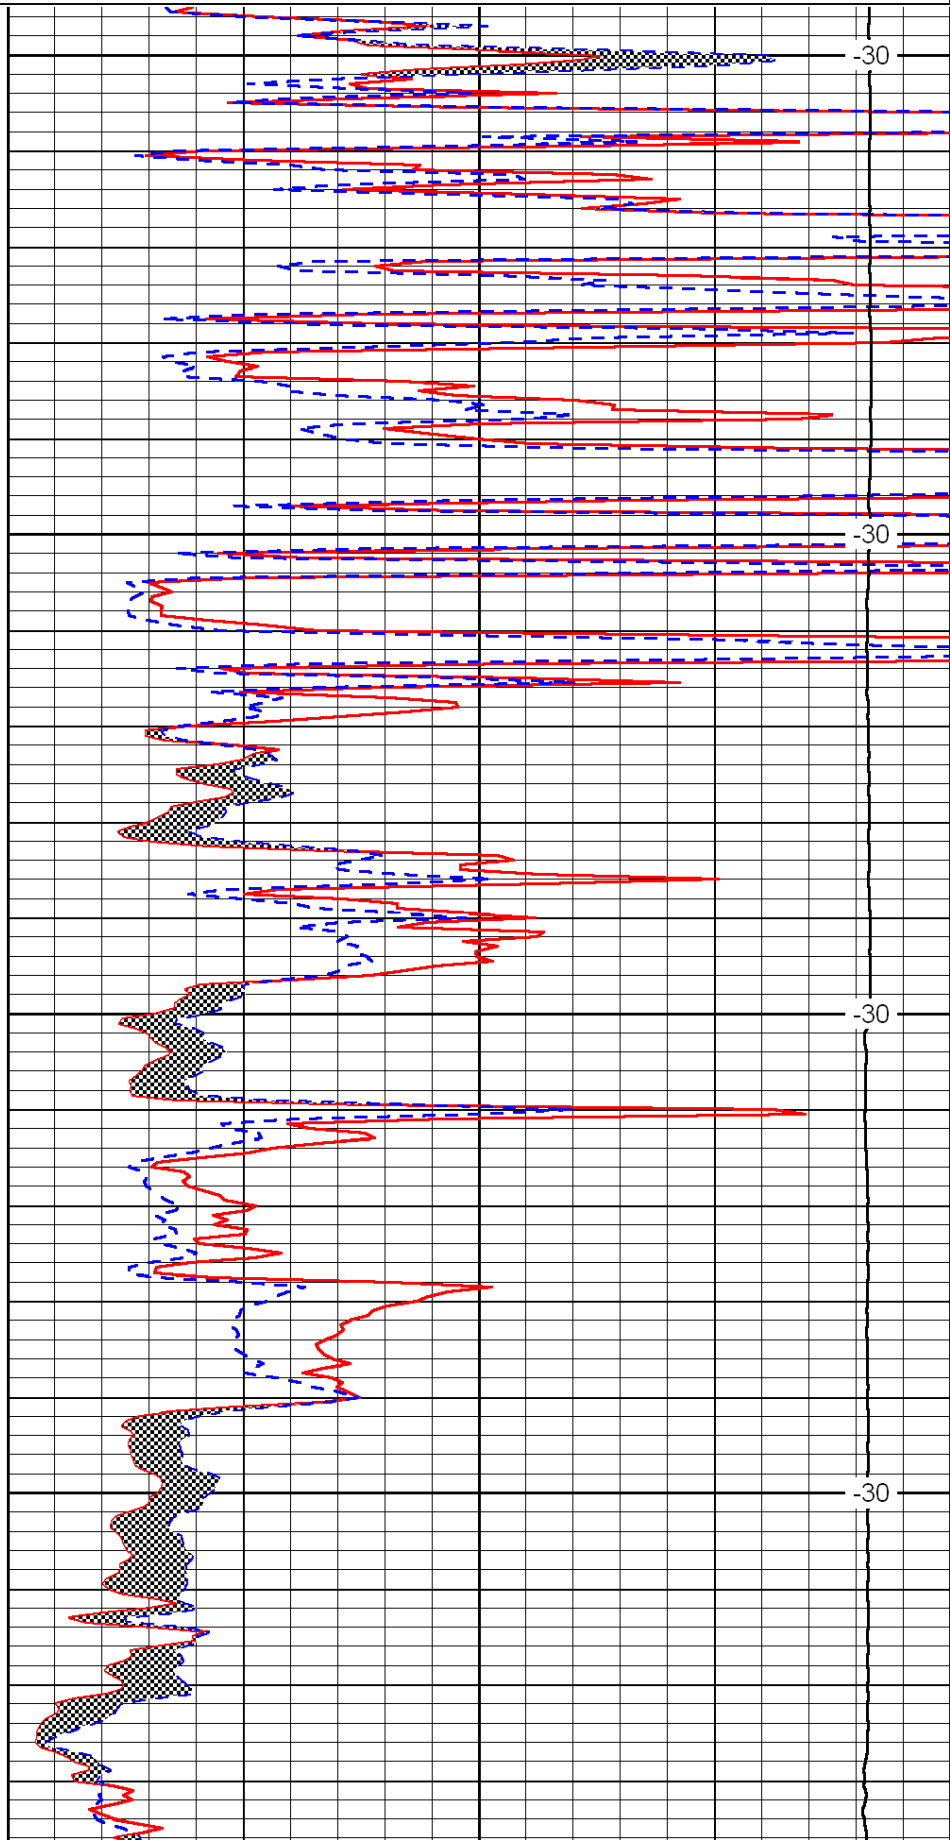


-30

-30

-30

-30

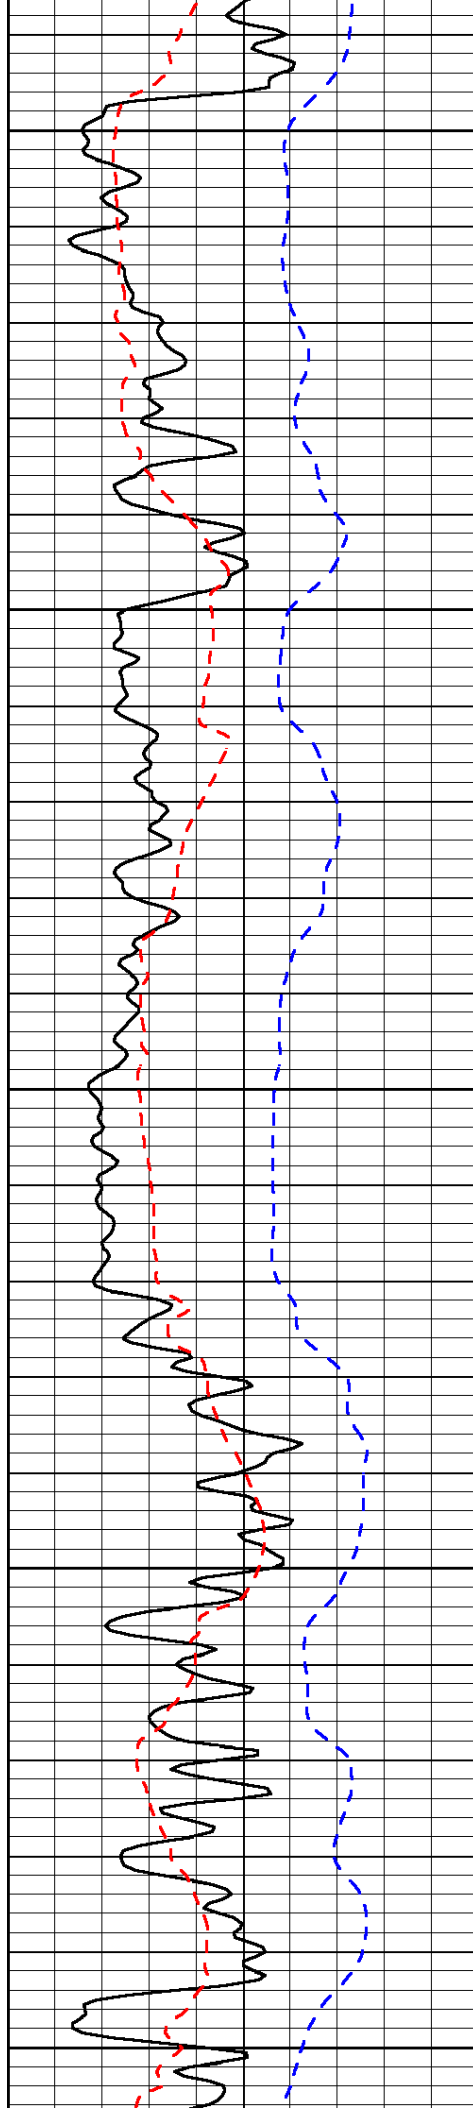


2600

2650

2700

2750

2800

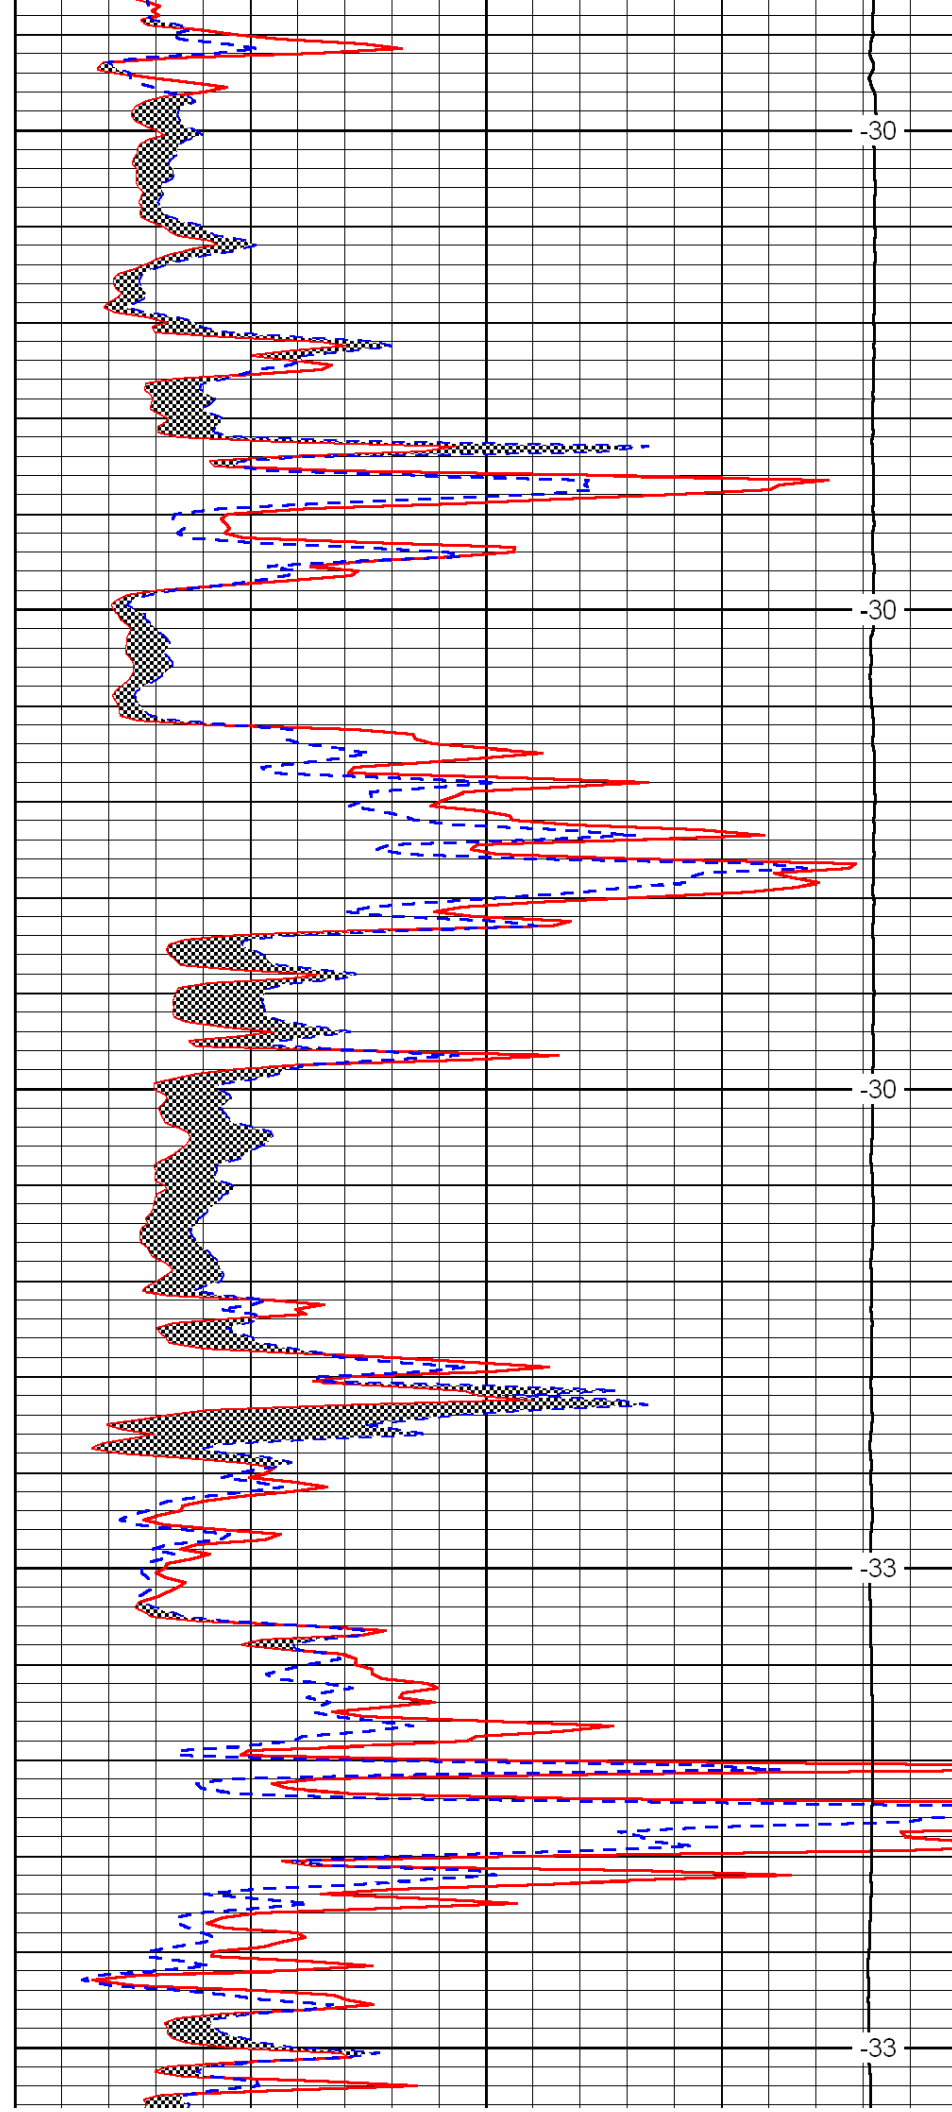


-30

-30

-30

-33

-33

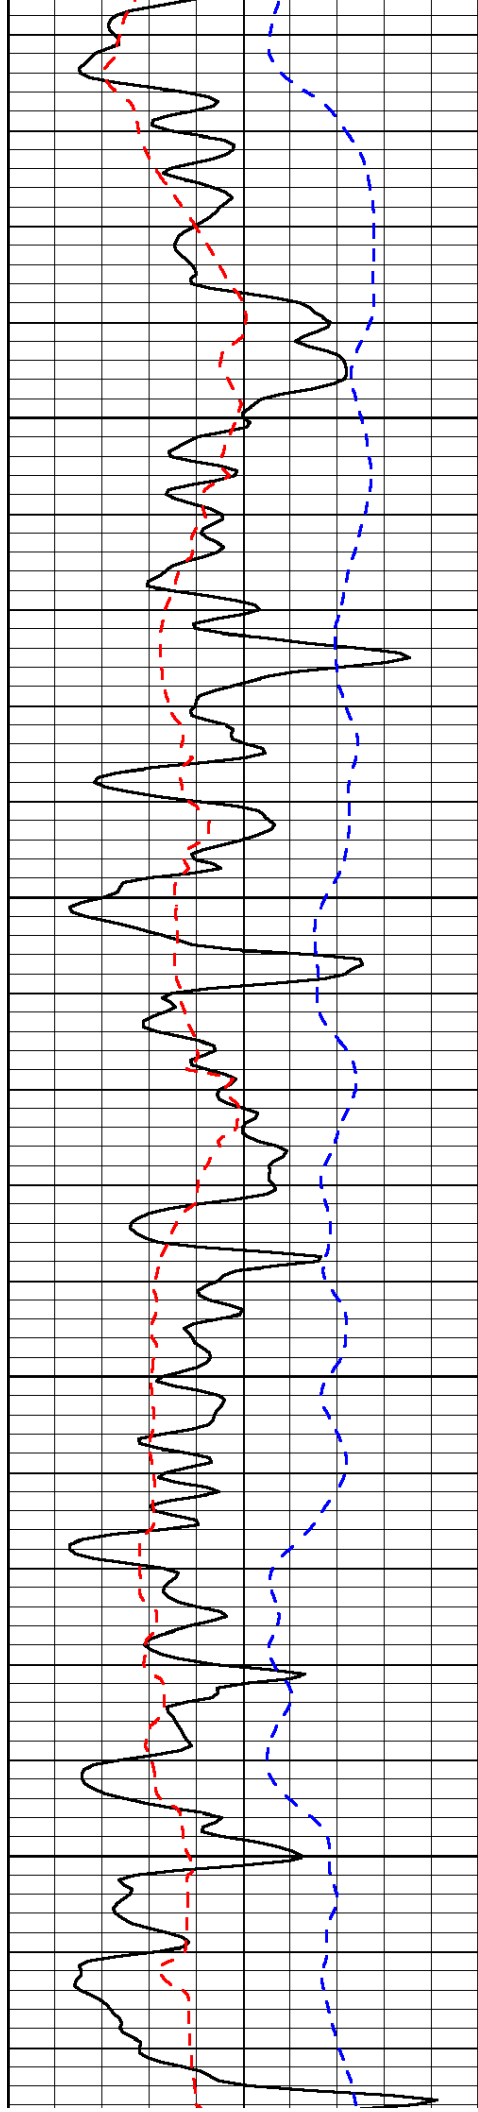


2850

2900

2950

3000

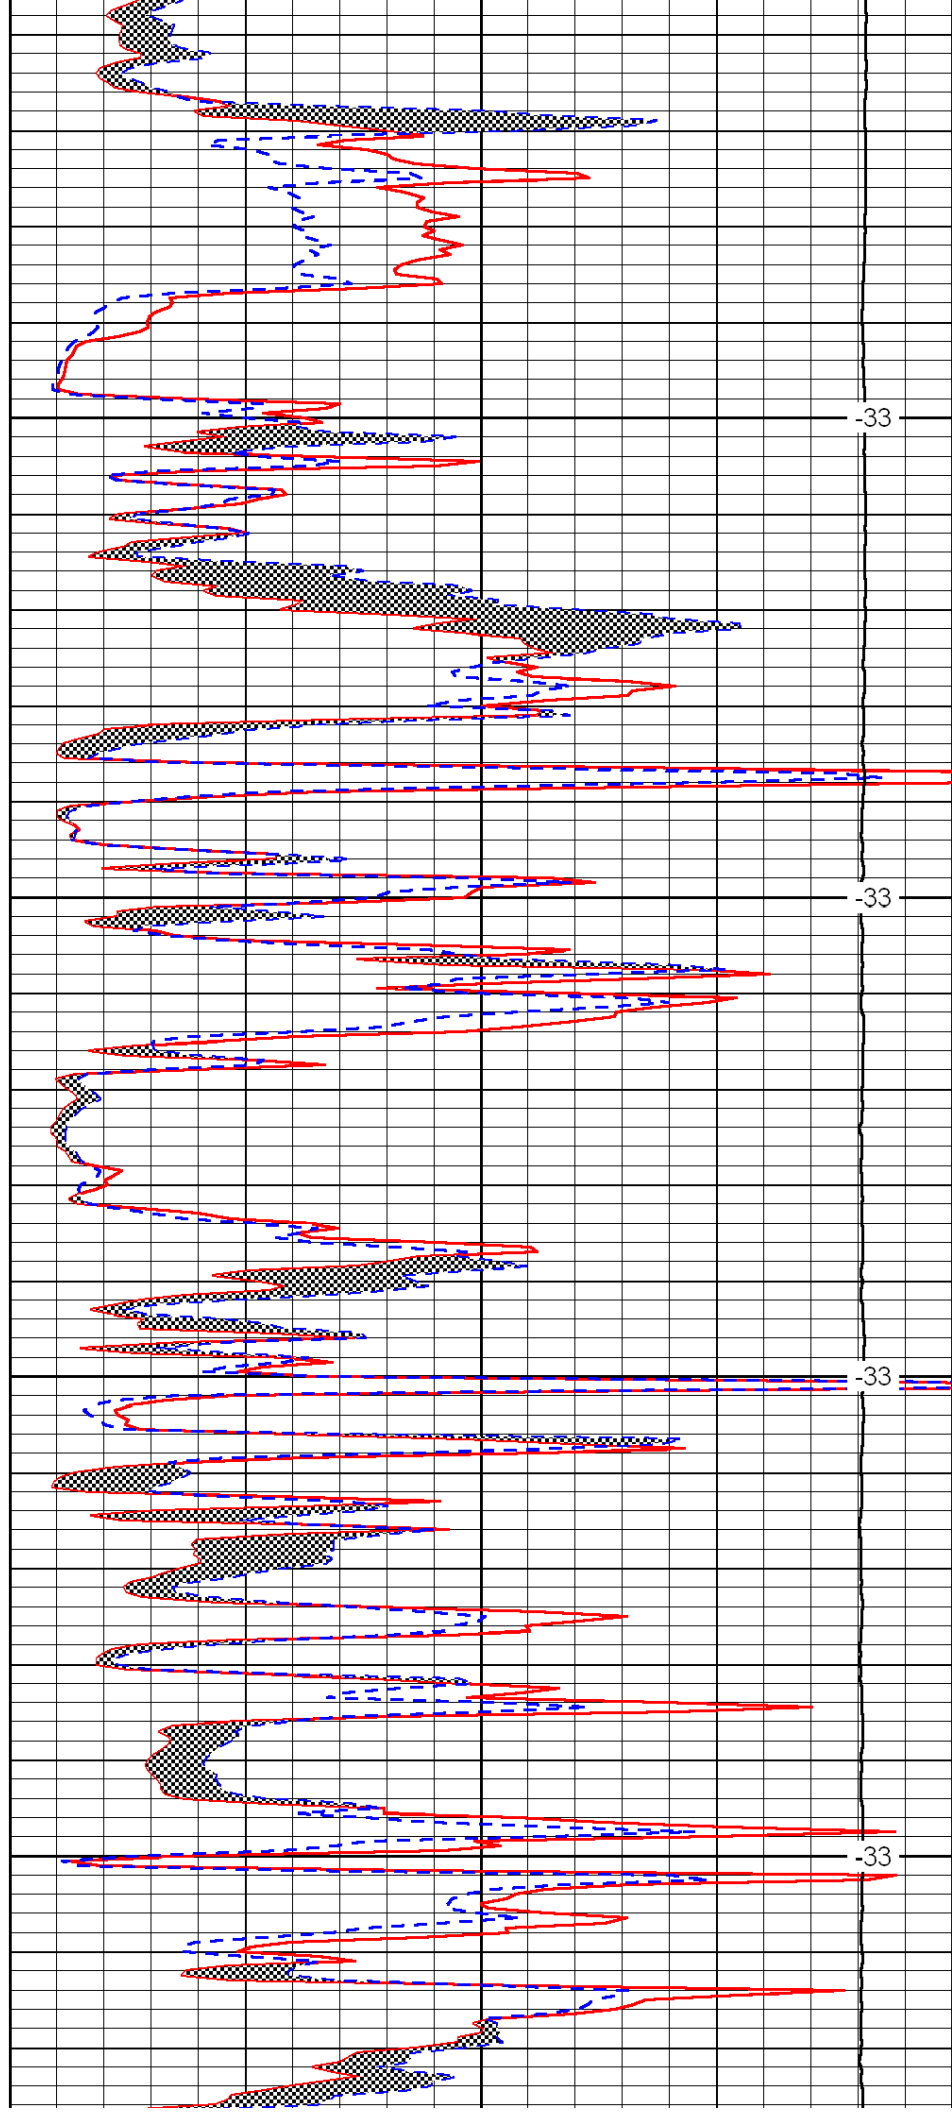


-33

-33

-33

-33

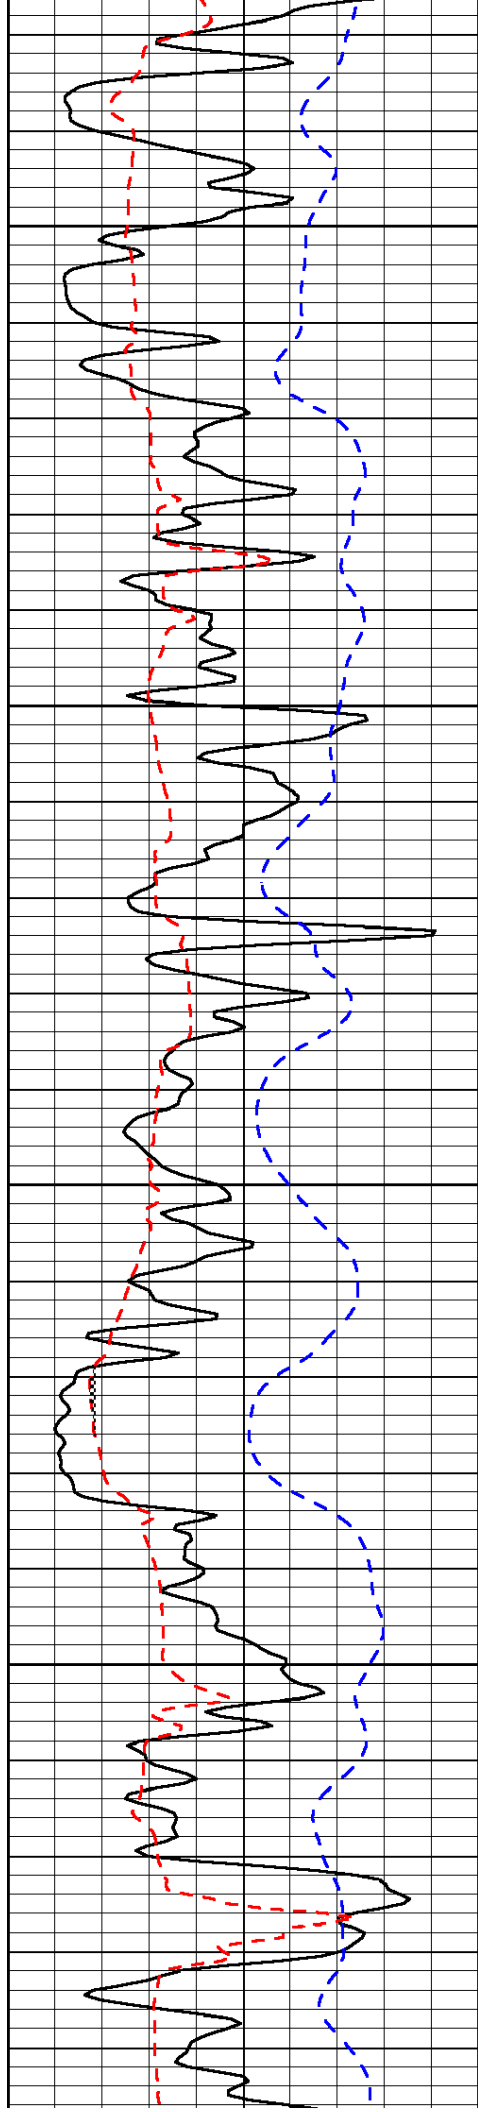




3050


3100

3150

3200

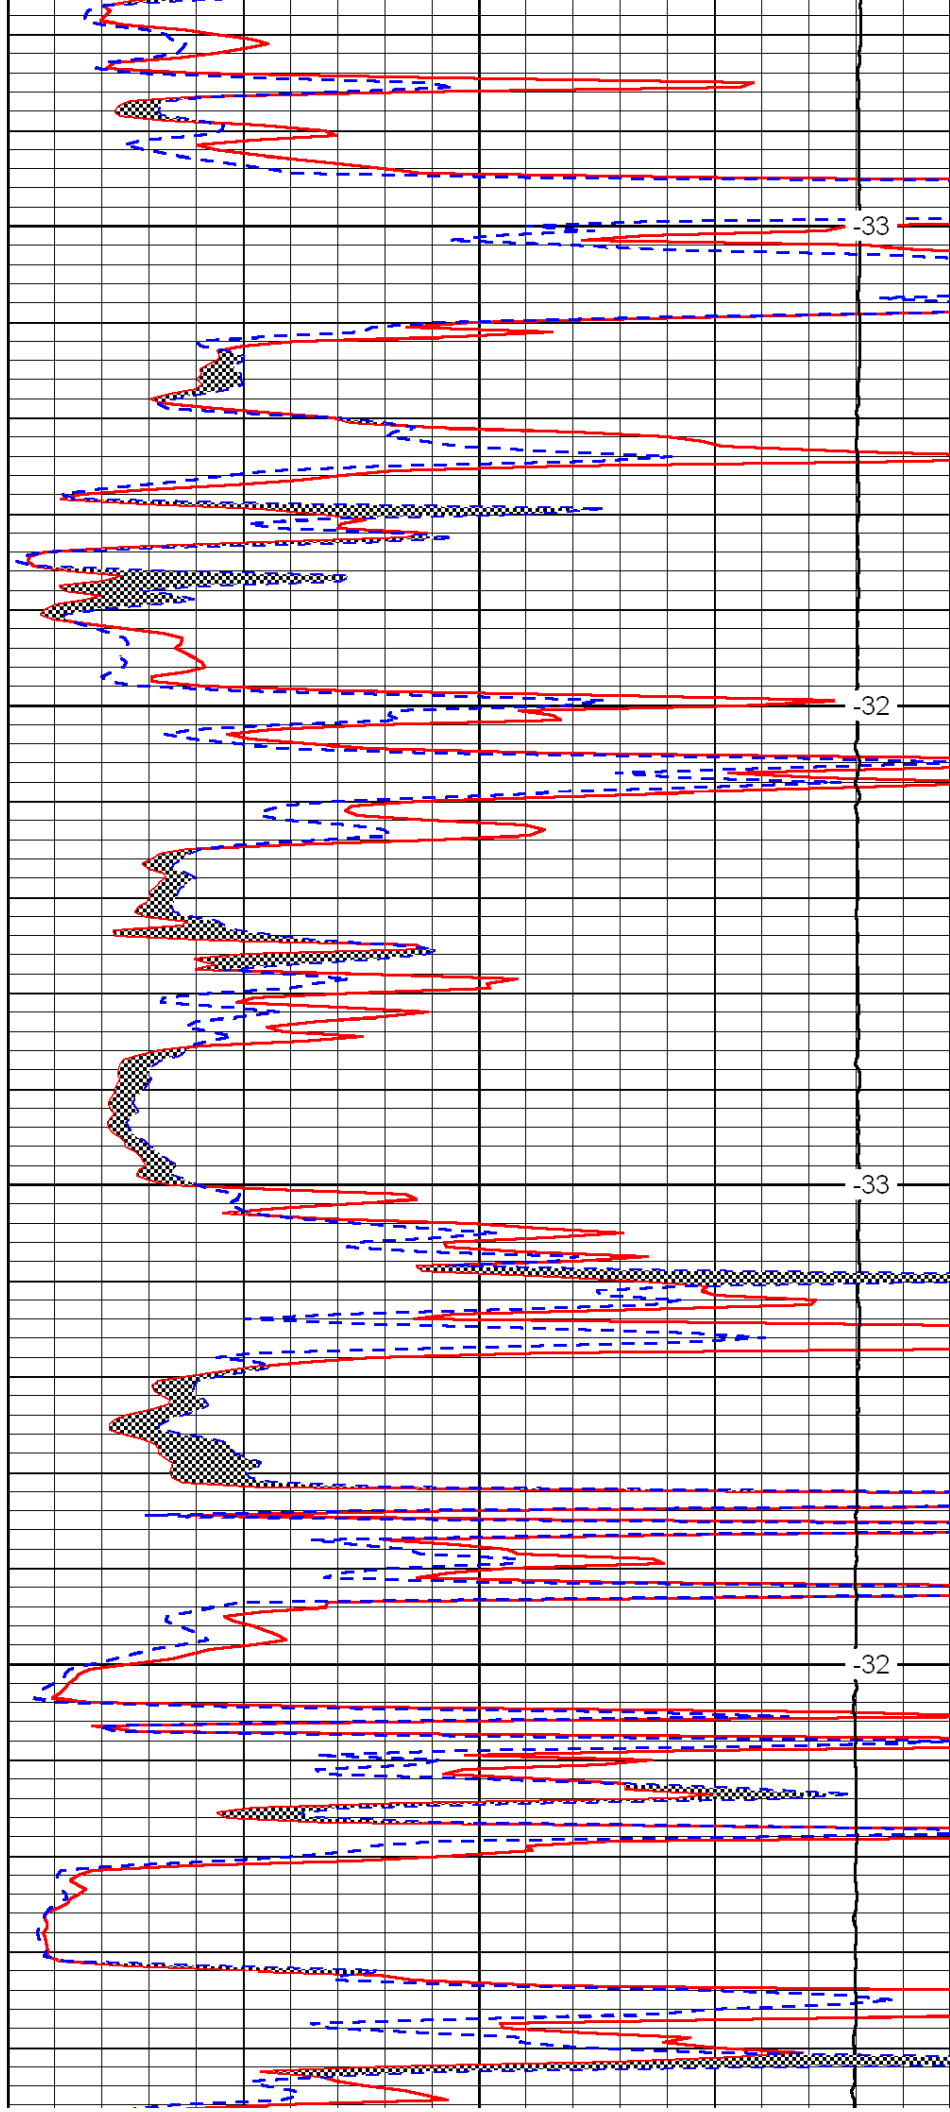

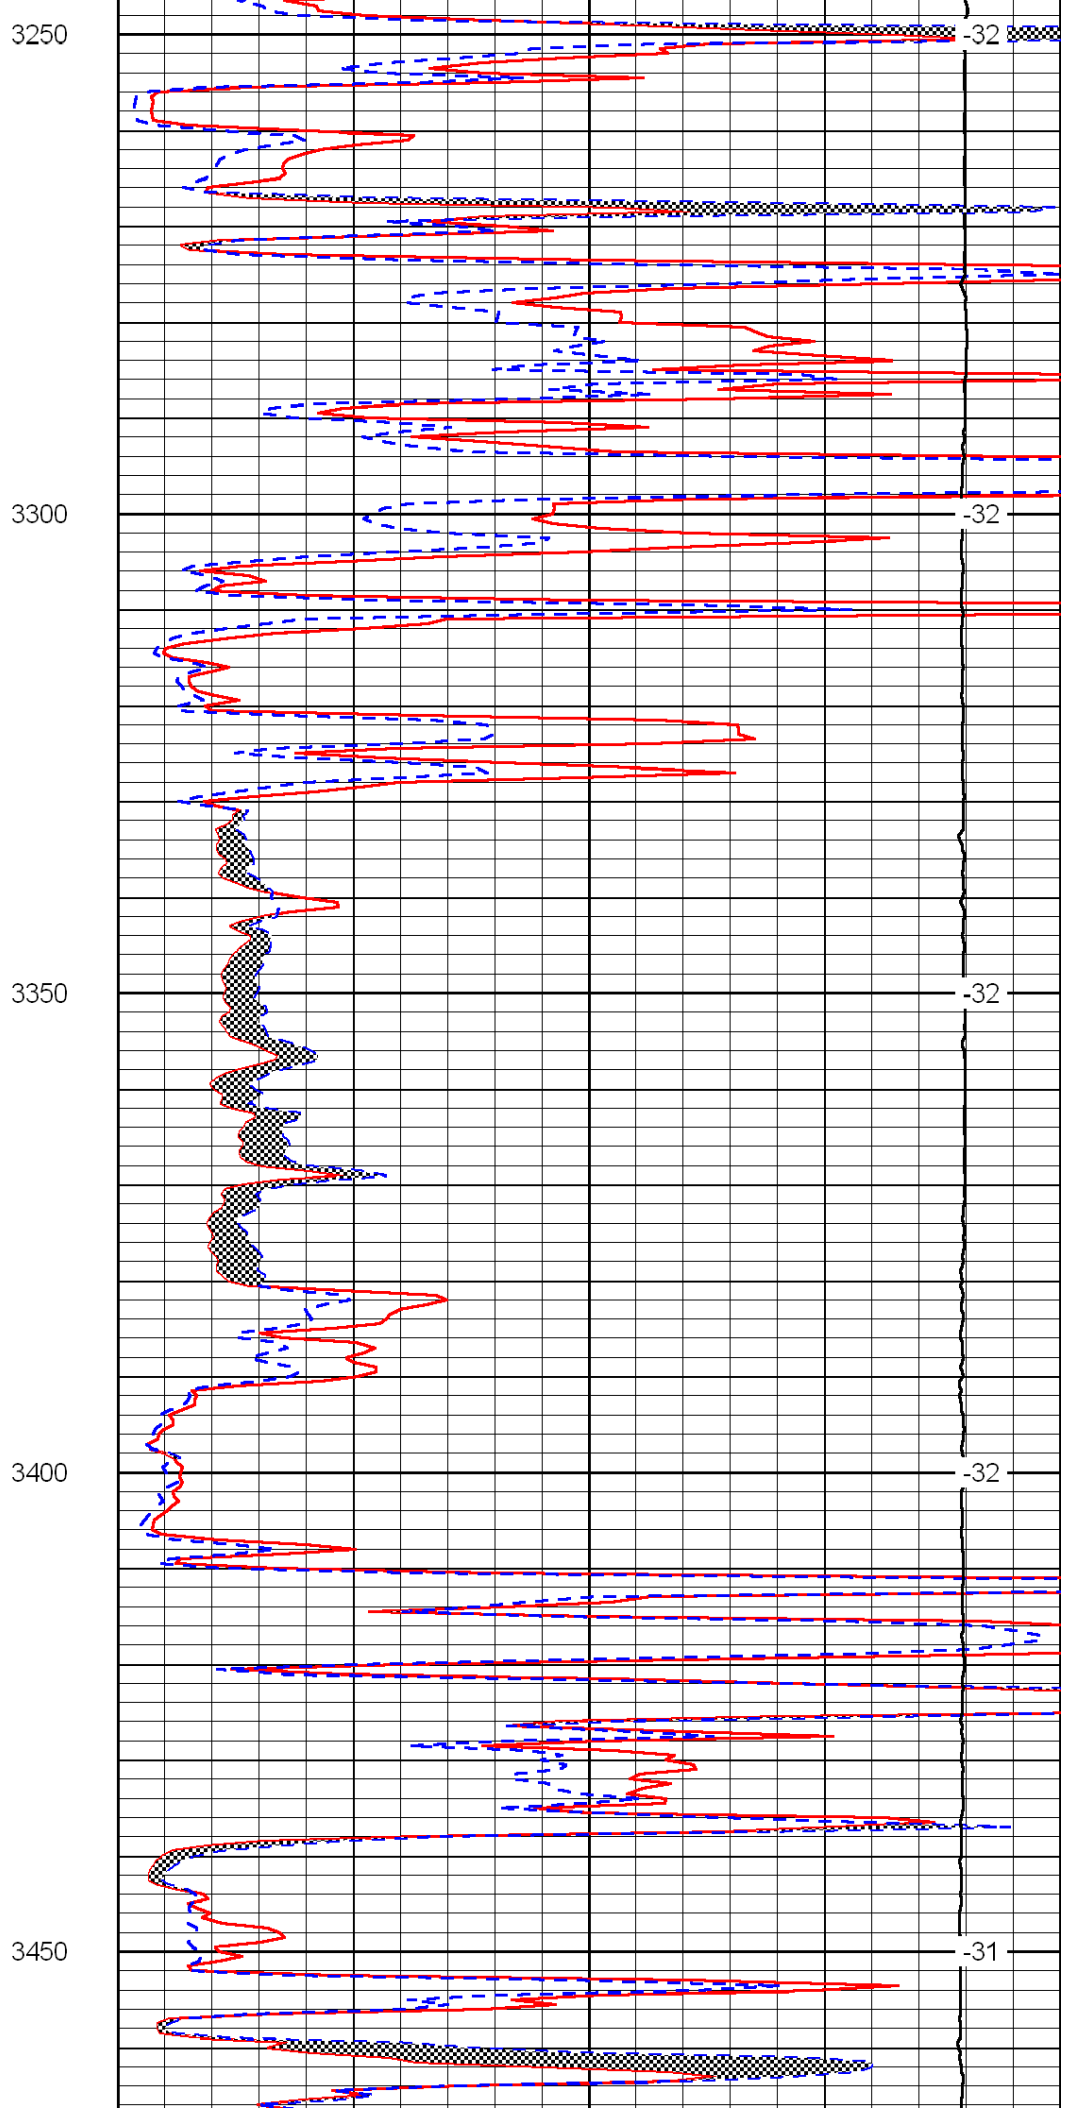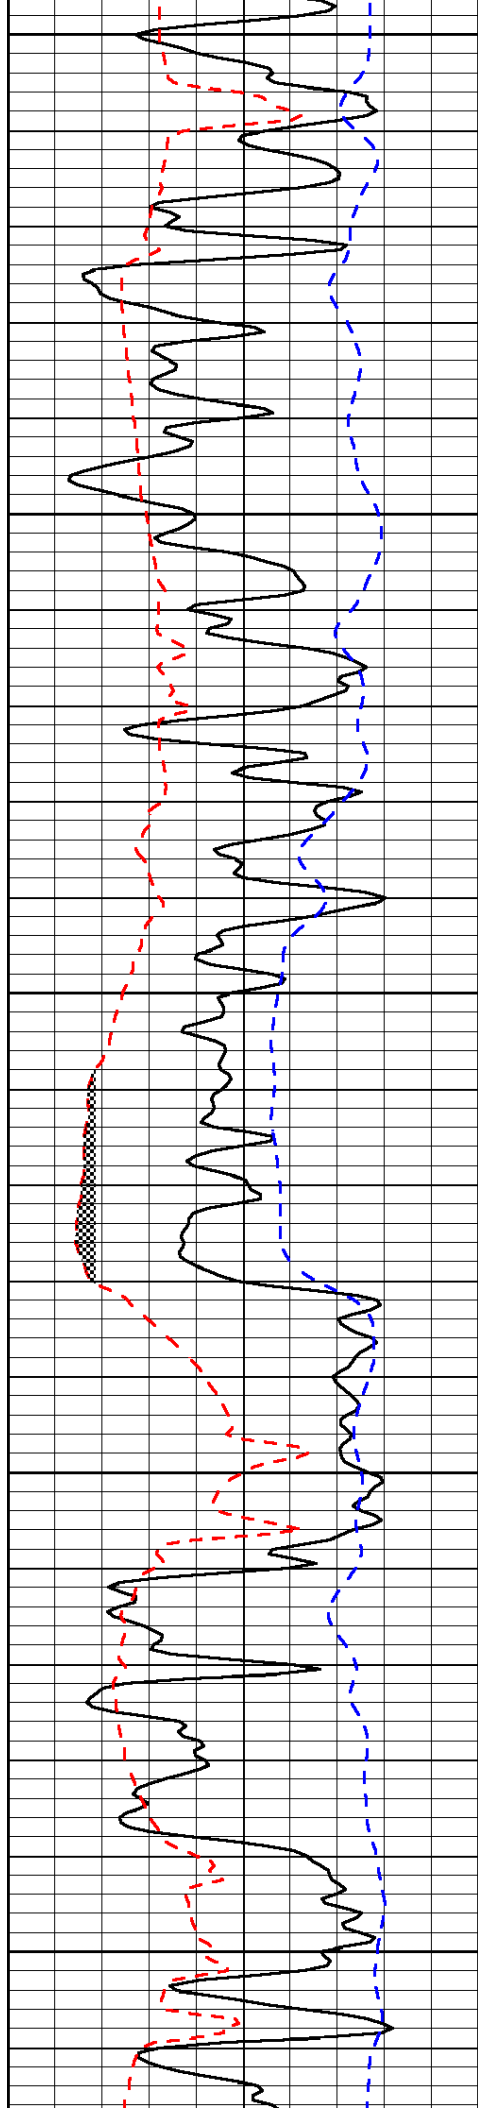

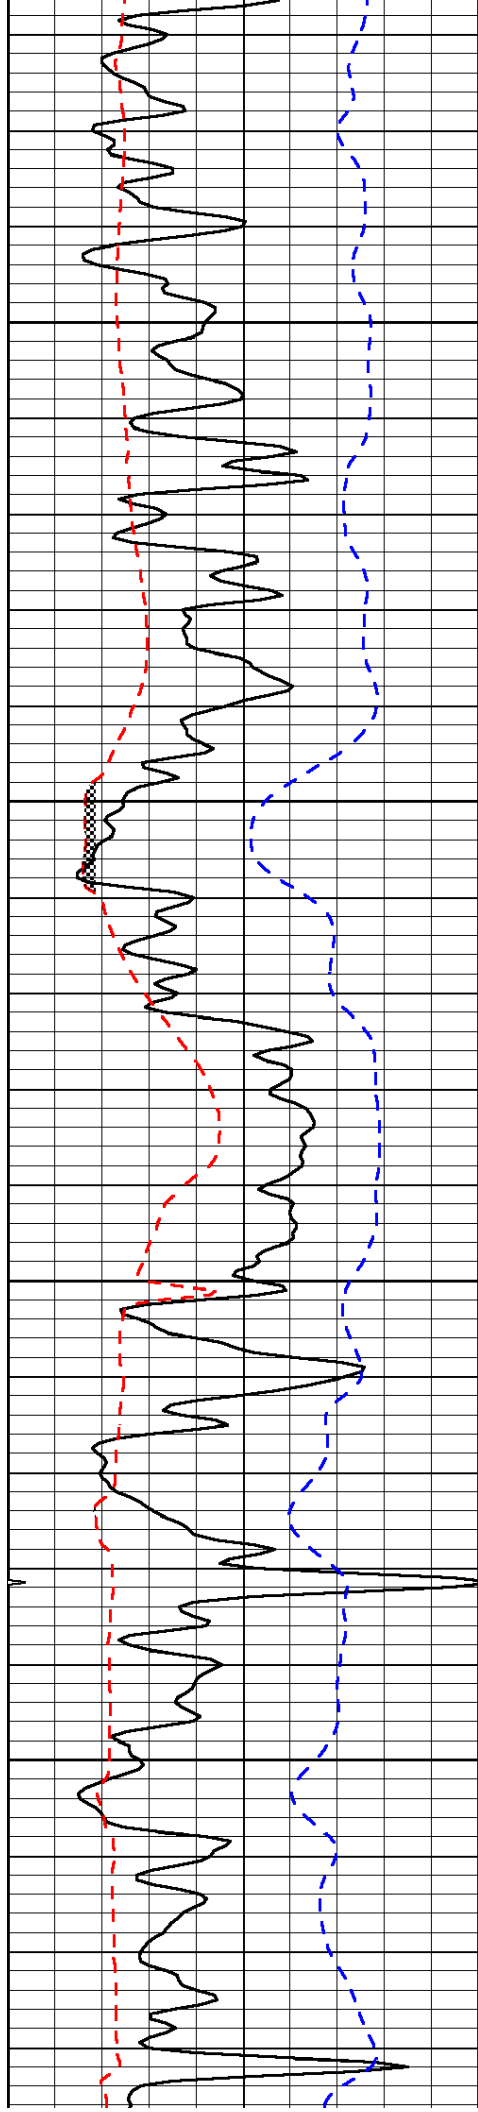



3500

3550

3600

3650

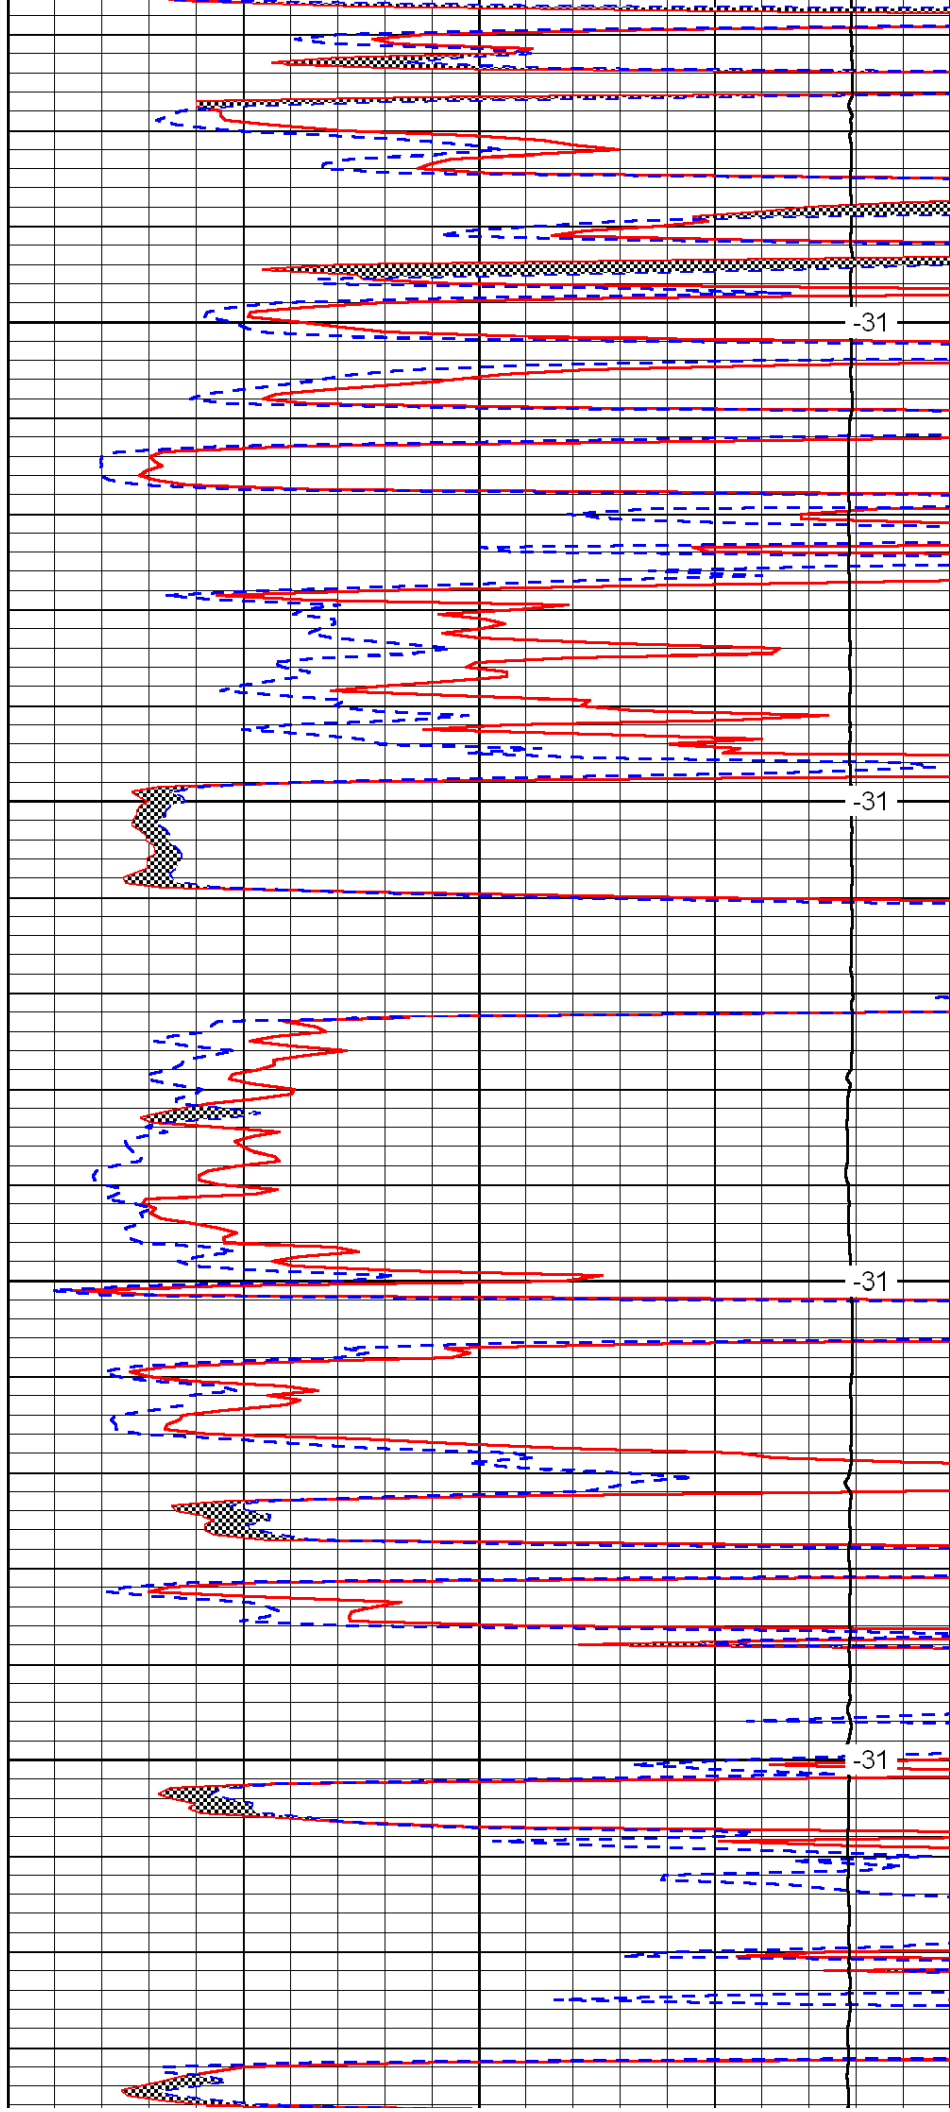

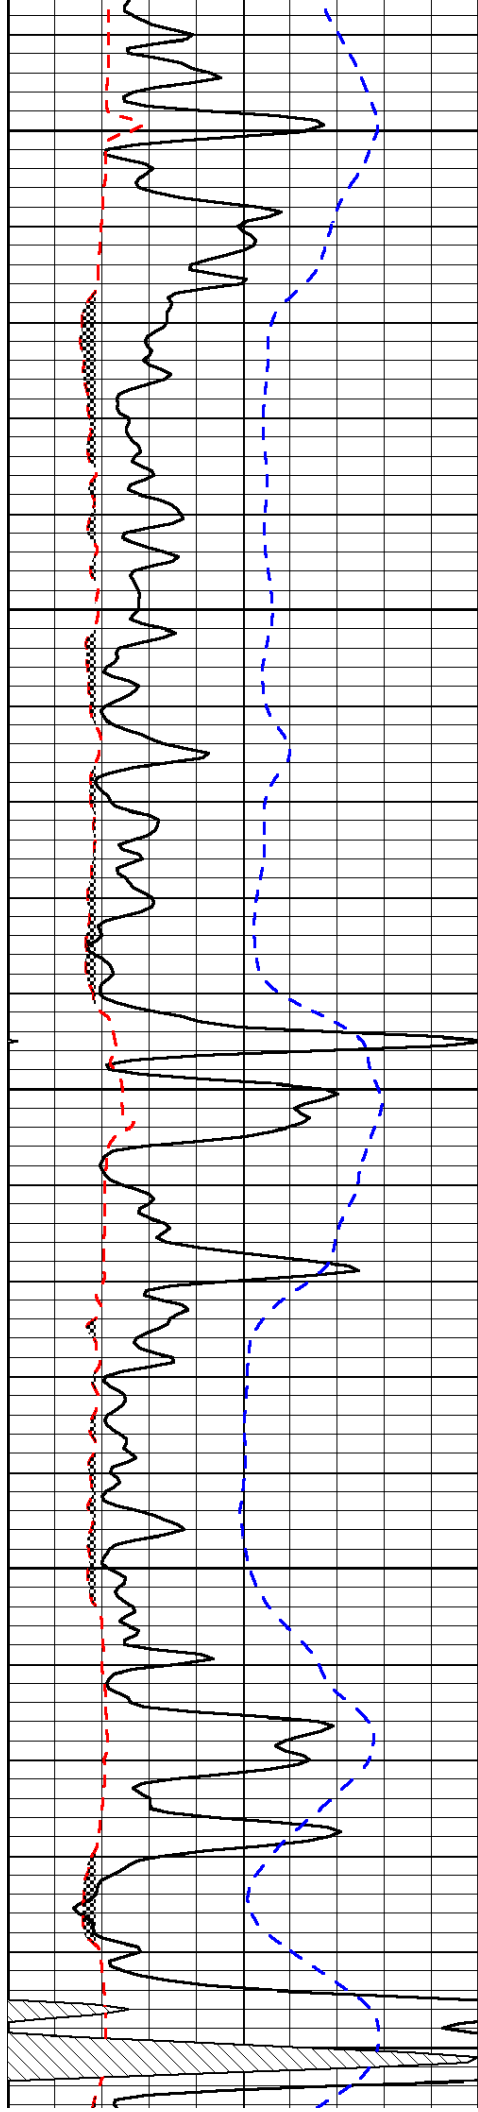


3700


3750

3800

3850

3900

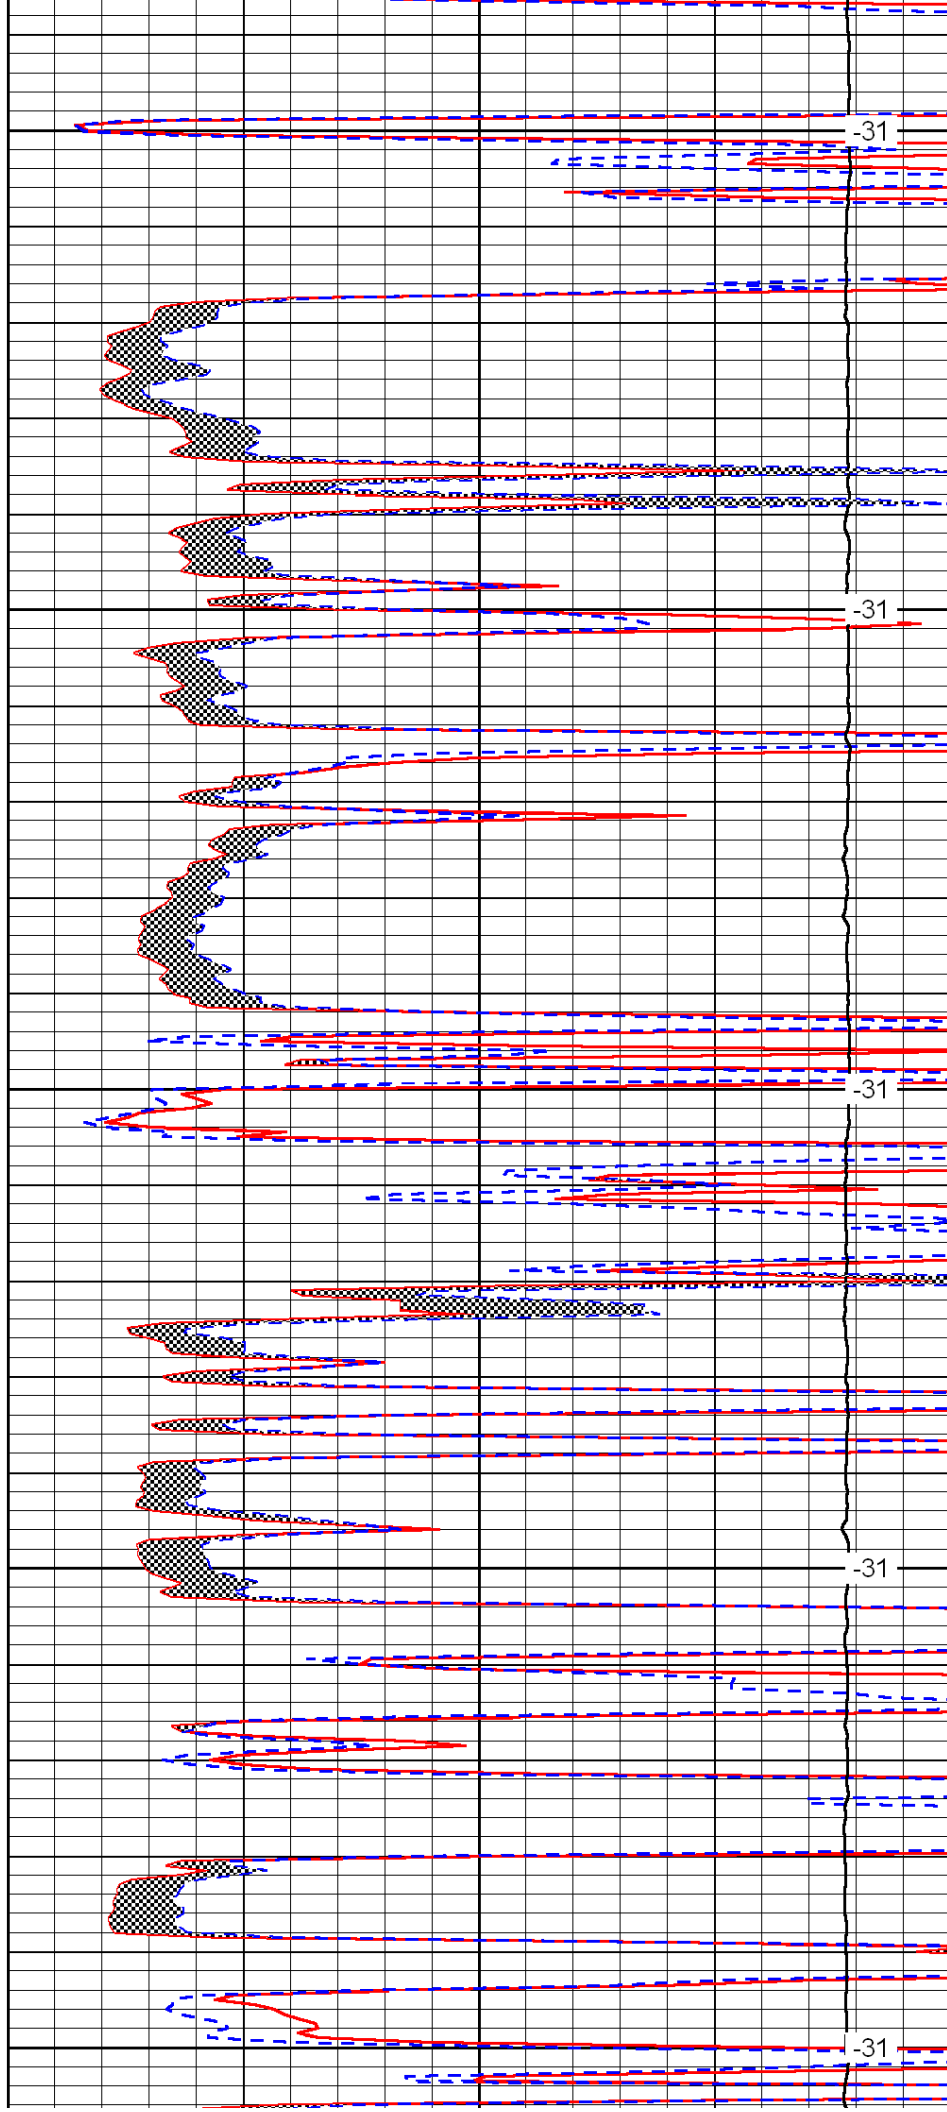

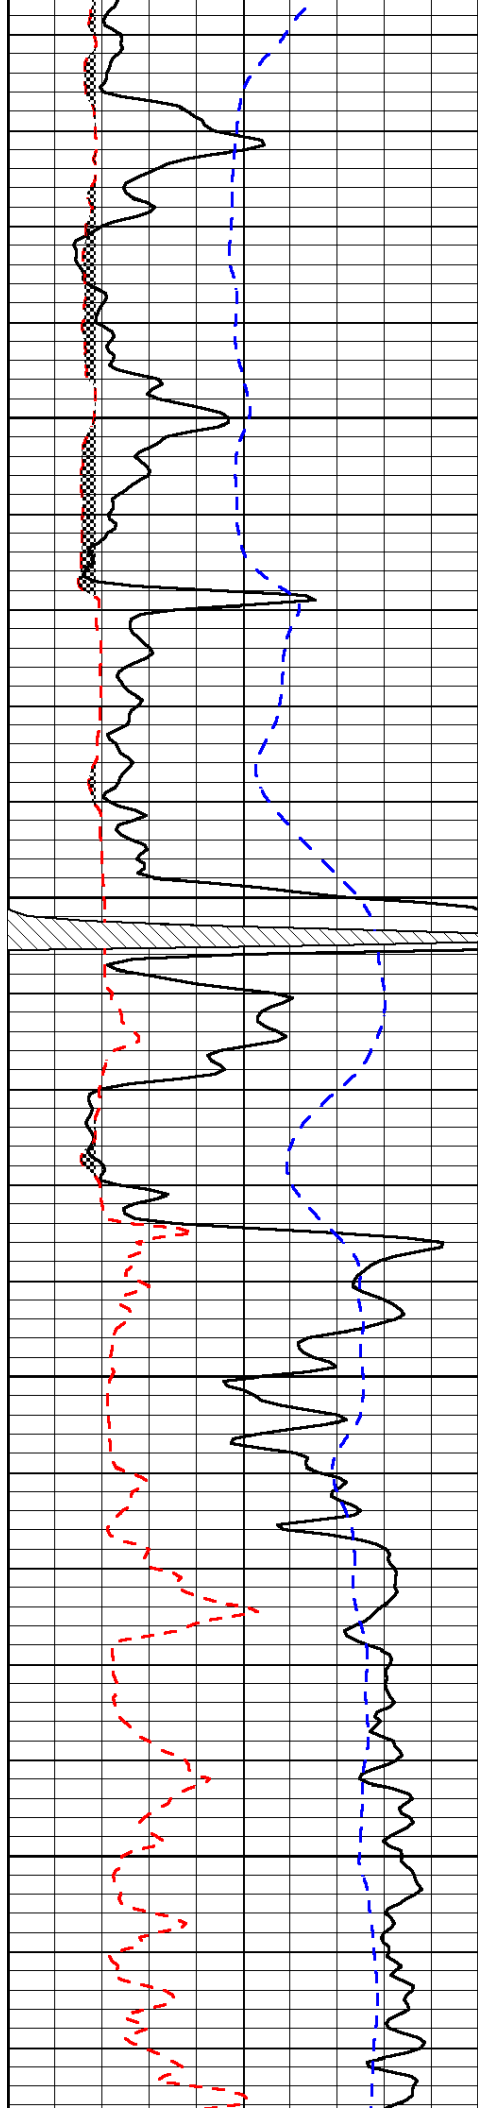


3950

4000

4050

4100

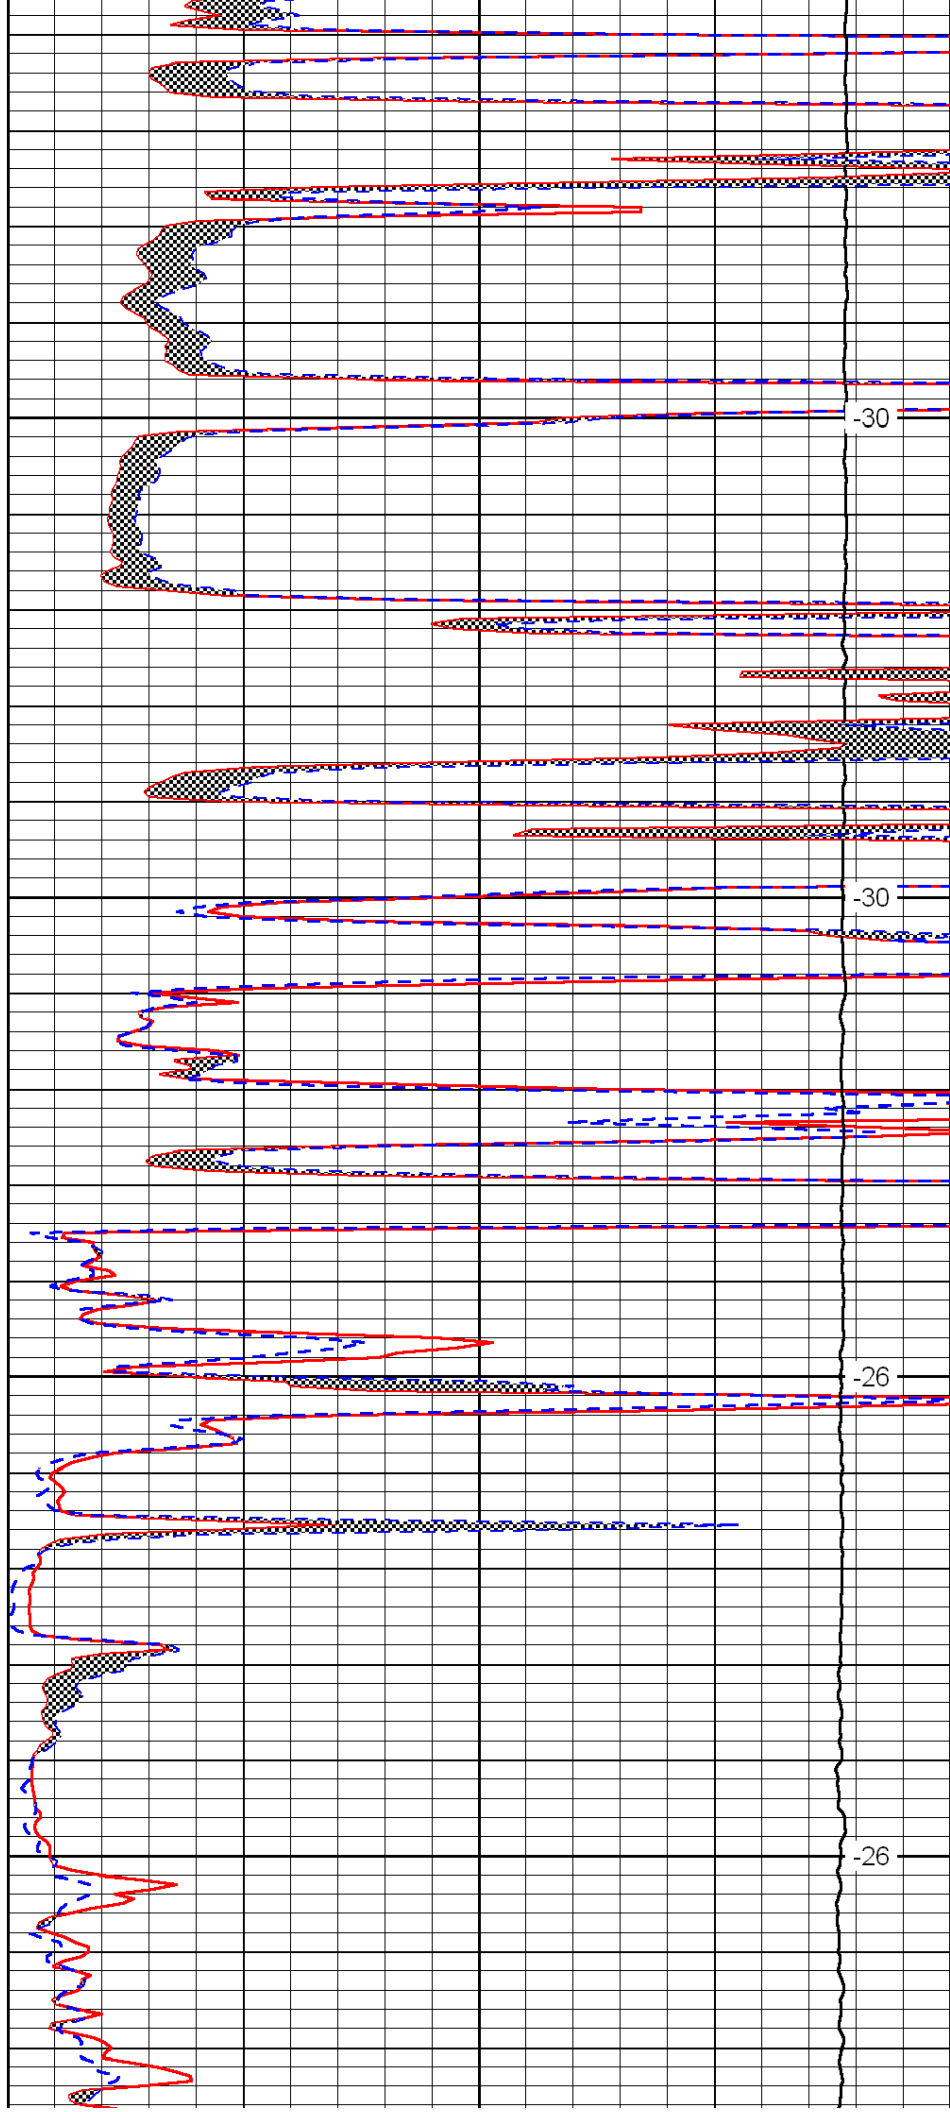


-30

-30

-26

-26

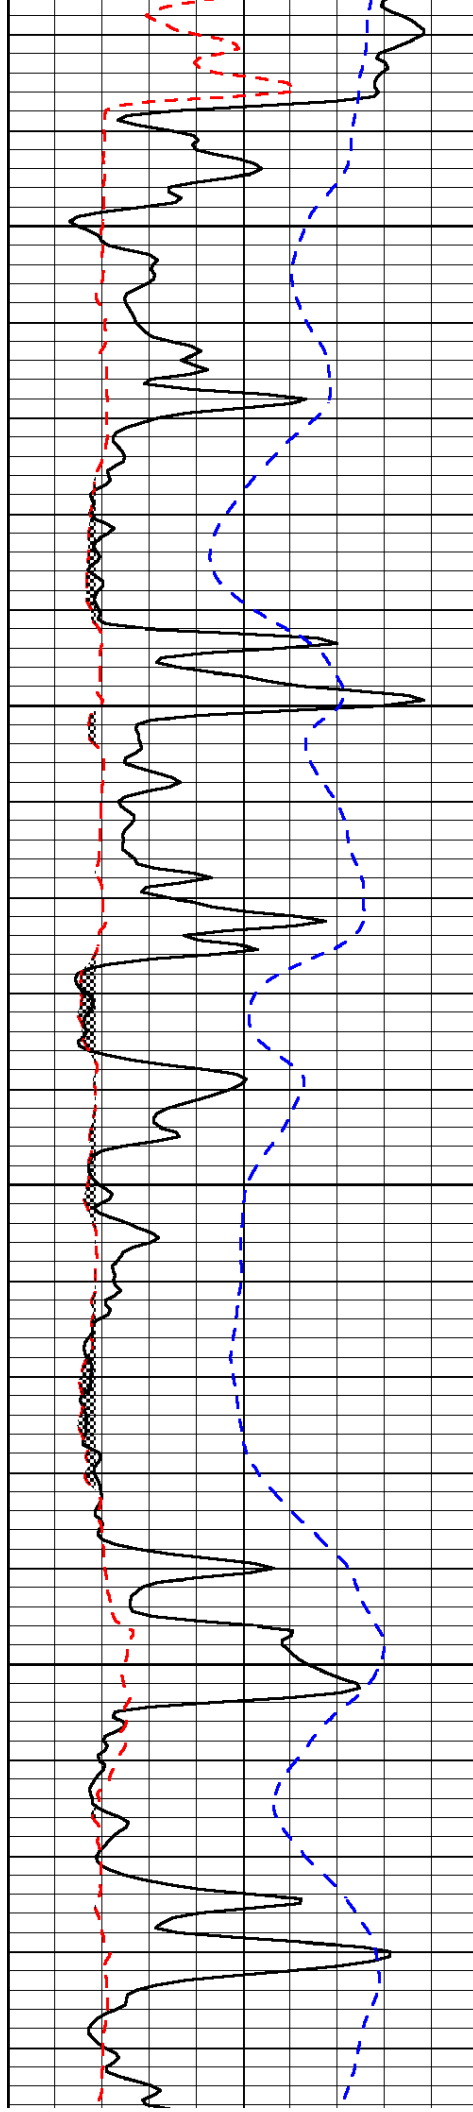


4150

4200

4250

4300

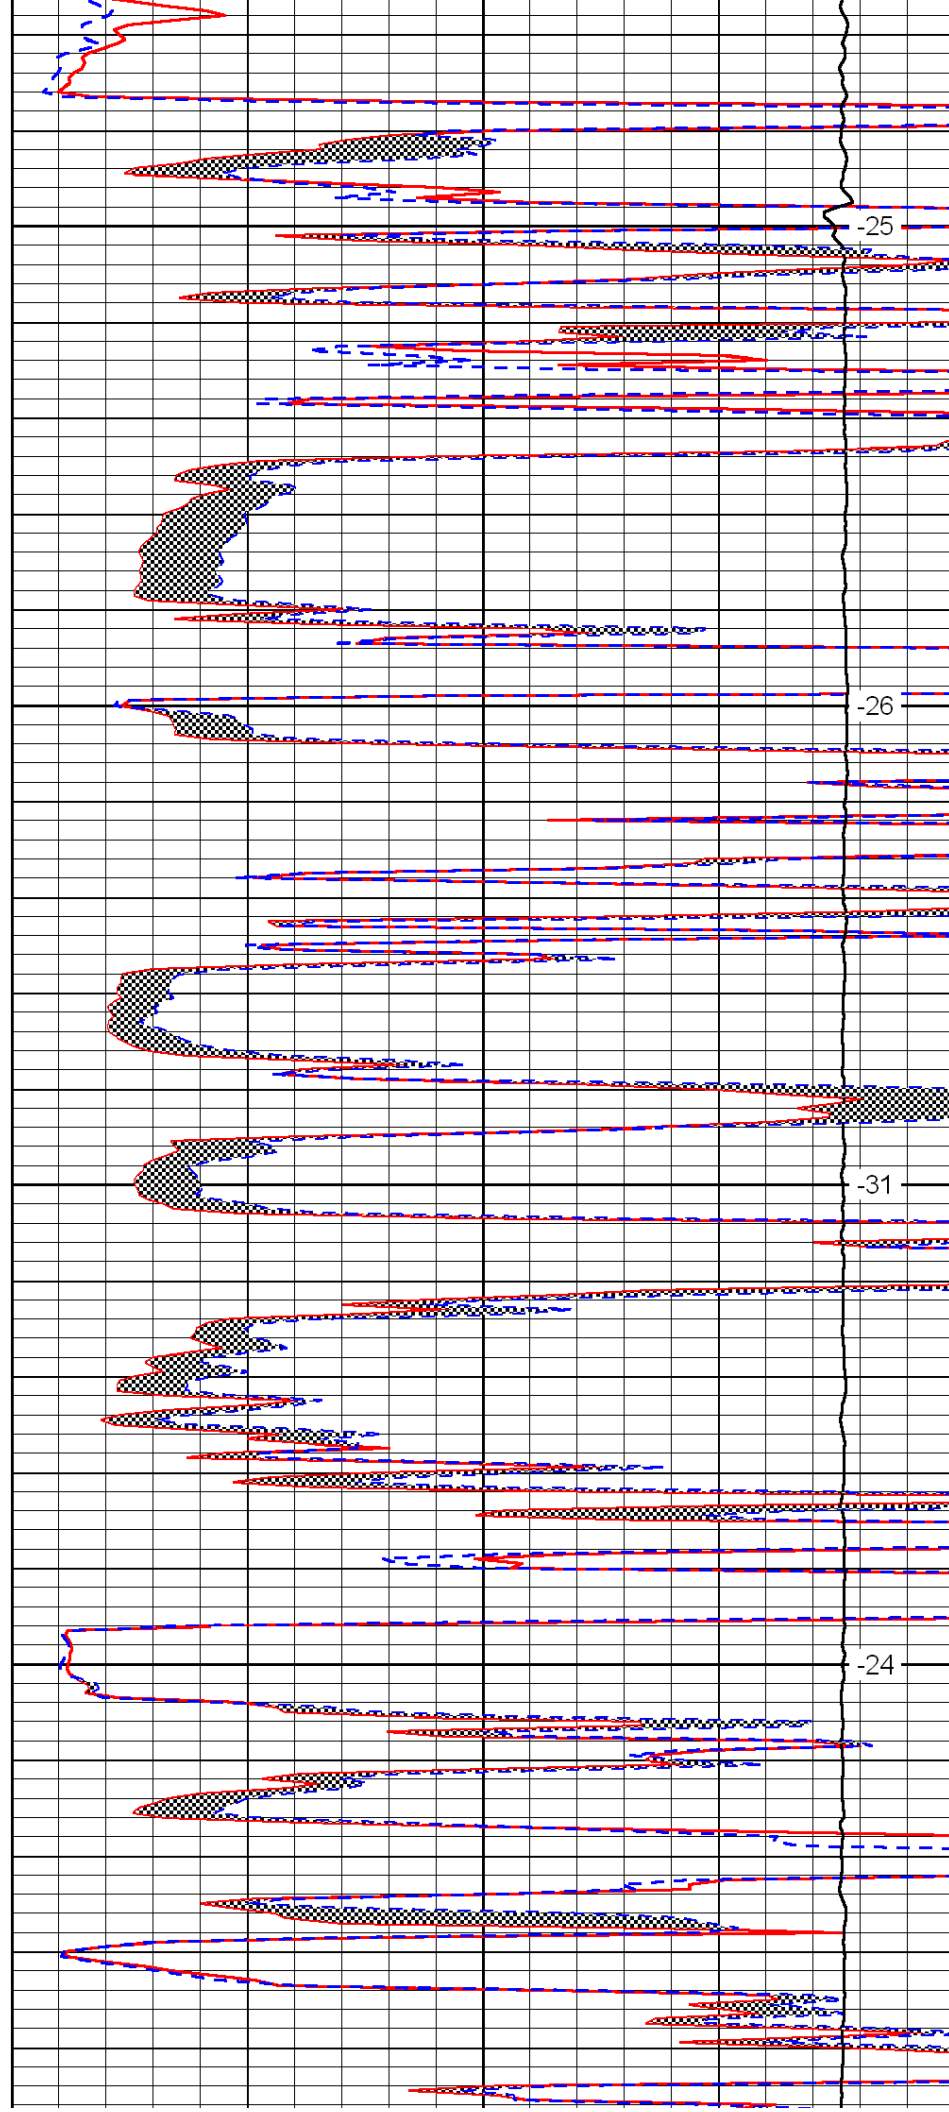

-25

-26

-31

-24

