



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.	15-051-25,945-00-00	
Company	Samuel Gary Jr & Associates, Inc.	
Well	Dome No.1-32	
Field	Wildcat	
County	Ellis	State
		Kansas
Location	NW NE SE SE 1080' FSL & 550' FEL	
Sec: 32	Twp: 15S	Rge: 16W
Other Services	CNL/CDL MEL/BHCS	

Permanent Datum	Ground Level	Elevation	1874
Log Measured From	Kelly Bushing		
Drilling Measured From	Kelly Bushing	9 Ft. Above Perm. Datum	
		K.B.	1883
		D.F.	
		G.L.	1874

Date	1/30/2010
Run Number	One
Depth Driller	3580
Depth Logger	3578
Bottom Logged Interval	3577
Top Log Interval	Surface
Casing Driller	8.625 @ 1005
Casing Logger	1000
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	8.100
Density / Viscosity	9.3 55
pH / Fluid Loss	10.0 8.4
Source of Sample	Flowline
Rm @ Meas. Temp	.85 @ 55
Rmf @ Meas. Temp	.64 @ 55
Rmc @ Meas. Temp	1.15 @ 55
Source of Rmf / Rmc	Charts
Rm @ BHT	.42 @ 112
Operating Rig Time	5 Hours
Max Rec. Temp. F	112
Equipment Number	15
Location	Hays
Recorded By	C. Desaire
Witnessed By	Tim Henrick

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
 (785) 625-3858

Pfeifer, 2 1/2 E to Vincent Rd,
 1/4 N, W Into

Database File: c:\warrior\backup of data\sam gary_dome#1-32\samgaryhd.db
 Dataset Pathname: dil/Stack
 Presentation Format: dil2in
 Dataset Creation: Sat Jan 30 04:52:14 2010
 Charted by: Depth in Feet scaled 1:600

0 Gamma Ray 150
-200 SP (MV) 0

0 Shallow Resistivity (Ohm-m) 50

0 Deep Resistivity (Ohm-m) 50

LSPD
(ft/min)



1000 Conductivity (mmho/m) 0


15000 Line Tension (lb) 0

Shallow Resistivity

50 (Ohm-m) 500

50 Deep Resistivity (Ohm-m) 500

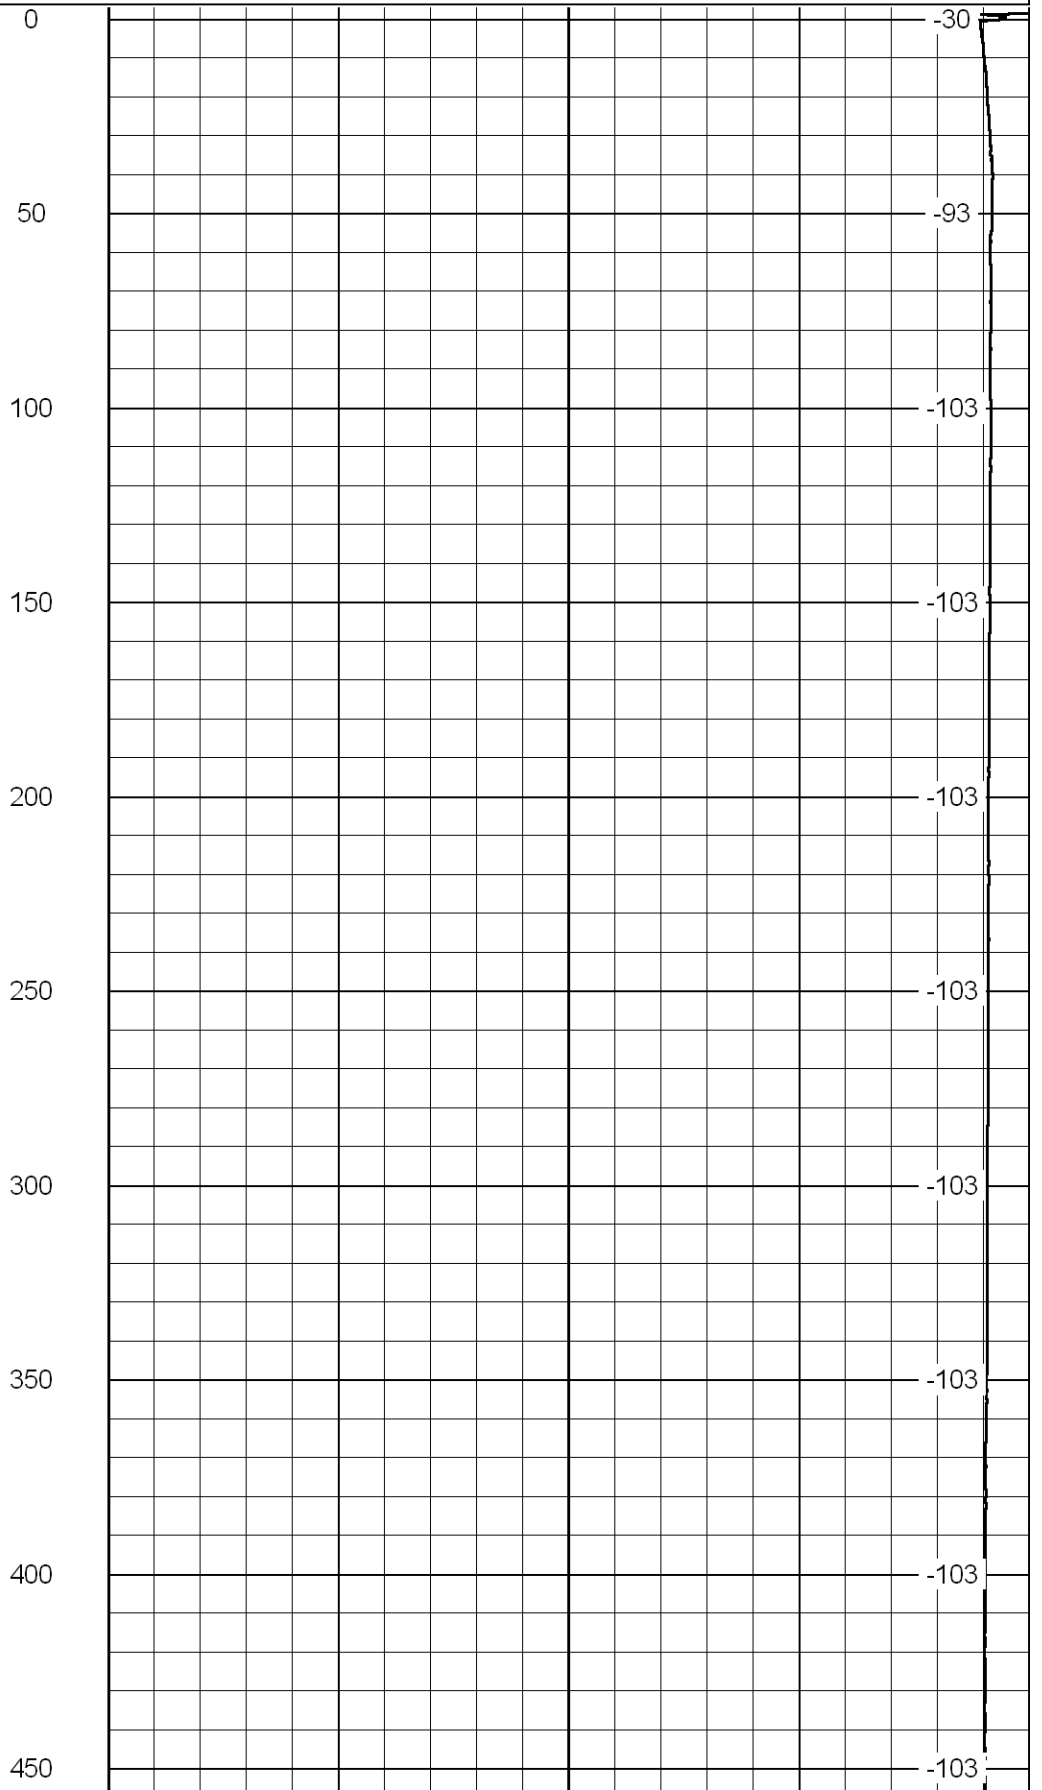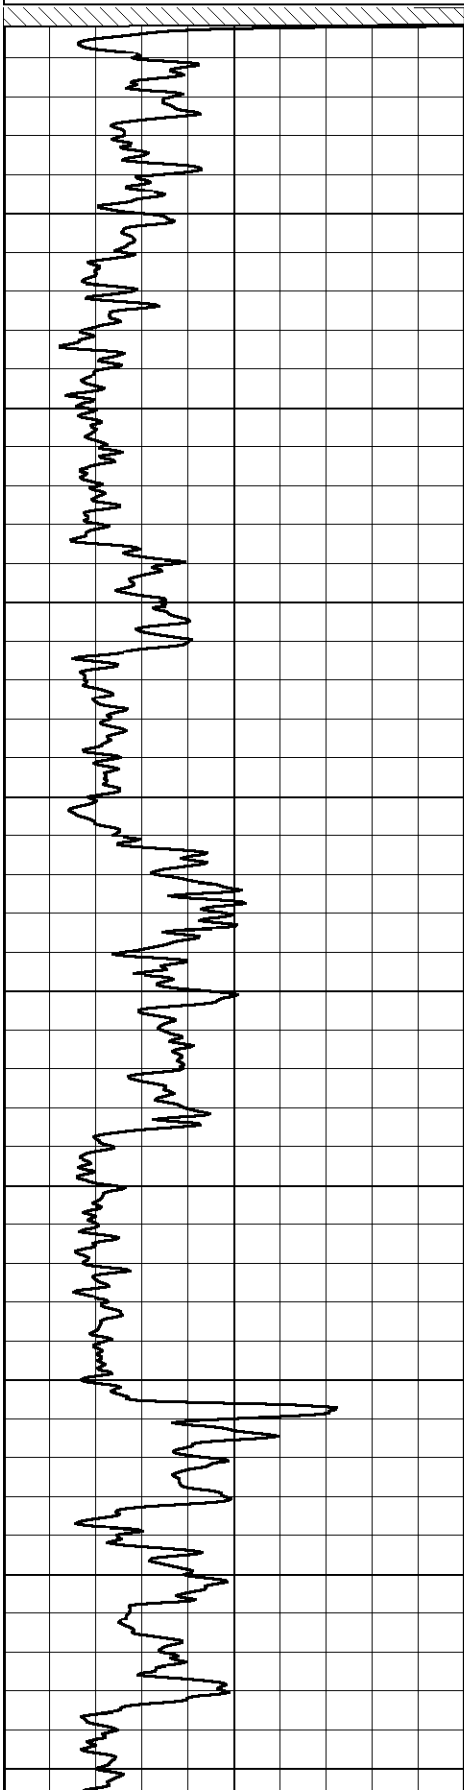

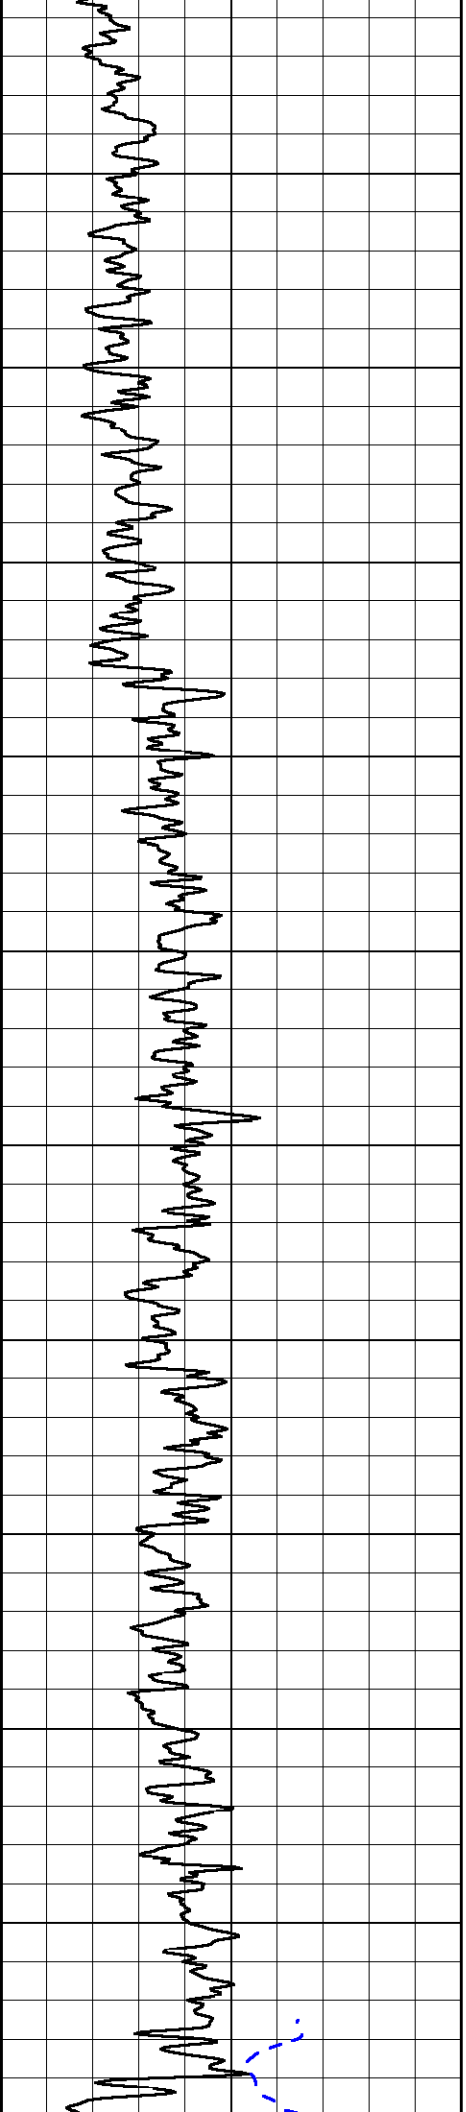

500

550

600

650

700

750


800

850

900

950

1000

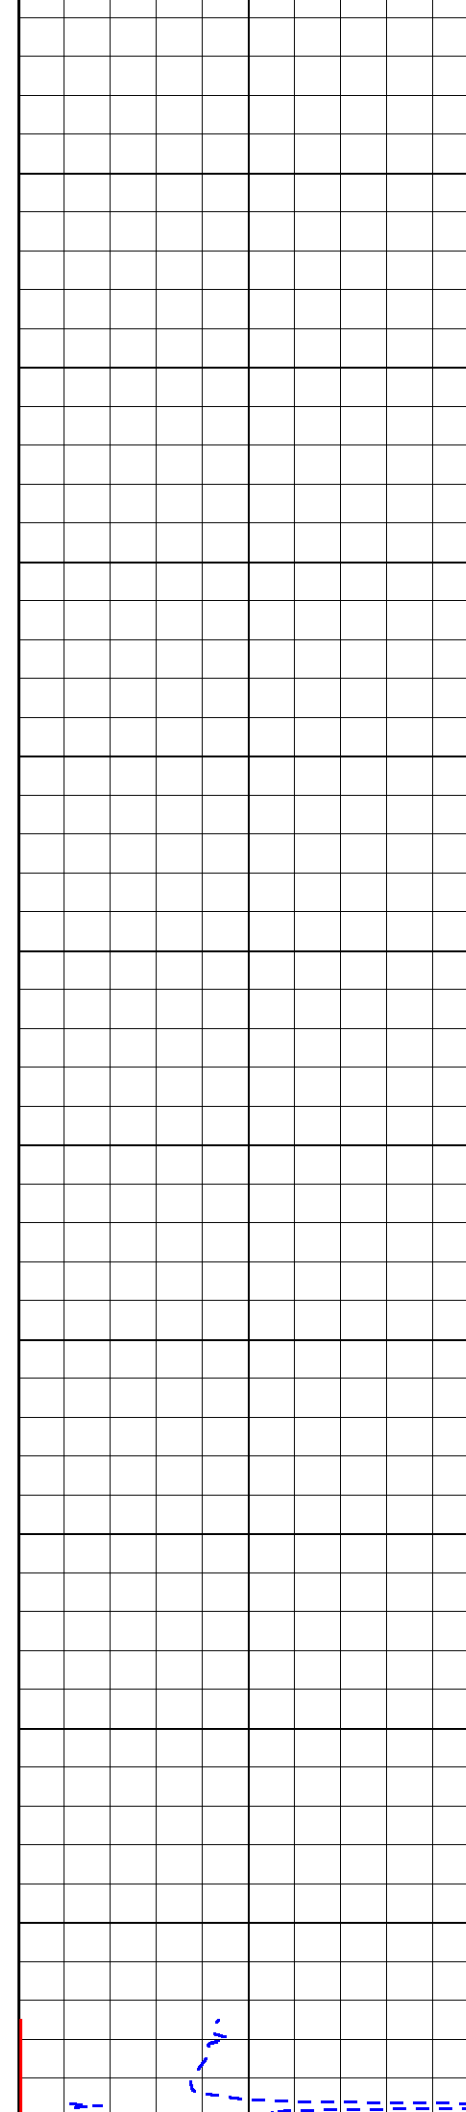

-103

-100

-100

-100

-100

-100



-100


-100



-100




-100


-100

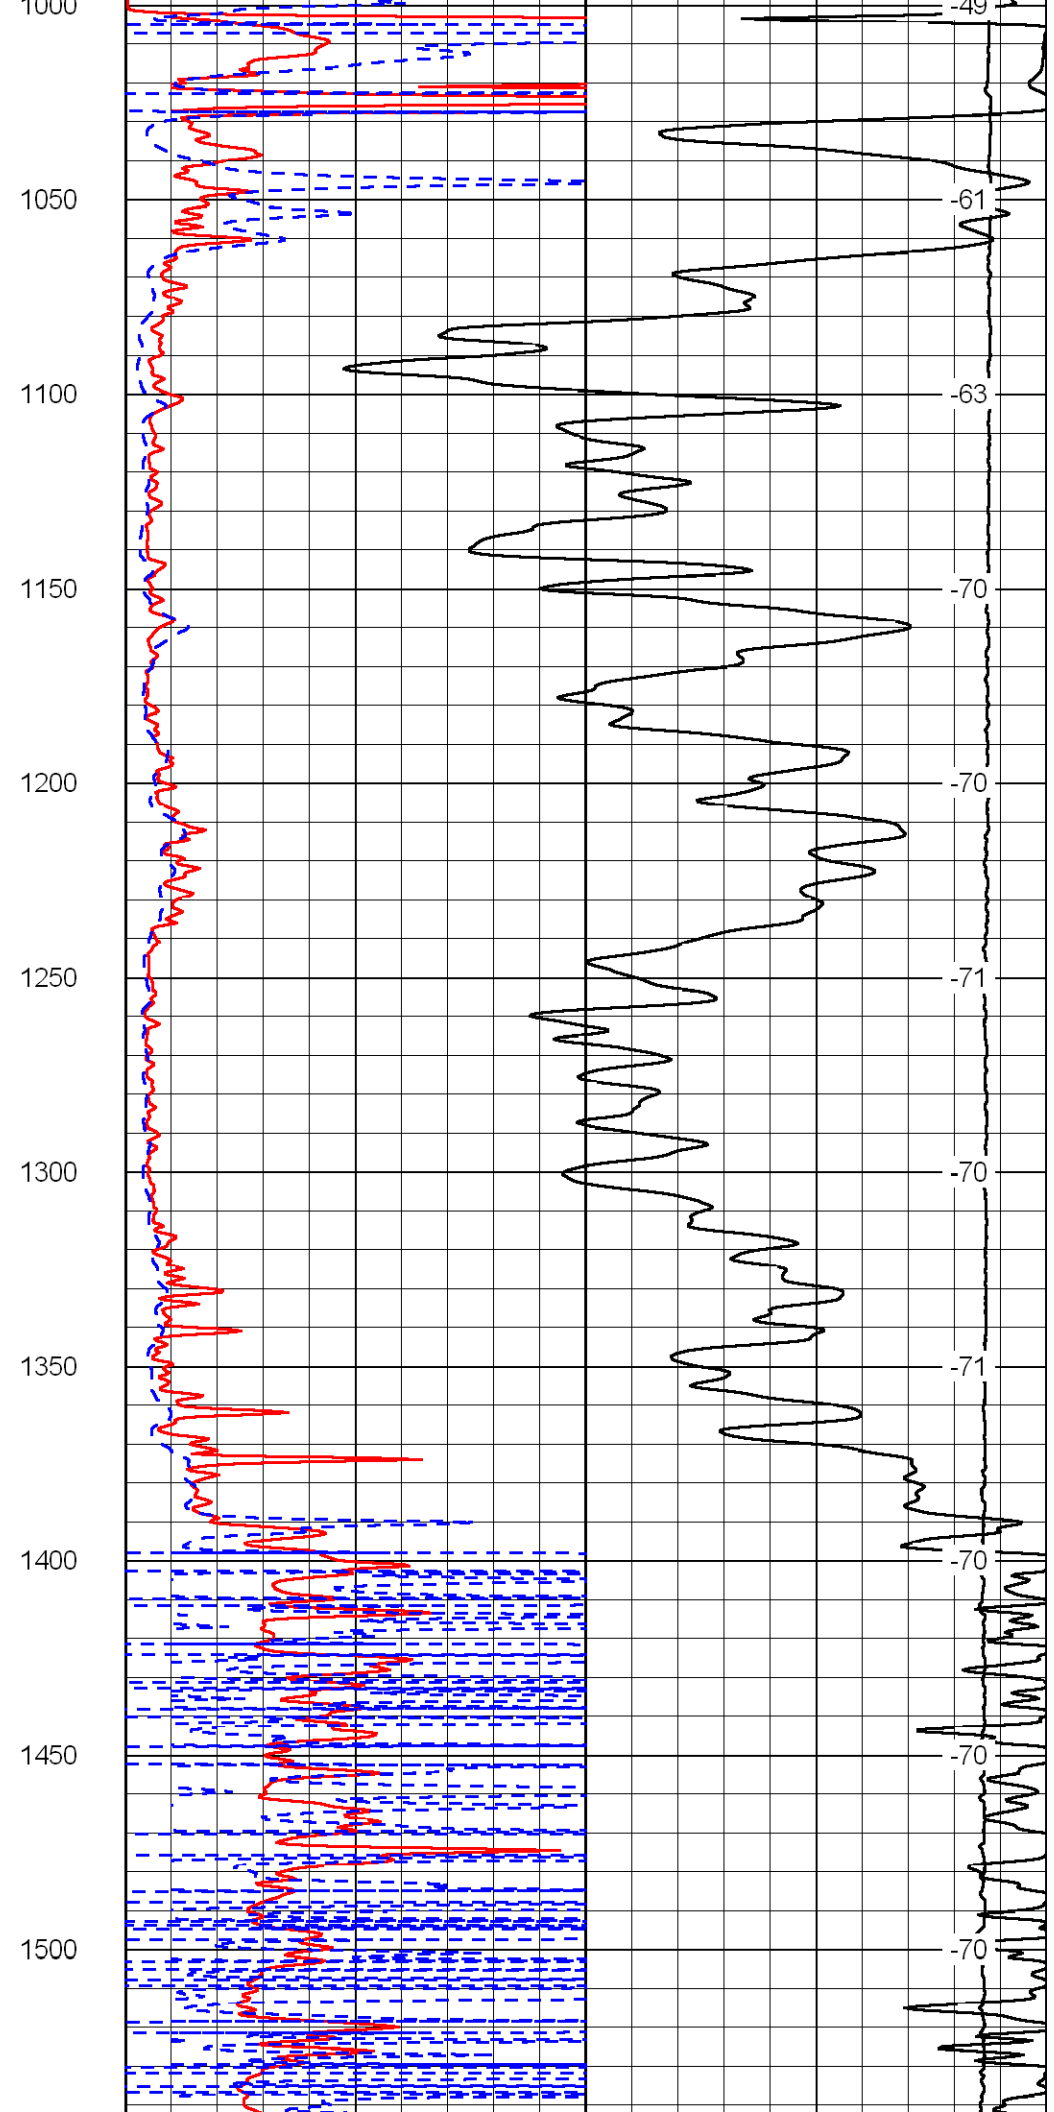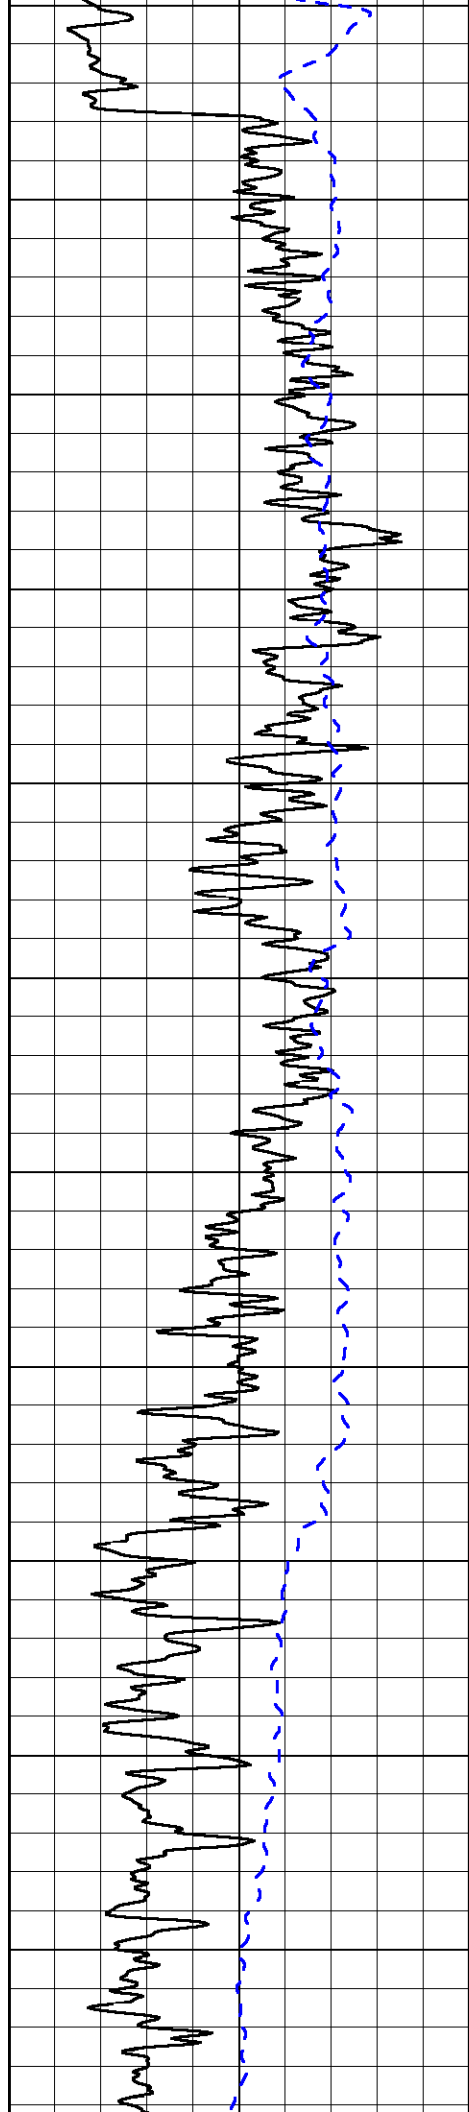

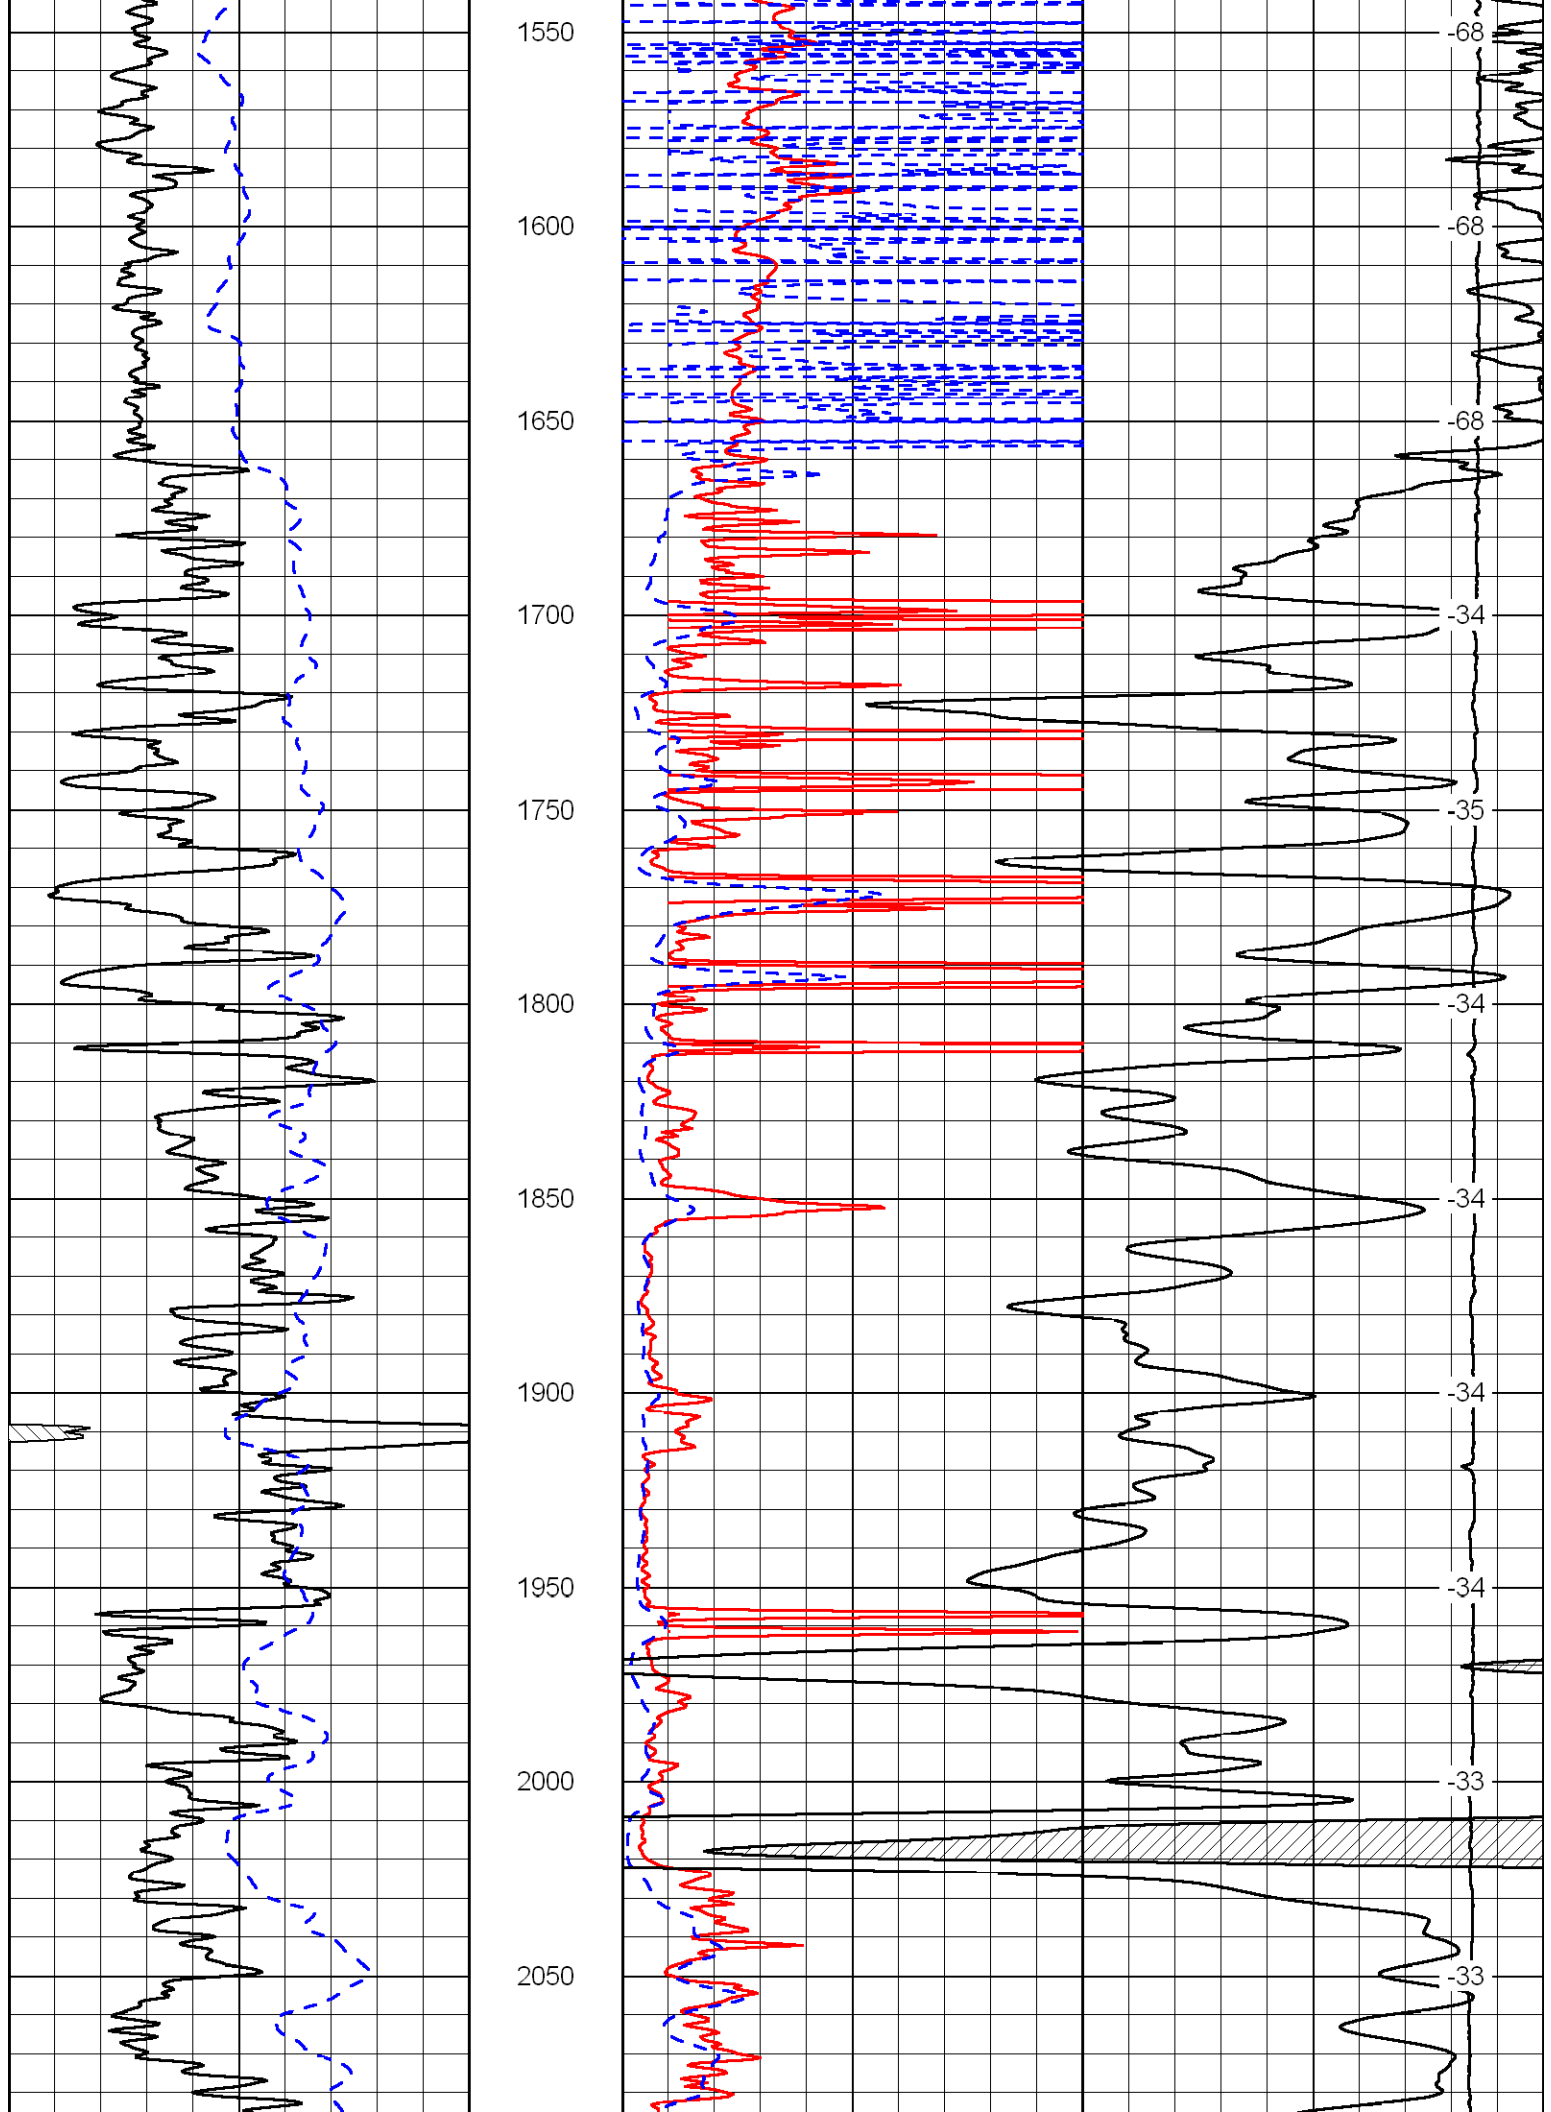

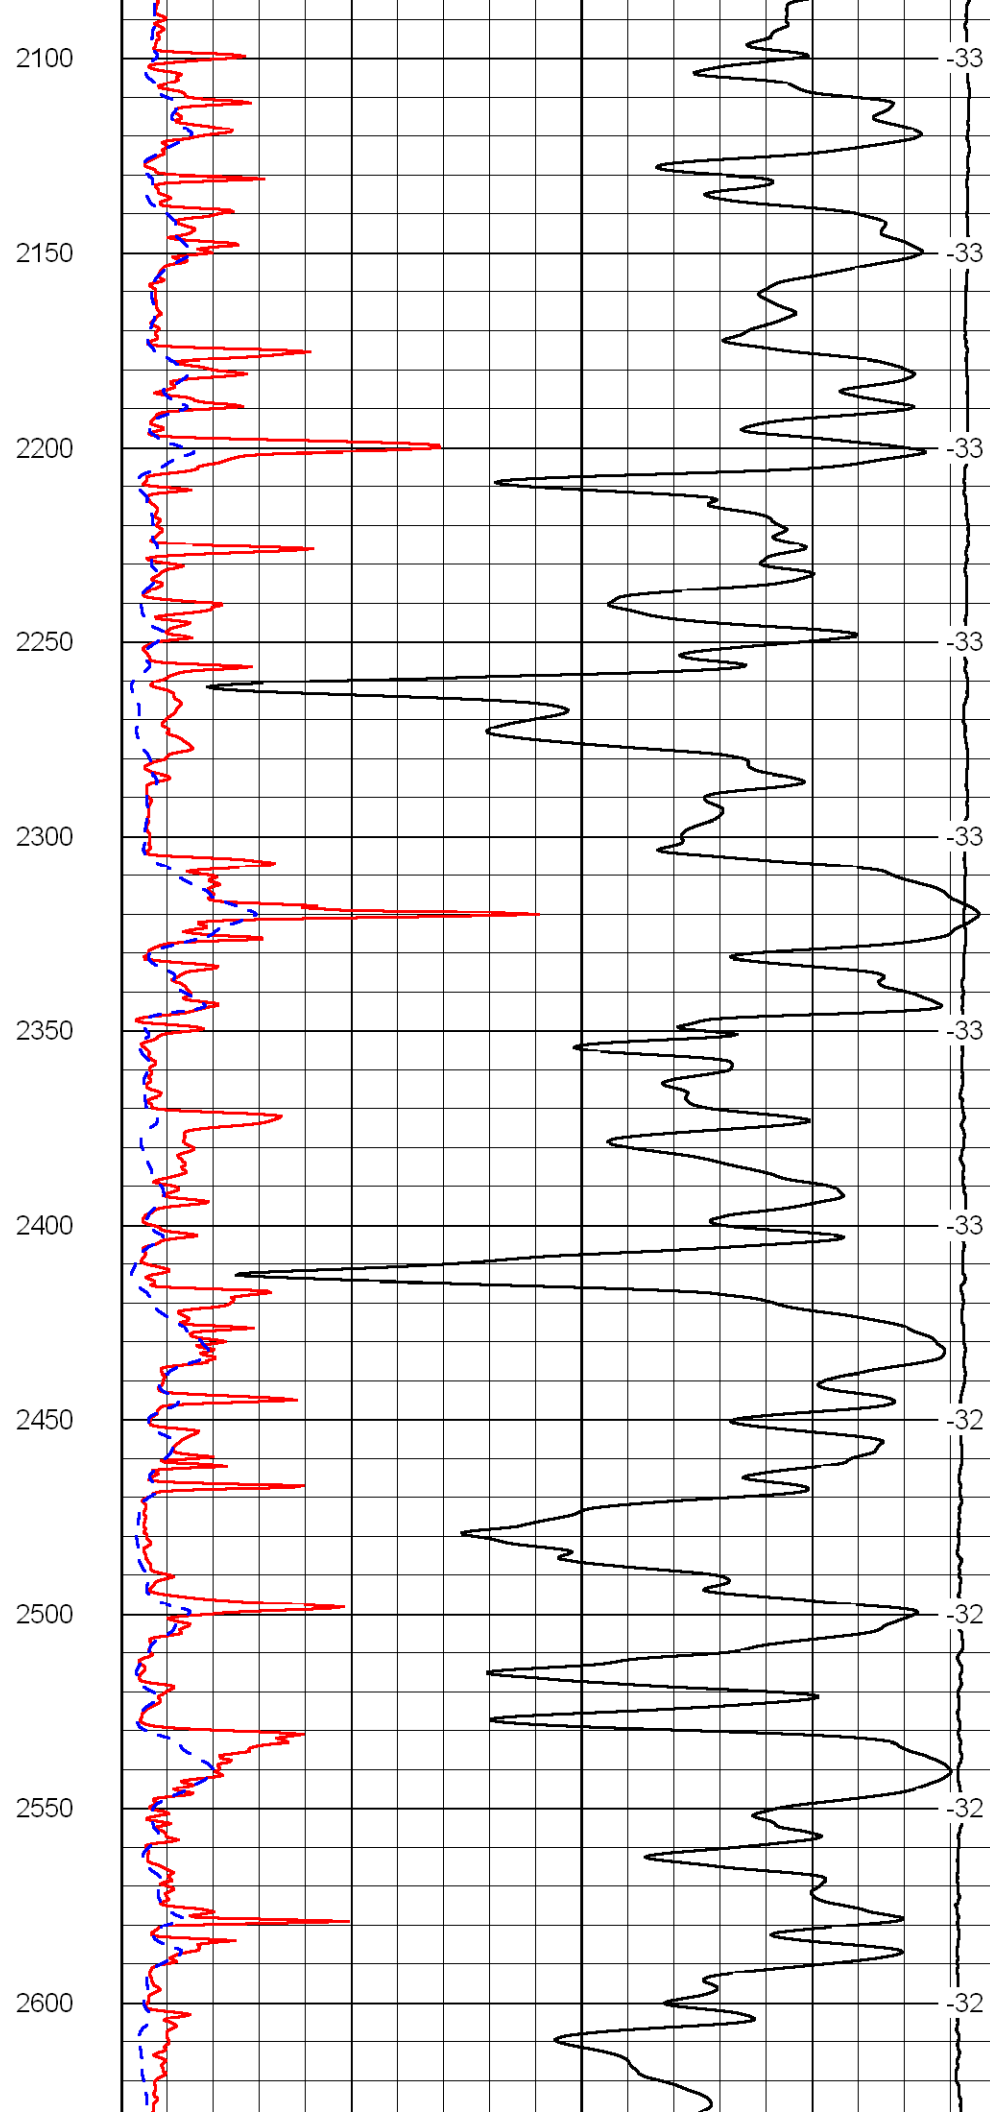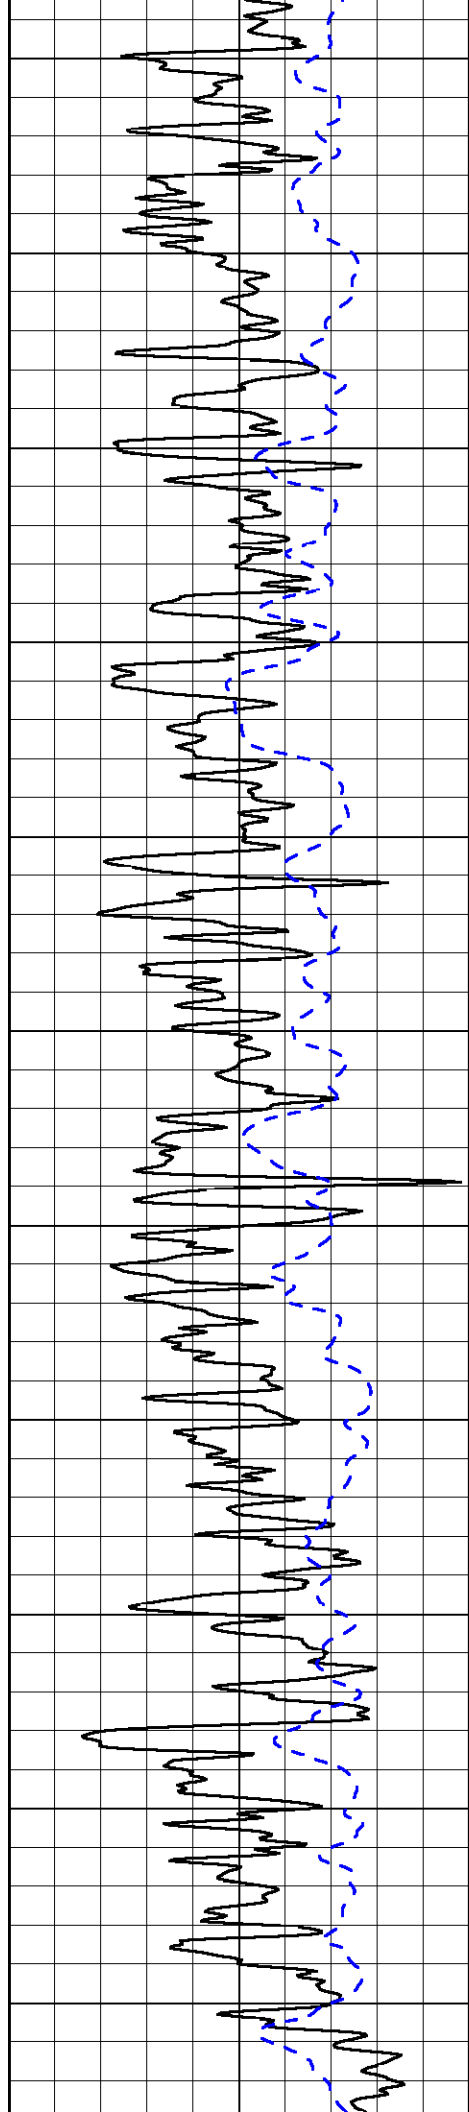

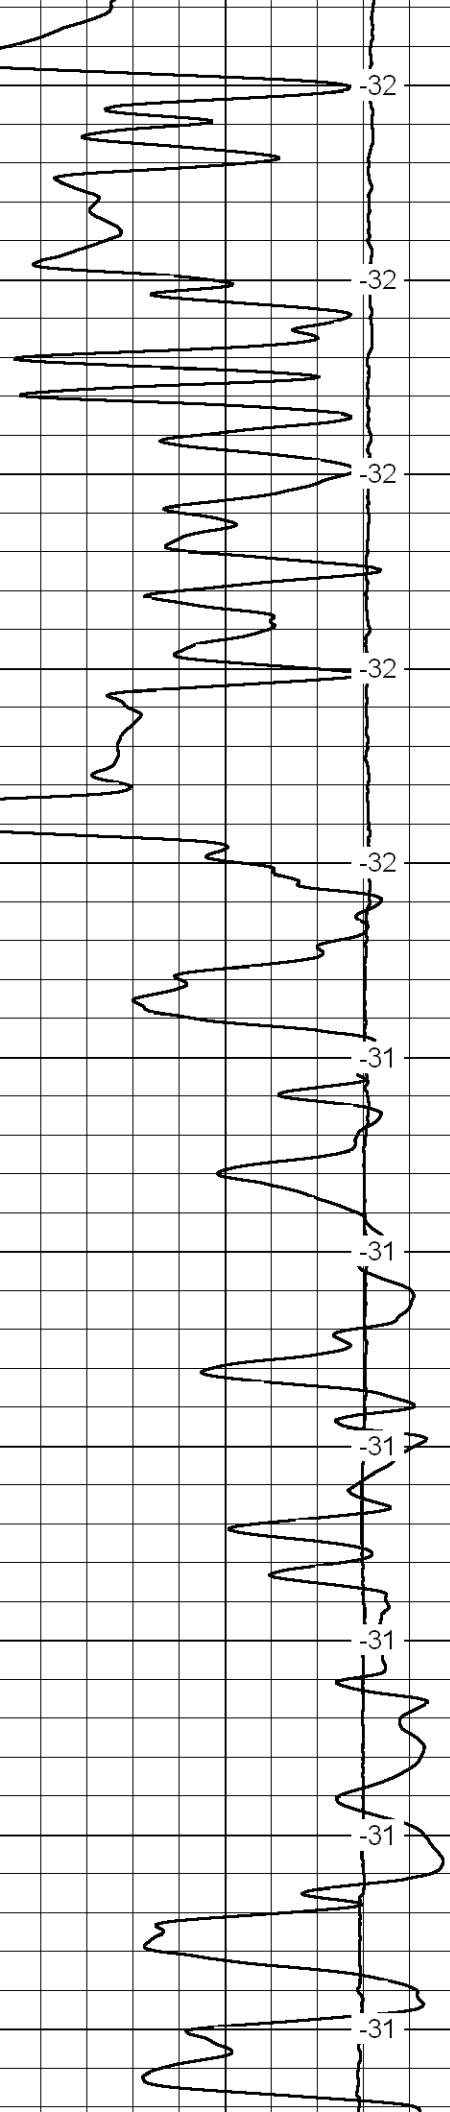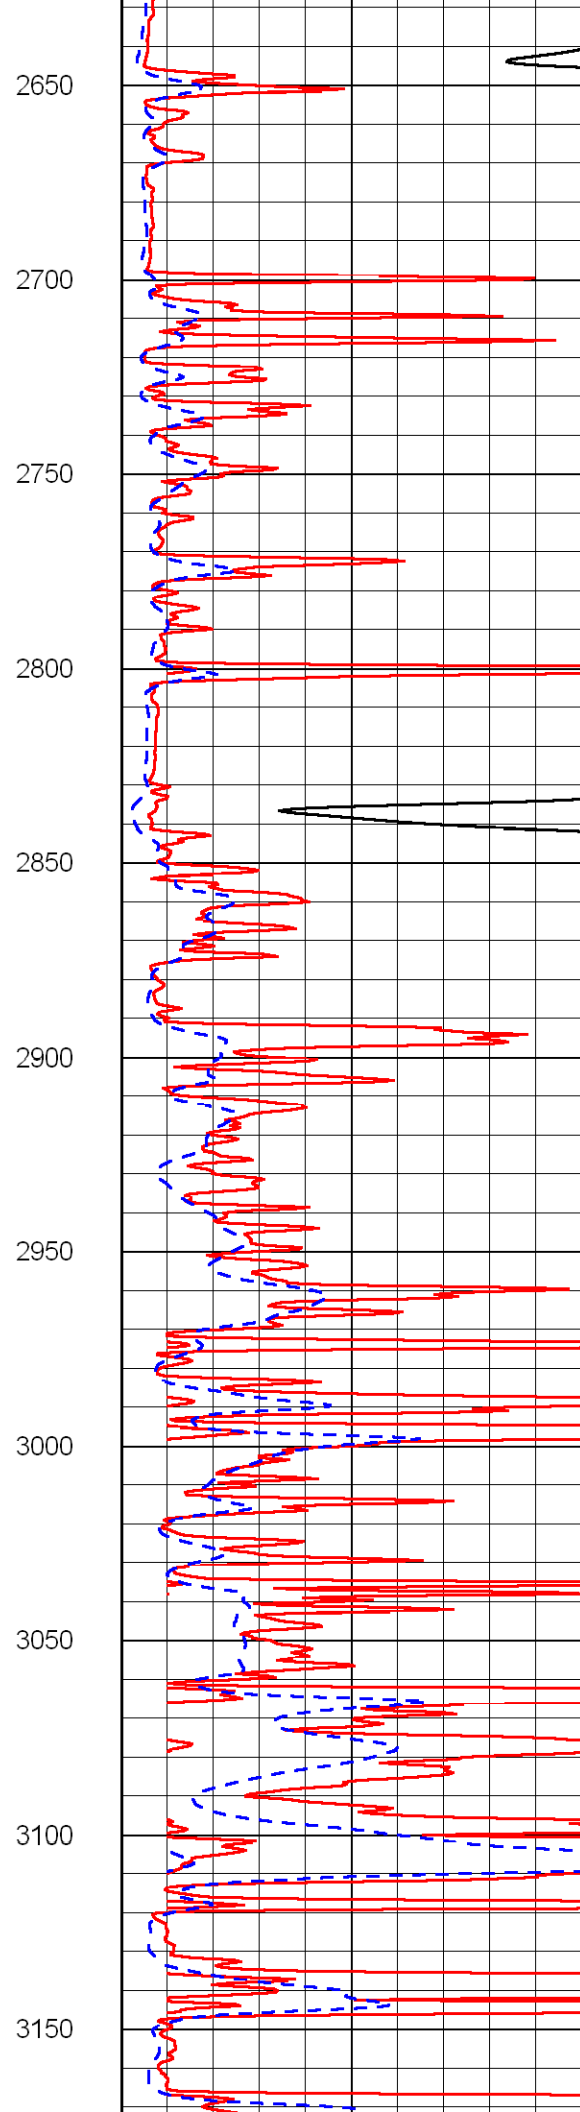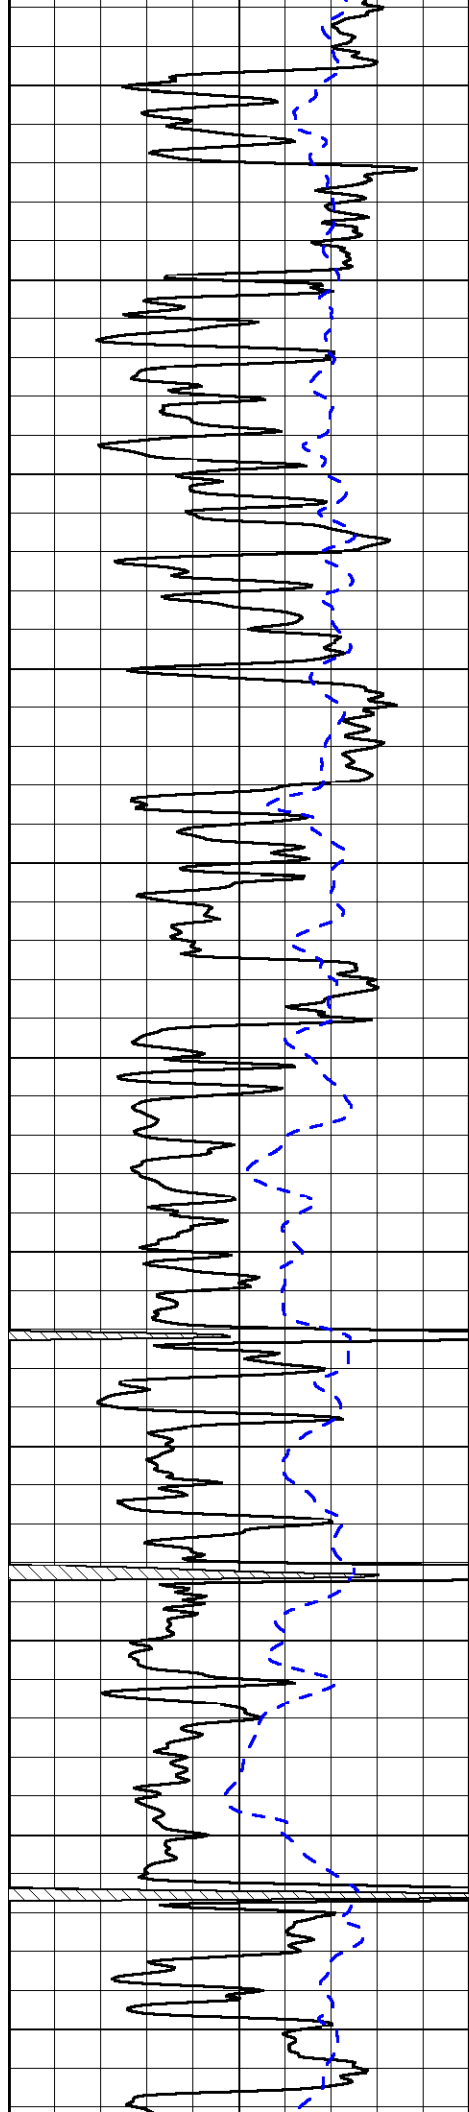

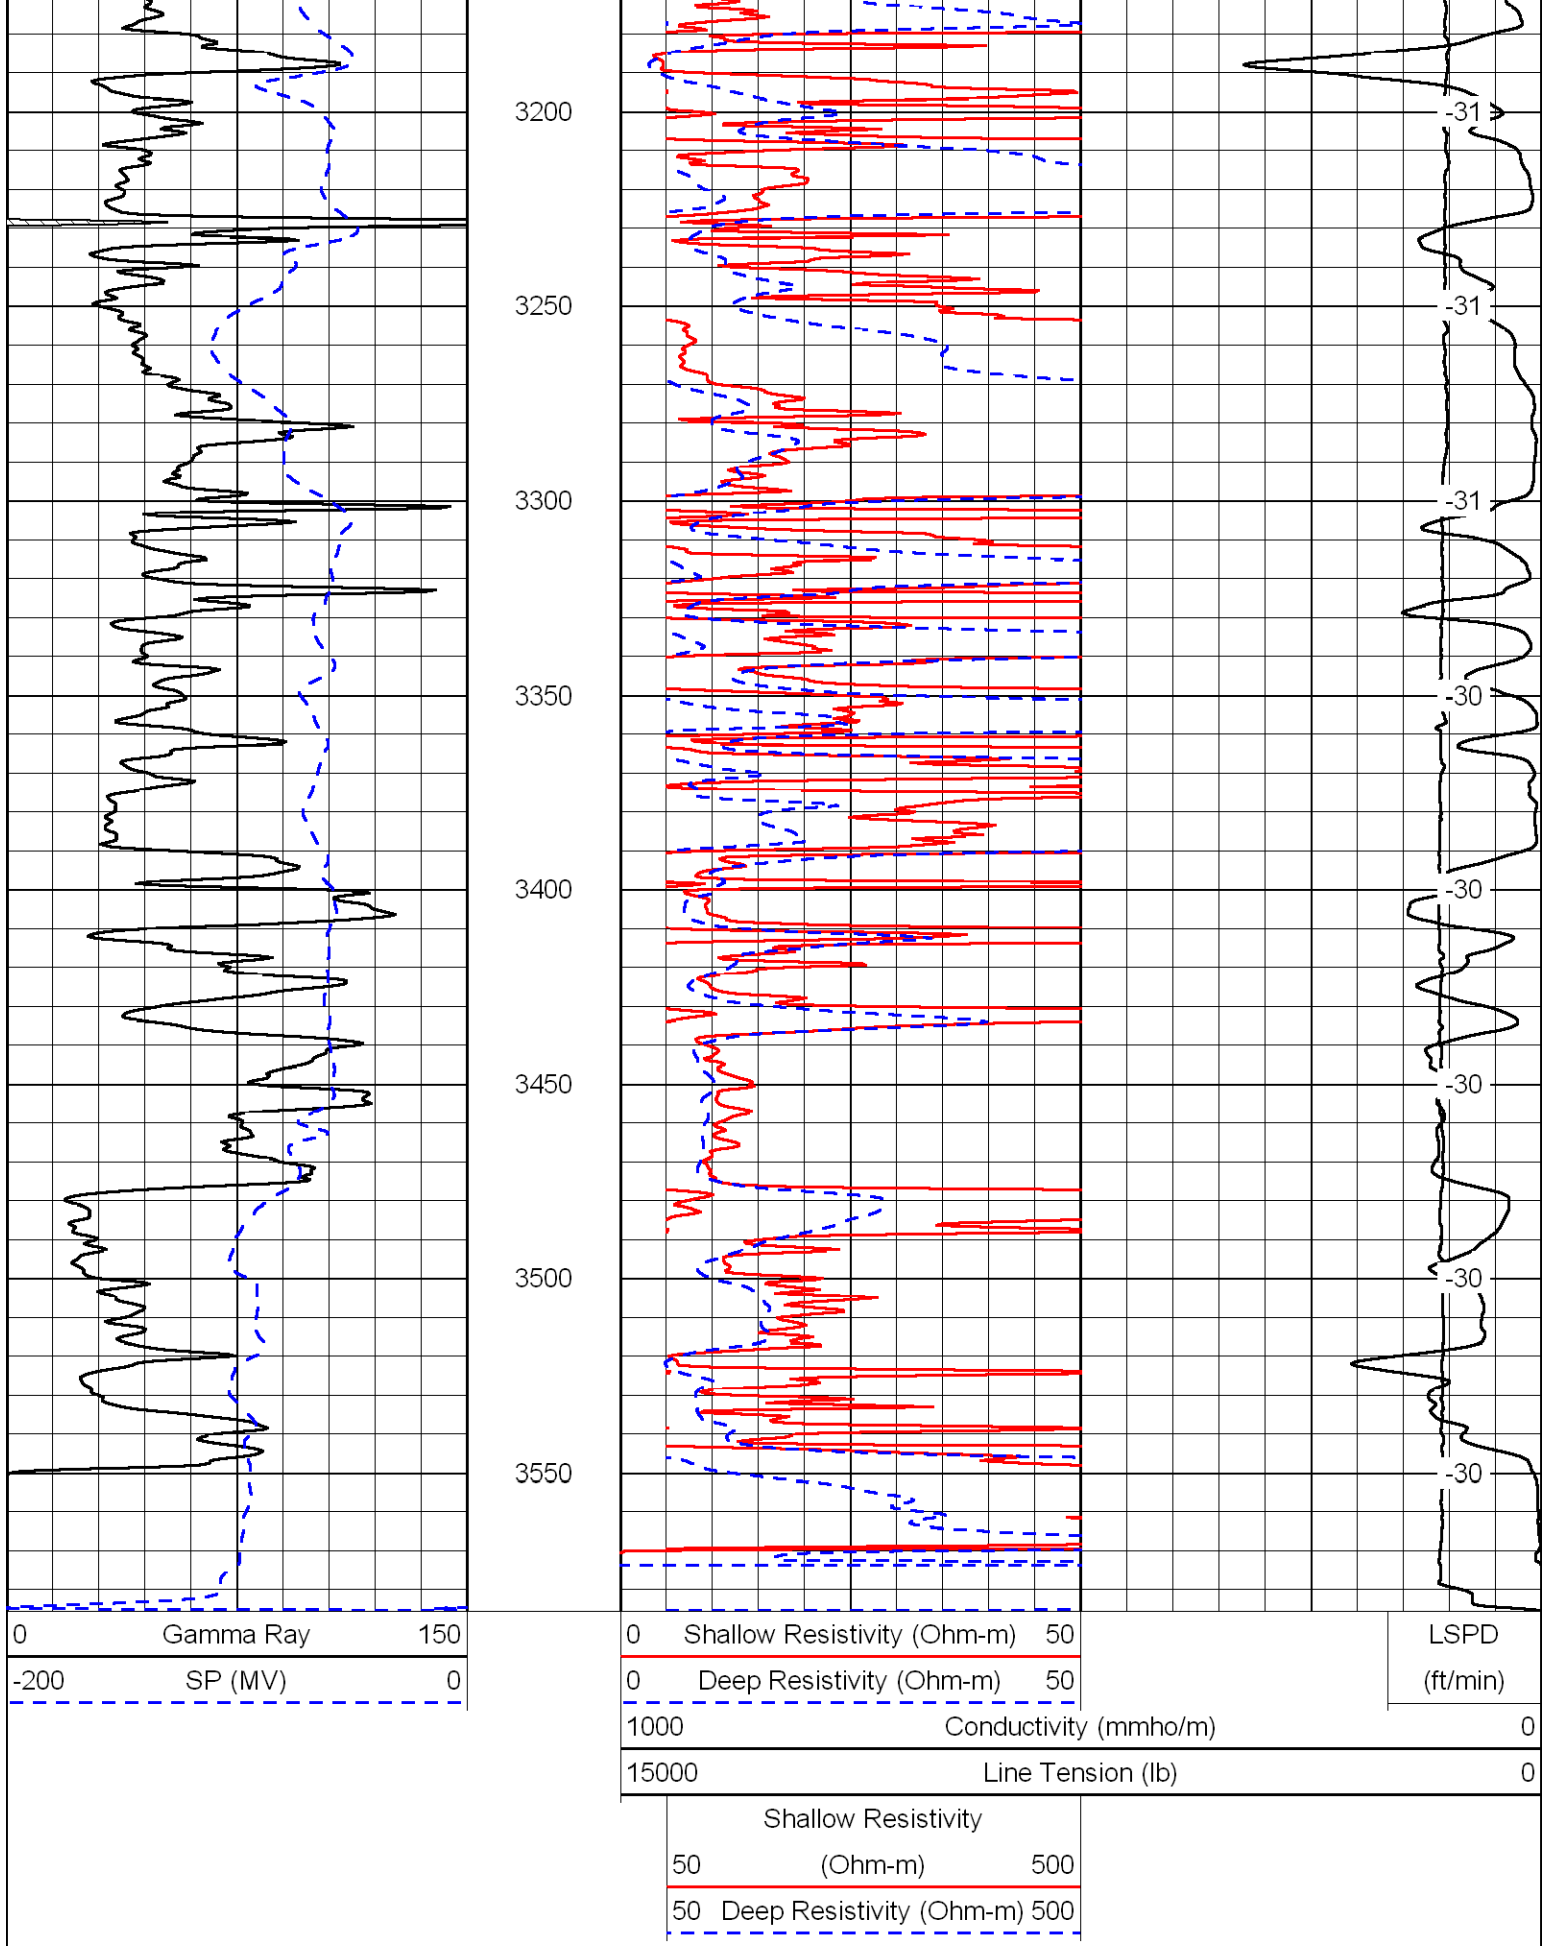



Database File: c:\warrior\backup of data\sam gary_dome#1-32\samgaryhd.db
 Dataset Pathname: dil/Stack
 Presentation Format: dil

0	Gamma Ray	150
-200	SP (MV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
15000	Line Tension (lb)	0

LSPD
(ft/min)

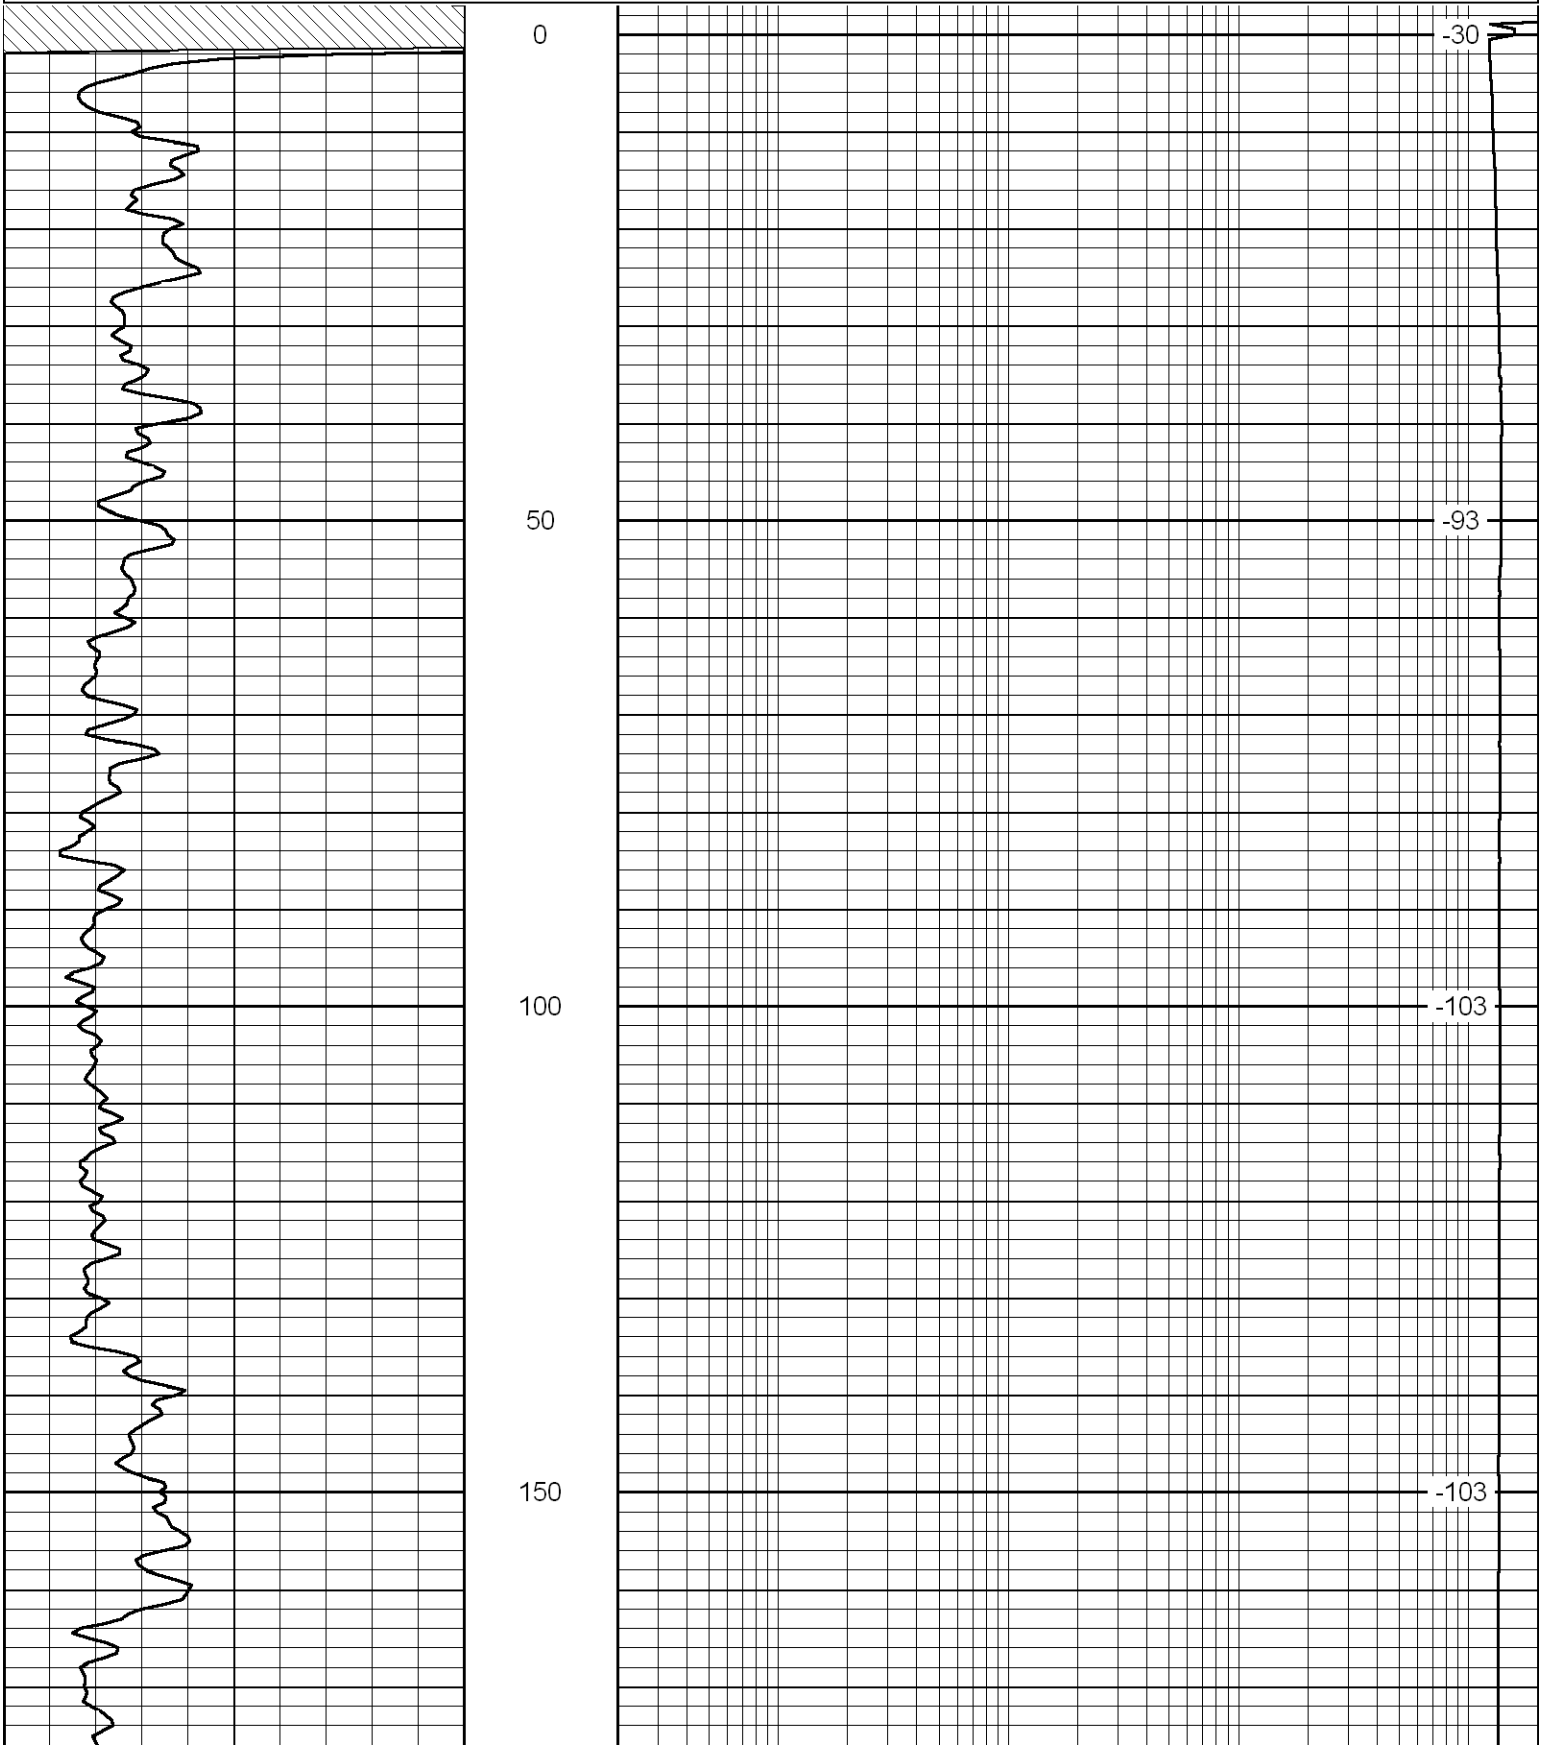

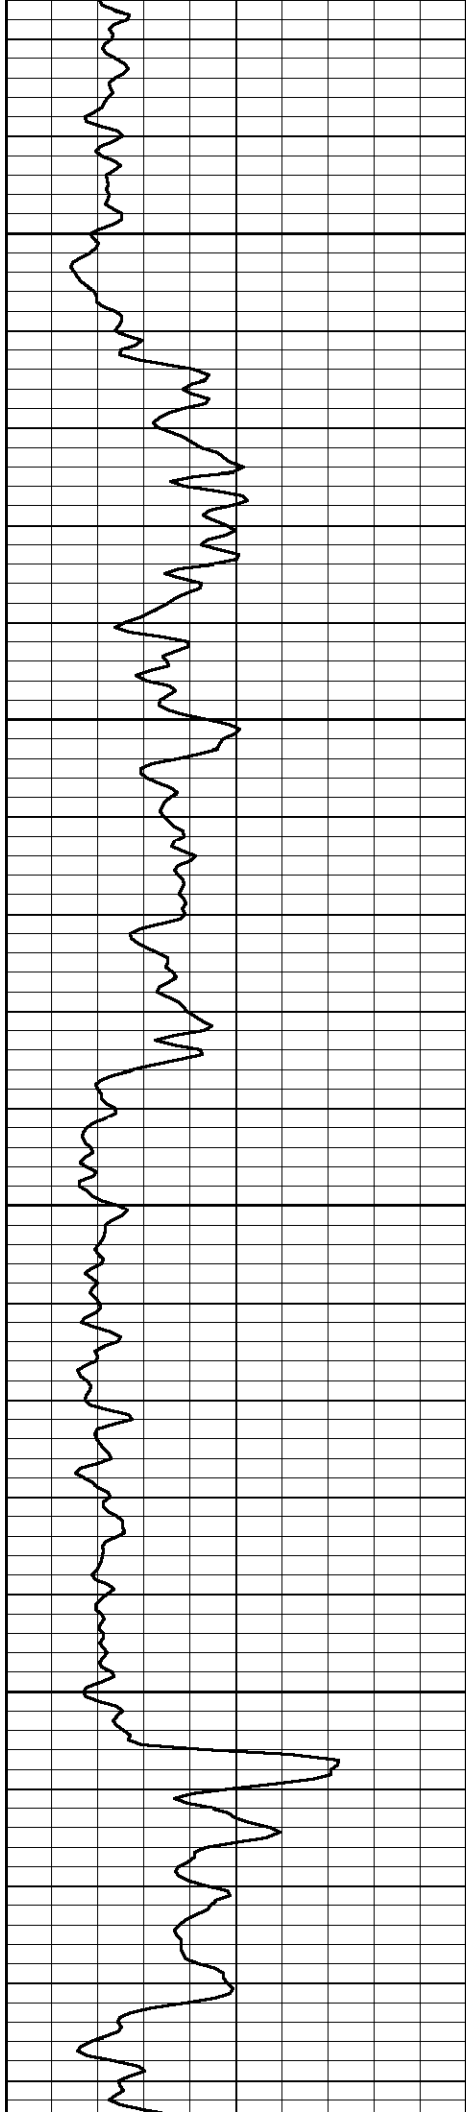

200

250

300


350

-103

-103

-103

-103

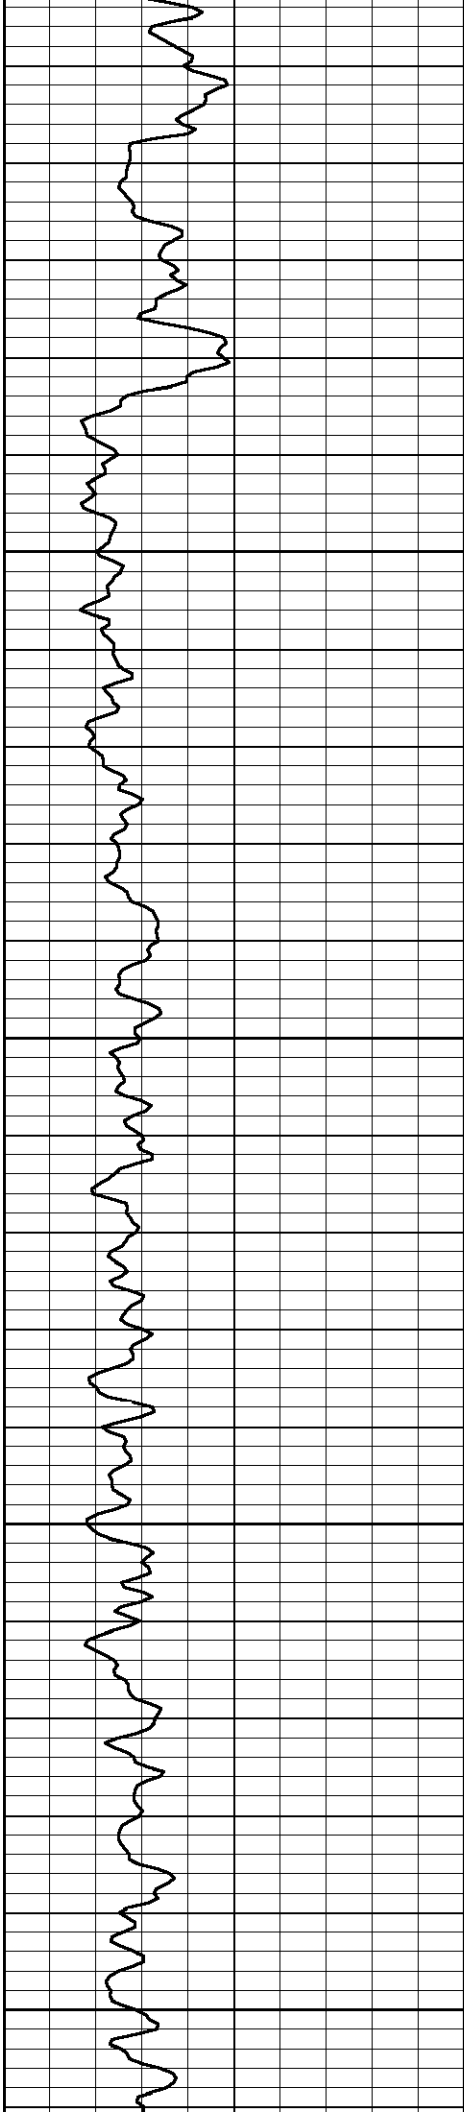

400

450

500

550

600


-103

-103

-103

-100

-100

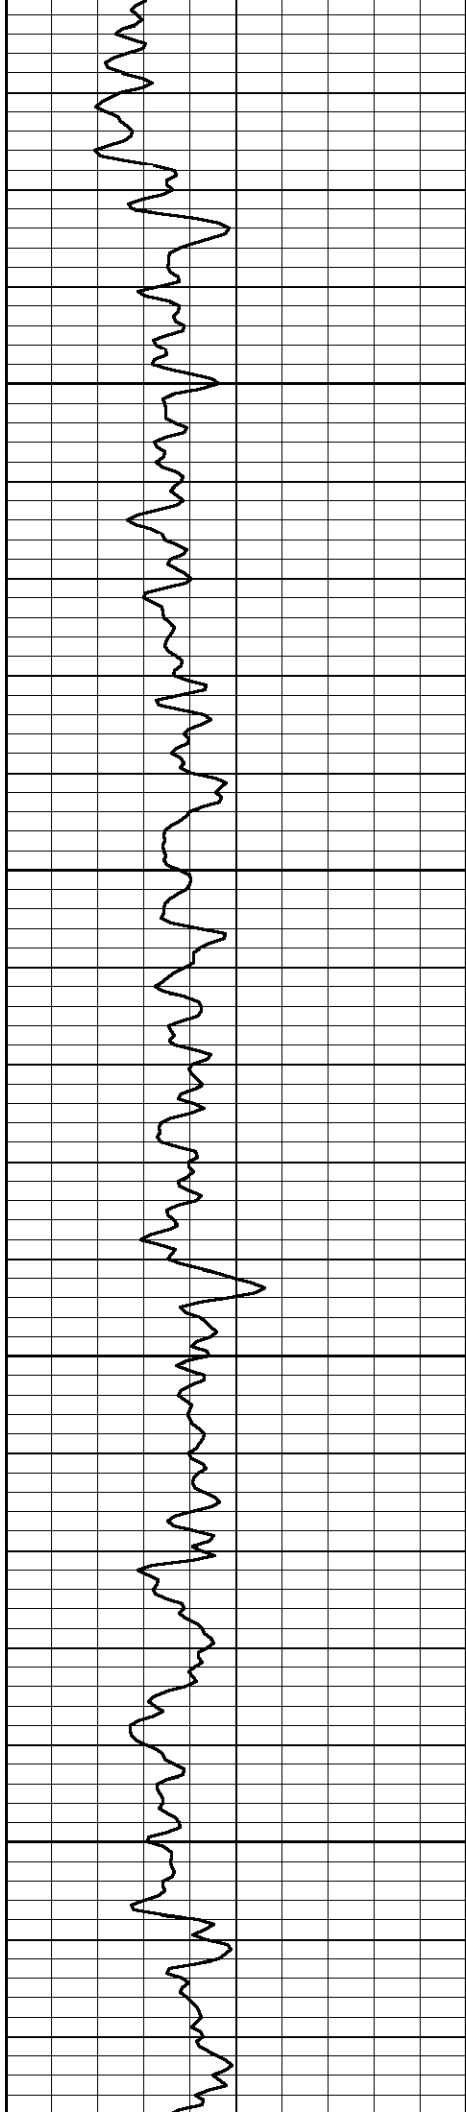

650

700

750


800

-100

-100

-100

-100

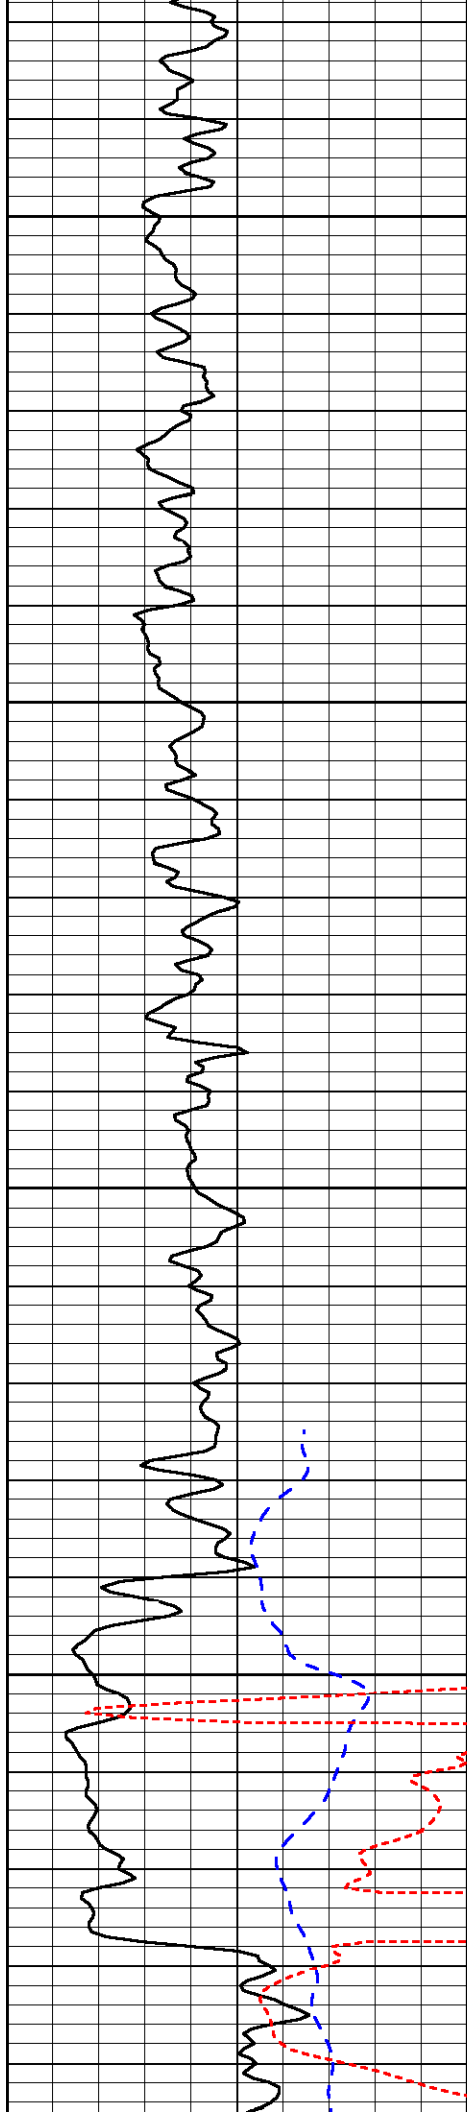


850

900

950

1000

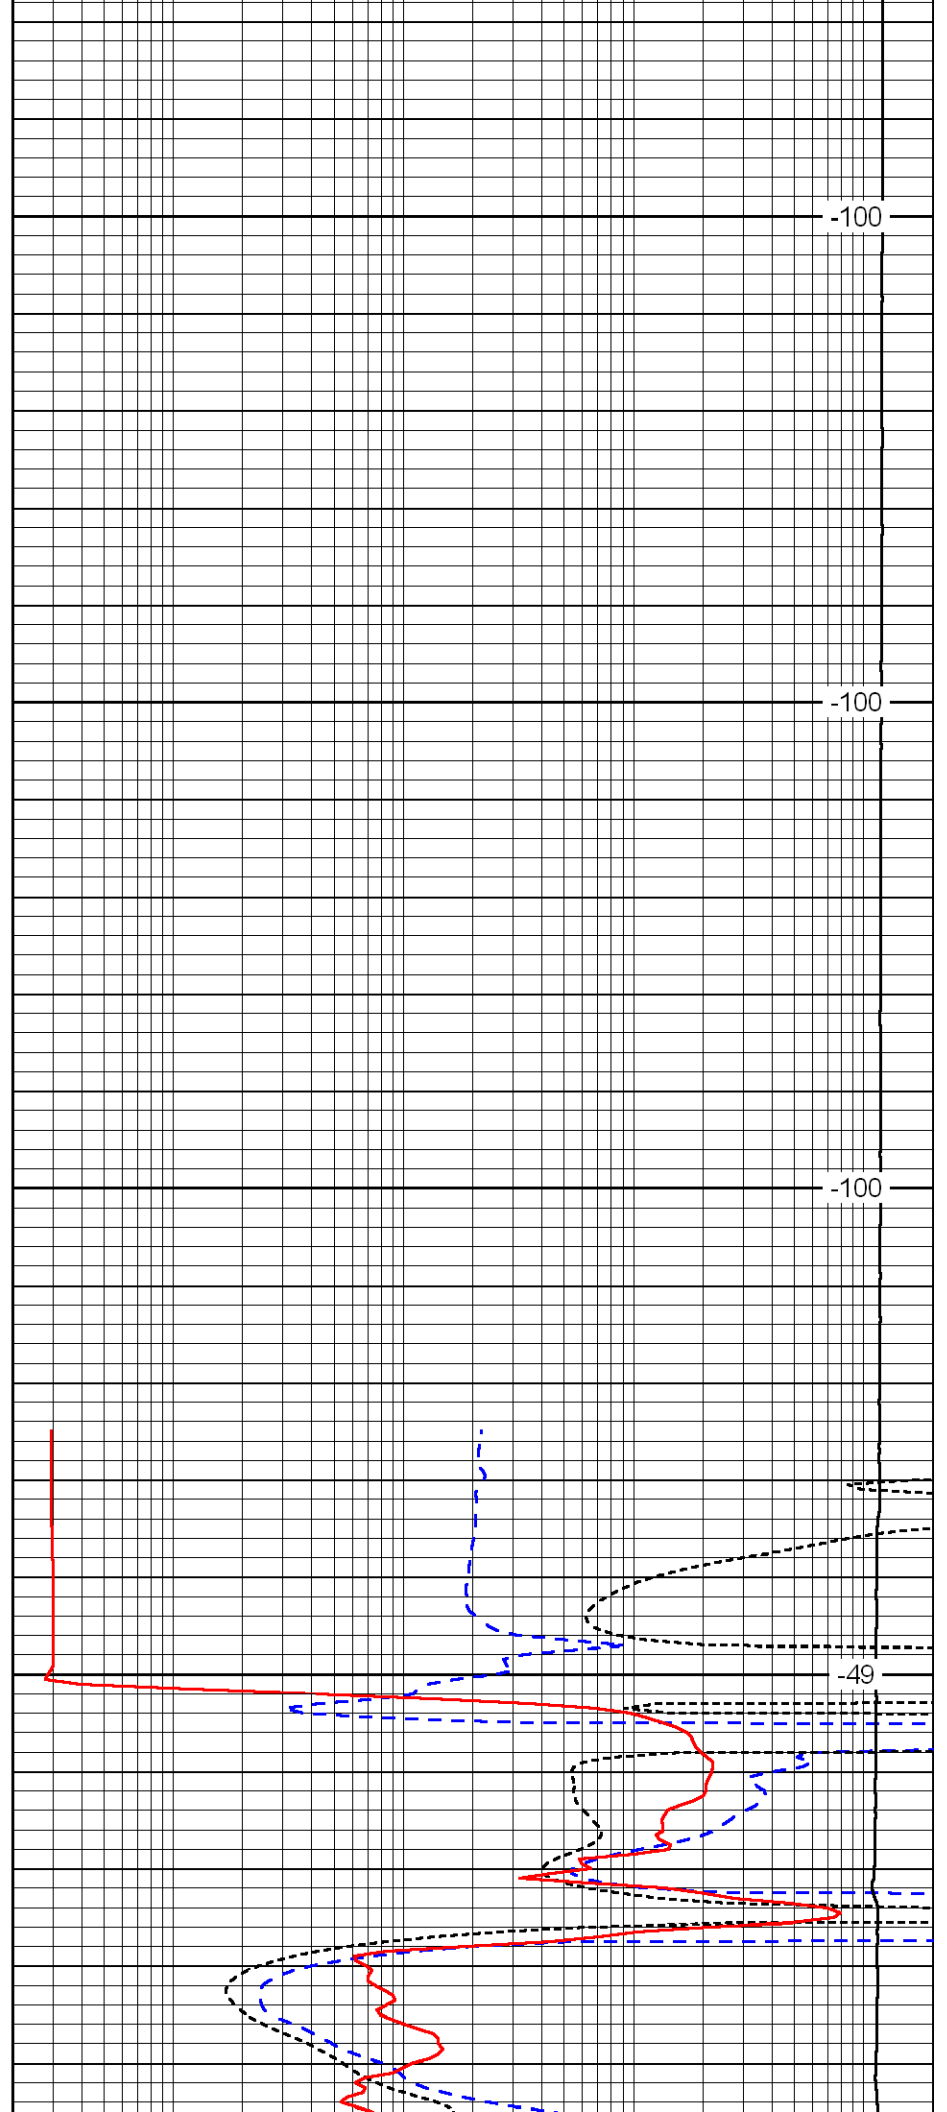


-100

-100

-100

-49

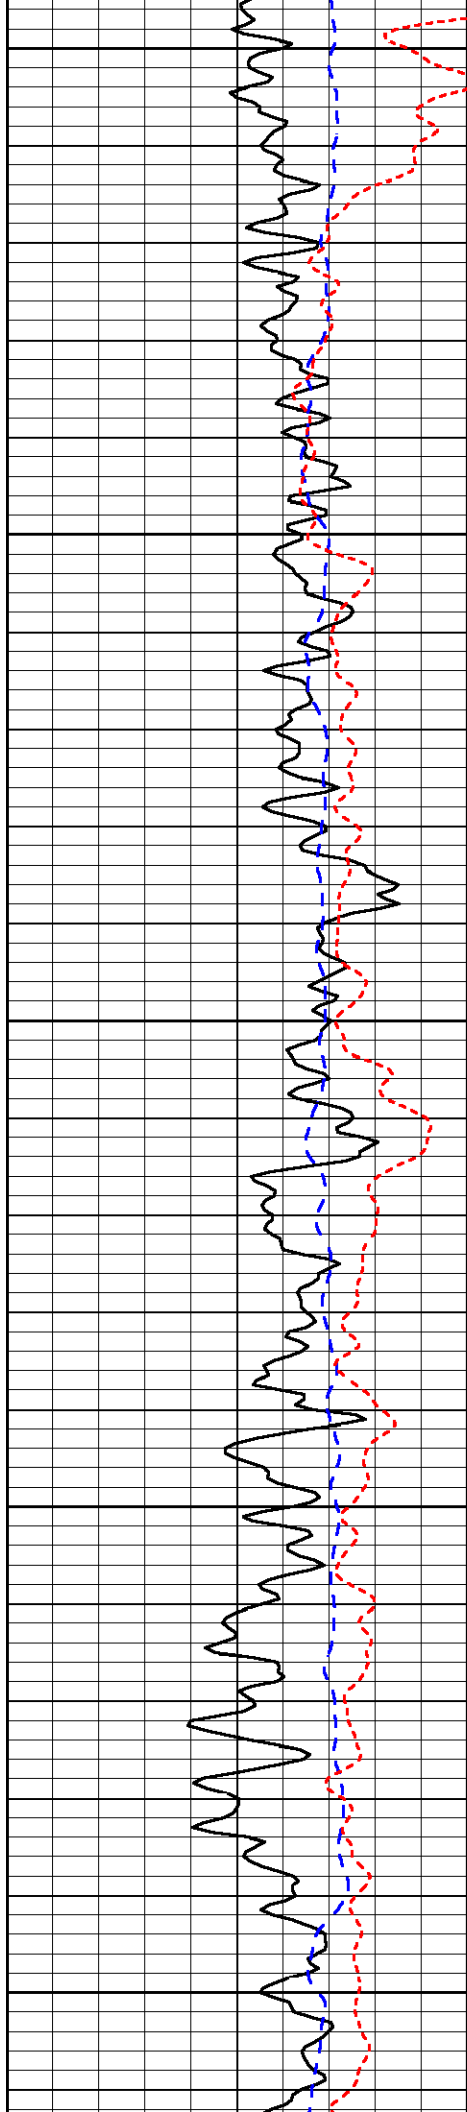


1050

1100

1150

1200

1250

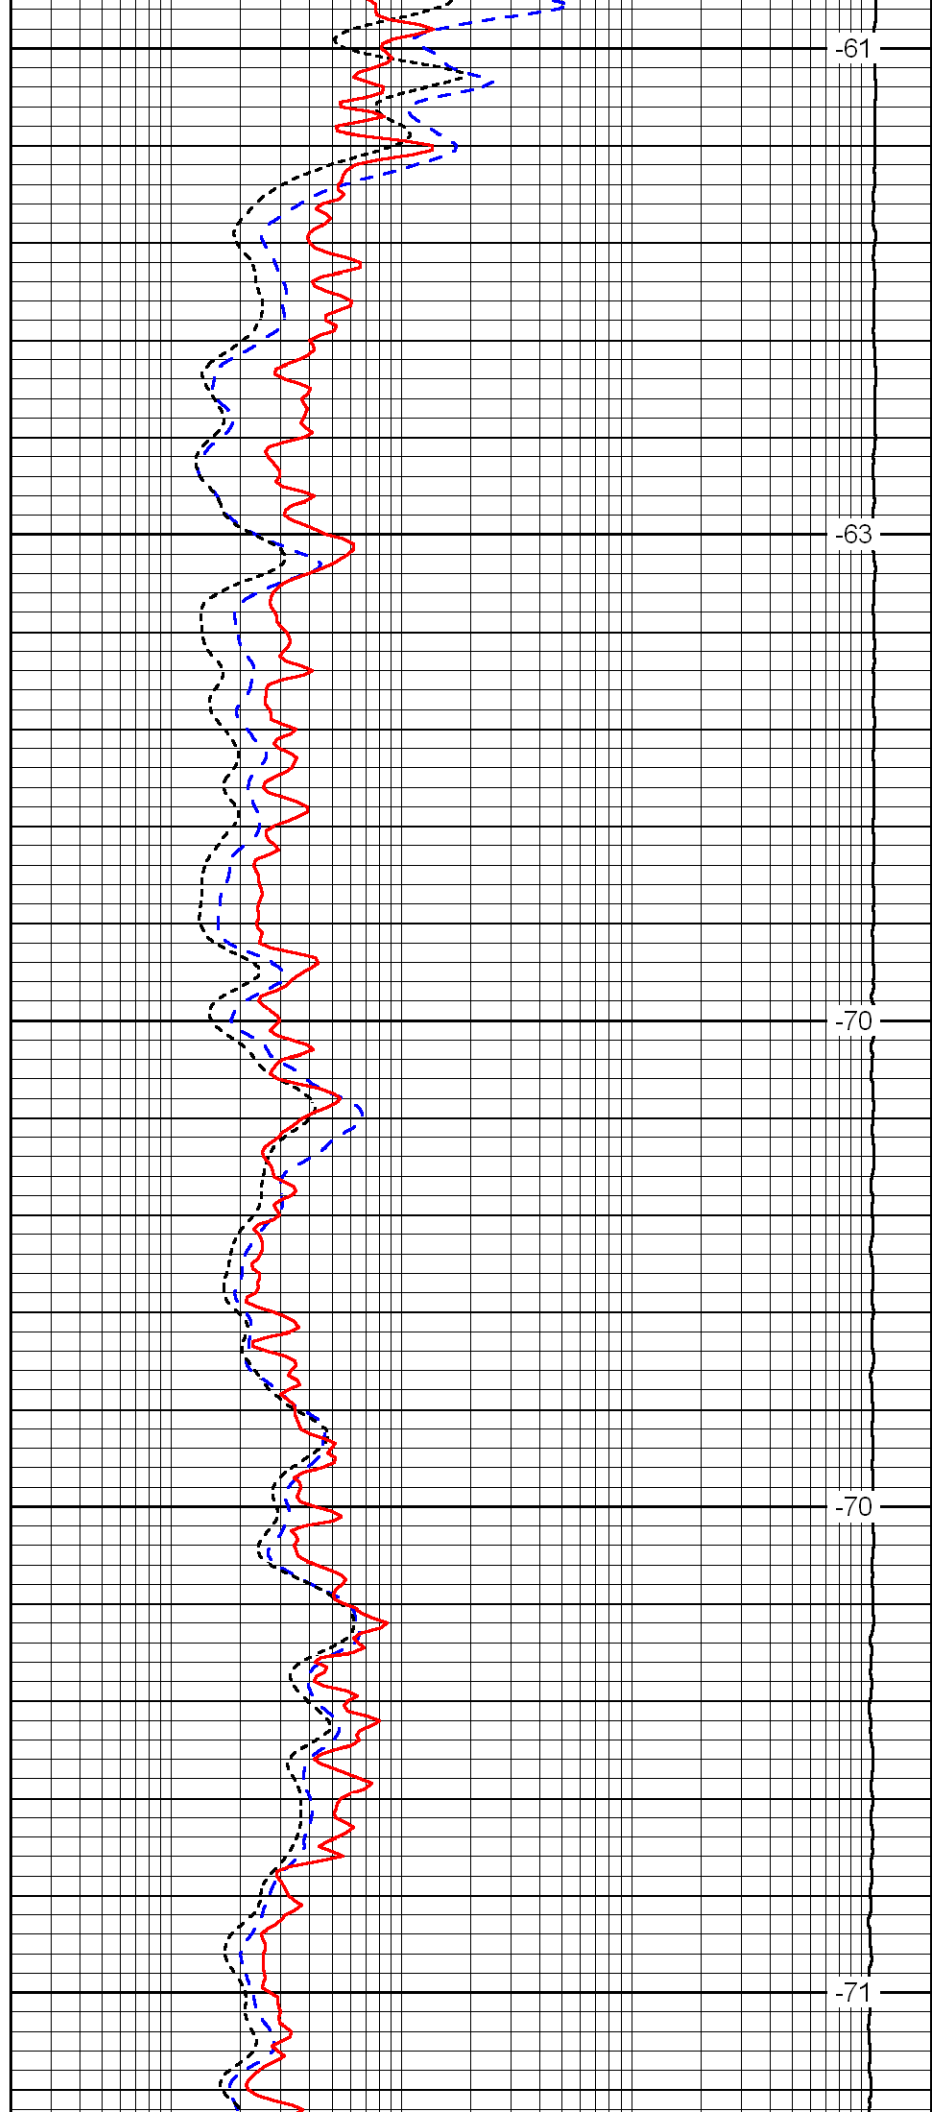


-61

-63

-70

-70

-71

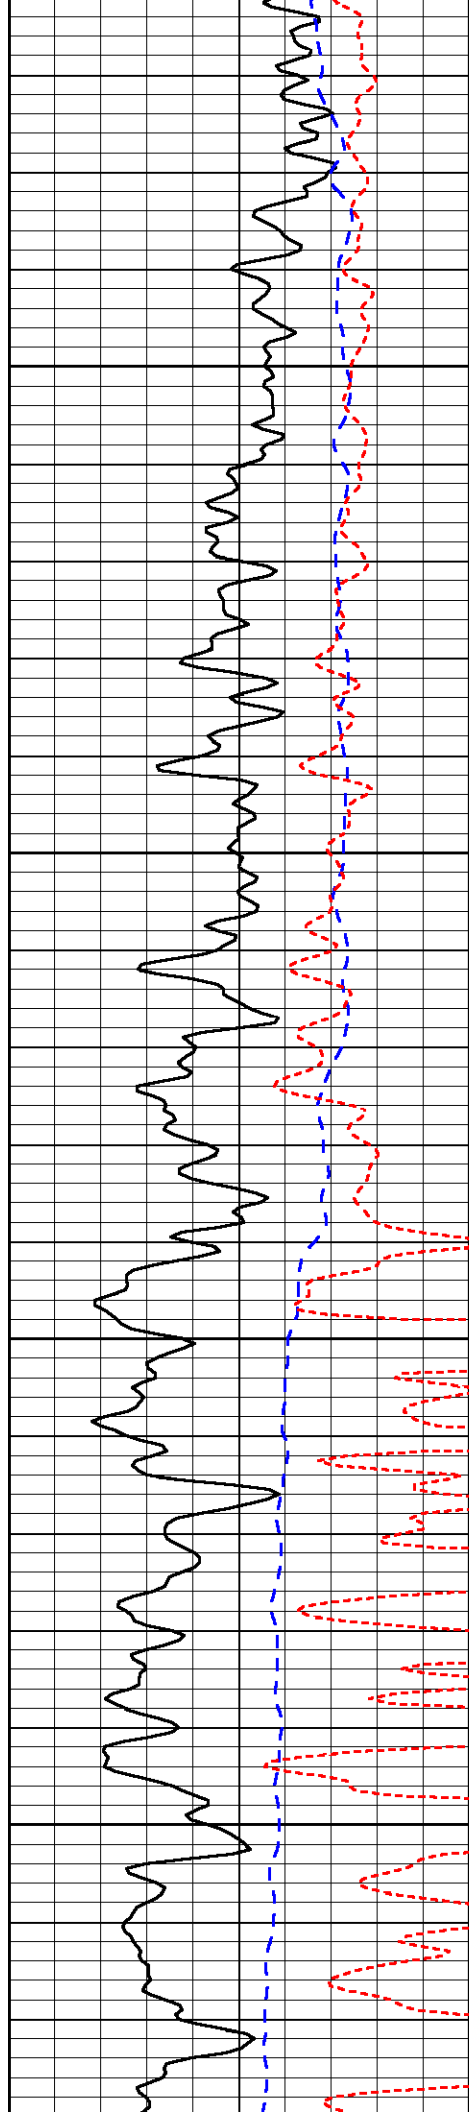


1300

1350

1400

1450

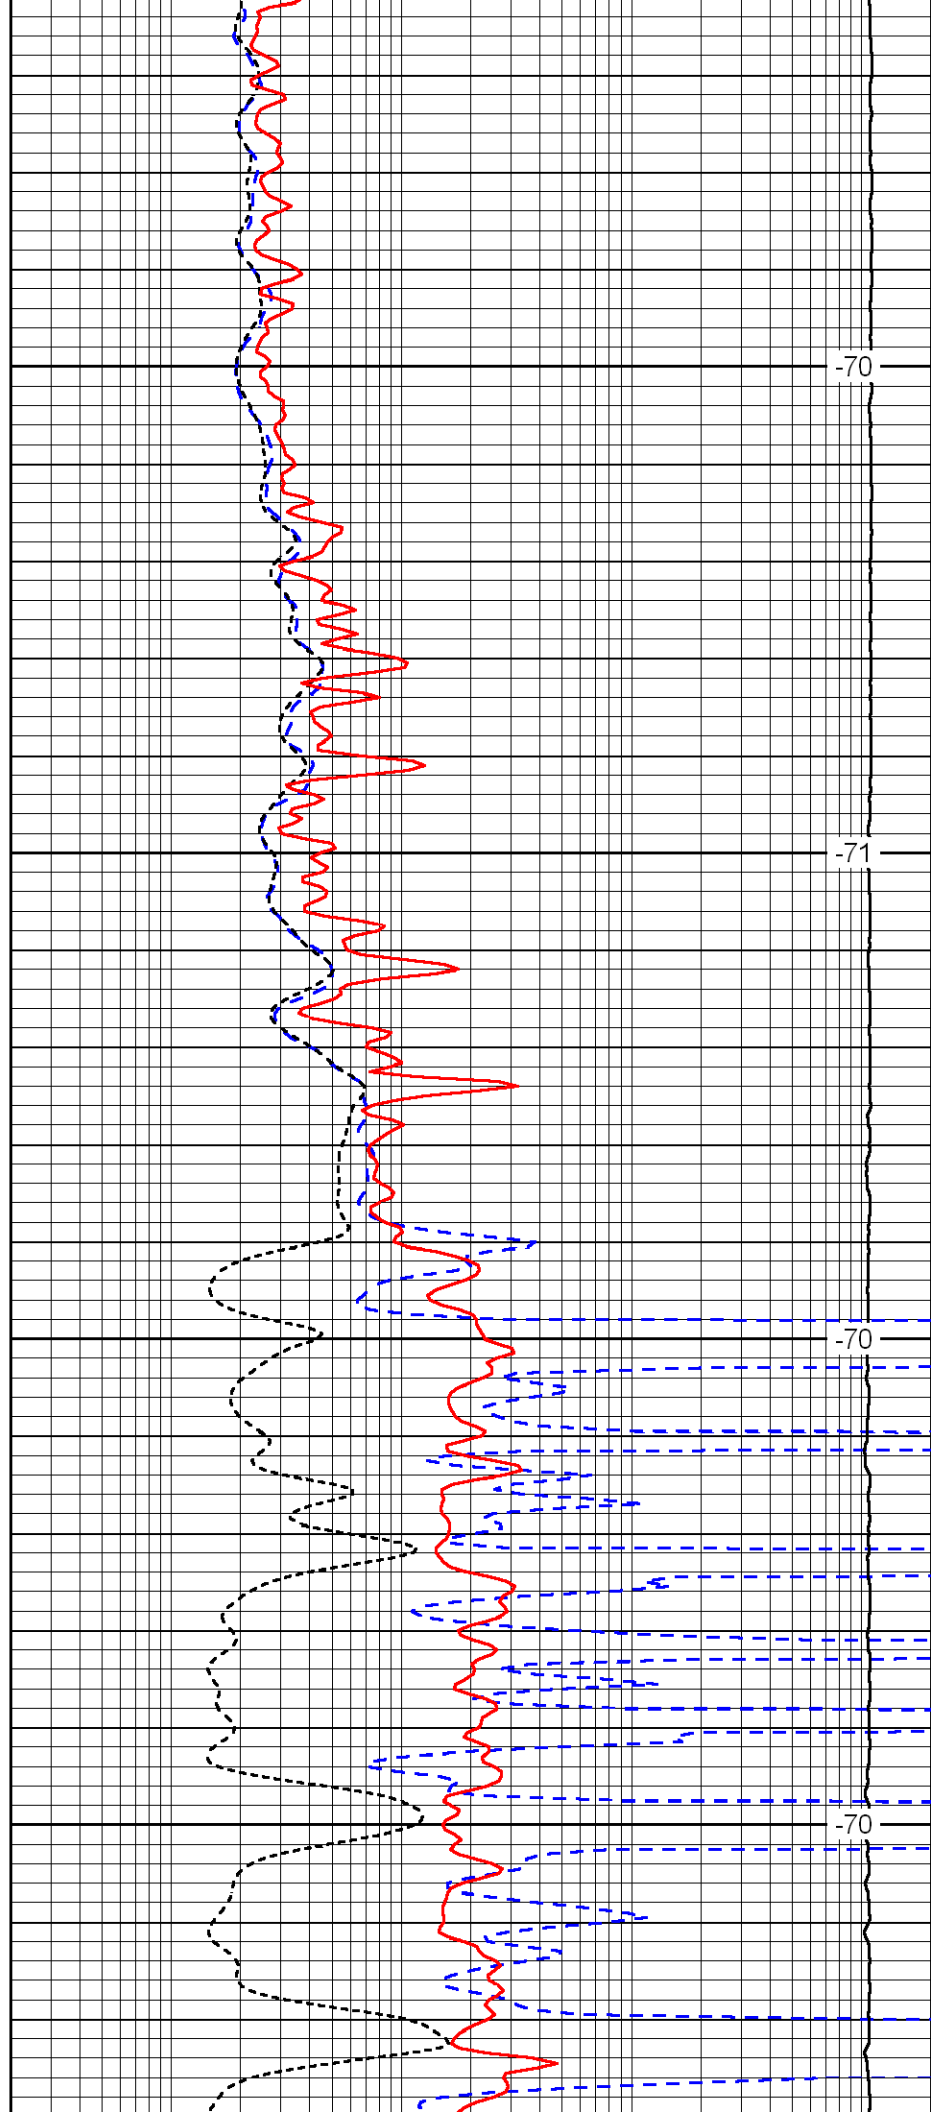


-70

-71

-70

-70

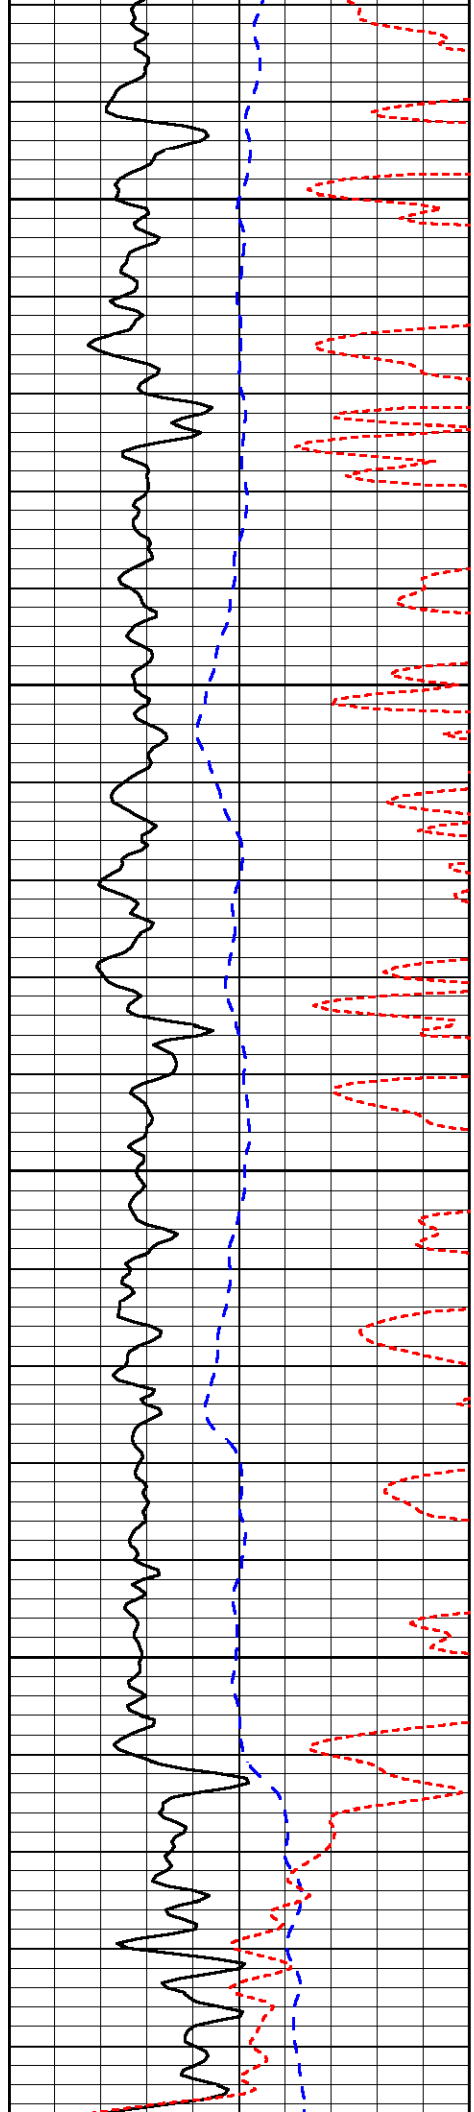


1500

1550

1600

1650

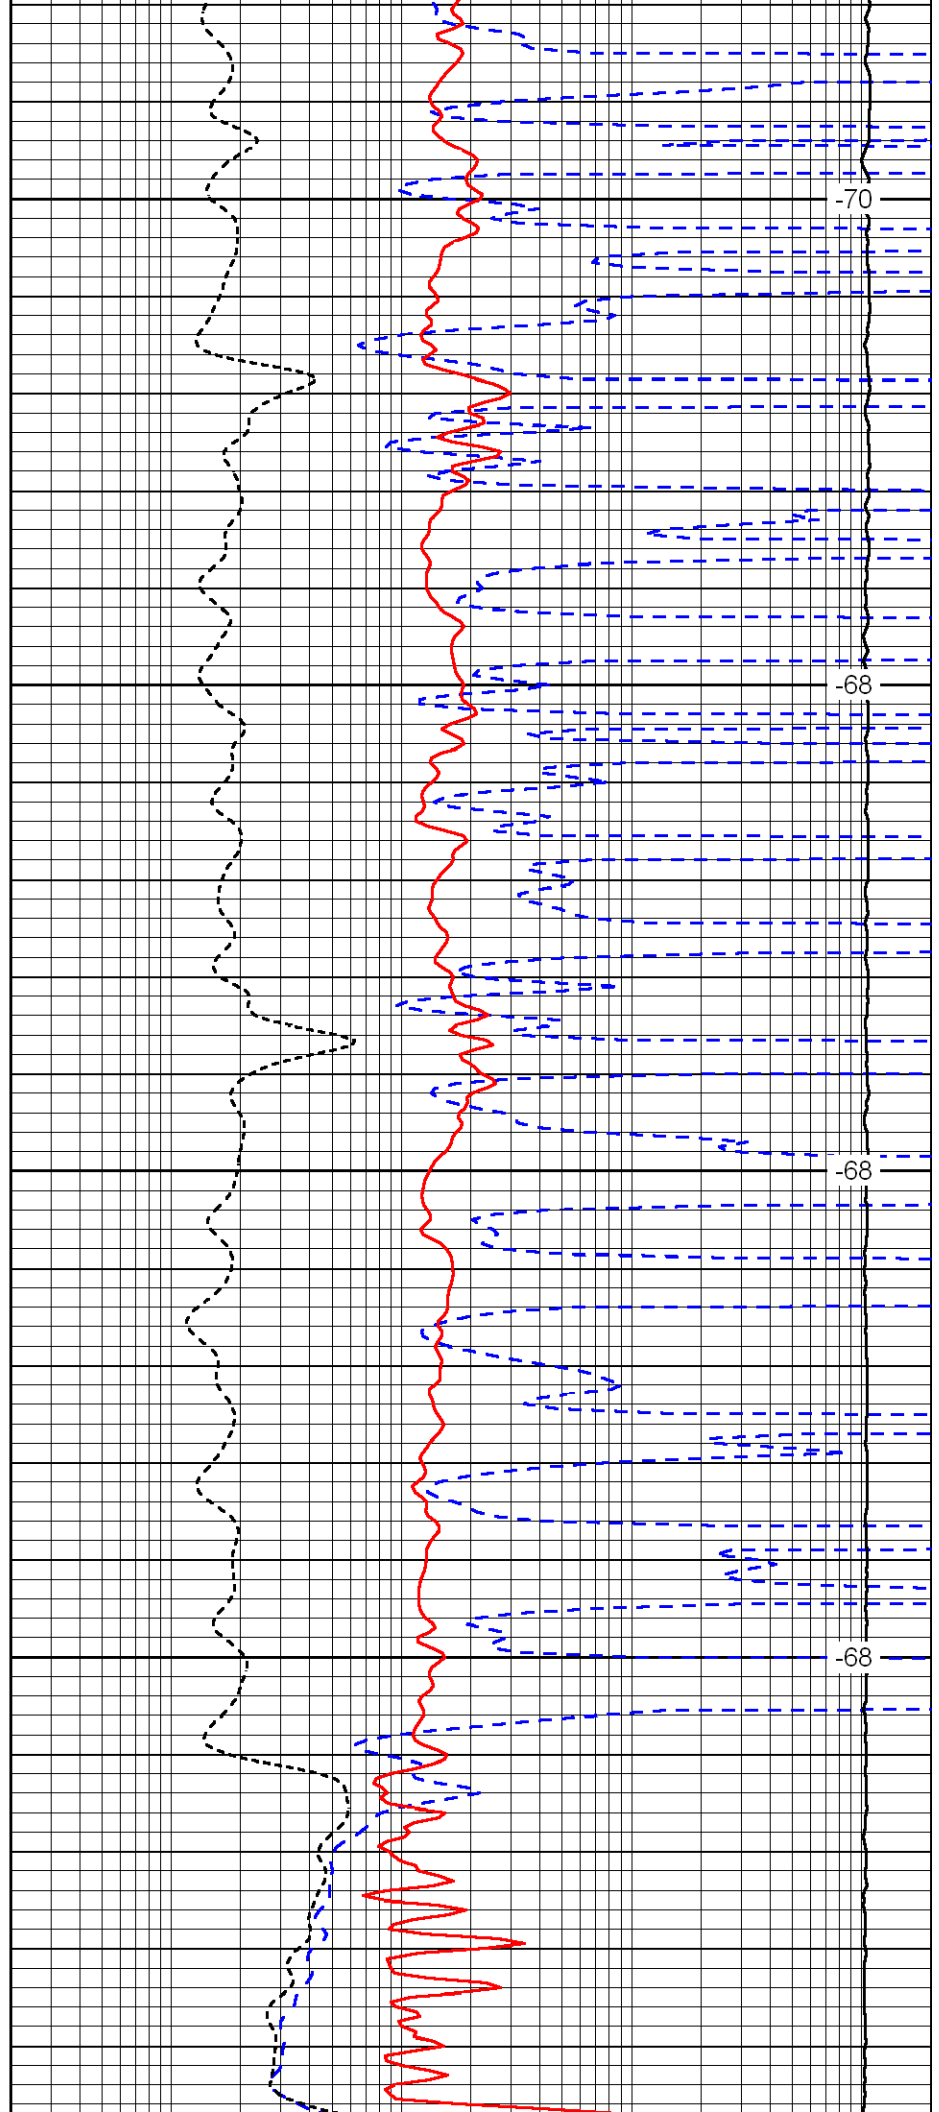


-70

-68

-68

-68

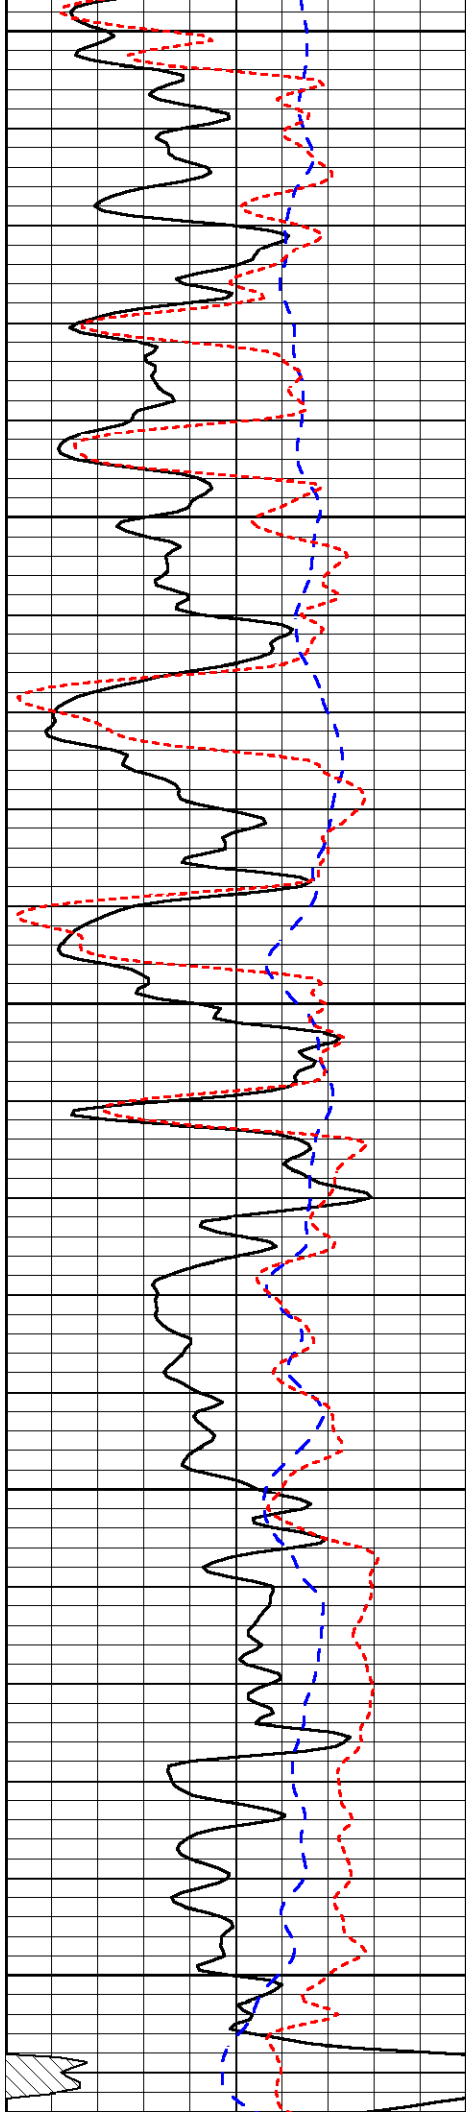


1700

1750

1800

1850

1900

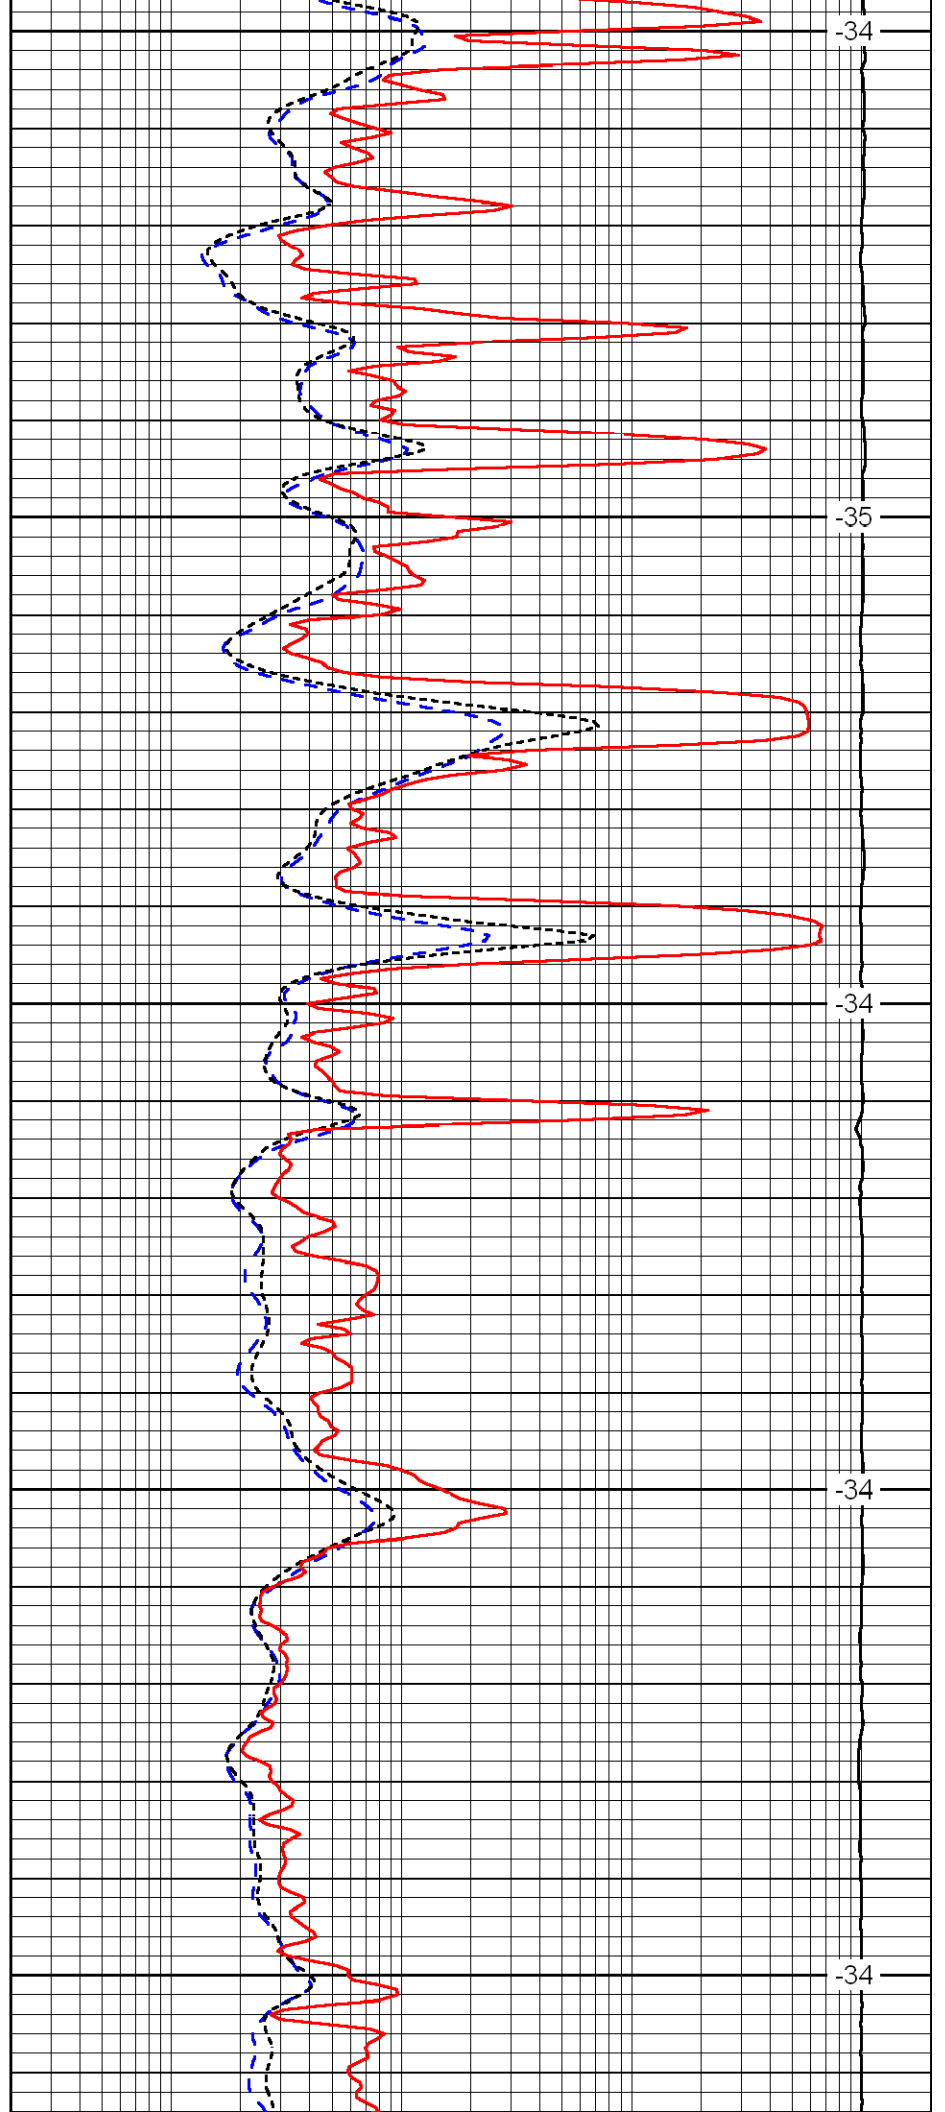


-34

-35

-34

-34

-34

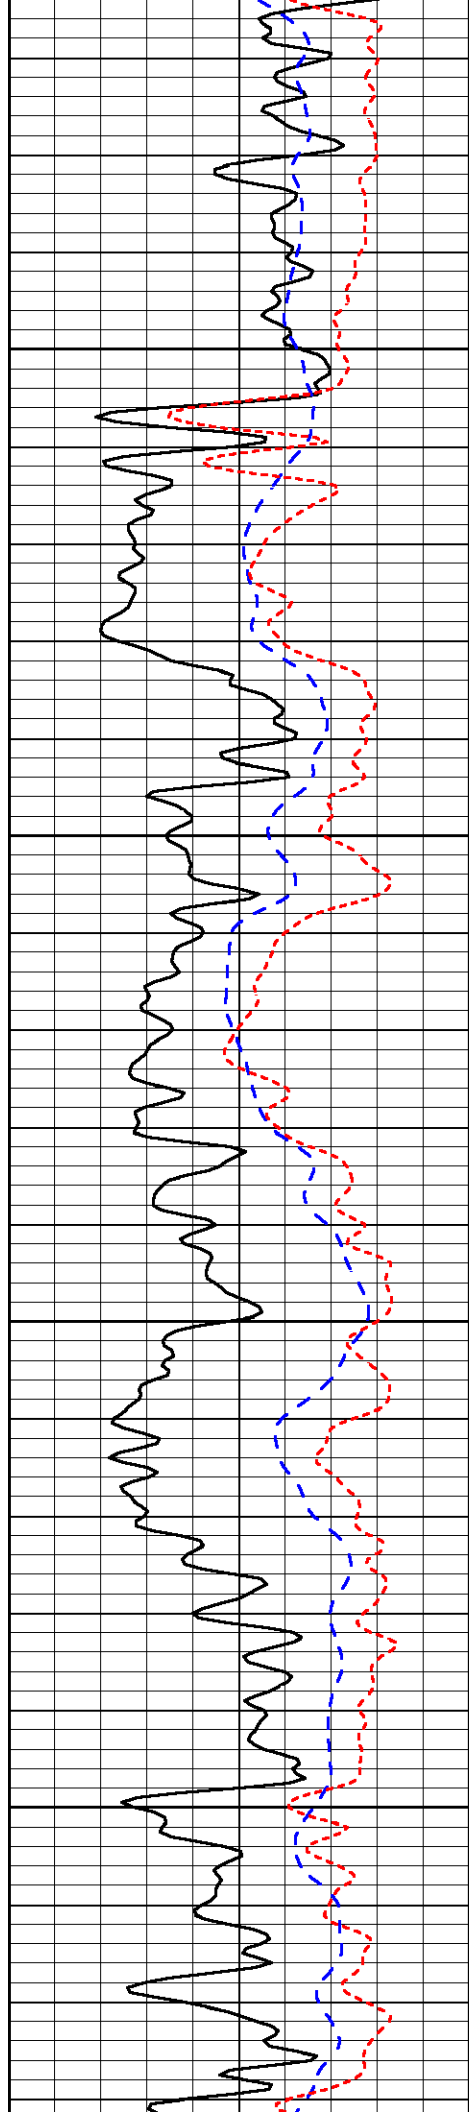


1950

2000

2050

2100

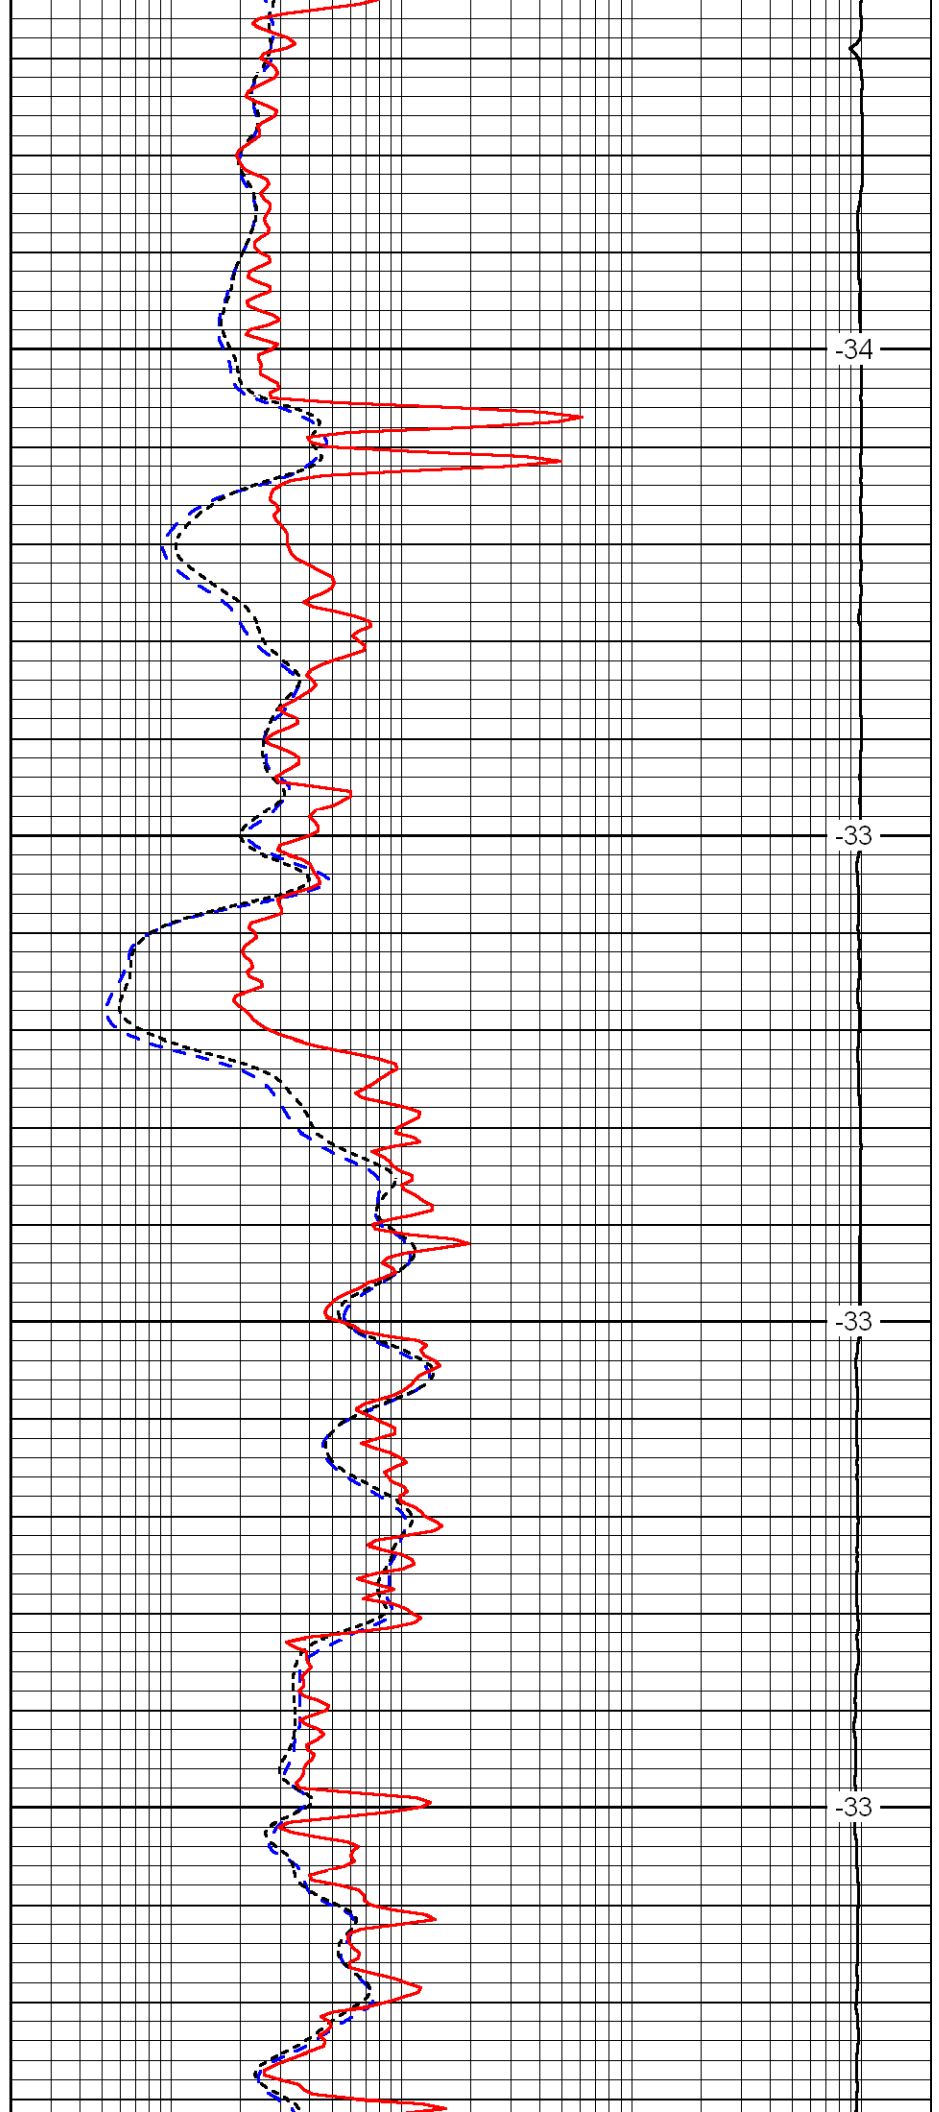


-34

-33

-33

-33

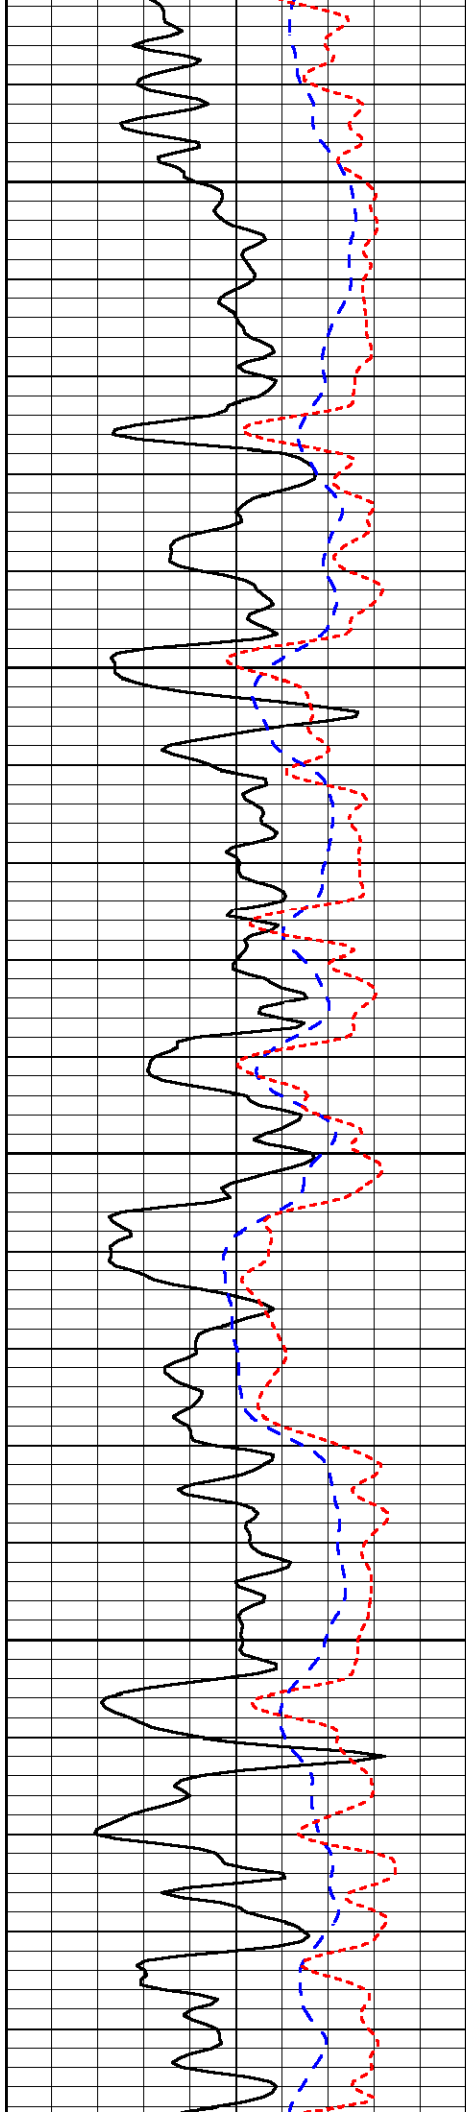


2150

2200

2250

2300

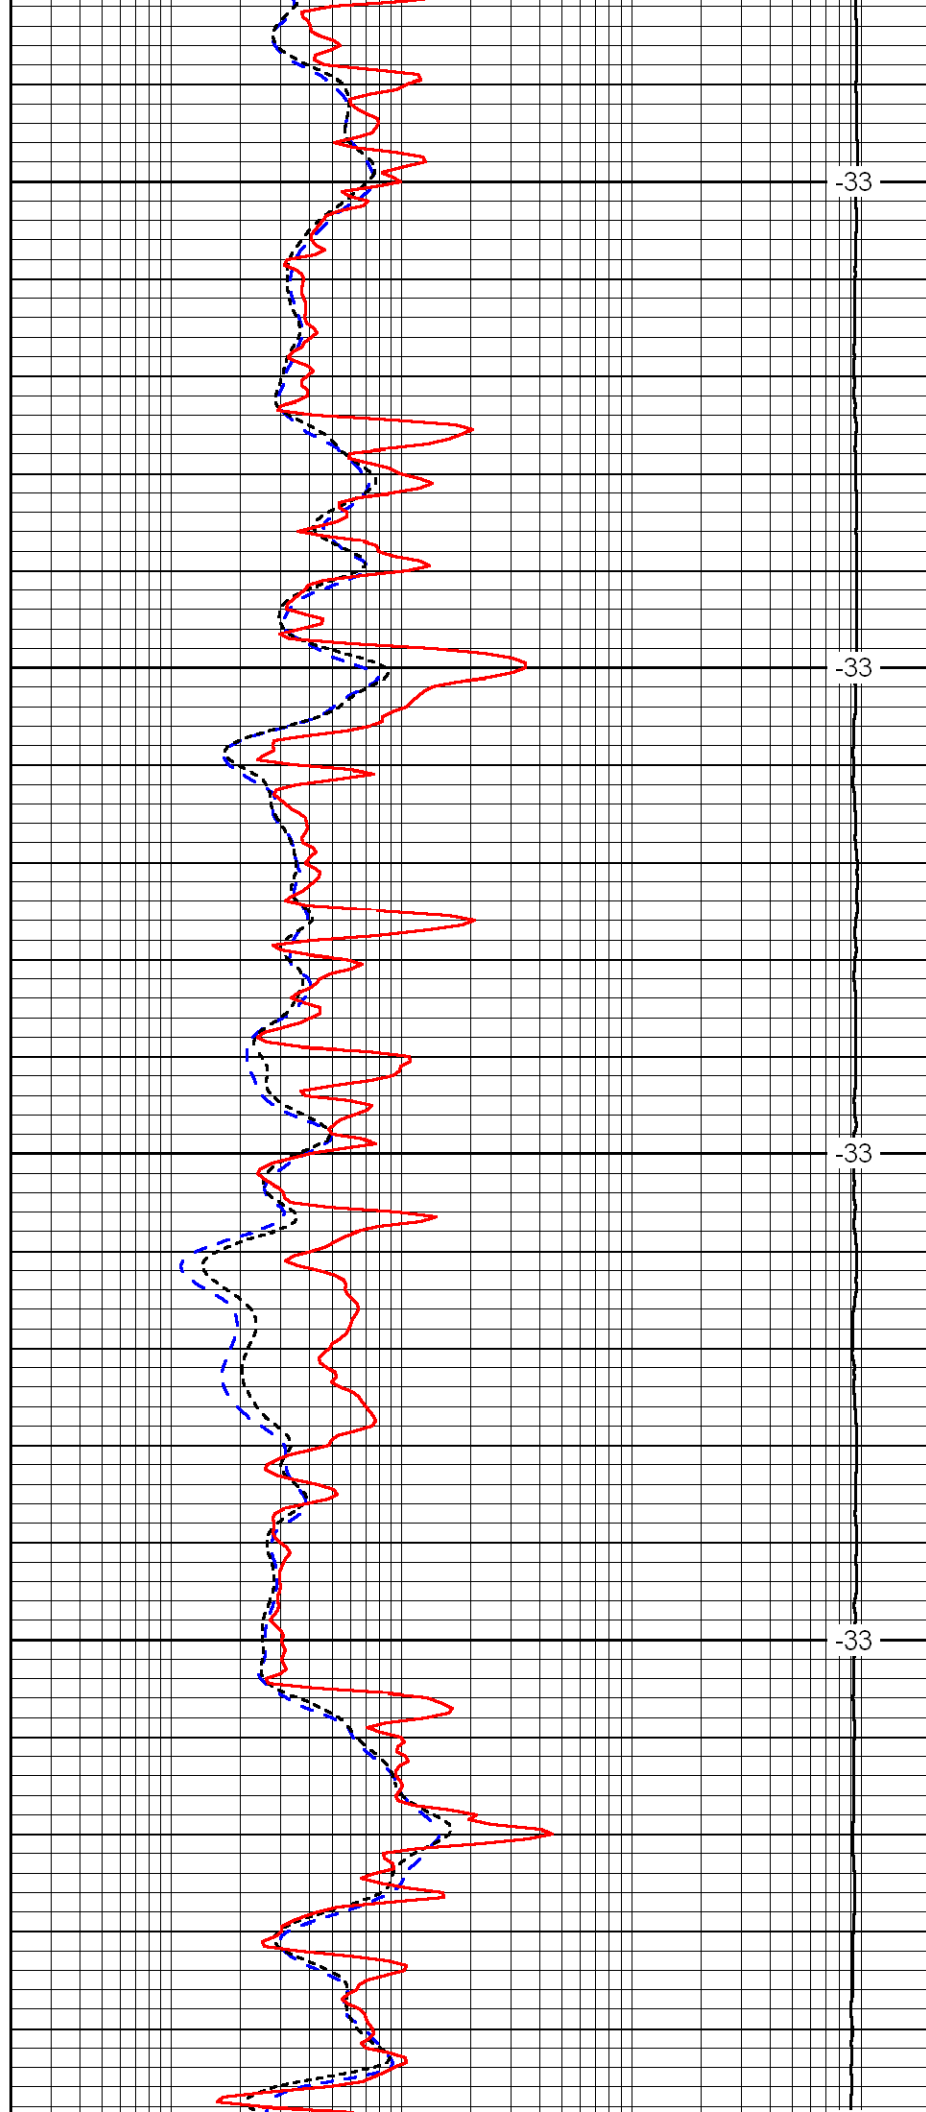


-33

-33

-33

-33

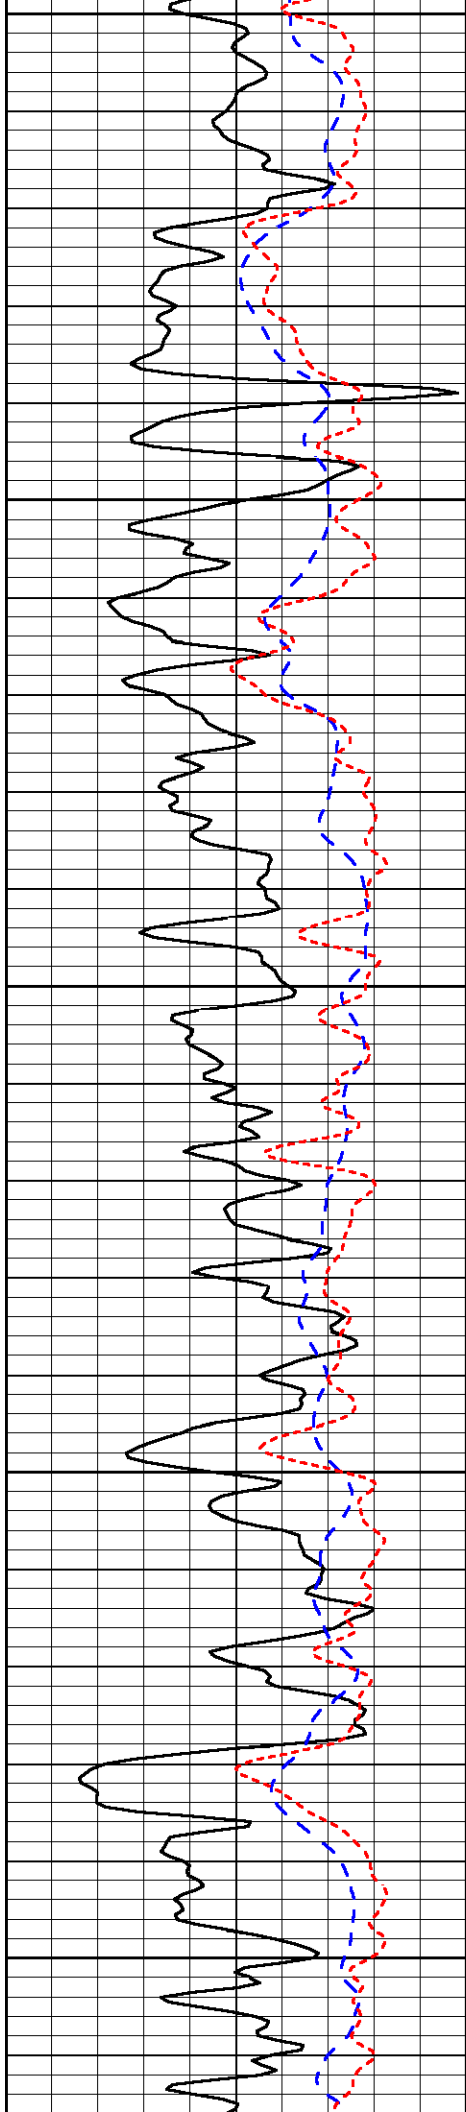


2350

2400

2450

2500

2550

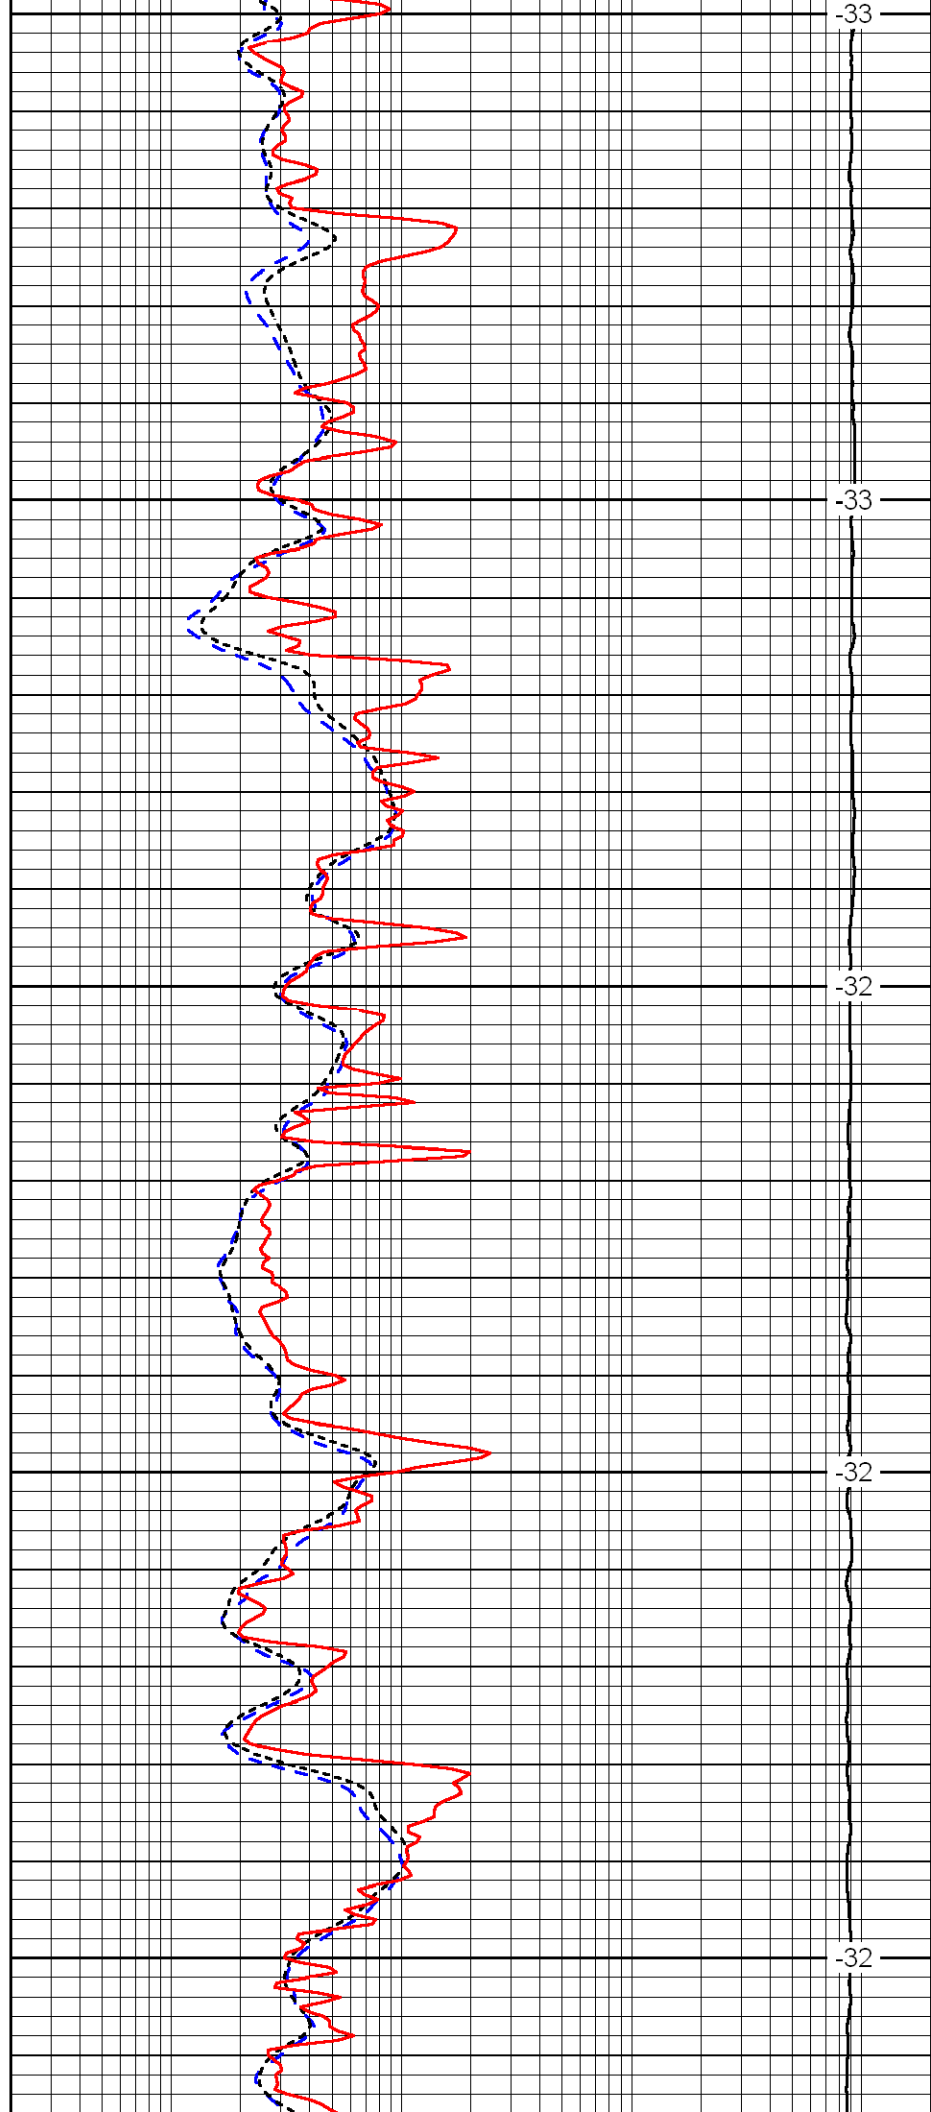


-33

-33

-32

-32

-32

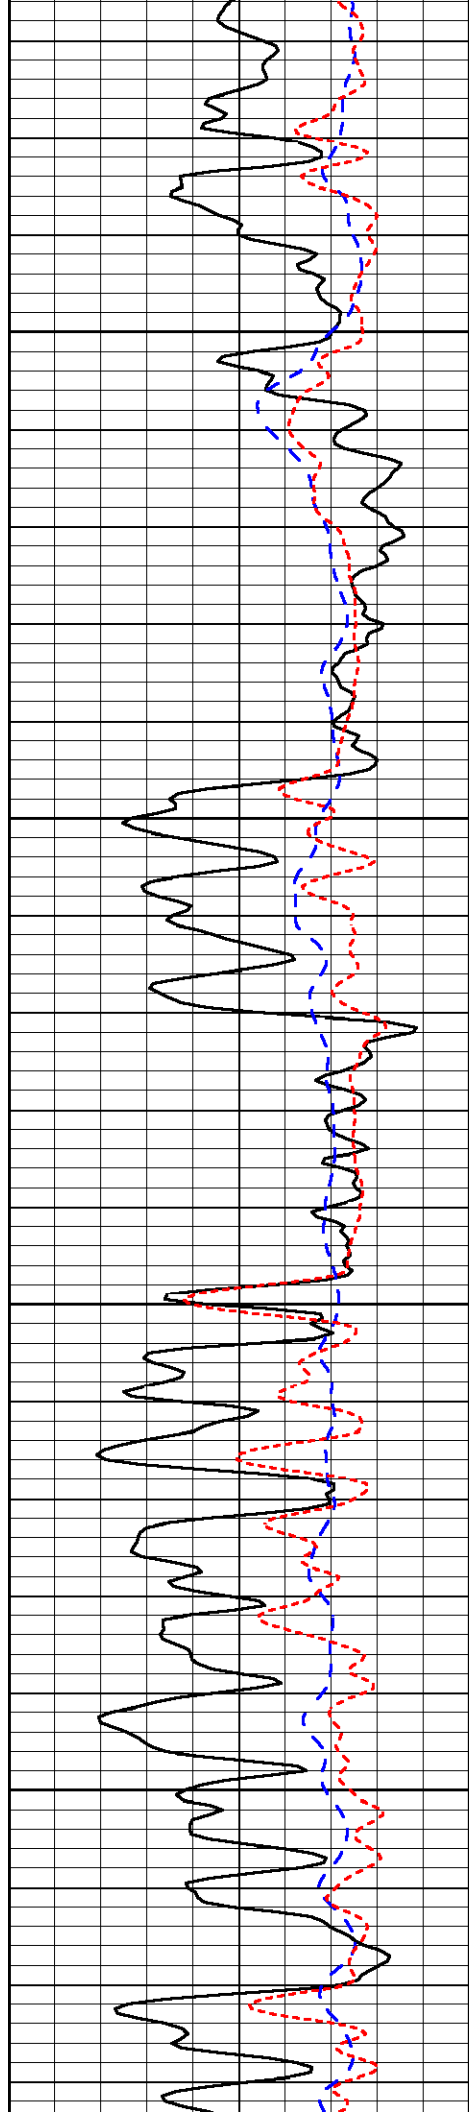


2600

2650

2700

2750

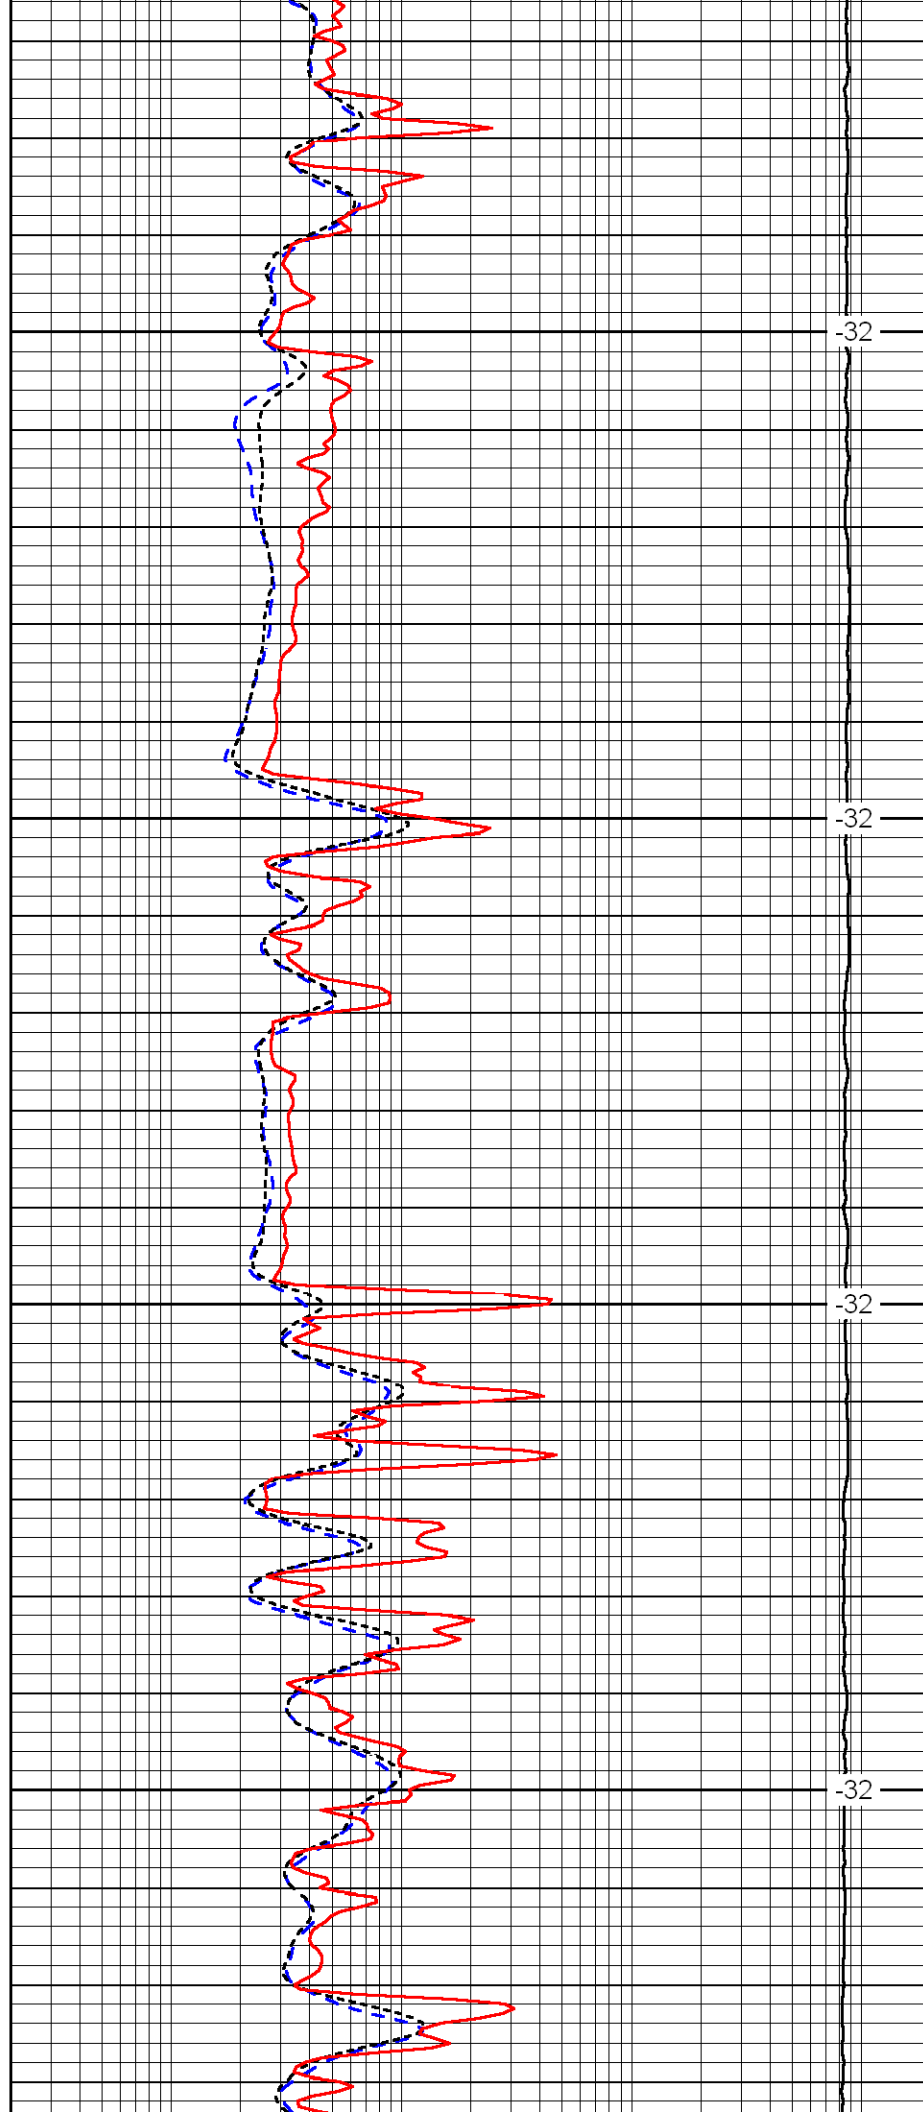


-32

-32

-32

-32

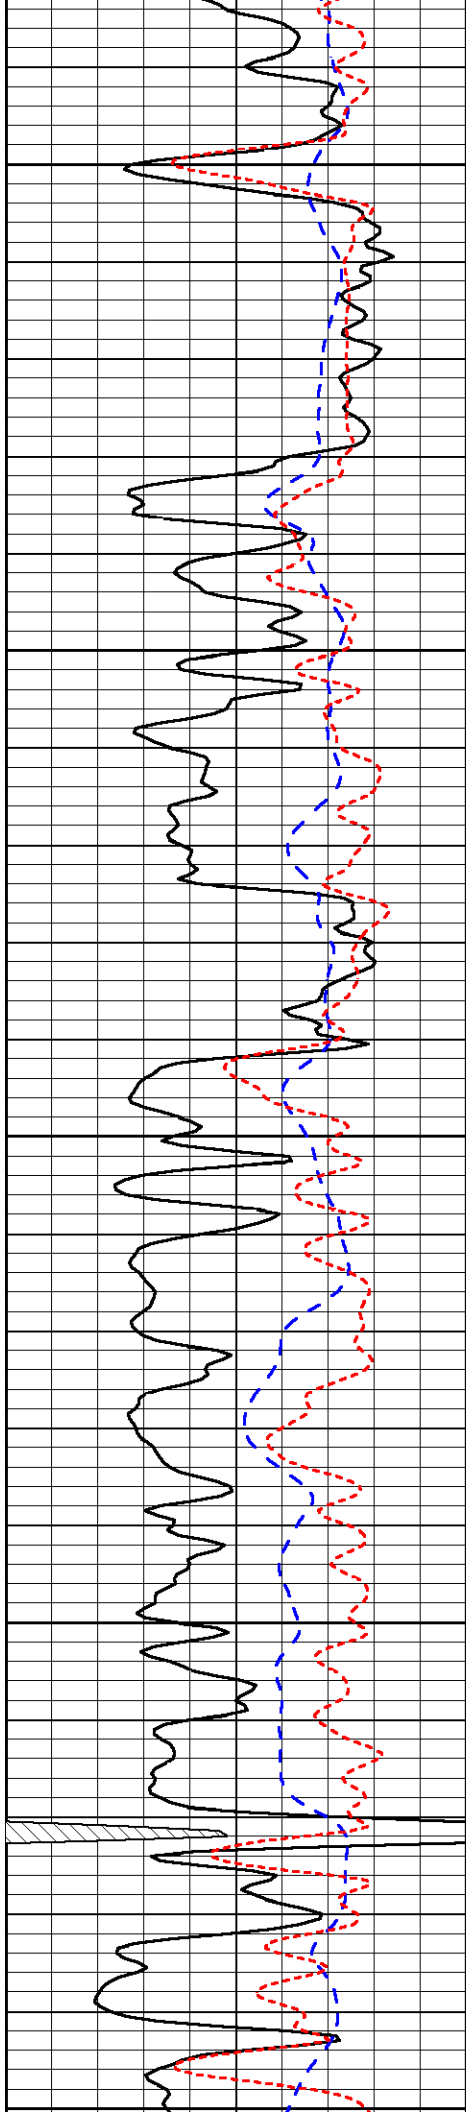


2800

2850

2900

2950

3000

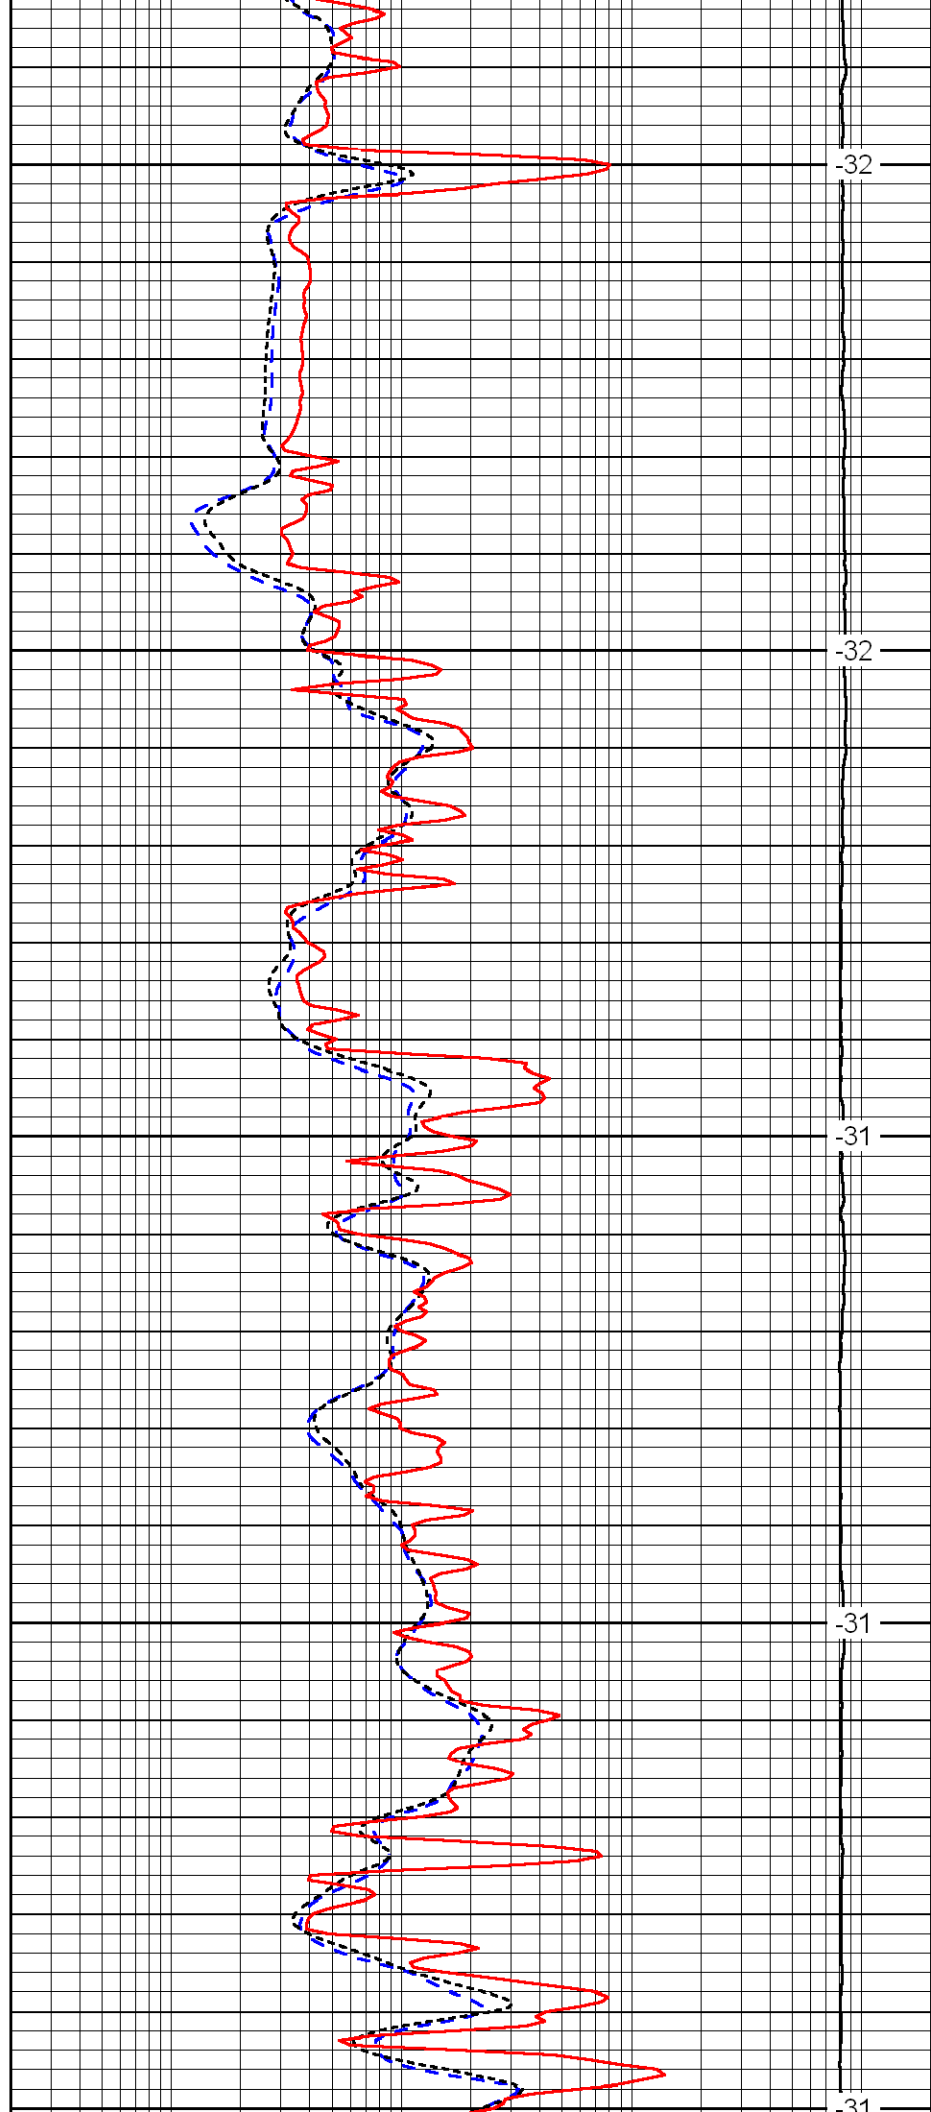



-32


-32

-31

-31

-31

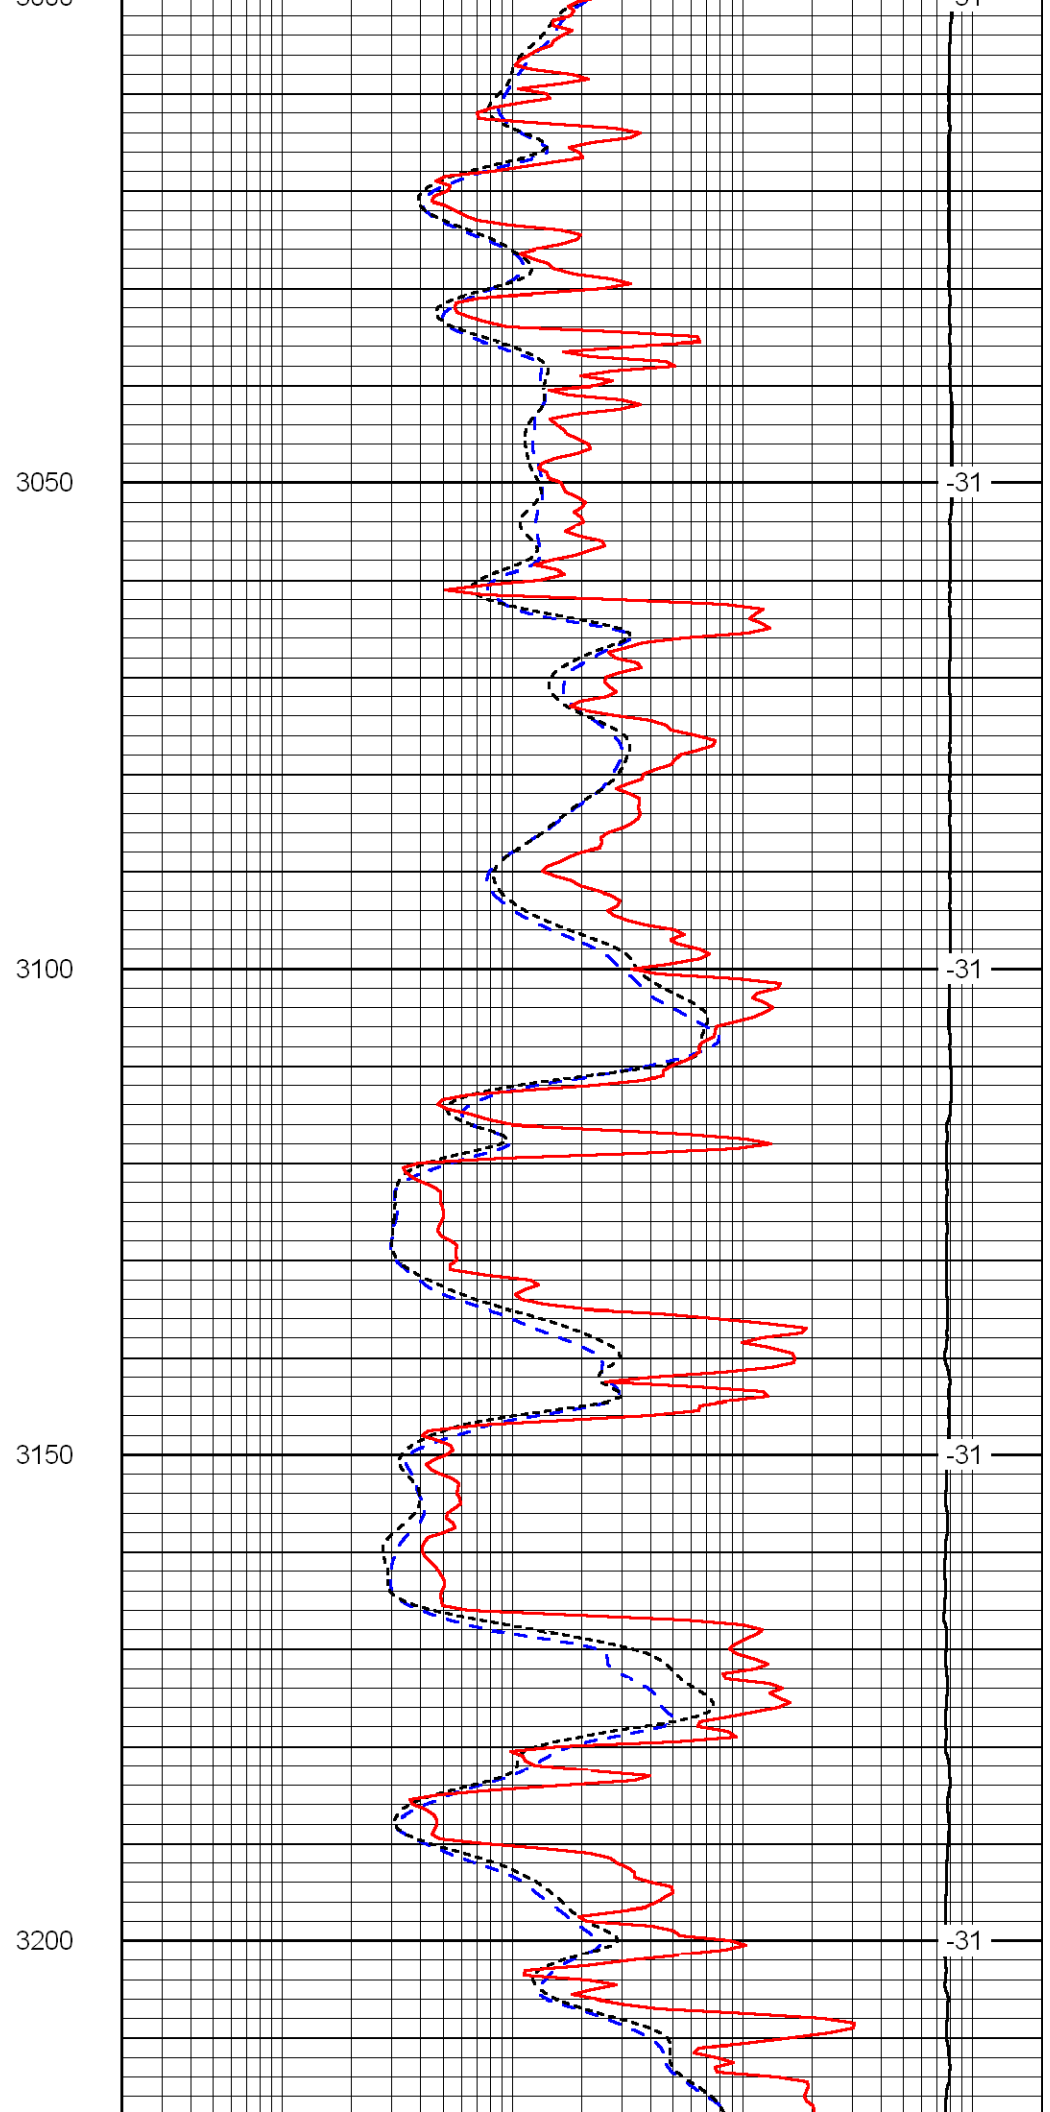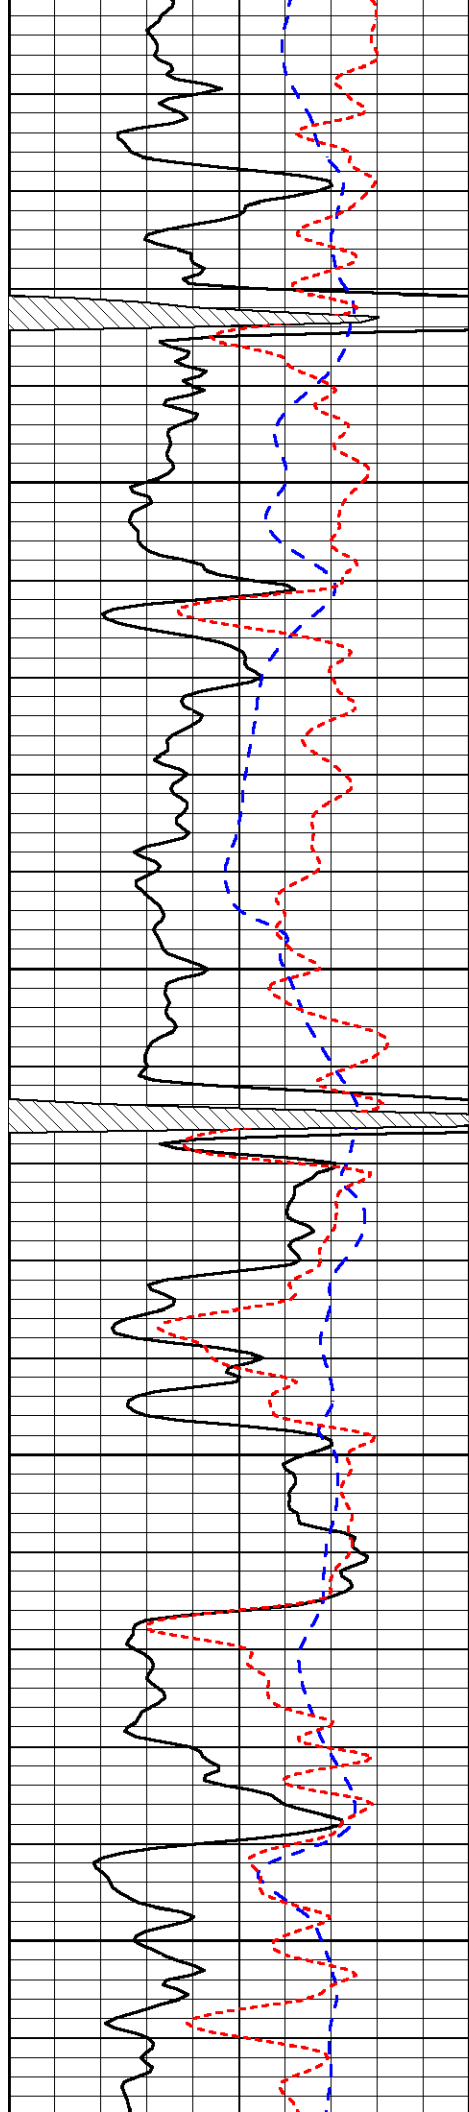

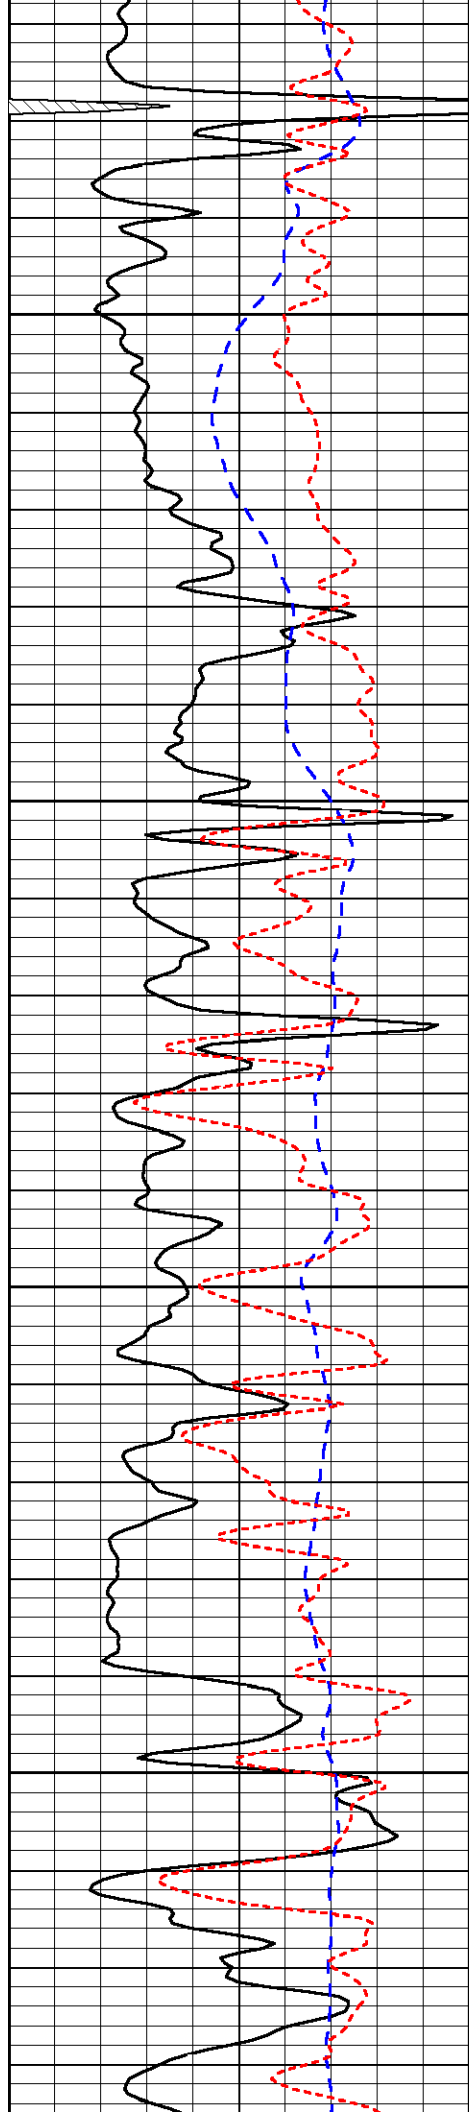


3250

3300

3350

3400

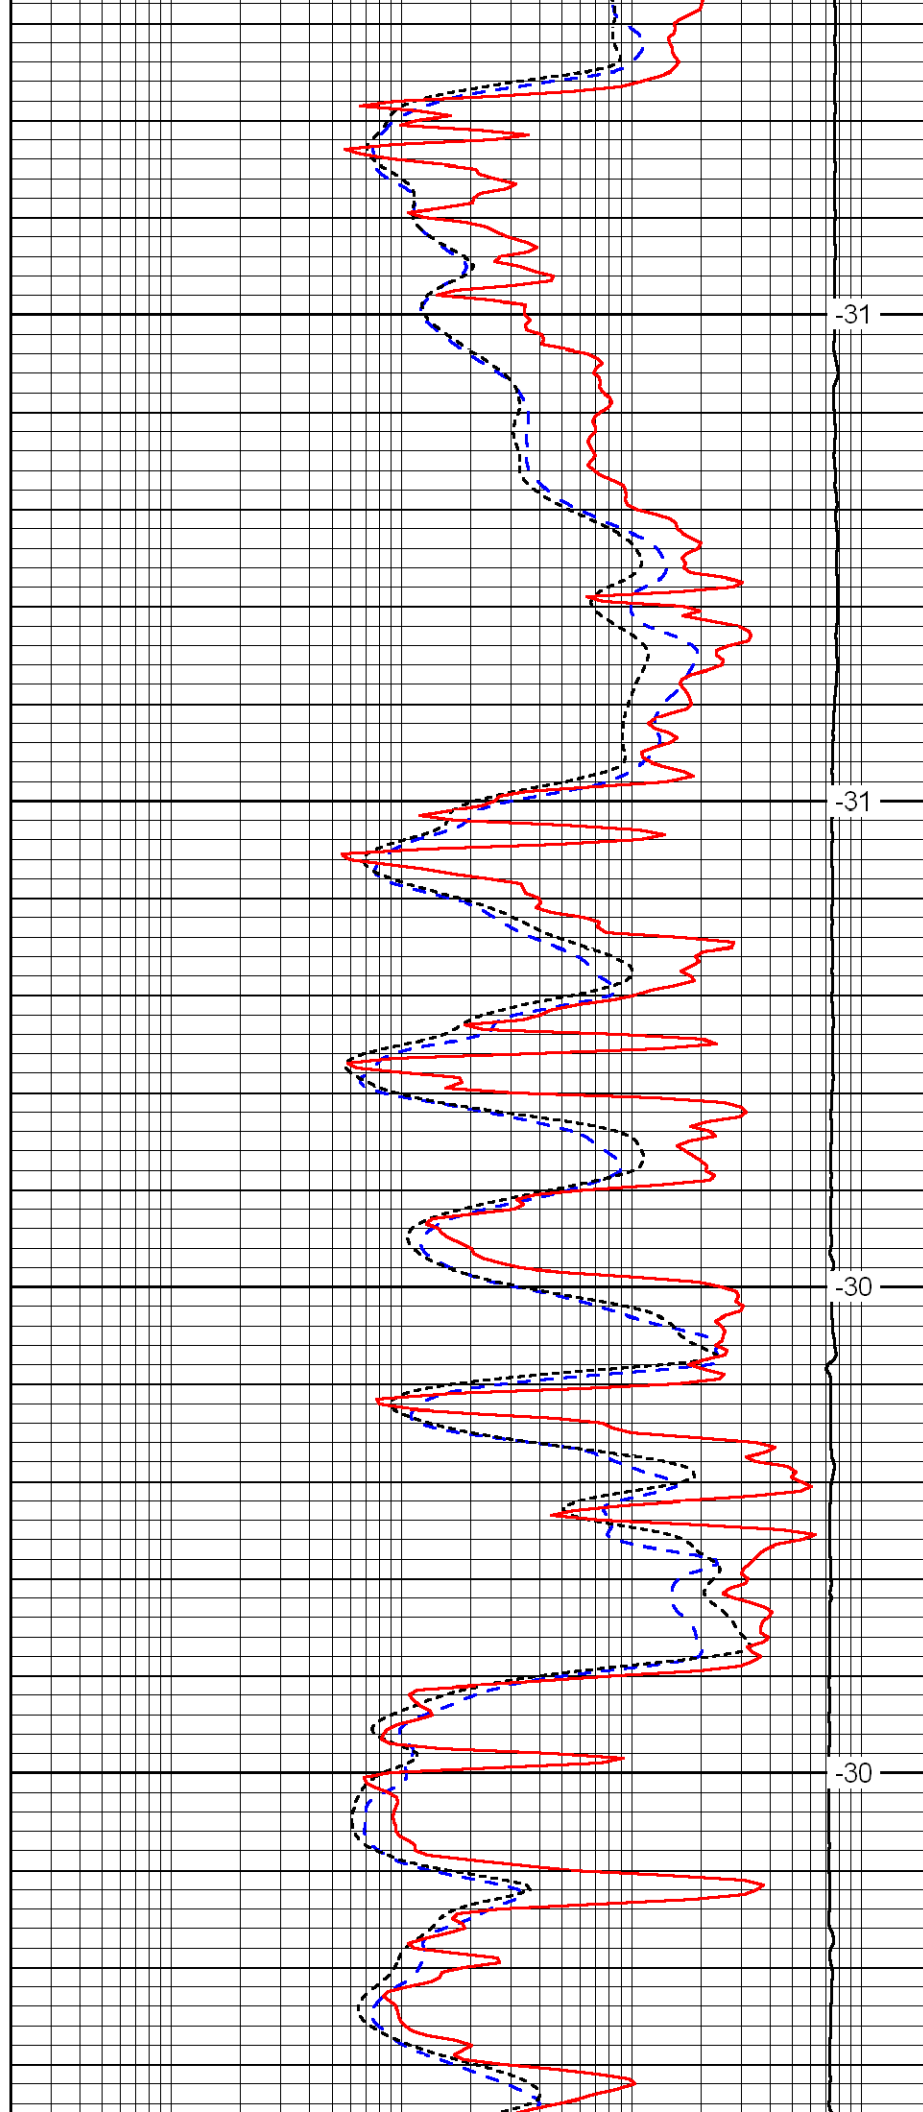


31

31

30

30

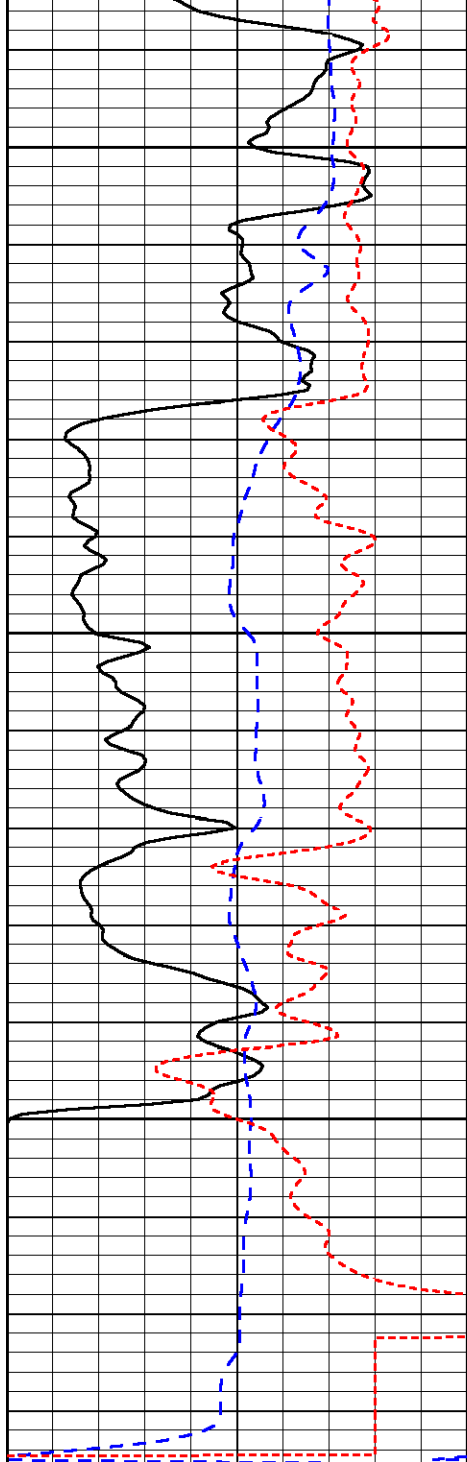


0	Gamma Ray	150
-200	SP (MV)	0
-160	Rxo / Rt	40

3450

3500

3550

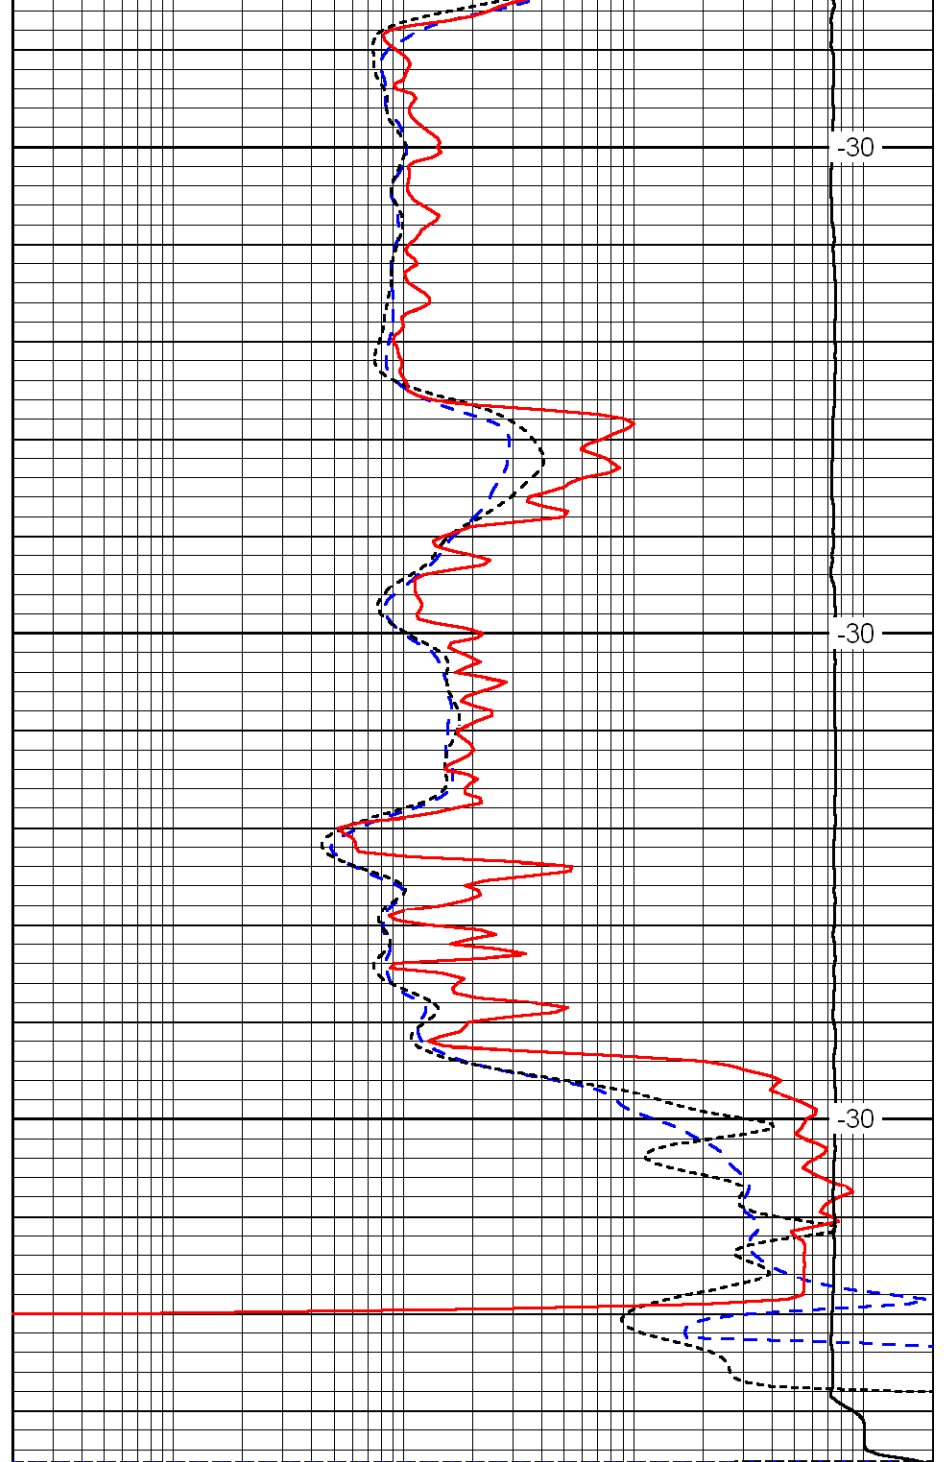

30

30

30

0.2	Deep Resistivity (Ohm-m)	2000
0.2	Medium Resistivity (Ohm-m)	2000
0.2	Shallow Resistivity (Ohm-m)	2000
15000	Line Tension (lb)	0

LSPD
(ft/min)