



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company American Warrior, Inc.		
	Well Darren No. 1-34		
	Field Wildcat		
	County Ness	State	Kansas
15-135-25,049-00-00	Location	1350' FSL & 1900' FWL	
	Sec: 34	Twp: 20 S	Rge: 25 W
Permanent Datum	Ground Level	Elevation 2372	
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	Elevation	
		K.B. 2383	
		D.F. 2372	
		G.L. 2372	
Date	4/26/2010		
Run Number	Two		
Depth Driller	4525		
Depth Logger	4524		
Bottom Logged Interval	4523		
Top Log Interval	3600		
Casing Driller	8.625 @ 211		
Casing Logger	210		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	6500		
Density / Viscosity	9.3 49		
pH / Fluid Loss	9.5 9.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.75 @ 60		
Rmf @ Meas. Temp	.56 @ 60		
Rmc @ Meas. Temp	1.01 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.37 @ 123		
Operating Rig Time	5 1/2 Hours		
Max Rec. Temp. F	123		
Equipment Number	007		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Jason Alm	Marc Downing	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Ness City, W to Laird elevator, 1/4 W to J rd, 13 S to county line,
1/8 W through cattle guard, 1/2 W, N into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

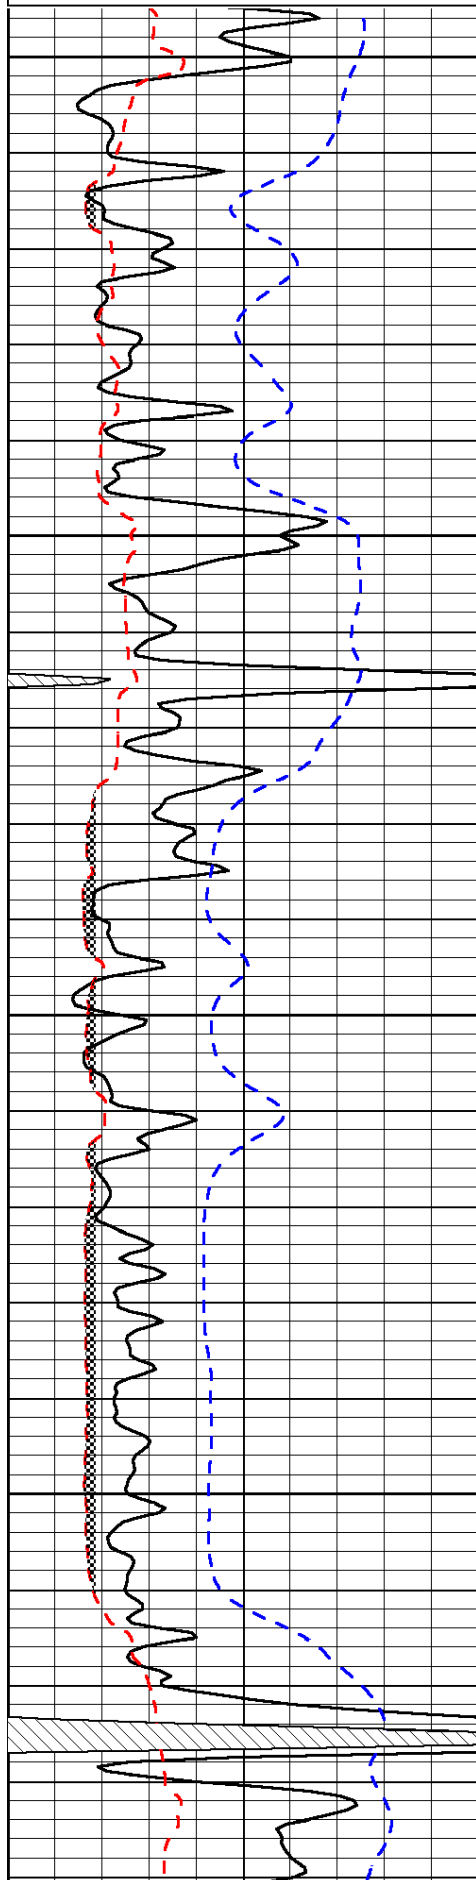

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

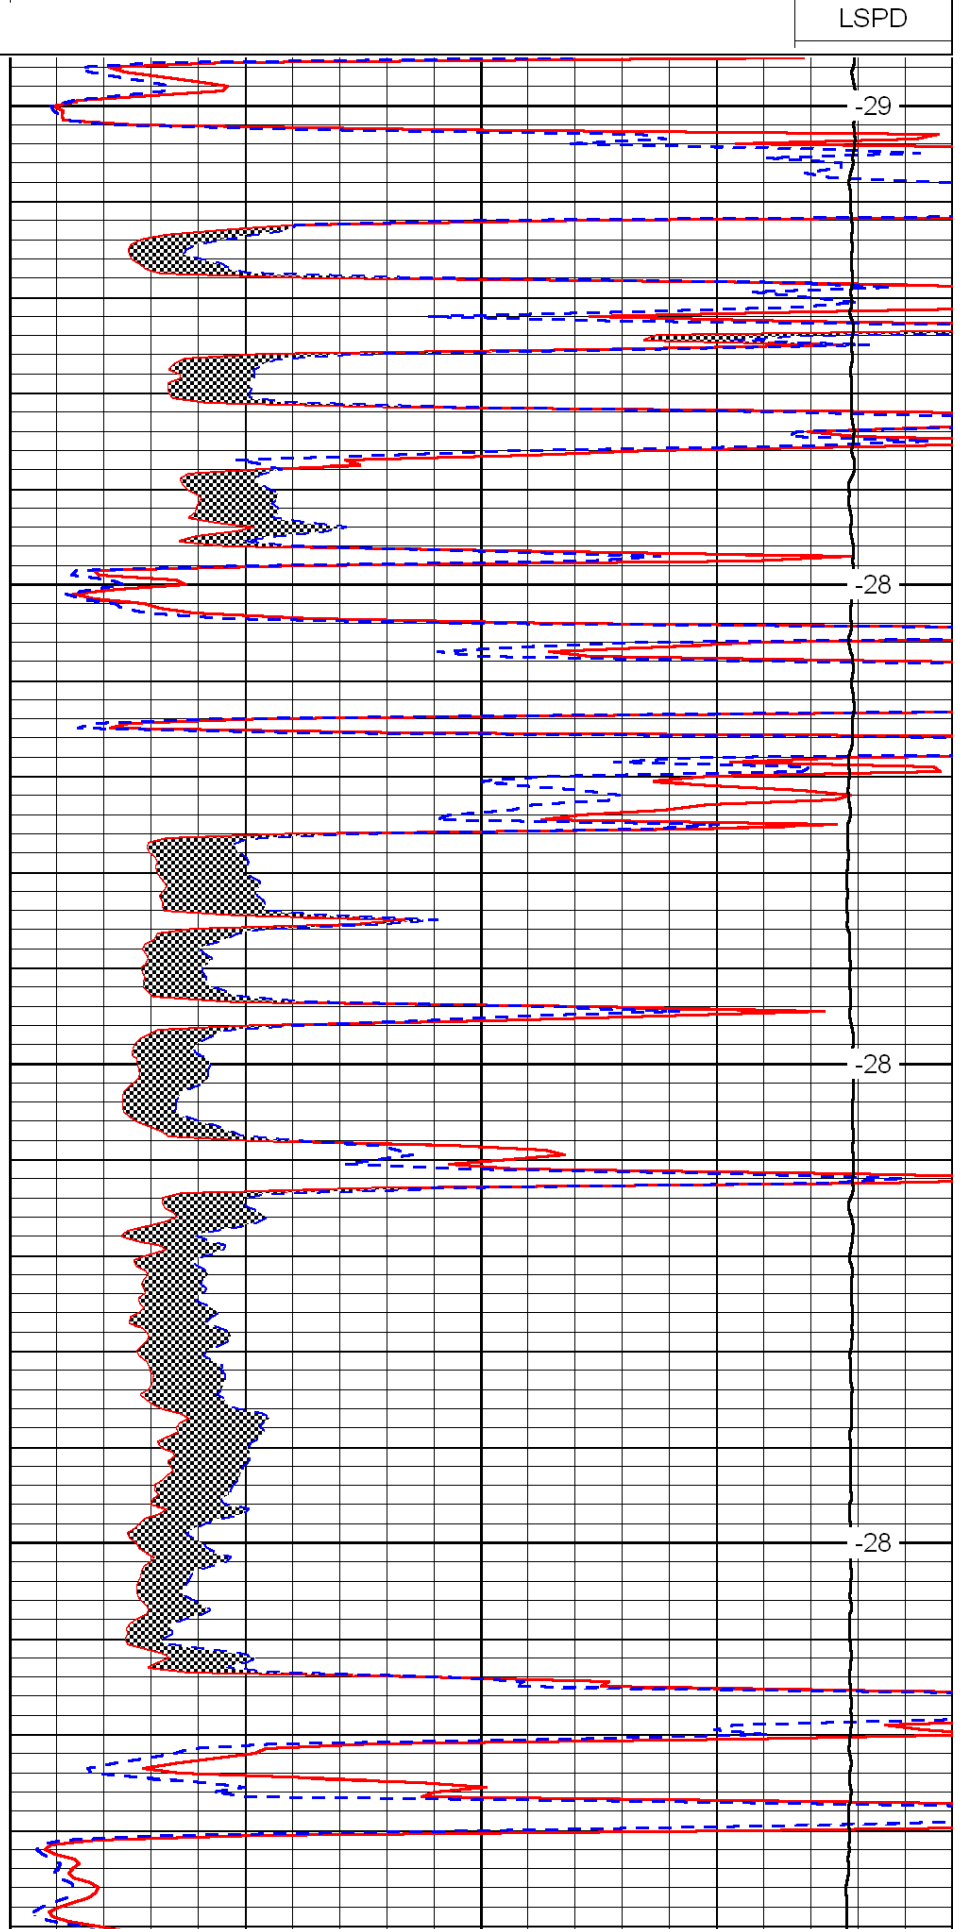

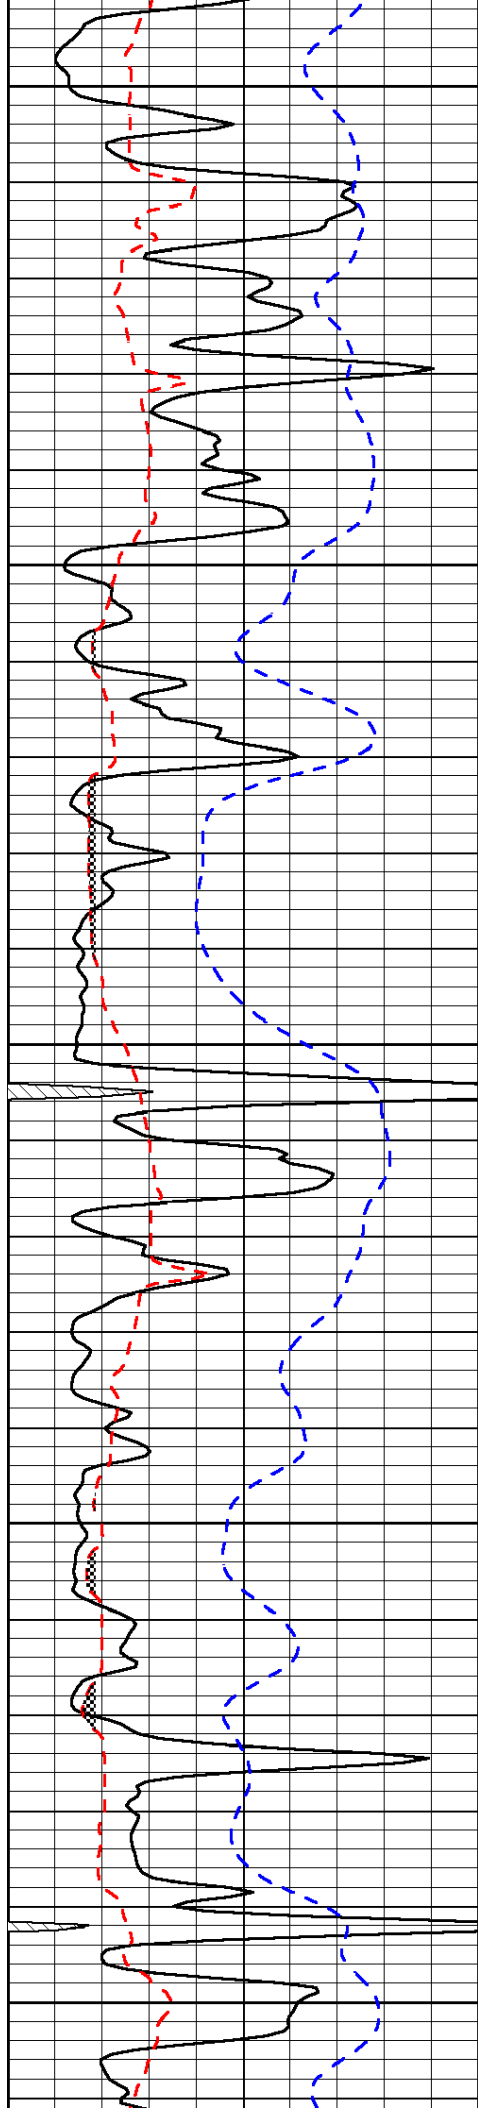


3800

3850

3900

3950

4000

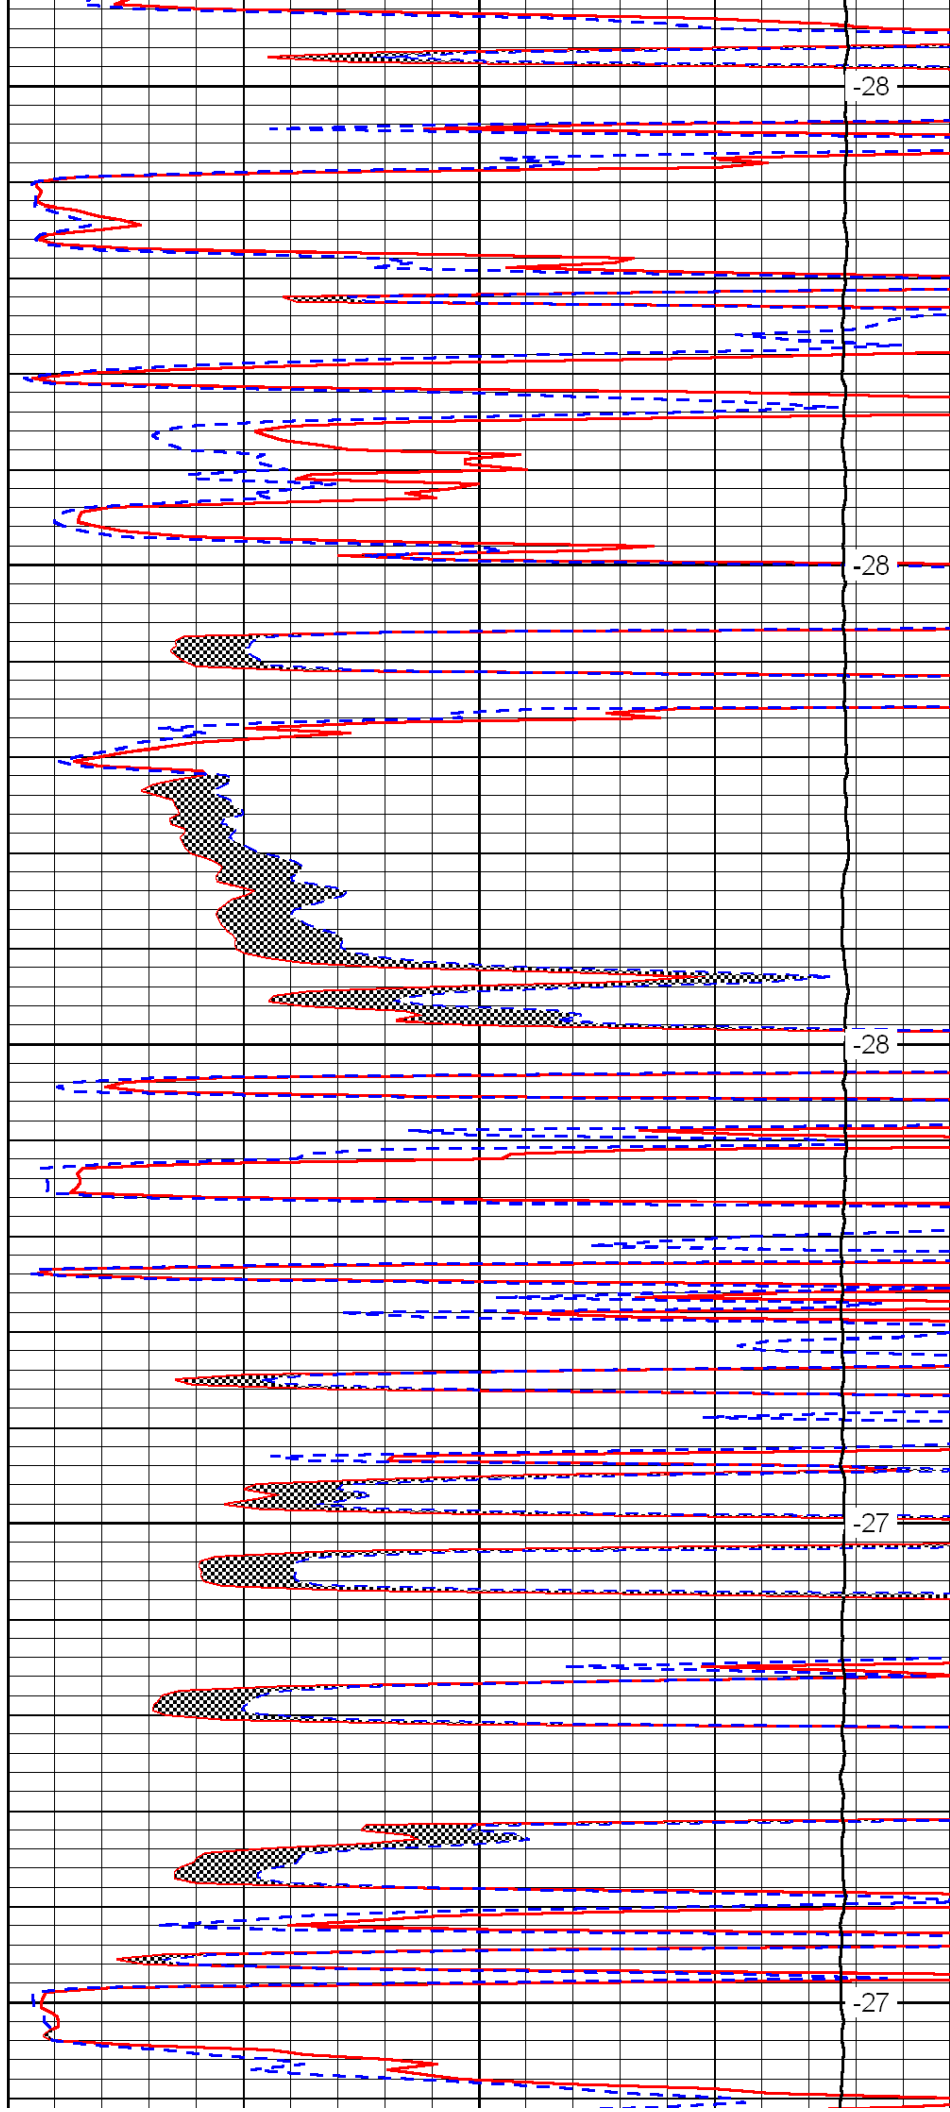


-28

-28

-28

-27

-27

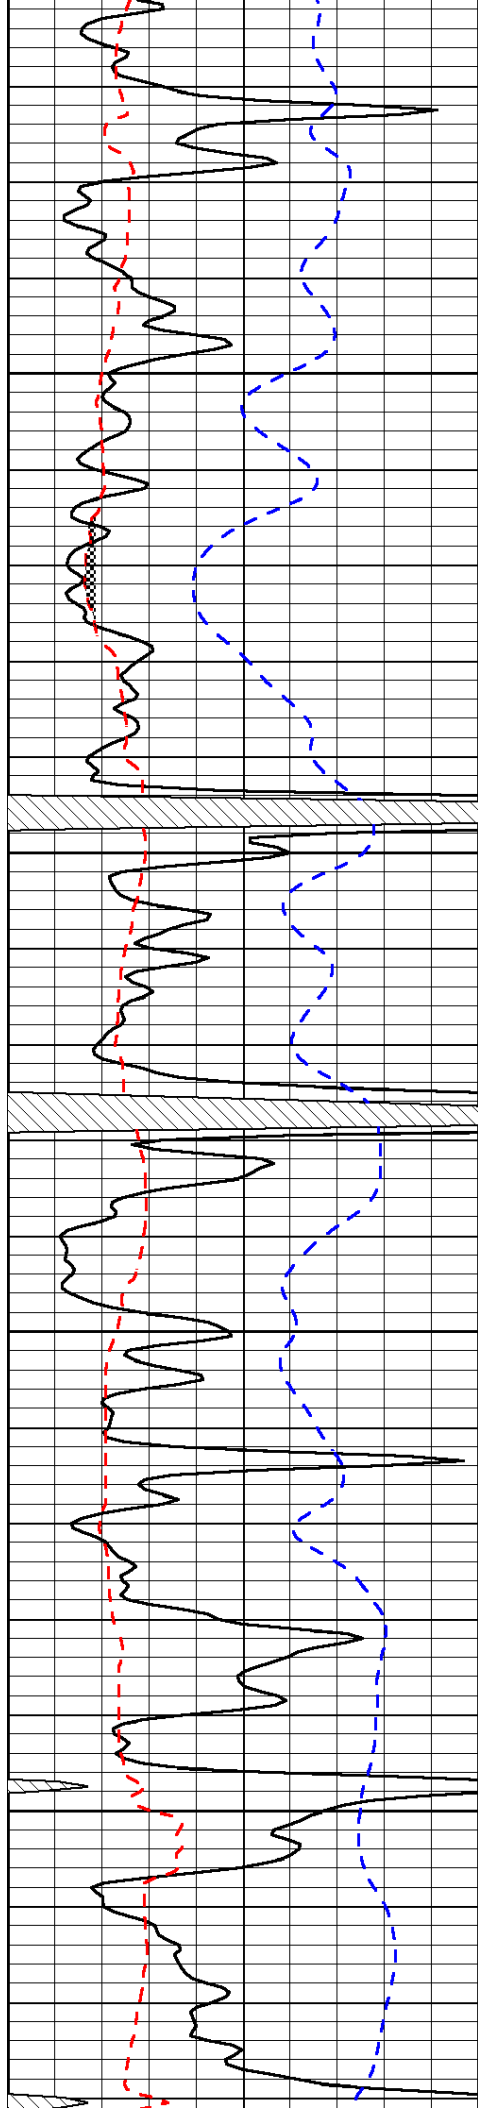



4050

4100

4150

4200

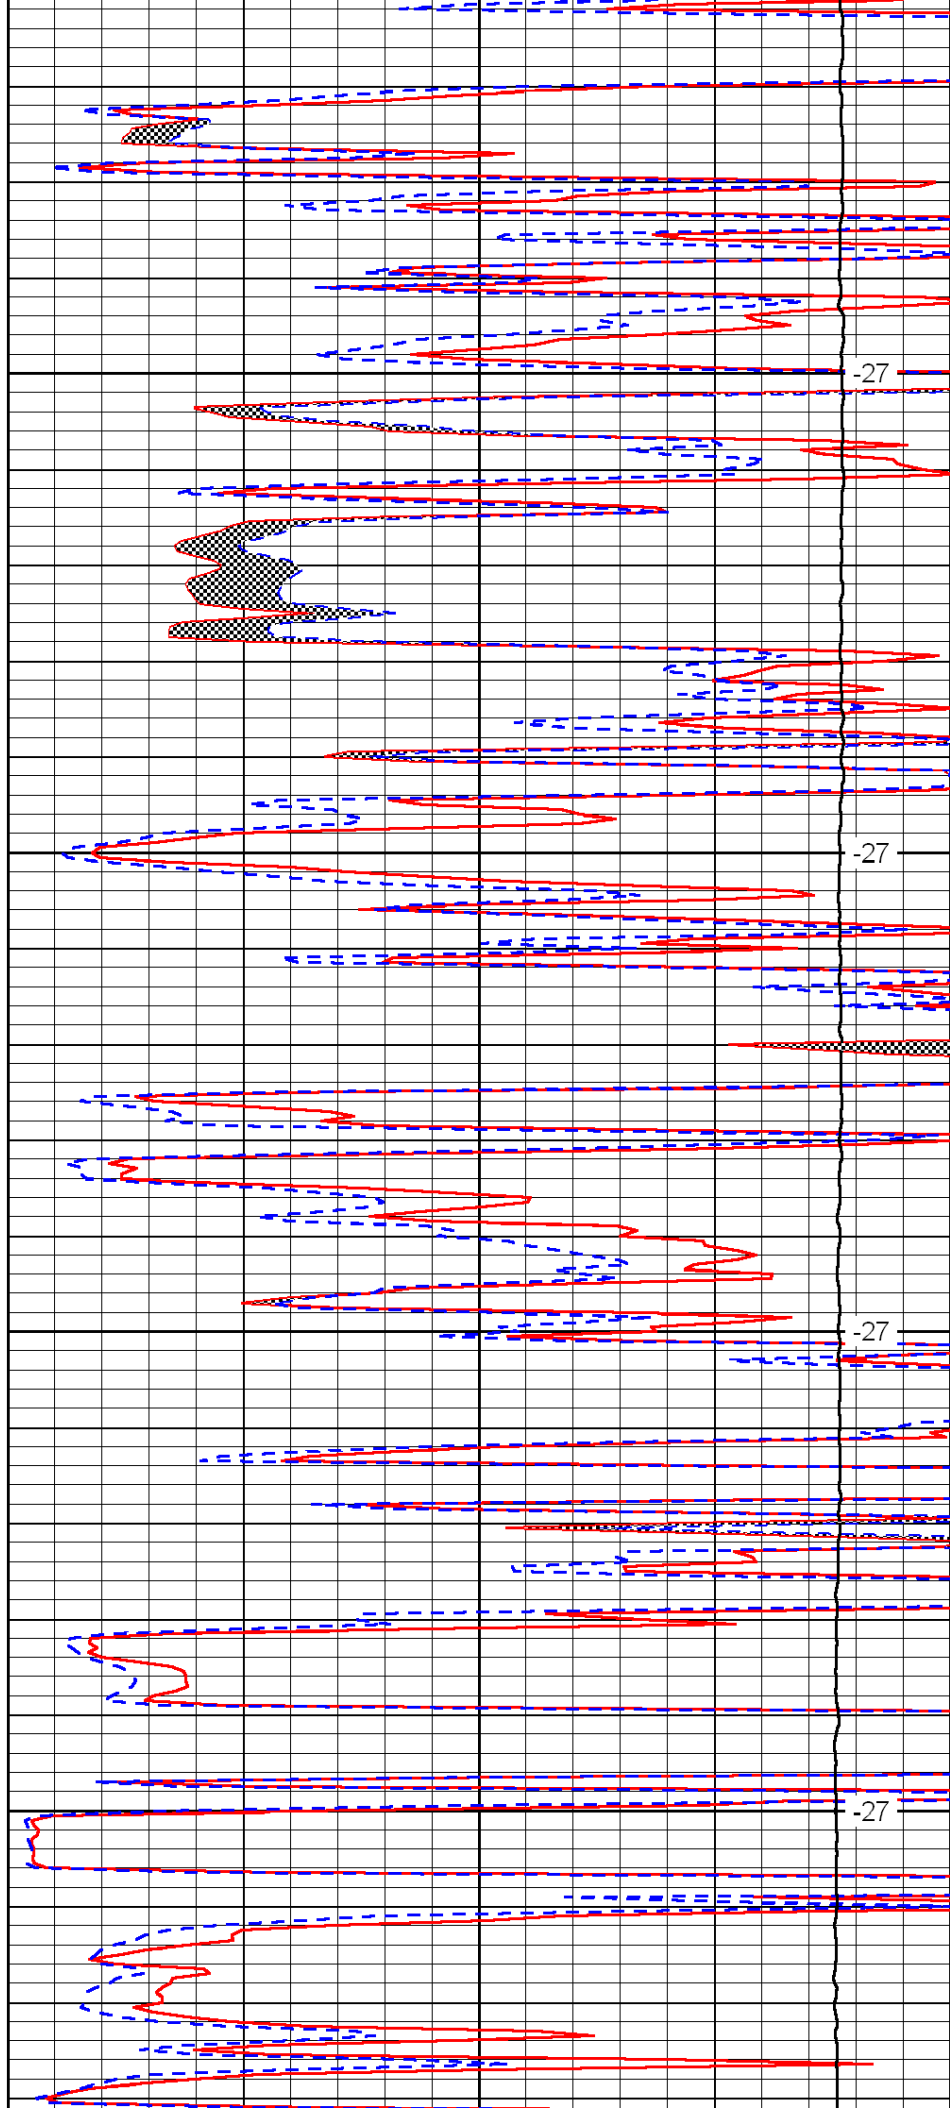

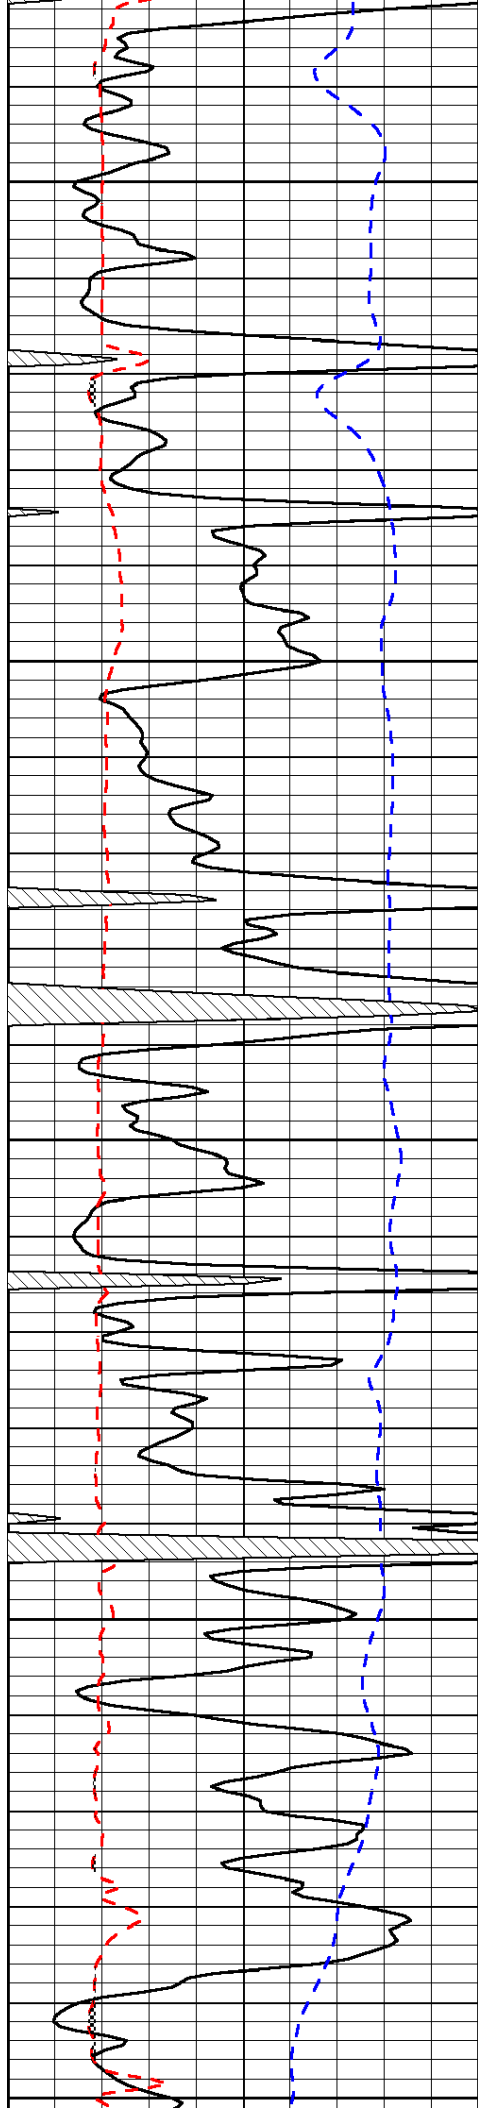


4250

4300

4350

4400

4450

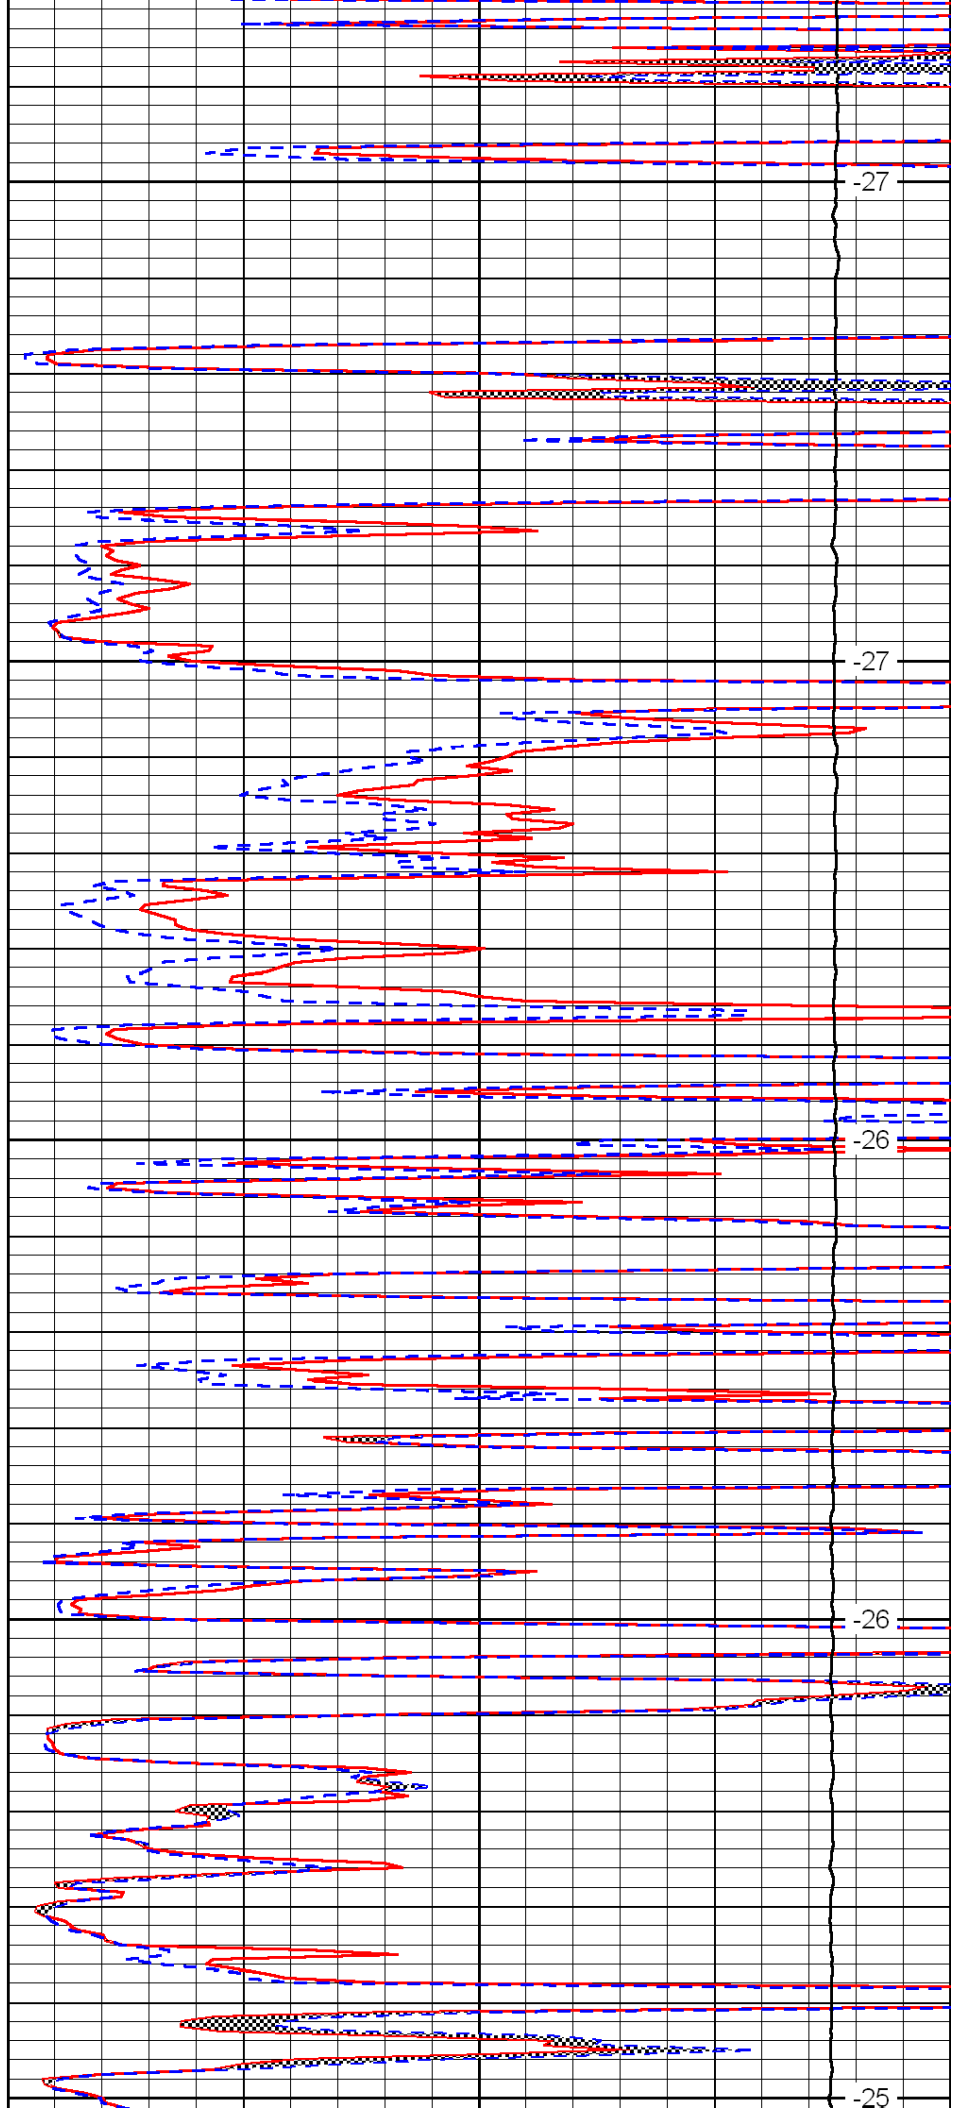


-27

-27


-26

-26

-25

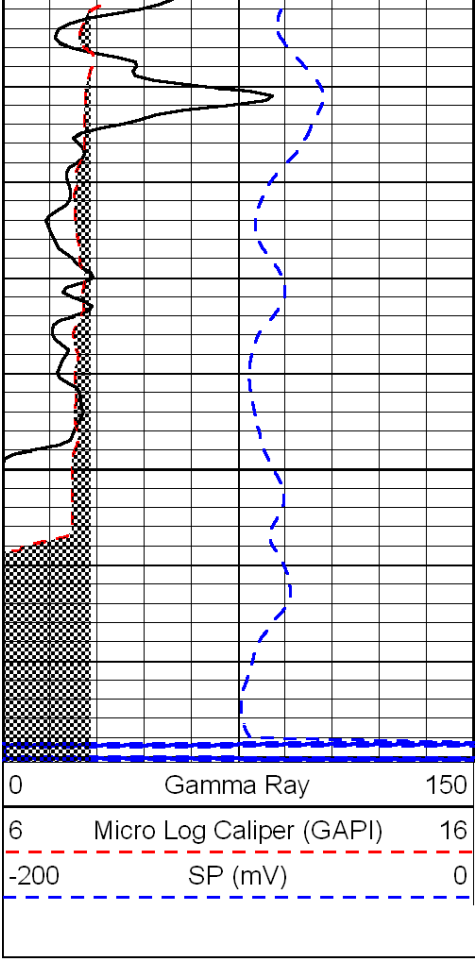

4500

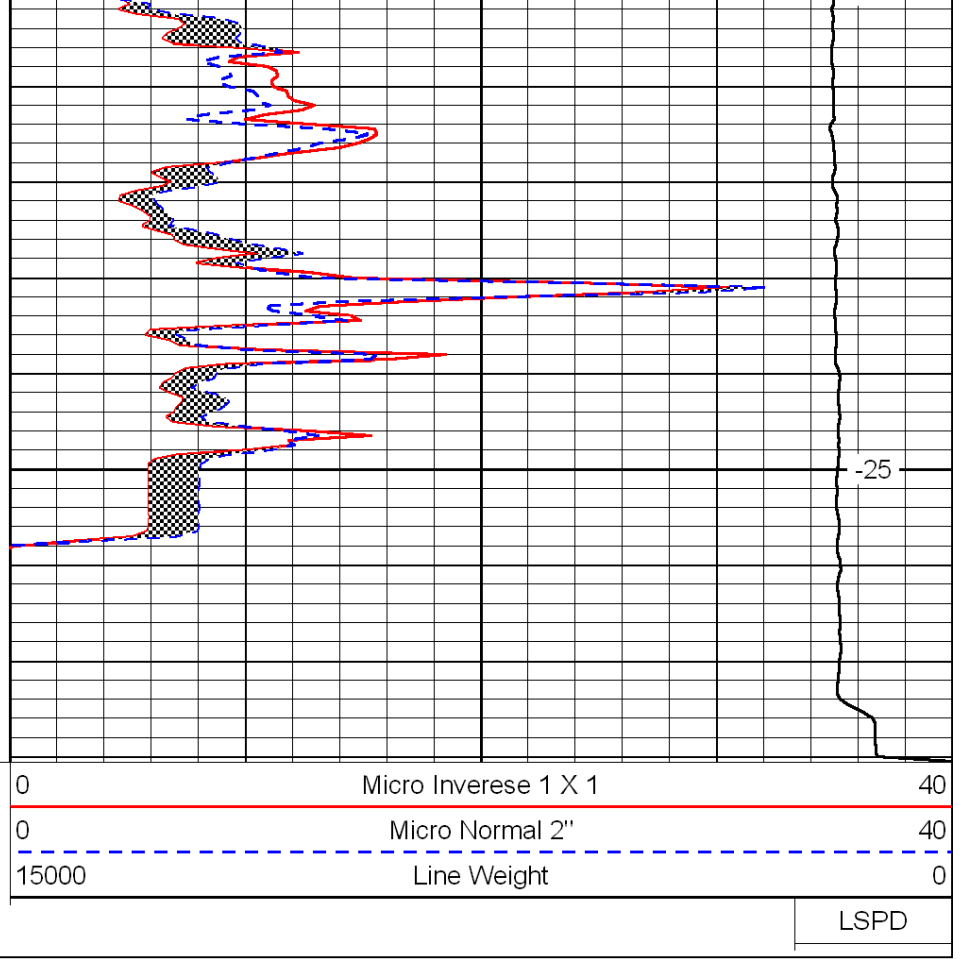

-25

LSPD