



DIGITAL LOG (785) 625-3858

Microresistivity Log

API No.	15-193-20,775-00-00	
Company	Mid-Continent Resources, Inc.	
Well	Nichols No. 2-36	
Field	Campus Northwest	
County	Thomas	State
Location	2280' FSL & 1300' FEL	
Sec:	36	Twp: 10 S Rge: 32 W
Other Services	CNL/CDL DIL/BHCS	

Permanent Datum	Ground Level	Elevation	3028
Log Measured From	Kelly Bushing	9	Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing		
Date	4/05/2010		

Run Number	Two
Depth Driller	4720
Depth Logger	4720
Bottom Logged Interval	4719
Top Log Interval	3700
Casing Driller	8.625 @ 306
Casing Logger	305
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	2.000
Density / Viscosity	9.4 54
pH / Fluid Loss	10.5 7.2
Source of Sample	Flowline
Rm @ Meas. Temp	1.8 @ 70
Rmf @ Meas. Temp	1.35 @ 70
Rmc @ Meas. Temp	2.43 @ 70
Source of Rmf / Rmc	Charts
Rm @ BHT	1.01 @ 125
Operating Rig Time	6 Hours
Max Rec. Temp. F	125
Equipment Number	4
Location	Hays
Recorded By	K. Bange
Witnessed By	Jason Alm.

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858

Exit 176 (Mittens @ Oakley), 1 1/2 W on 40 to 450rd, N to 'T' intersection
1/2 W, 1/2 N, W into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

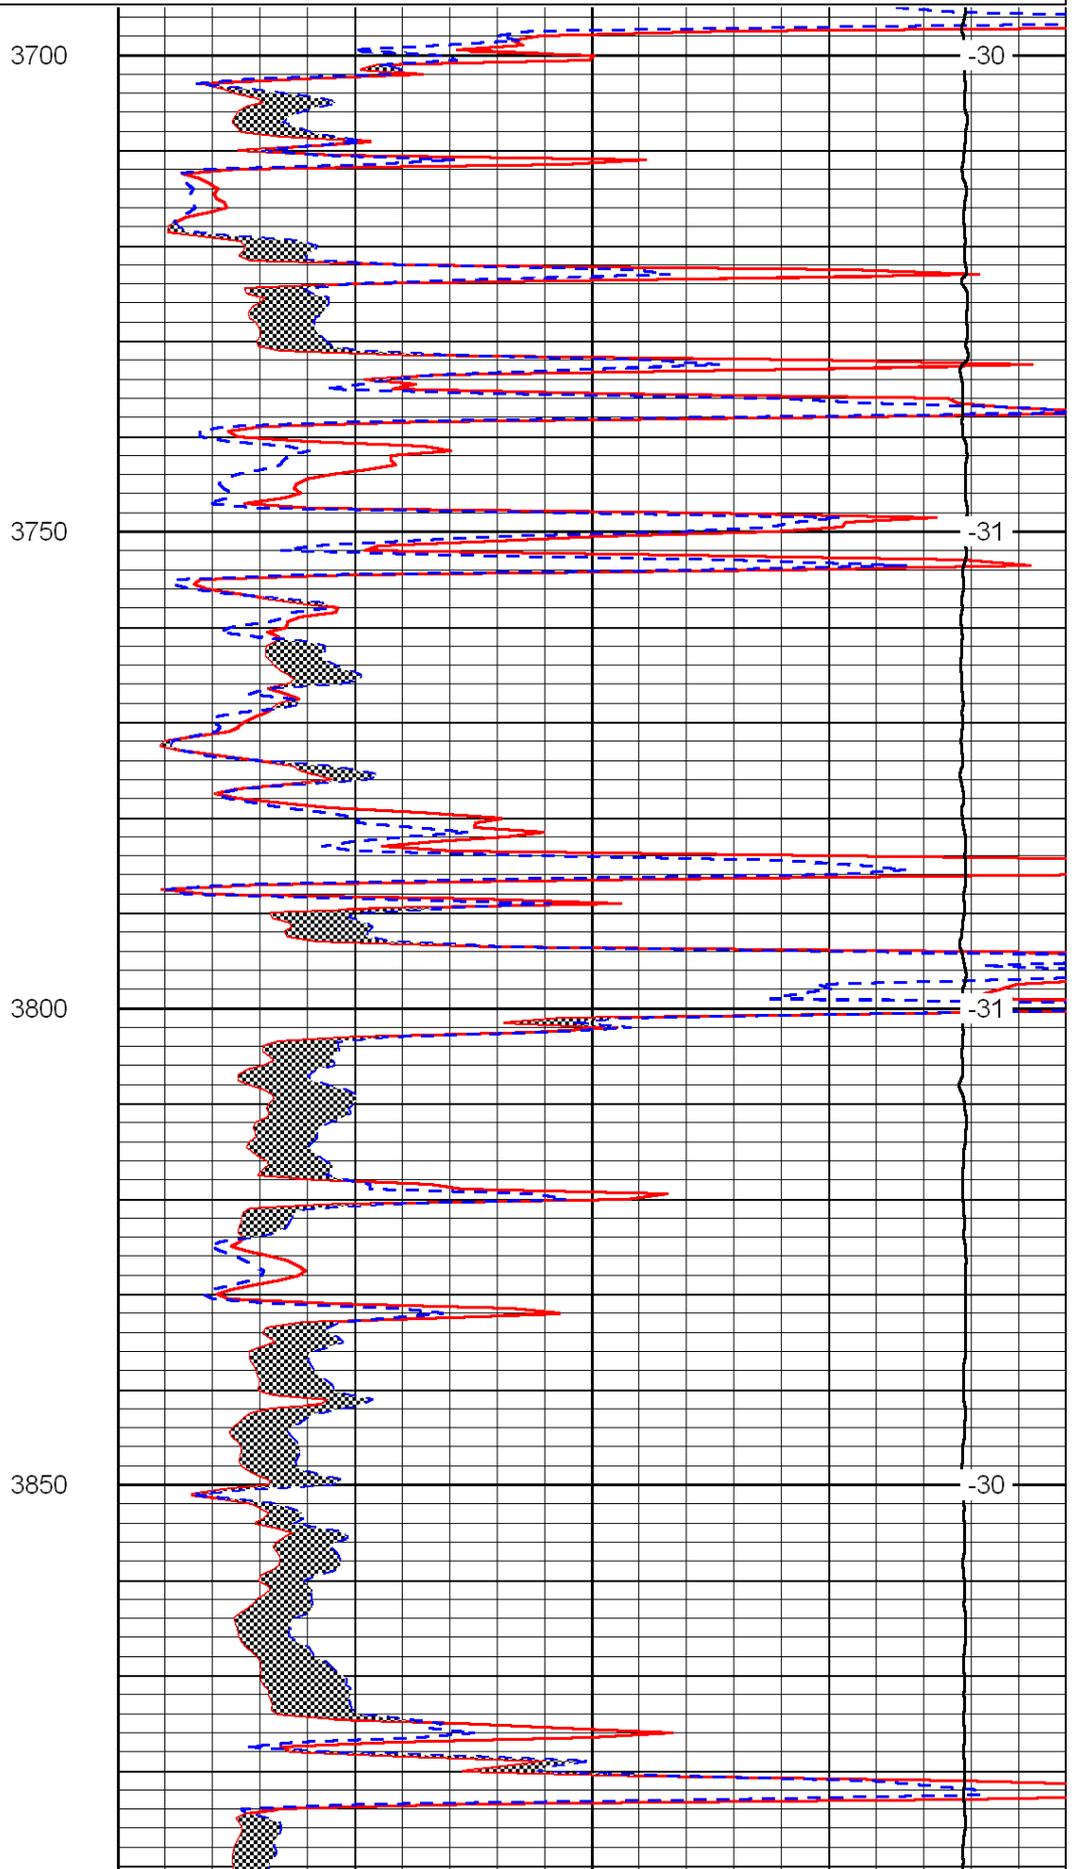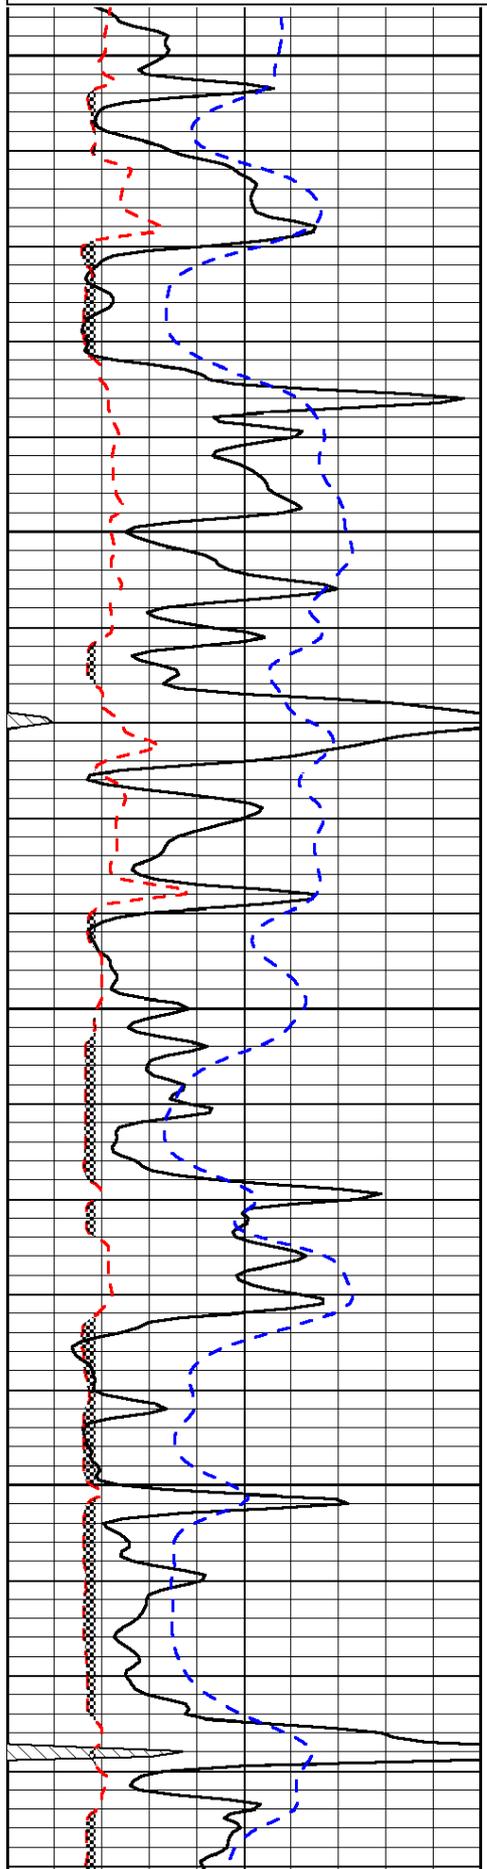

3700

-30

3750


-31

3800

-31

3850

-30

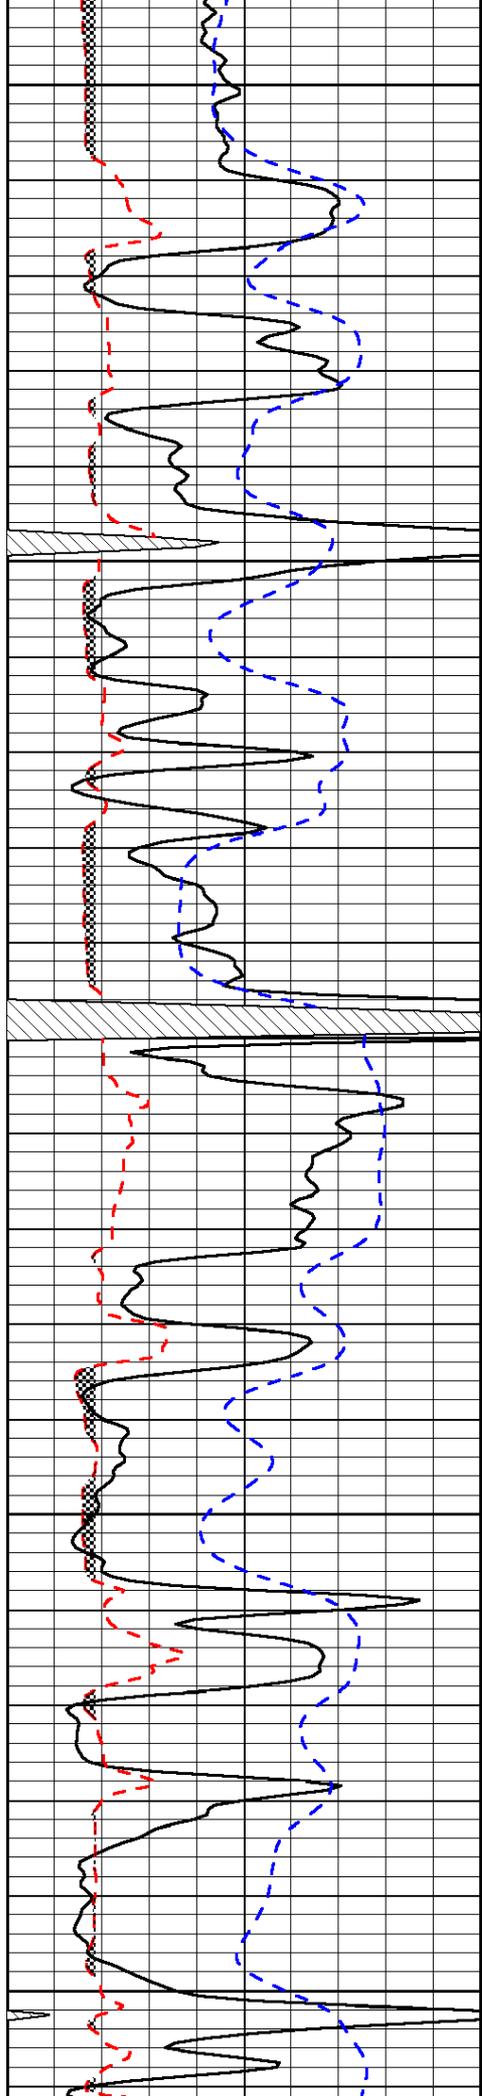


3900

3950

4000

4050

4100

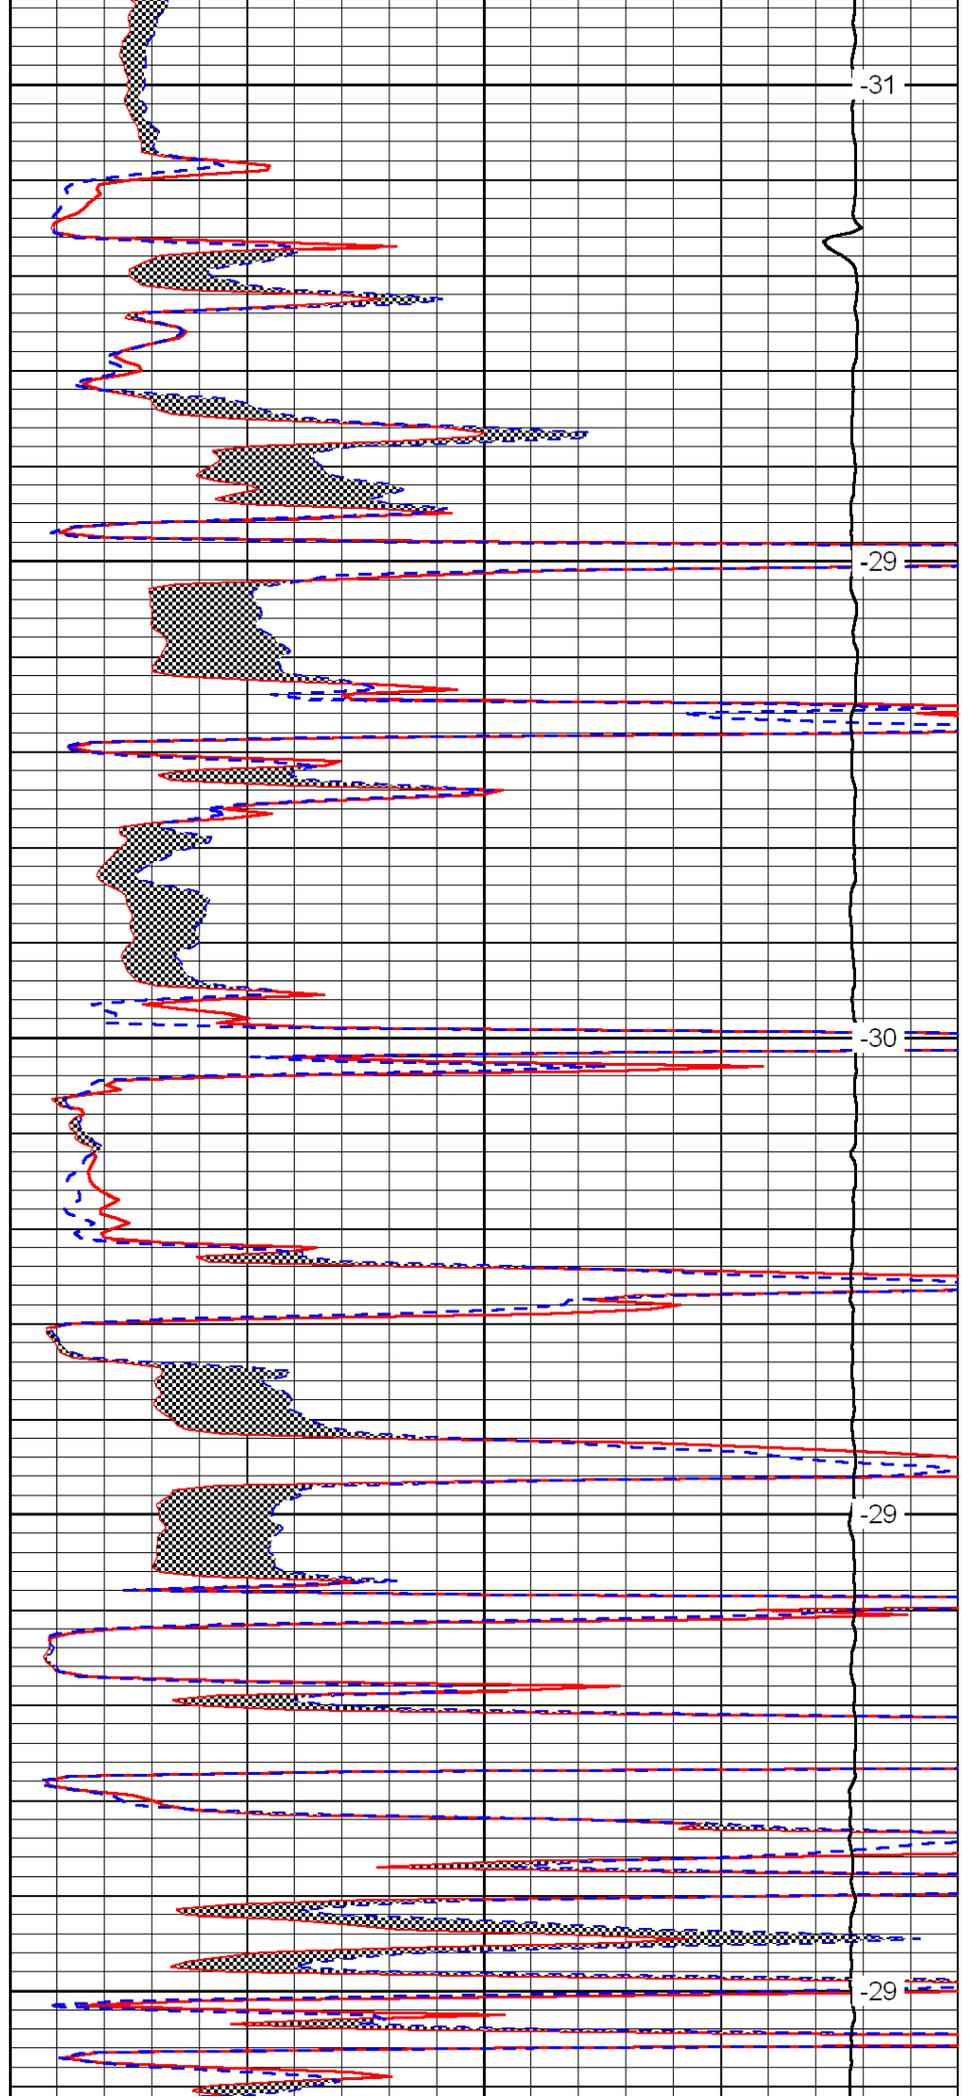


-31

-29

-30

-29

-29

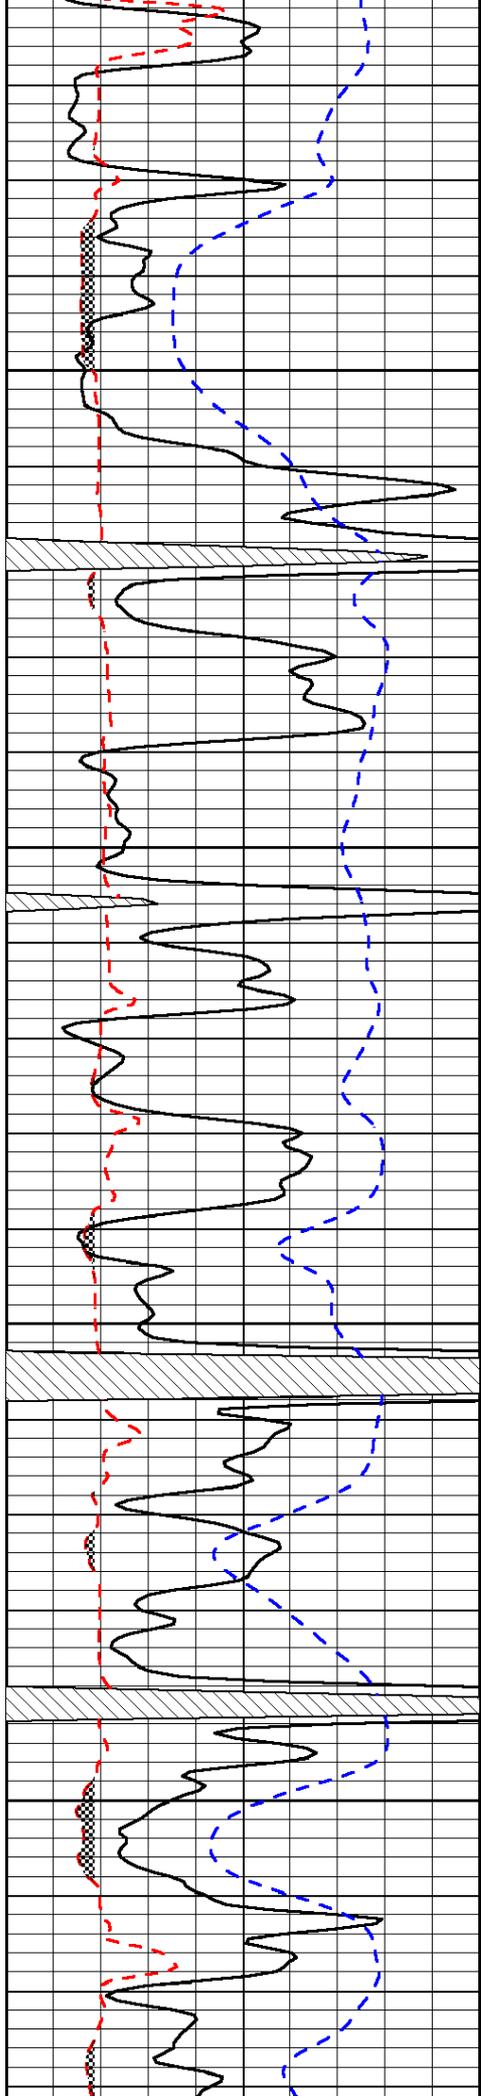


4150

4200

4250

4300

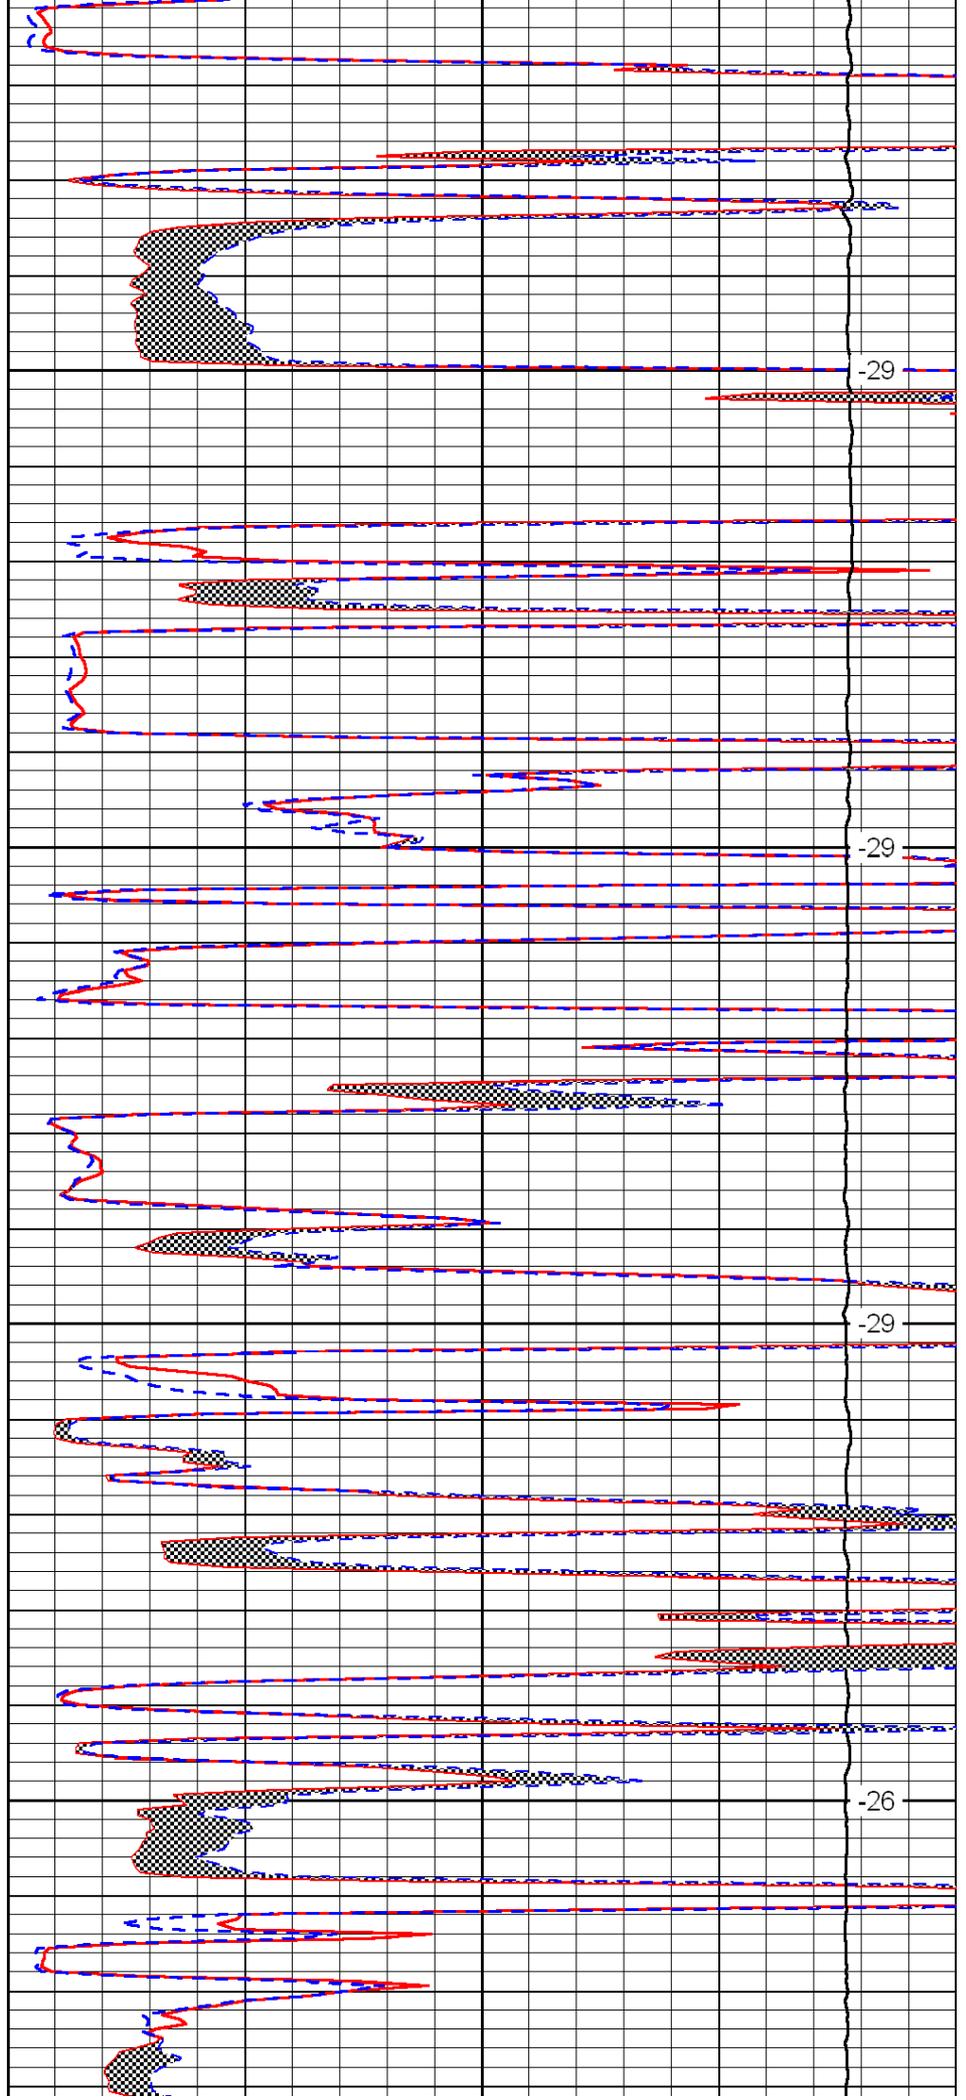


-29

-29

-29

-26

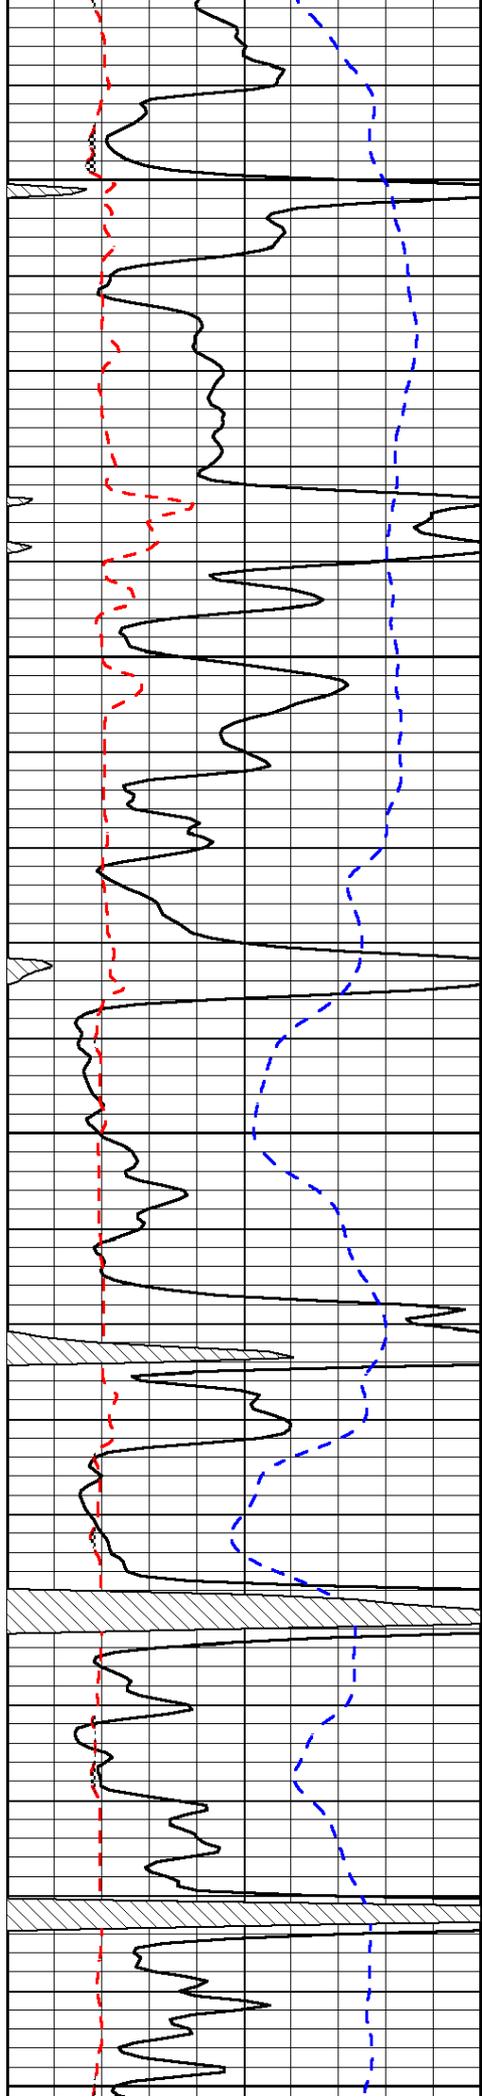


4350

4400

4450

4500

4550

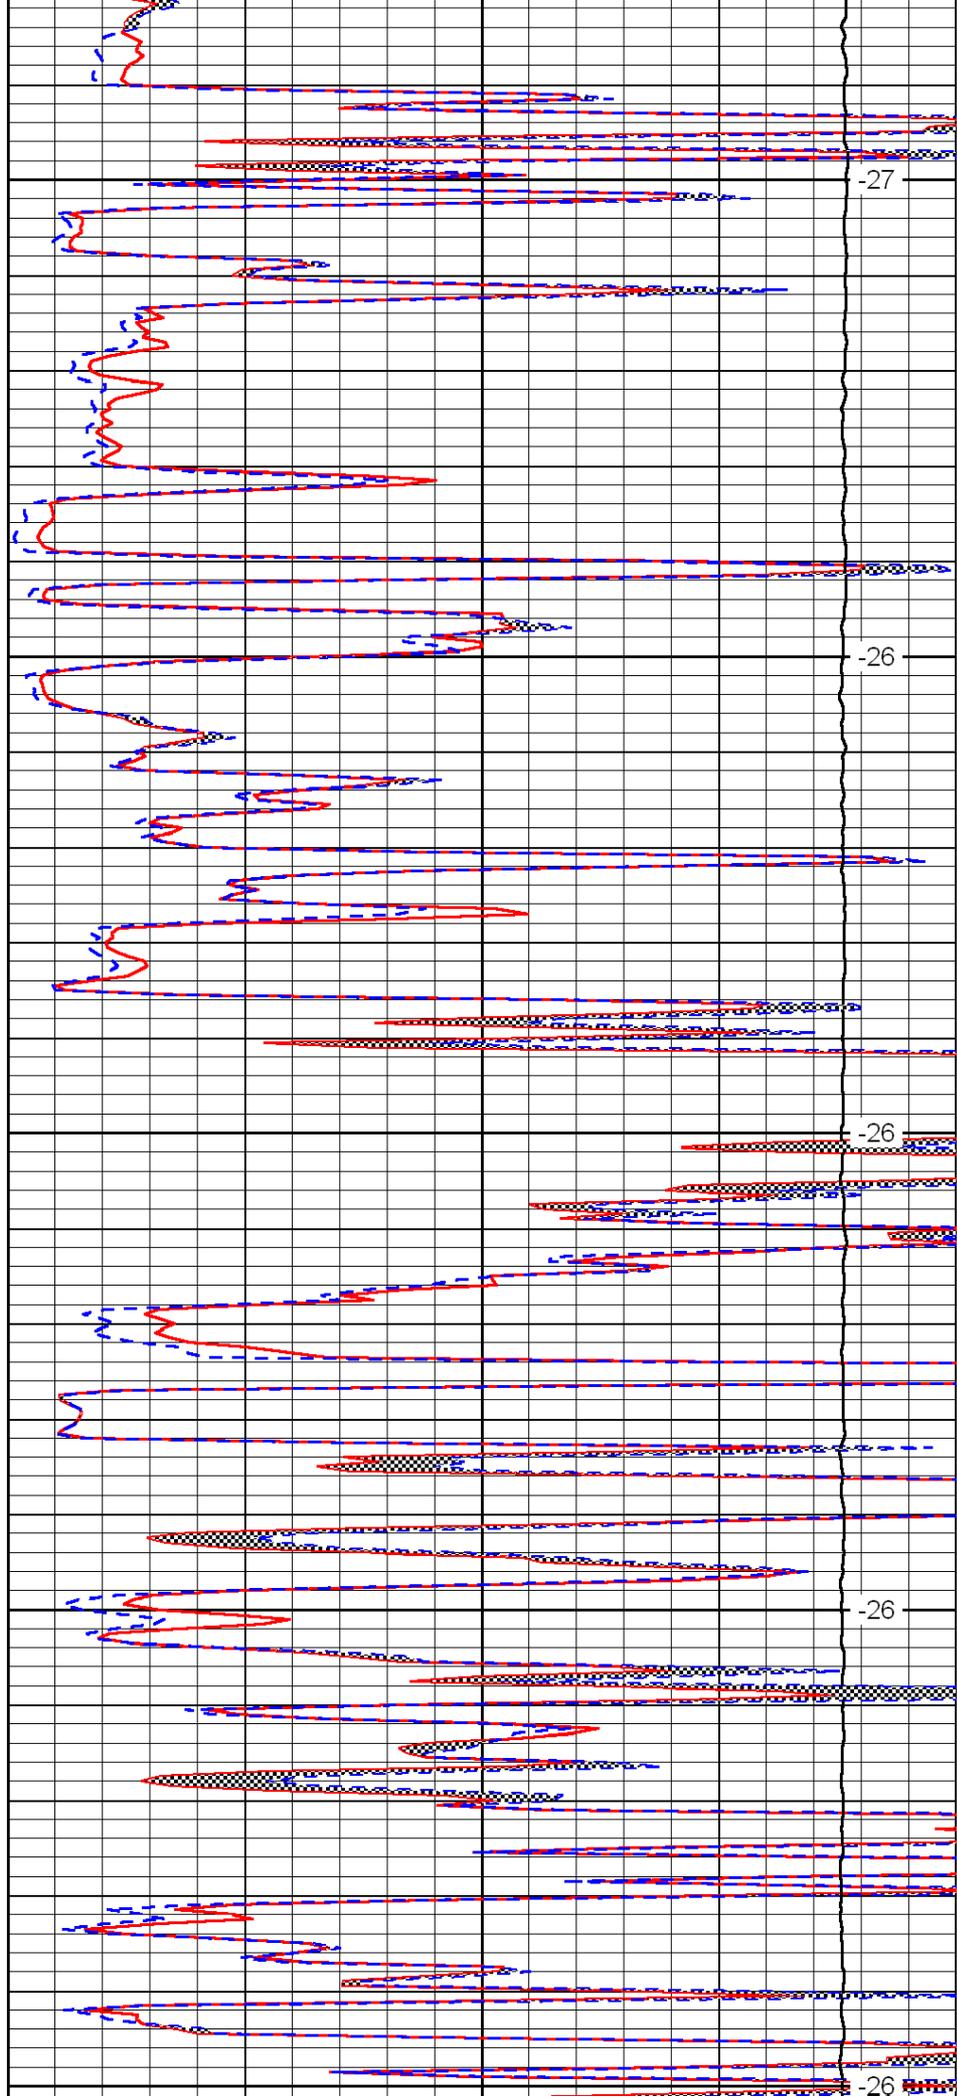


-27

-26


-26

-26

-26

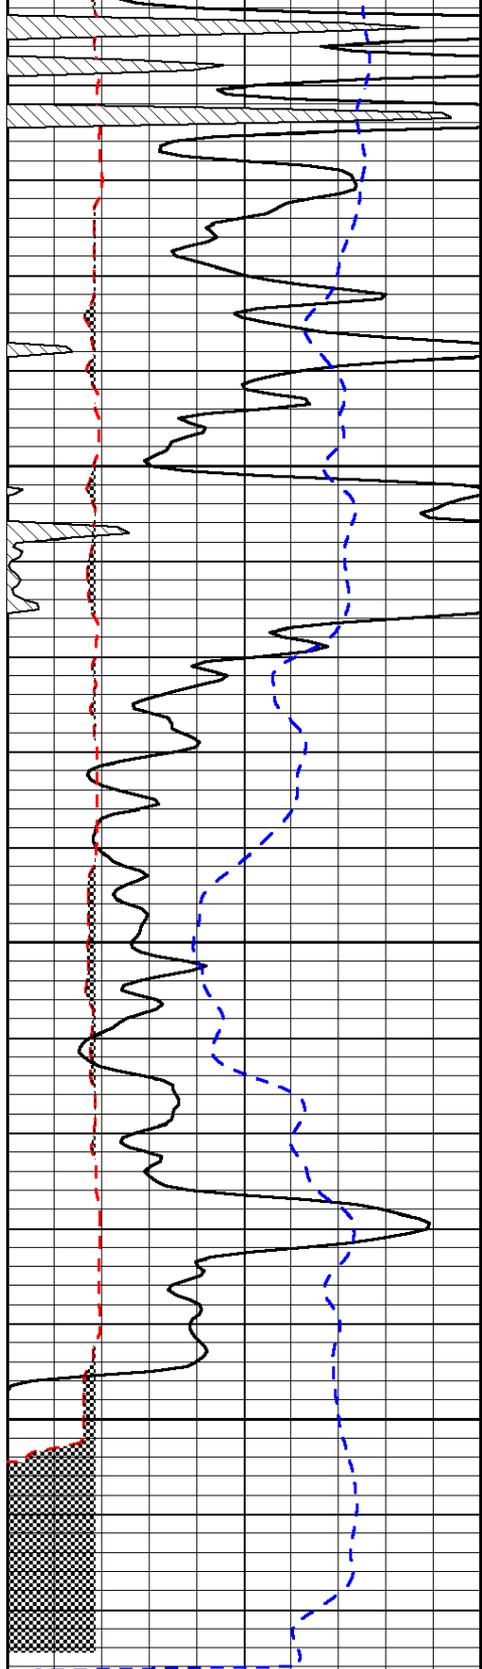

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

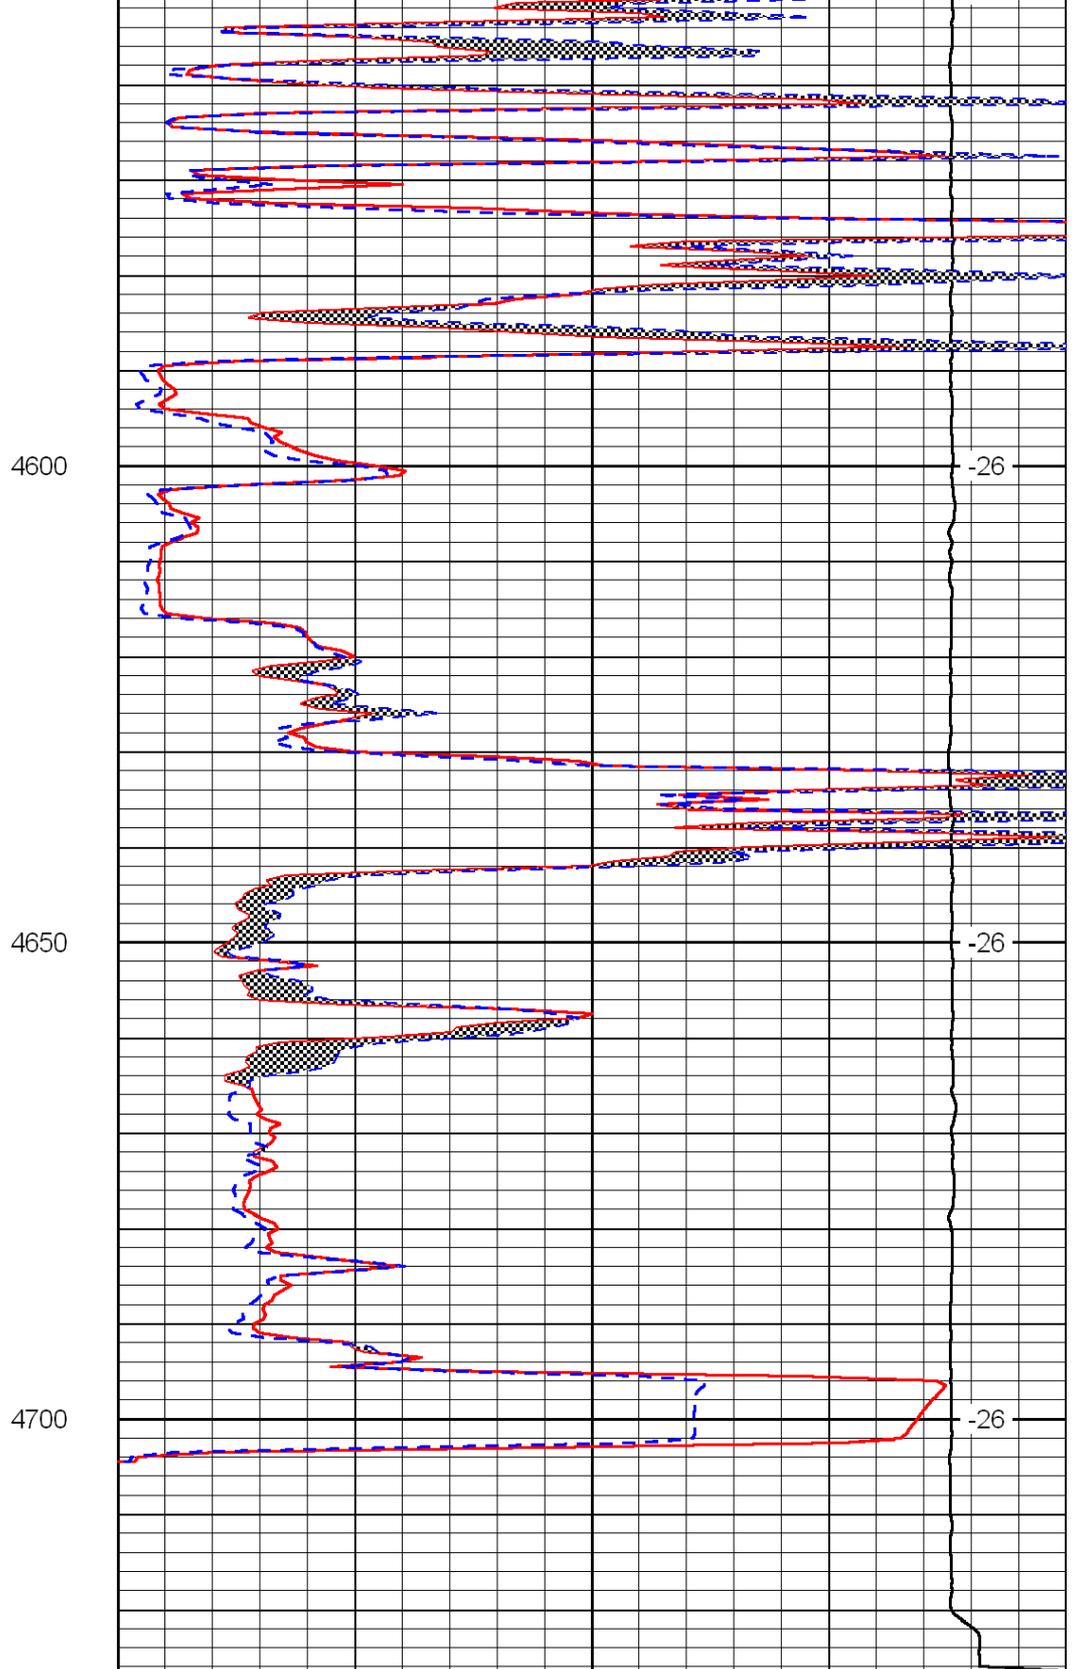

0	Micro Inverse 1 X 1	40
0	Micro Normal 2'	40
15000	Line Weight	0

LSPD