

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-13264-00-00
Spot: SESESW Sec/Twnshp/Rge: 36-24S-15W
330 feet from S Section Line, 2970 feet from E Section Line
Lease Name: THUROW A Well #: 1
County: STAFFORD Total Vertical Depth: 4397 feet

Operator License No.: 5030

Op Name: VESS OIL CORPORATION

Address: 8100 E. 22ND N. BLDG. 300
WICHITA, KS 67226

PROD Size: 5.5 feet: 4392 WITH 100 SX CMT
SURF Size: 8.625 feet: 290 WITH 280 SX CMT

#14290

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 12/30/2004 10:45 AM

Plug Co. License No.: 31529

Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MONTE ANDREWS

Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 4340' & 5 SX CMT. PLUG AT 1260' WITH 50 SX CMT. PLUG AT 960' WITH GEL & 75 SX CMT. PLUG AT 330' W TIH 100 SX CMT. PLUG AT 40' W TIH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 12/30/2004 5:02 PM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

PUMP DOWN 5 1/2" 8 5/8" ANNULUS WITH 10 SX GEL TO KILL GAS FLOW. SAND BACK TO 4340' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 1260' WITH 50 SX CMT. 2ND PLUG AT 960' WITH 14 SX GEL & 75 SX CMT. 3RD PLUG AT 330' WITH 100 SX CMT CIRCULATING CMT TO SURFACE UP 8 5/8". 4TH PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4390	4397	OH	
1500	1596		

RECEIVED
JAN 11 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY UNITED CEMENTING. RECOVERED 1290' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

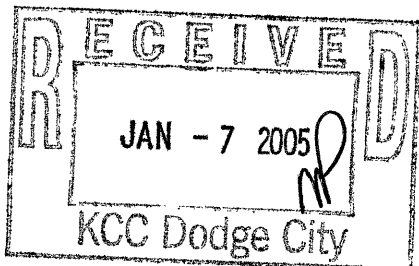

Signed

Richard W. Lacey
(TECHNICIAN)

INVOICED

DATE

1-11-05

INV. NO.

2005061053

Form CR-2/3