



**SUPERIOR
Hays,
Kansas**

**DUAL
INDUCTION
LOG**

Company: MULL DRILLING COMPANY, INC.
Well: #1-31 CURTIS "D"
Field: WILDCAT
County: GOVE
State: KANSAS

Company: MULL DRILLING COMPANY, INC.
Well: #1-31 CURTIS "D"
Field: WILDCAT
County: GOVE
State: KANSAS

Location: 990' FSL & 1101' FWL
API #: 15-063-21833-0000
SEC 31 TWP 15S RGE 27W
Permanent Datum: GROUND LEVEL Elevation: 2563
Log Measured From: KELLY BUSHING 9' A.G.L.
Drilling Measured From: KELLY BUSHING
Other Services: CDL/CNL MEL/SONIC
Elevation: K.B. 2672 D.F. 2570 G.L. 2563

Date	3-27-10
Run Number	ONE
Depth Driller	4570
Depth Logger	4574
Bottom Logged Interval	4572
Top Log Interval	0
Casing Driller	8 5/8" @ 232
Casing Logger	232
Bit Size	7 7/8
Type Fluid In Hole	CHEMICAL MUD
Density / Viscosity	9.3/62
pH / Fluid Loss	10.0/8.4
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.3 @ 64F
Rmf @ Meas. Temp	.975 @ 64F
Rmc @ Meas. Temp	1.56 @ 64F
Source of Rmf / Rmc	MEASURED
Rm @ BHT	.687 @ 121F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	
Maximum Recorded Temperature	121F
Equipment Number	680
Location	HAYS, KANSAS
Recorded By	JASON CAPPELLUCCI
Witnessed By	KEVIN KESSLER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS
UTICA KS., 3 W. TO QUINTER RD. - N. TO GOVE COUNTY RD. - W. TO FARMHOUSE
N. ACROSS 3 CATTLE GUARDS - 1/4 W. - S. INTO


Charted by:




Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50

1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

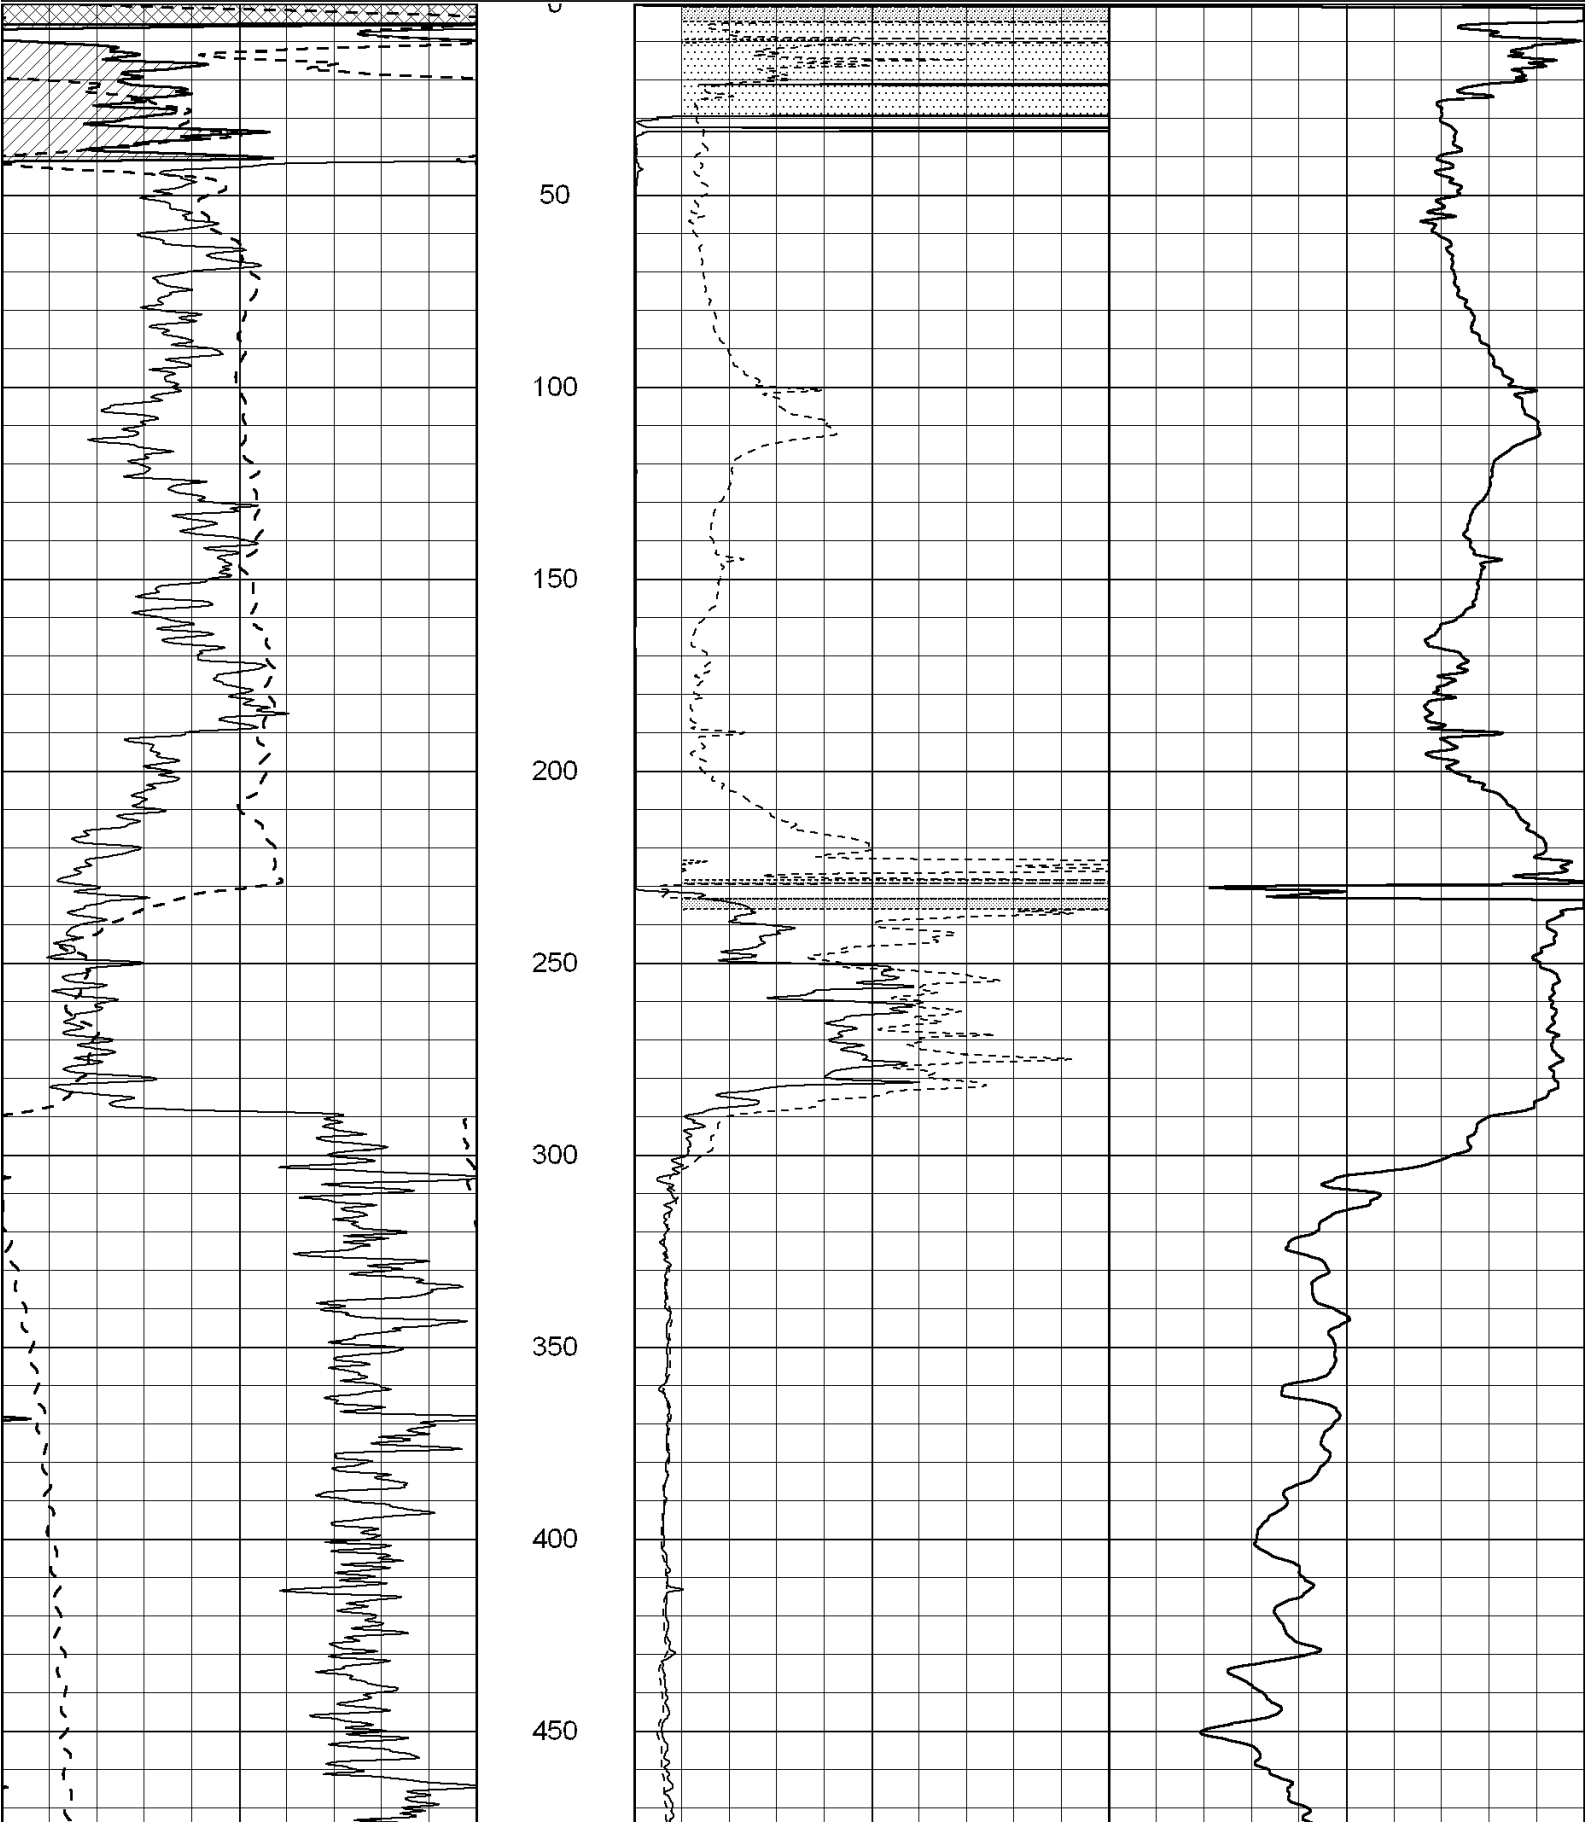

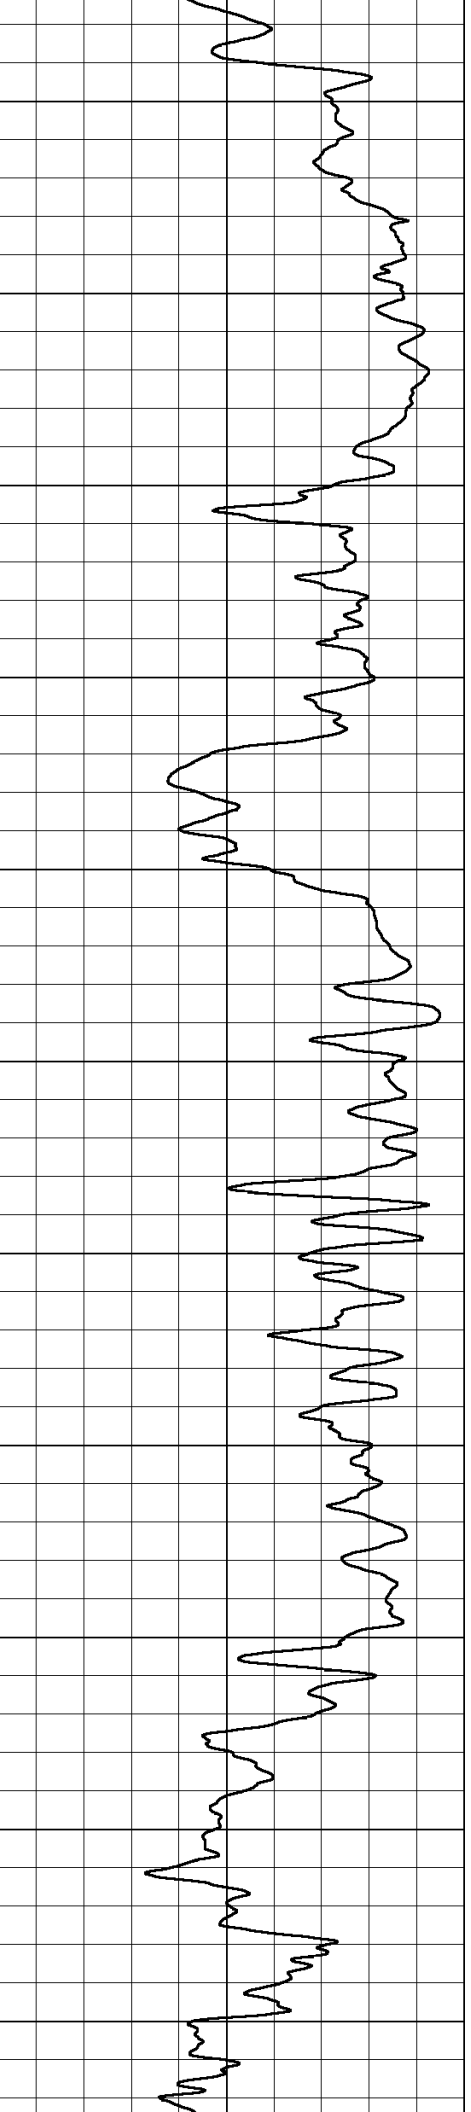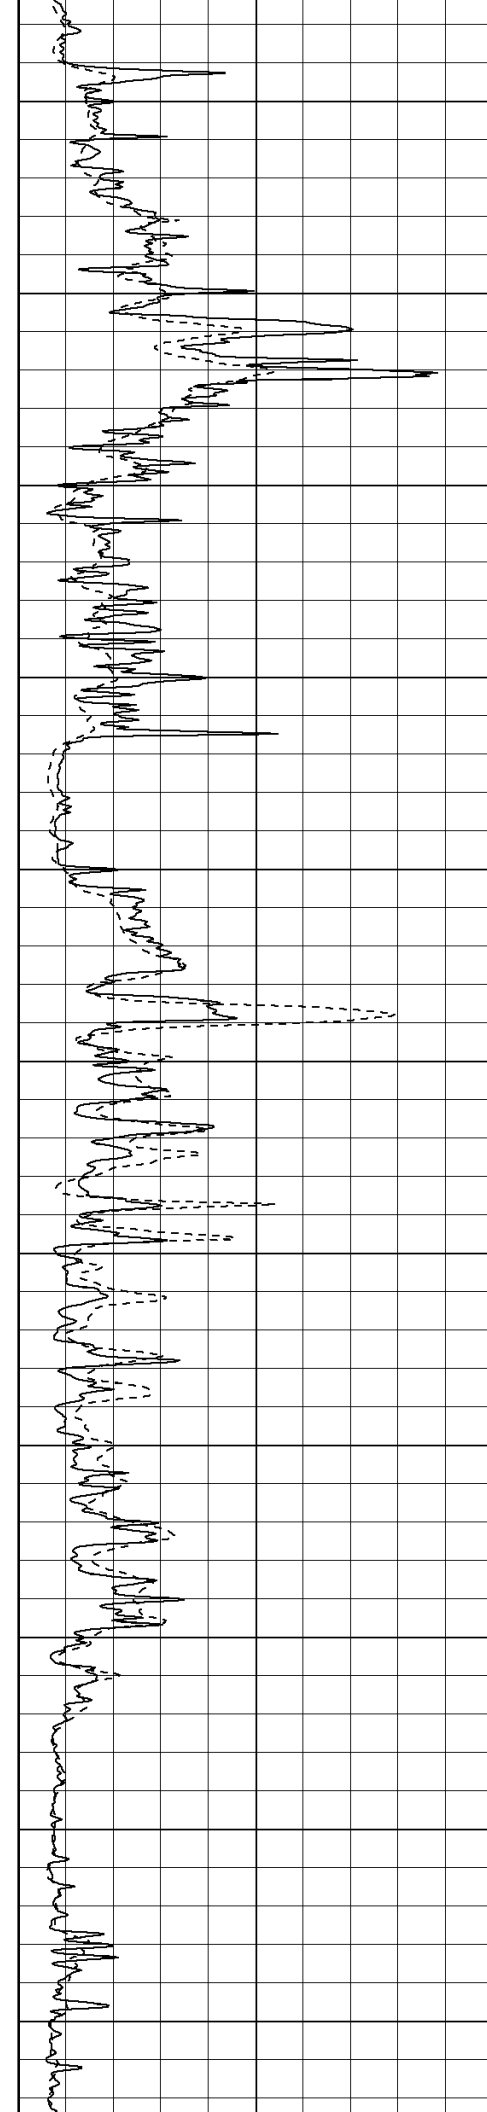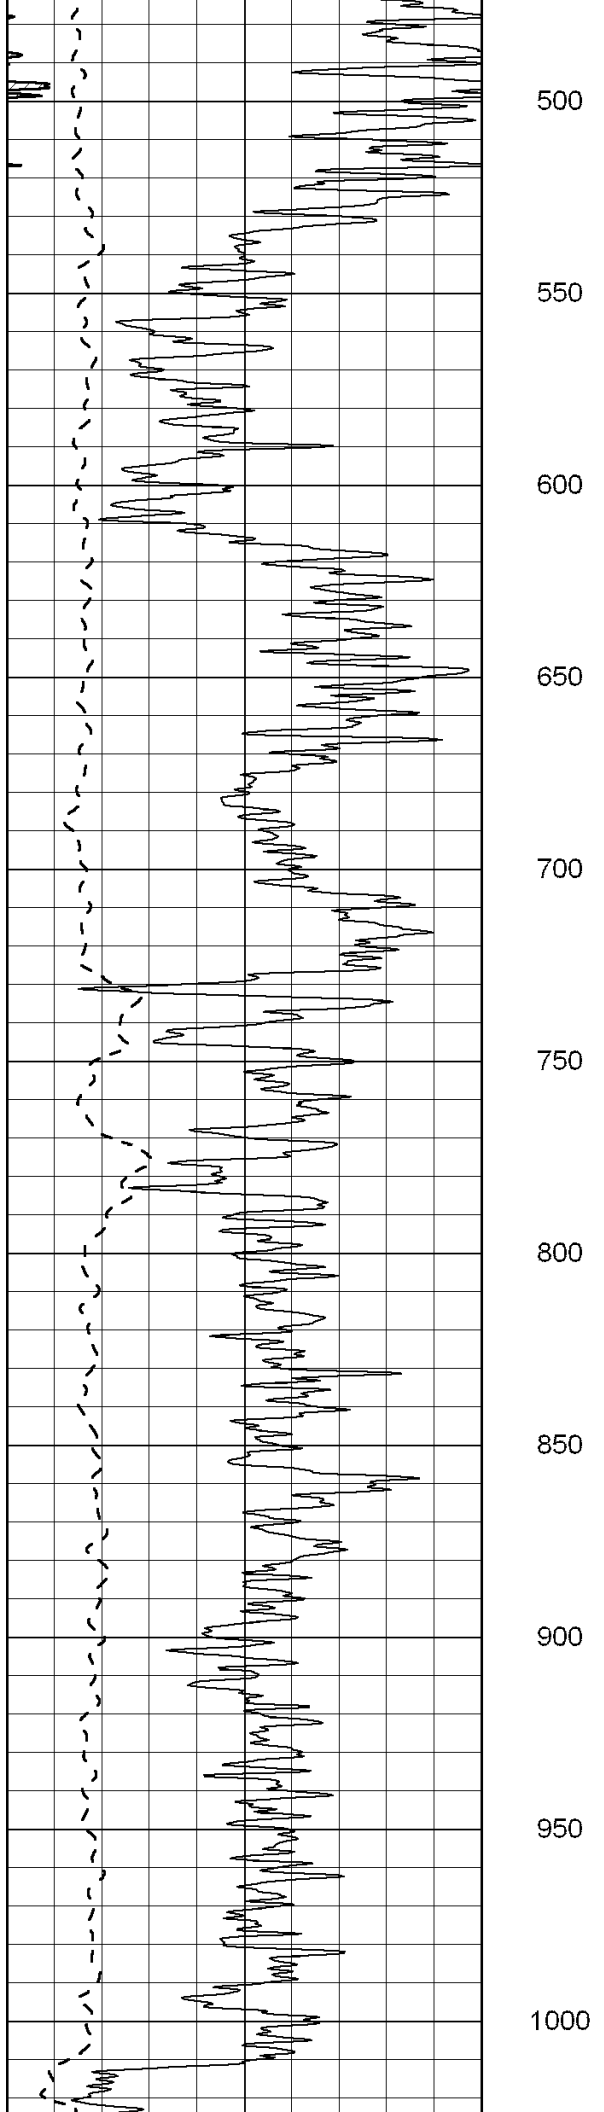

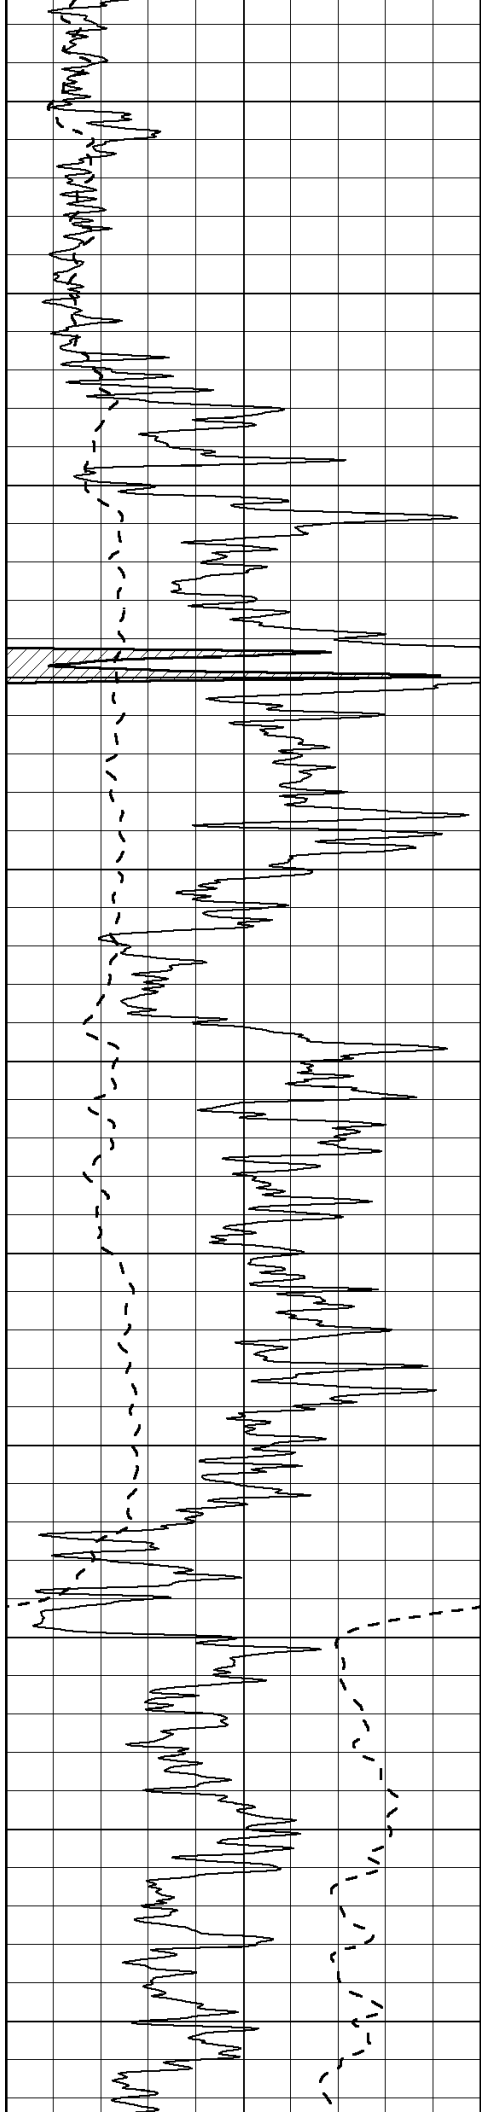

1050

1100

1150

1200

1250

1300



1350

1400

1450

1500

1550

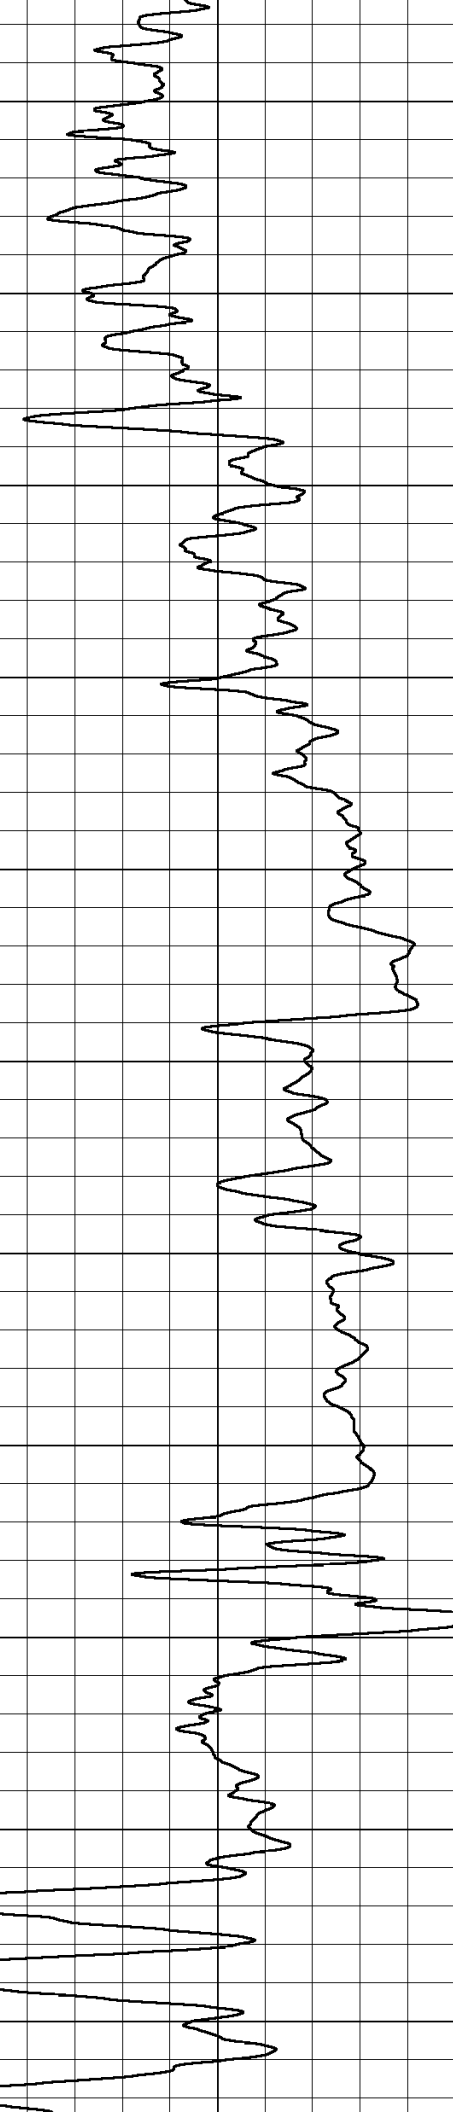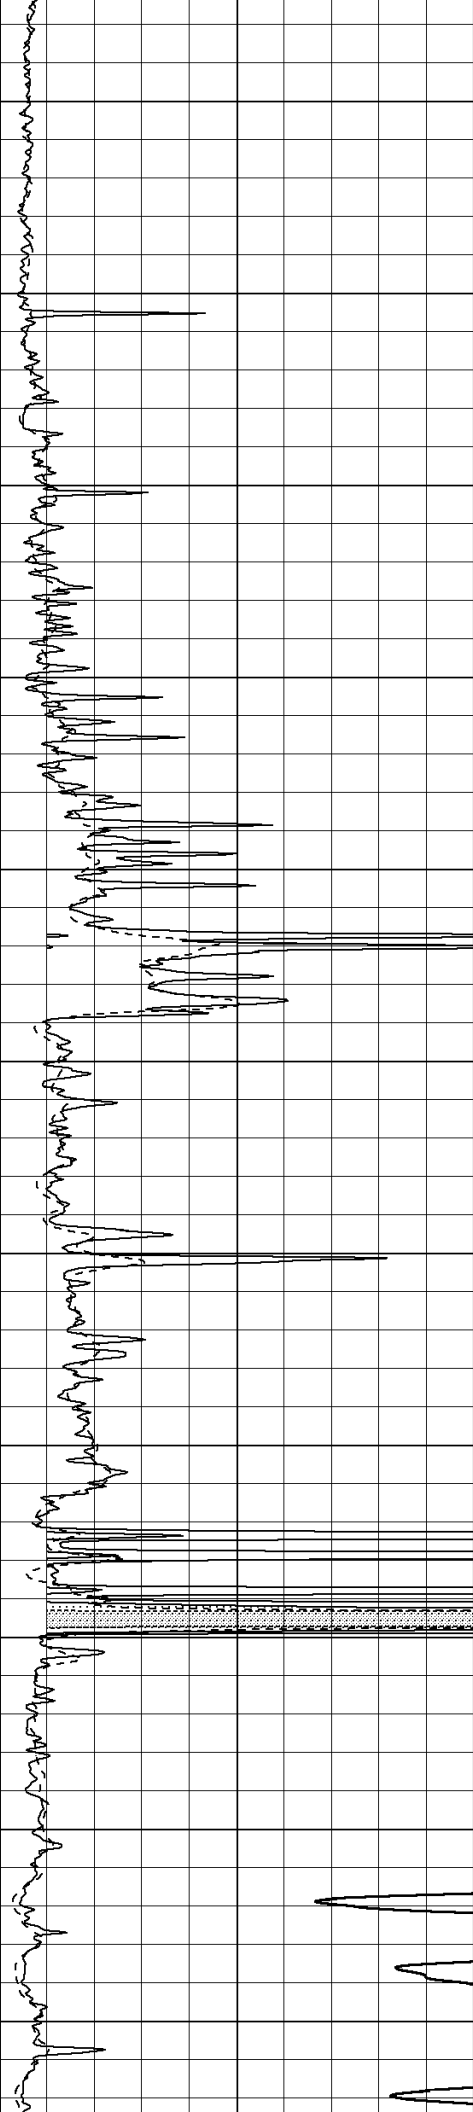

1600

1650

1700

1750

1800

1850



1900



1950


2000

2050

2100

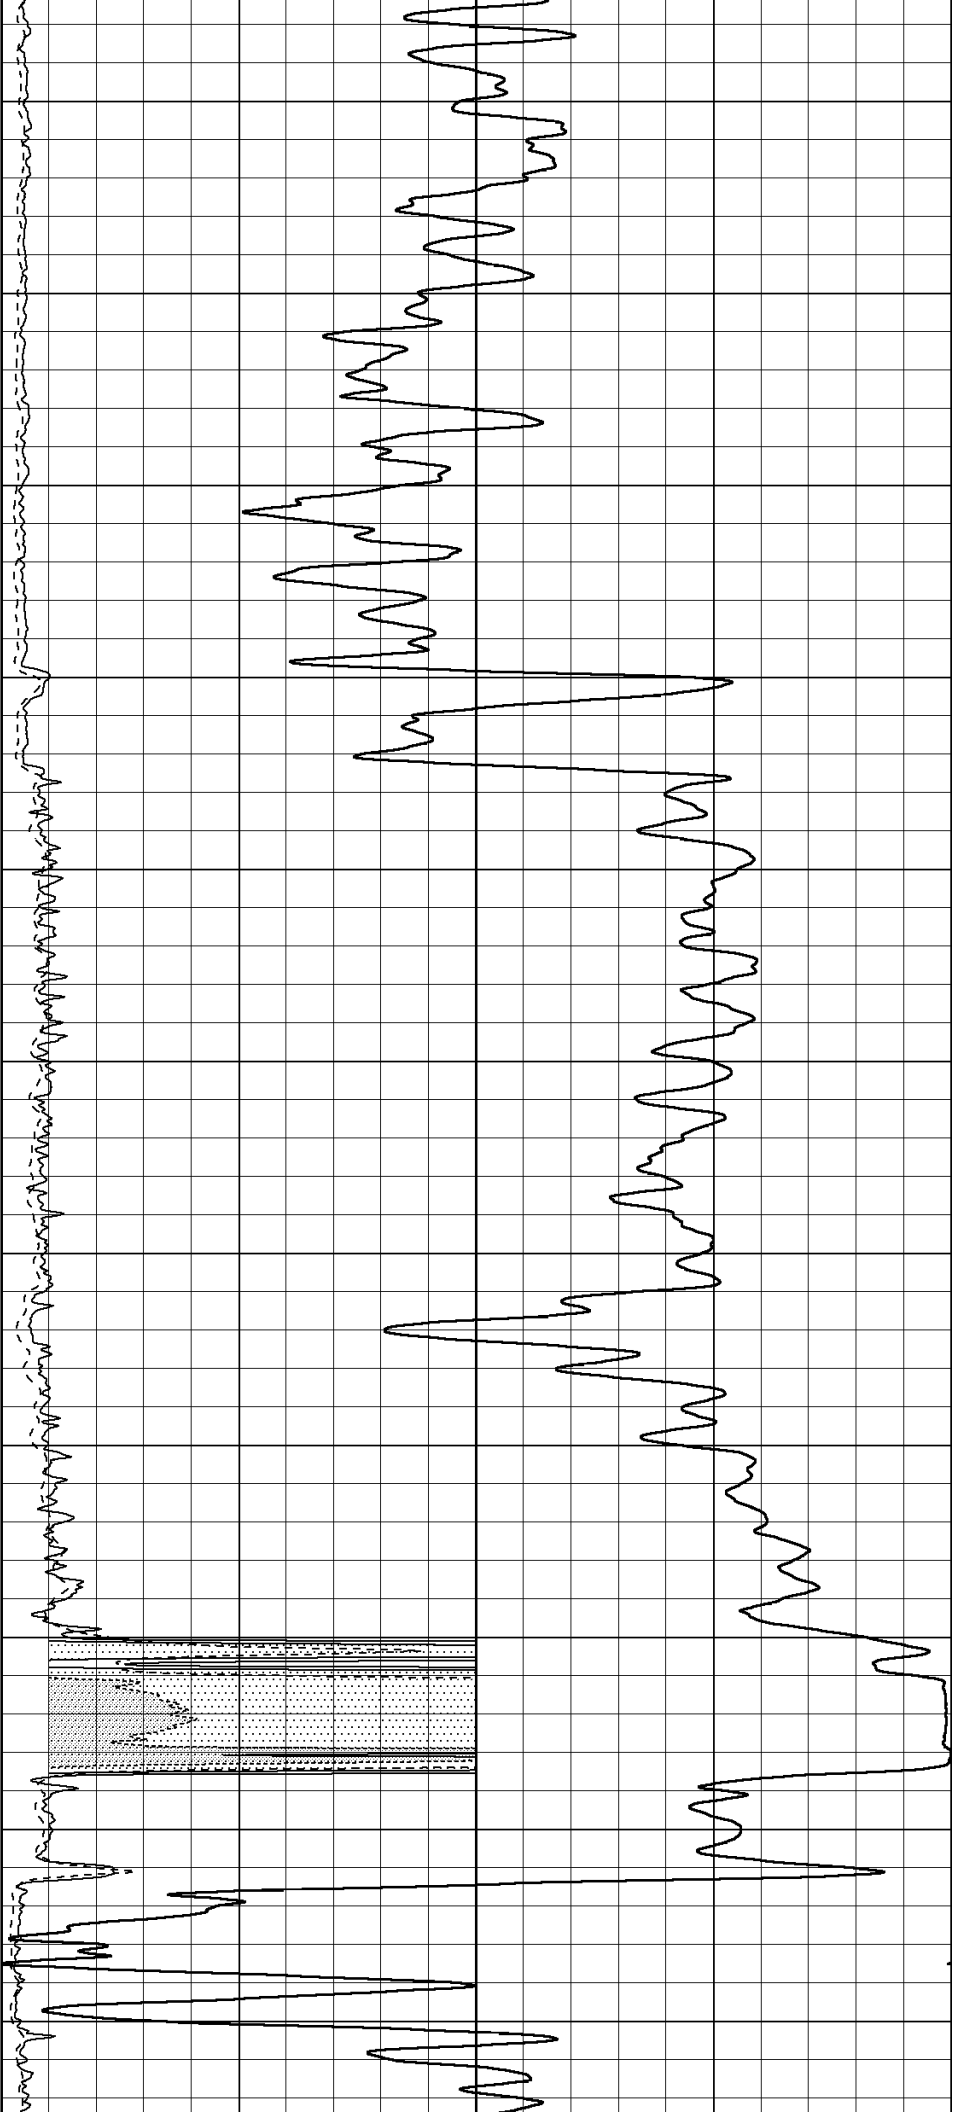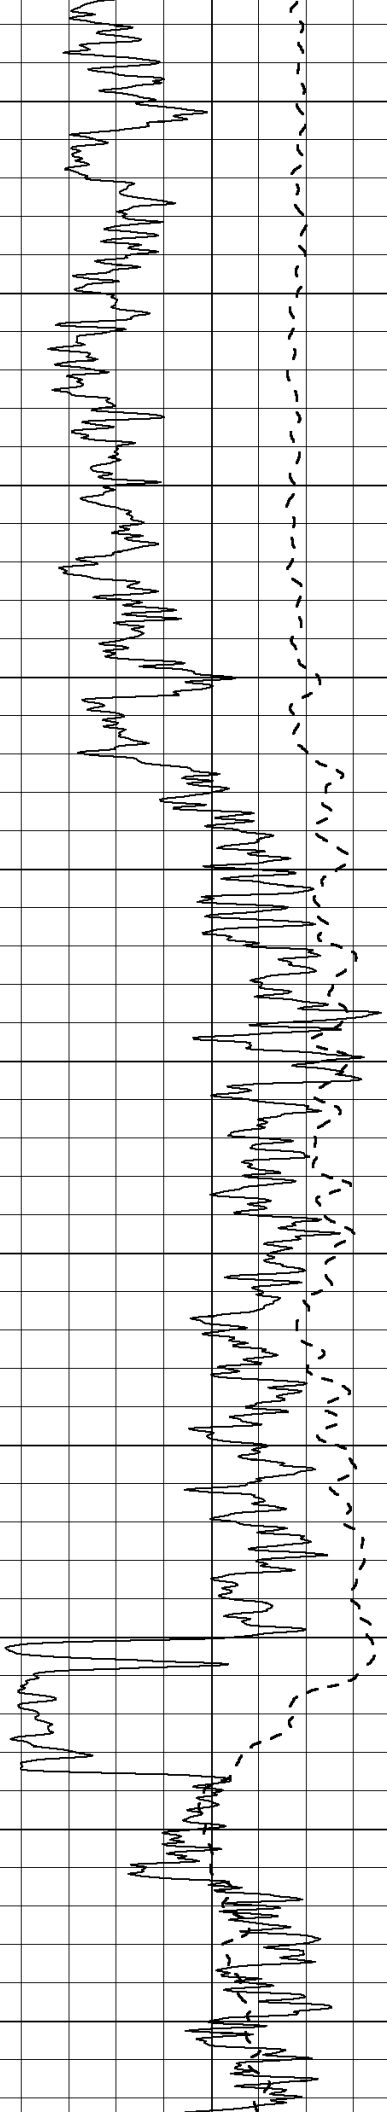

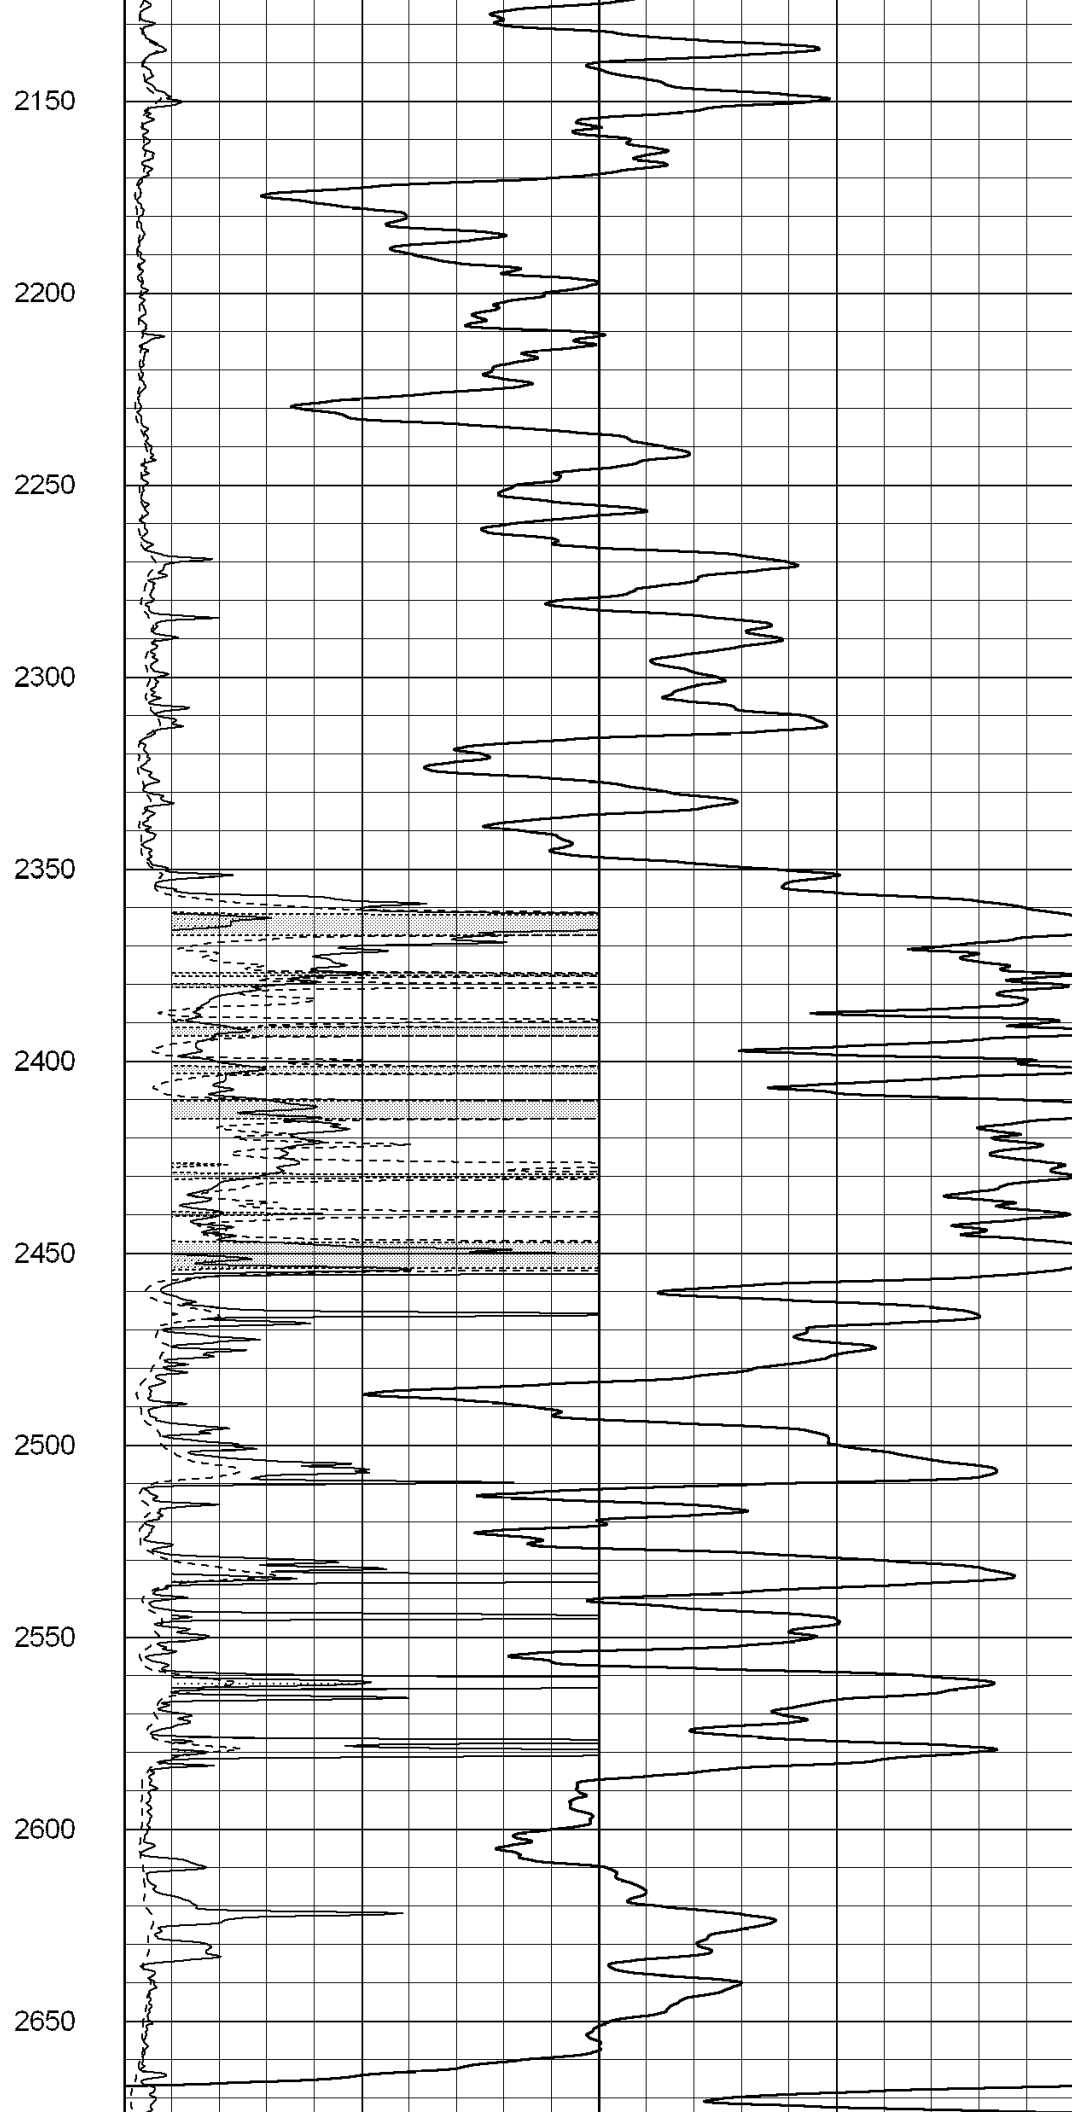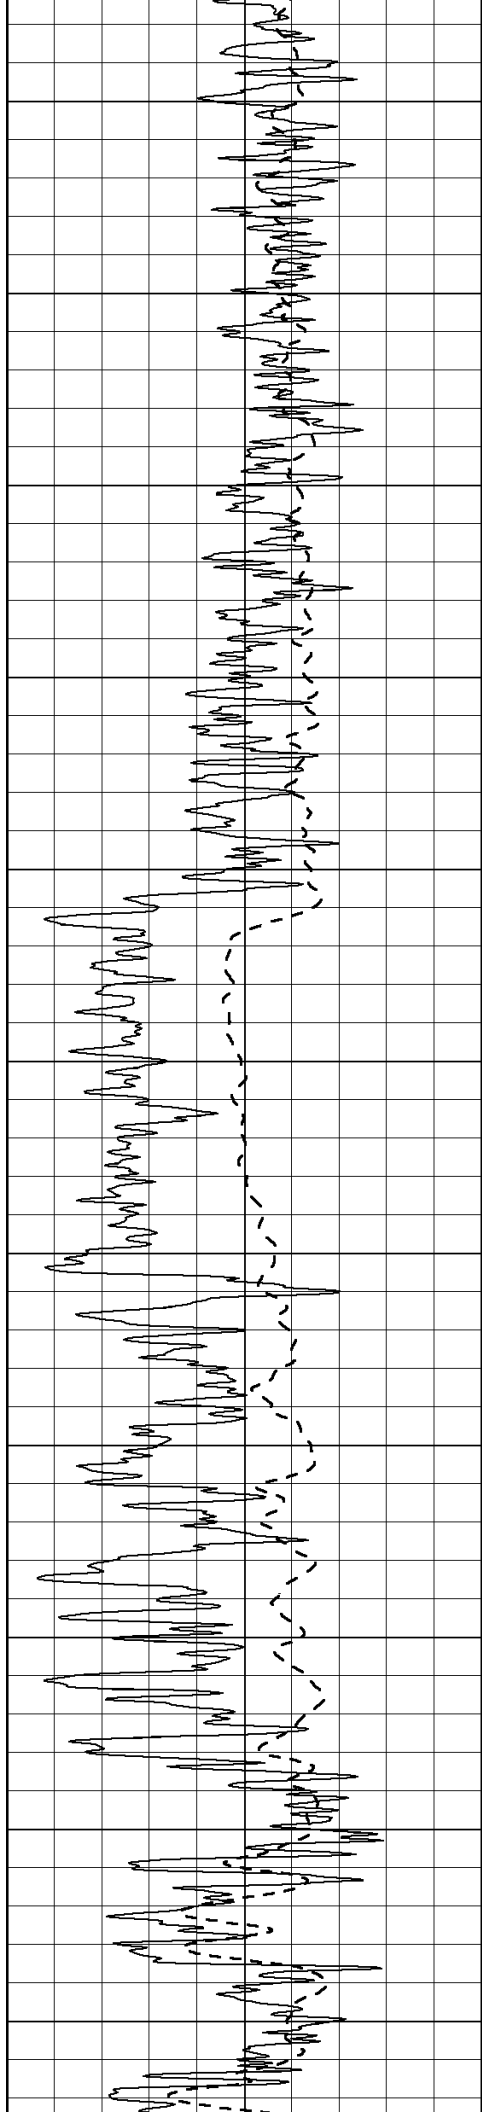

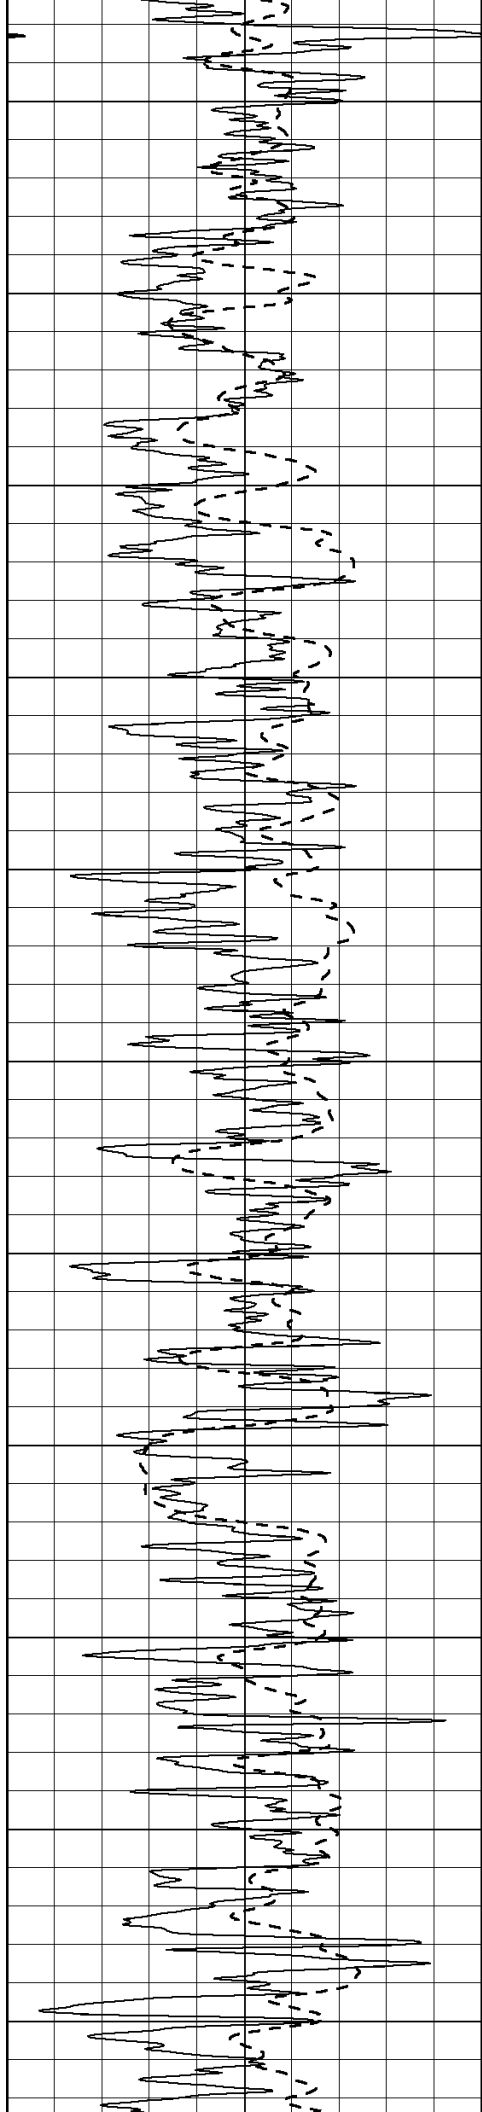

2700

2750

2800

2850

2900

2950


3000


3050

3100

3150

3200

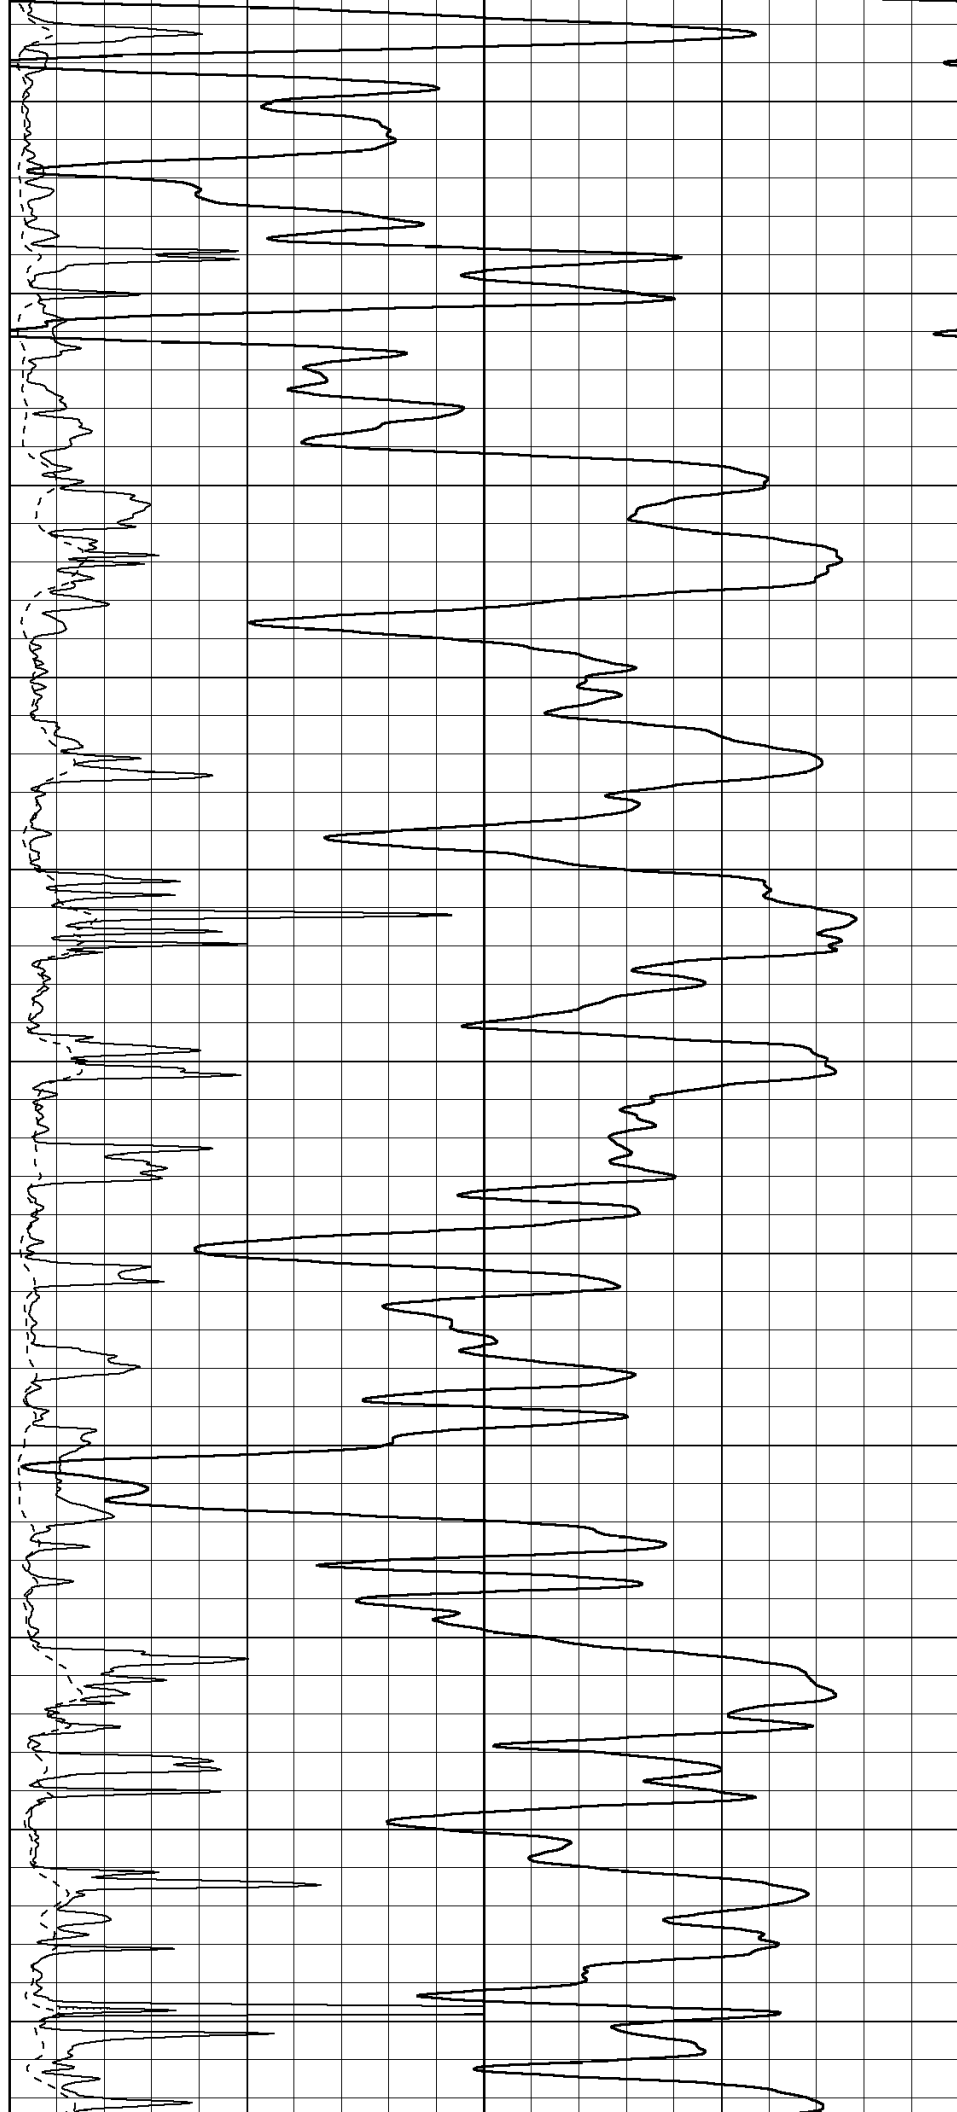

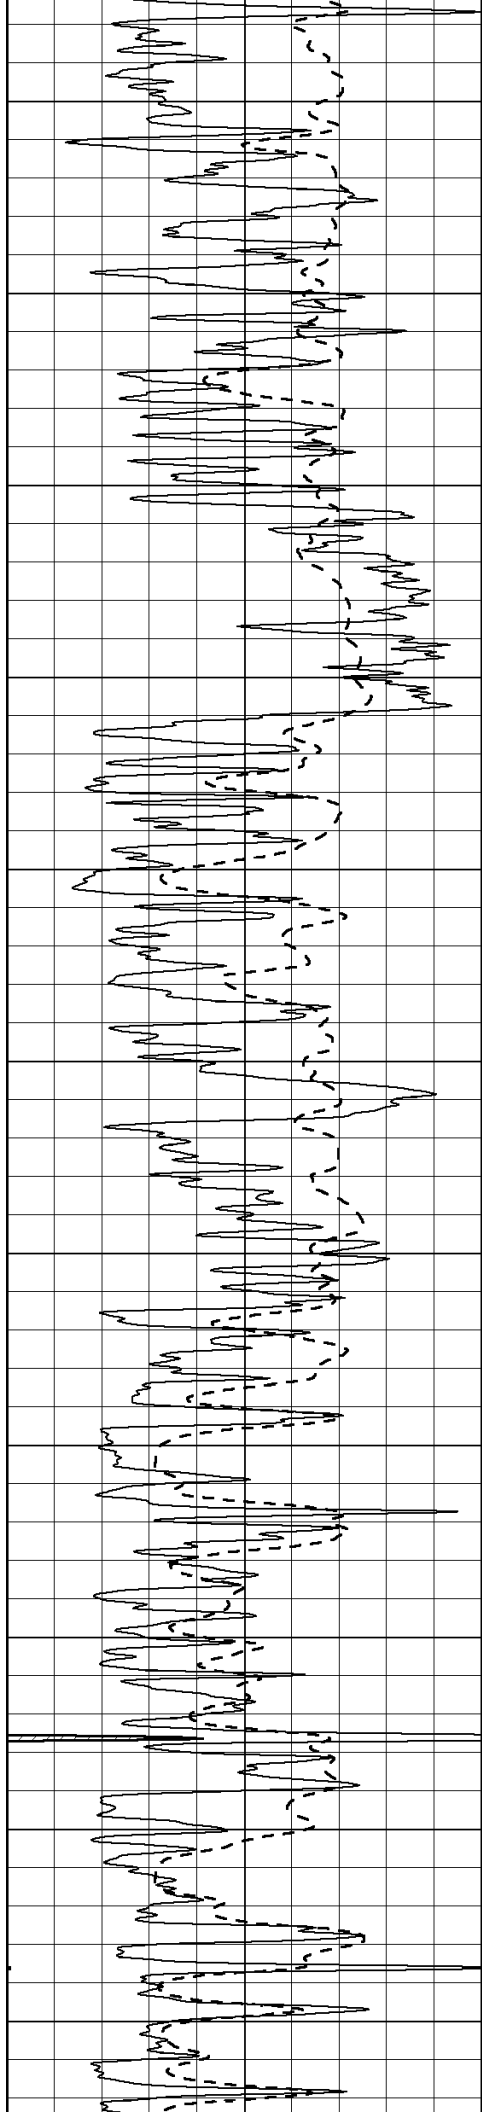

3250

3300

3350

3400

3450

3500


3550


3600


3650

3700



3750

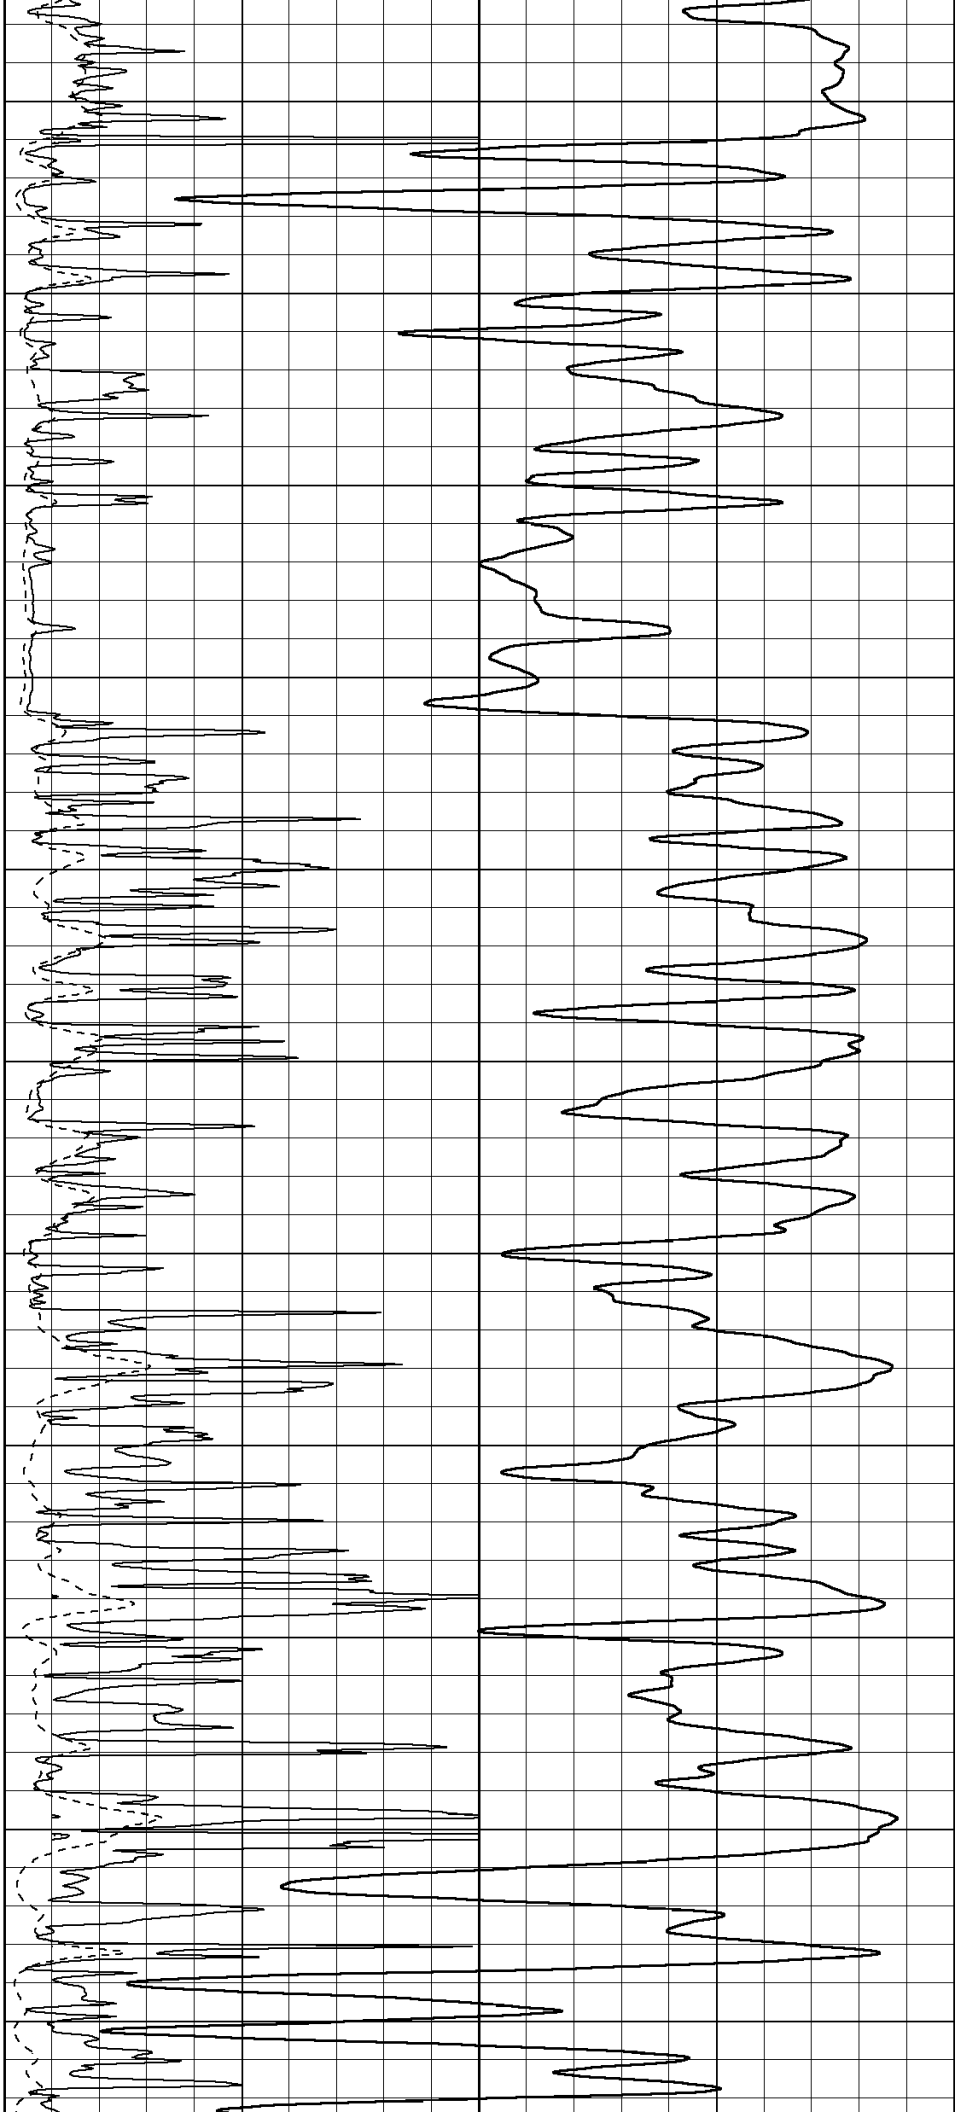


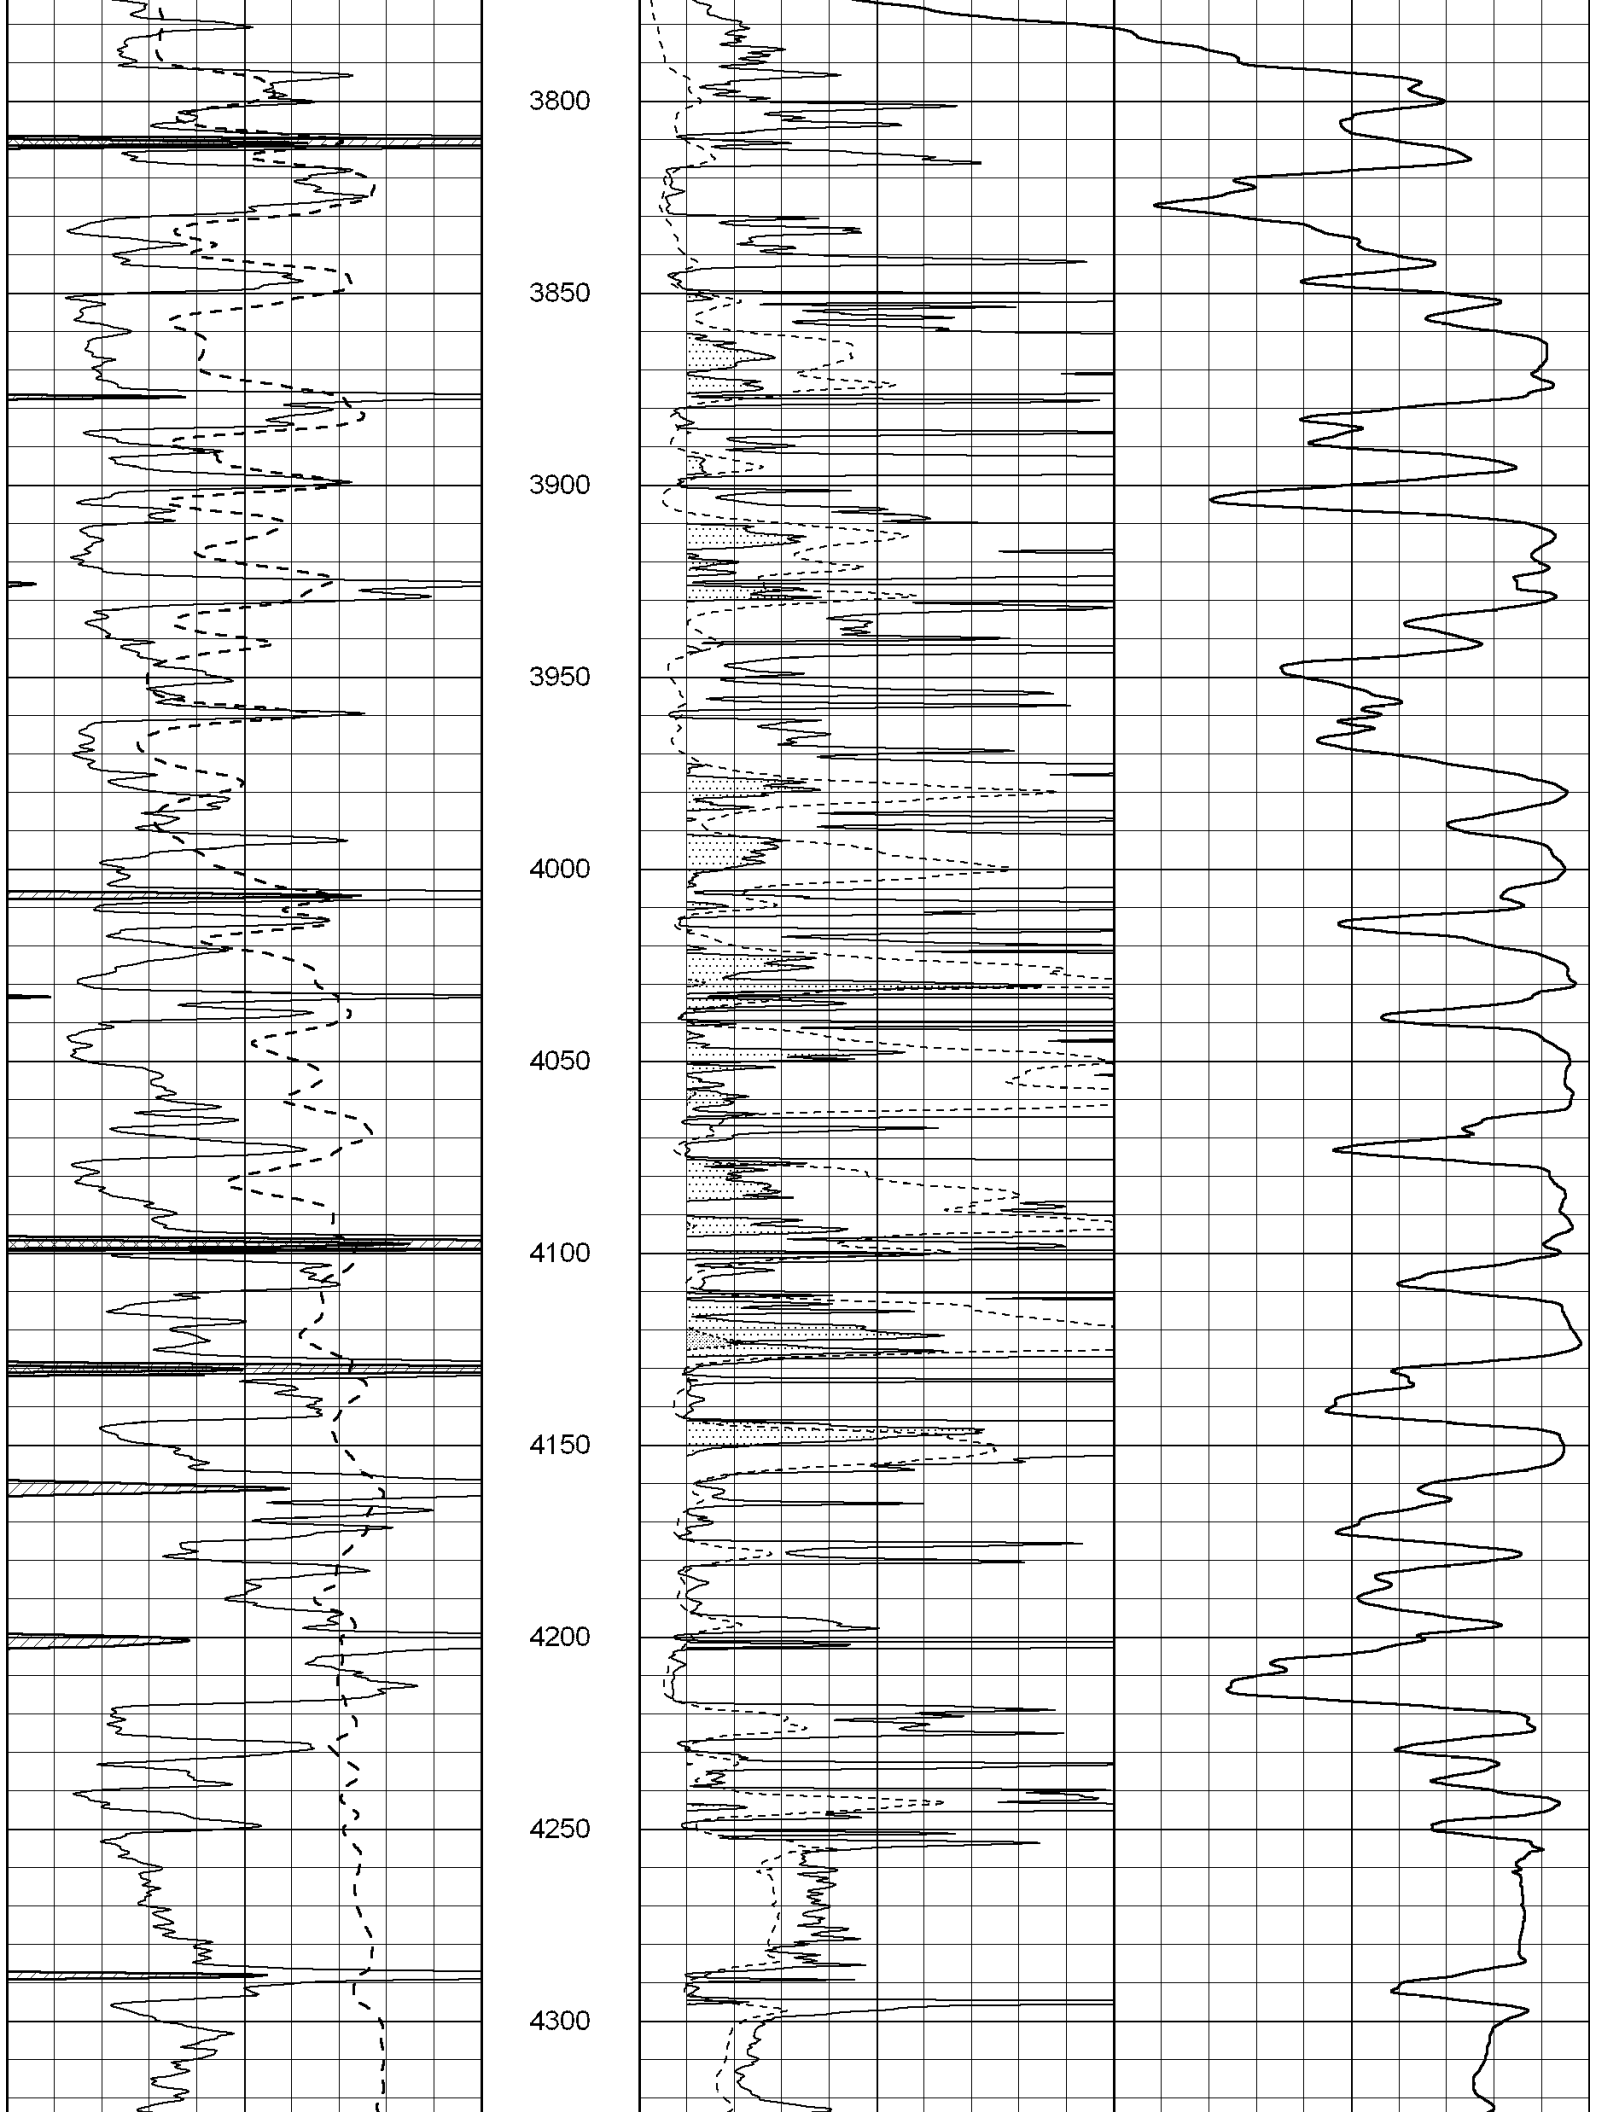

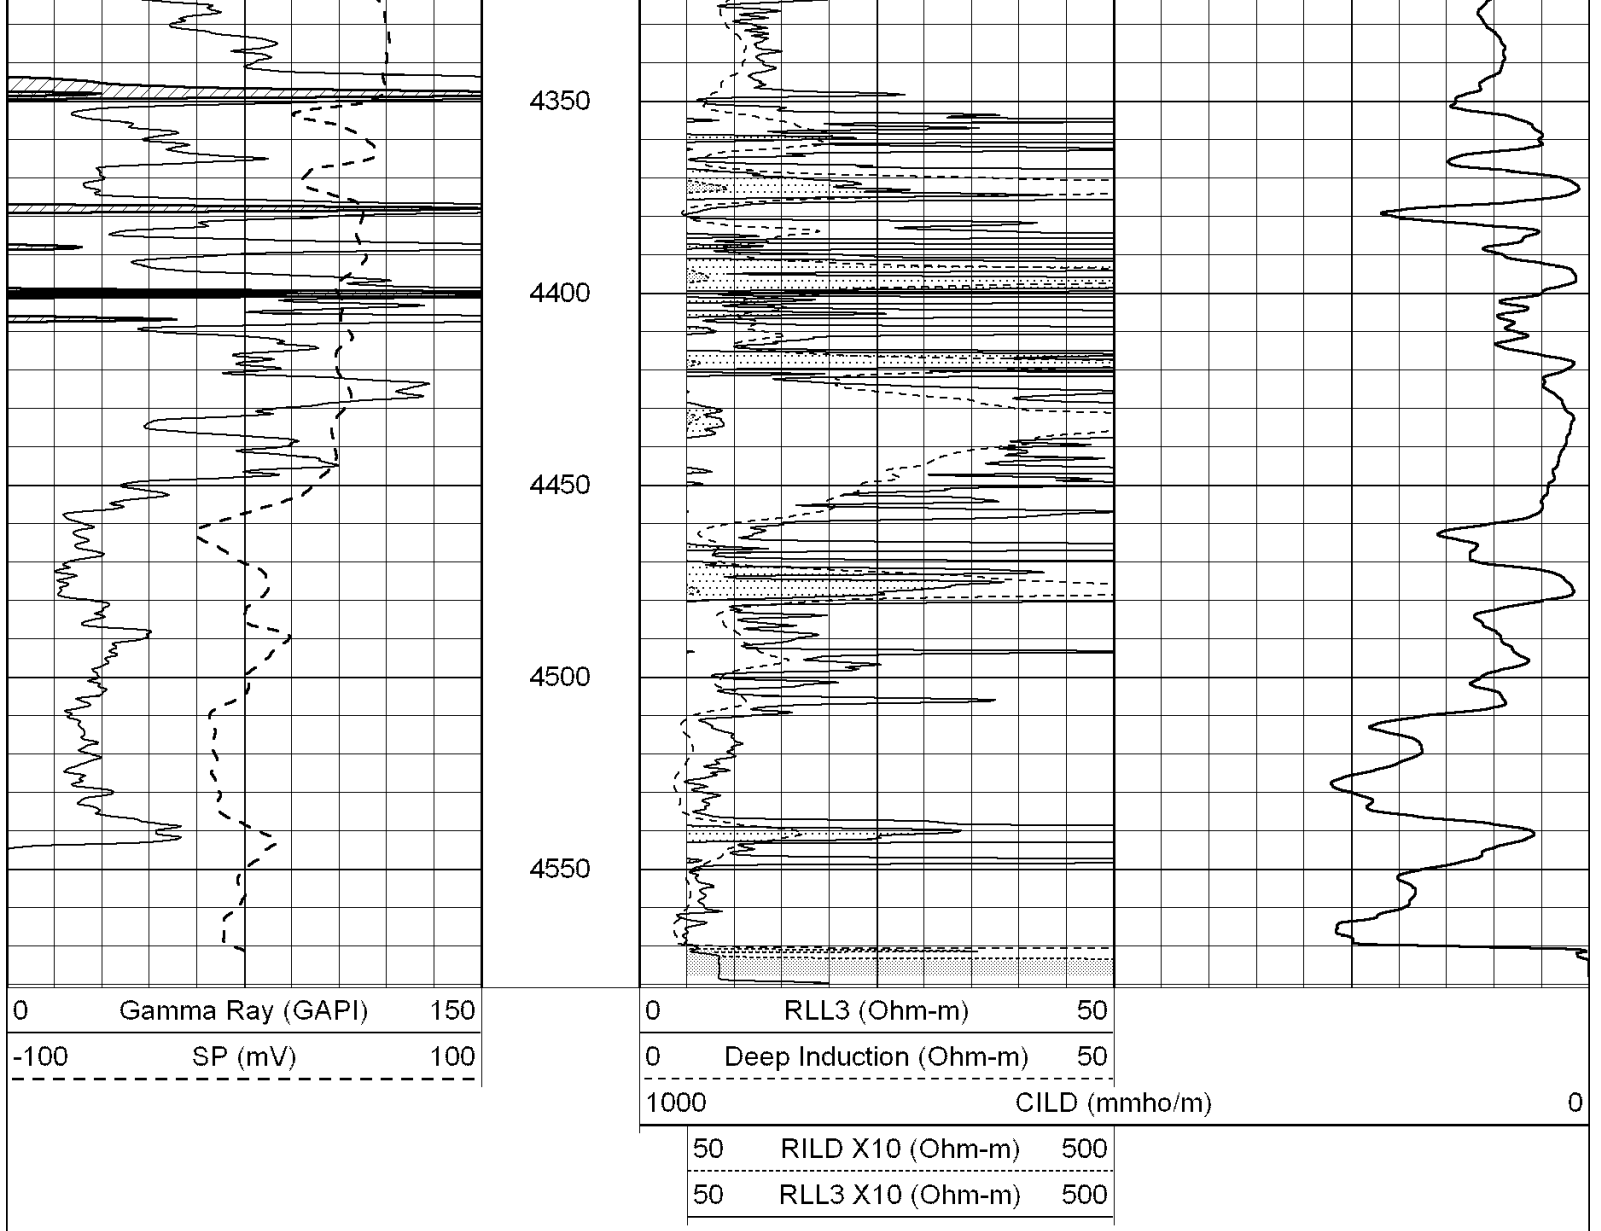

Database File: 005106ddn.db
 Dataset Pathname: pass3.2
 Presentation Format: _dil
 Dataset Creation: Sat Mar 27 22:18:07 2010 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

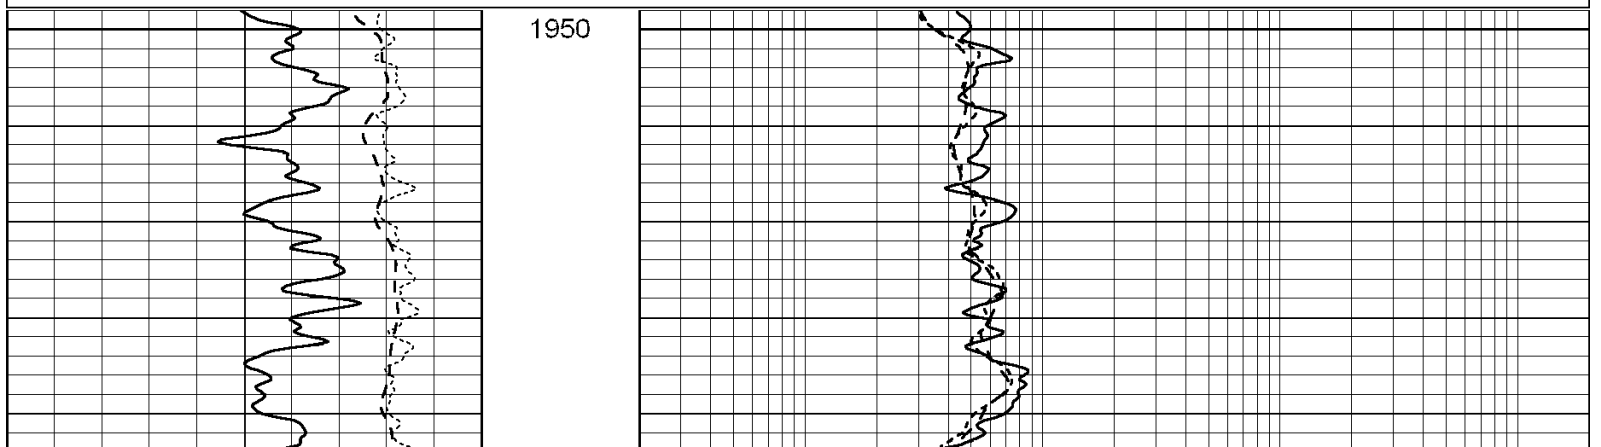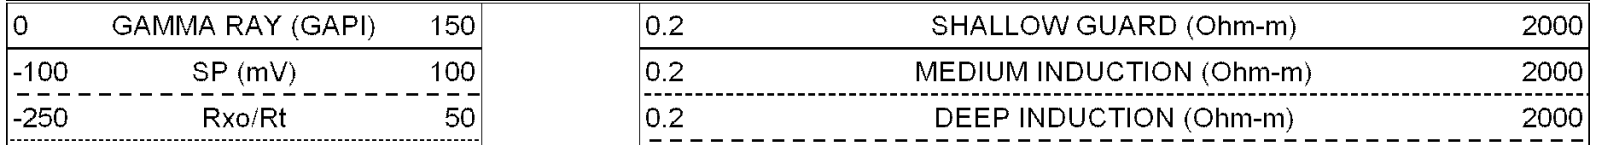

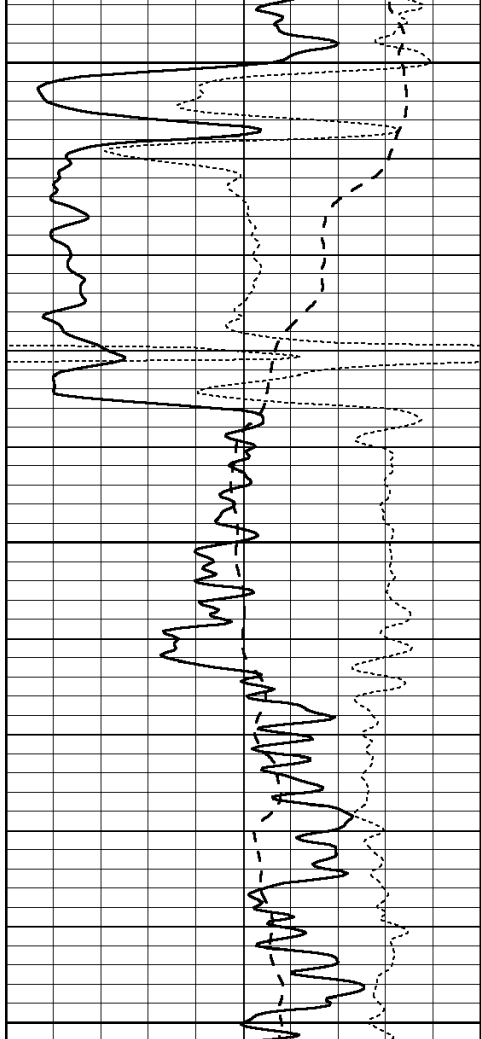


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

2000

2050

2100

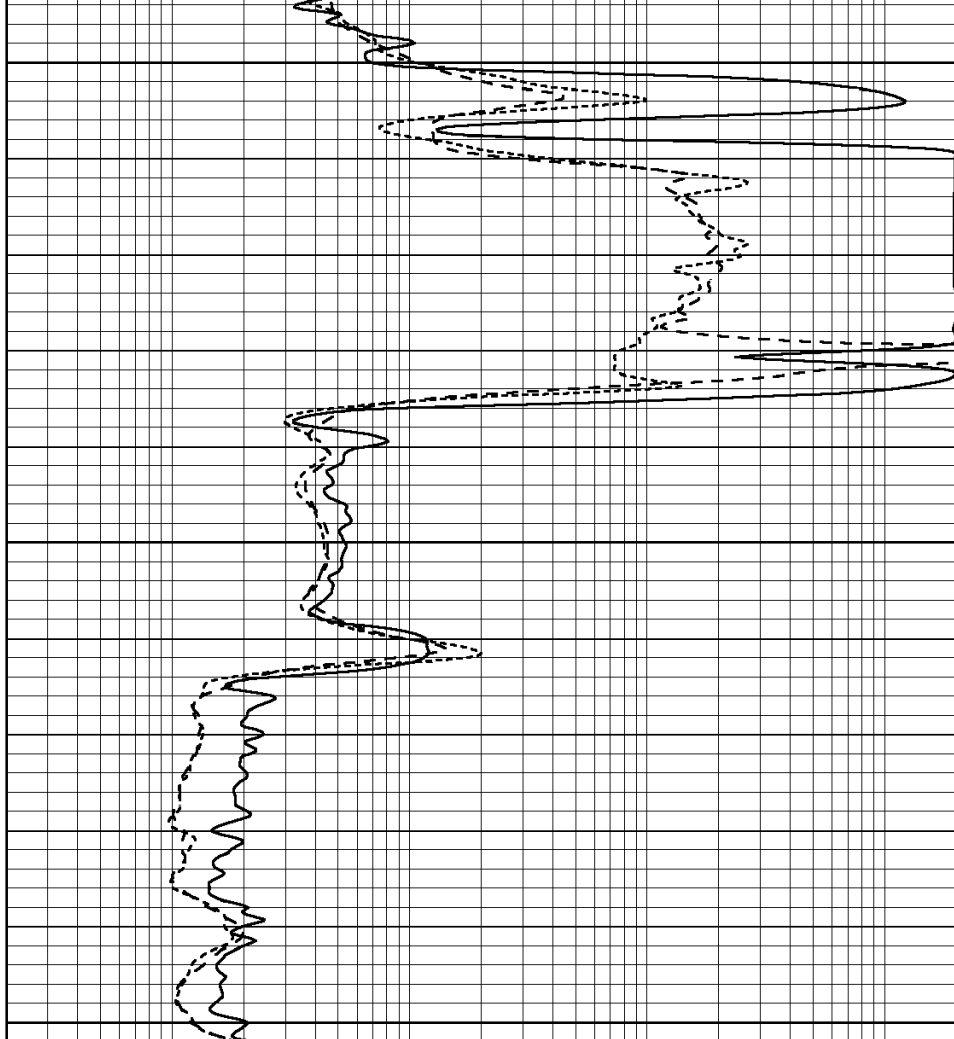


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000


Database File: 005106ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Sat Mar 27 21:23:05 2010 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

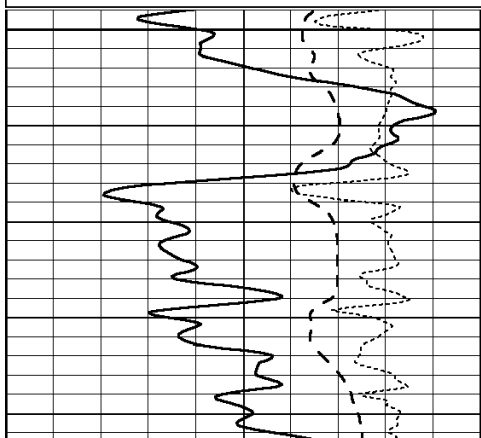

3500

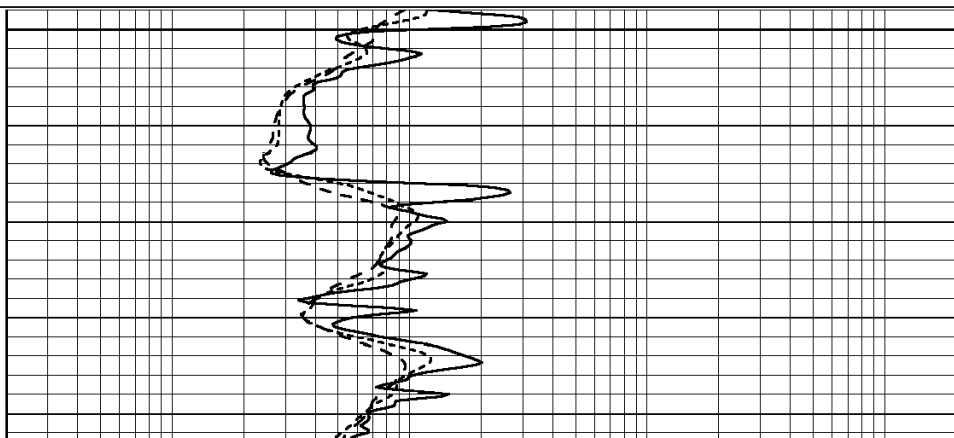

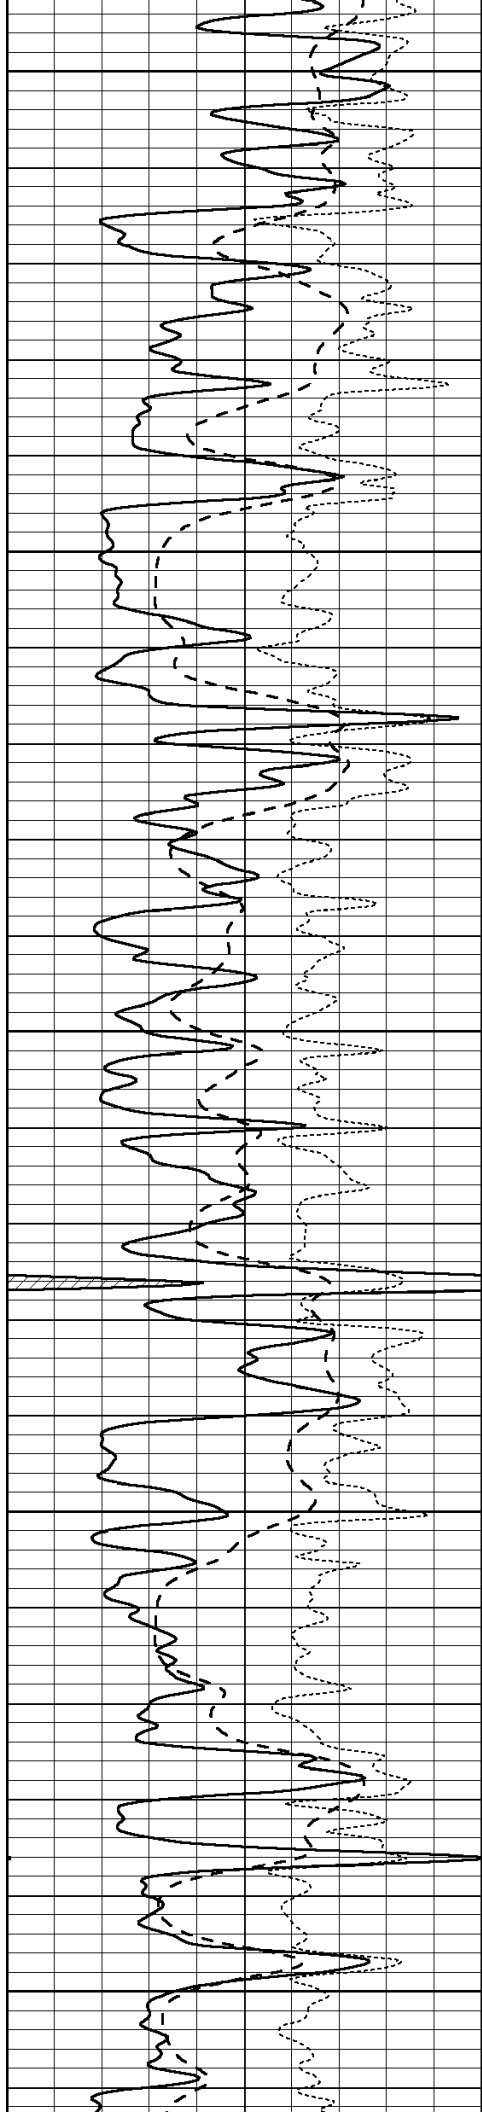


3550


3600

3650

3700

3750

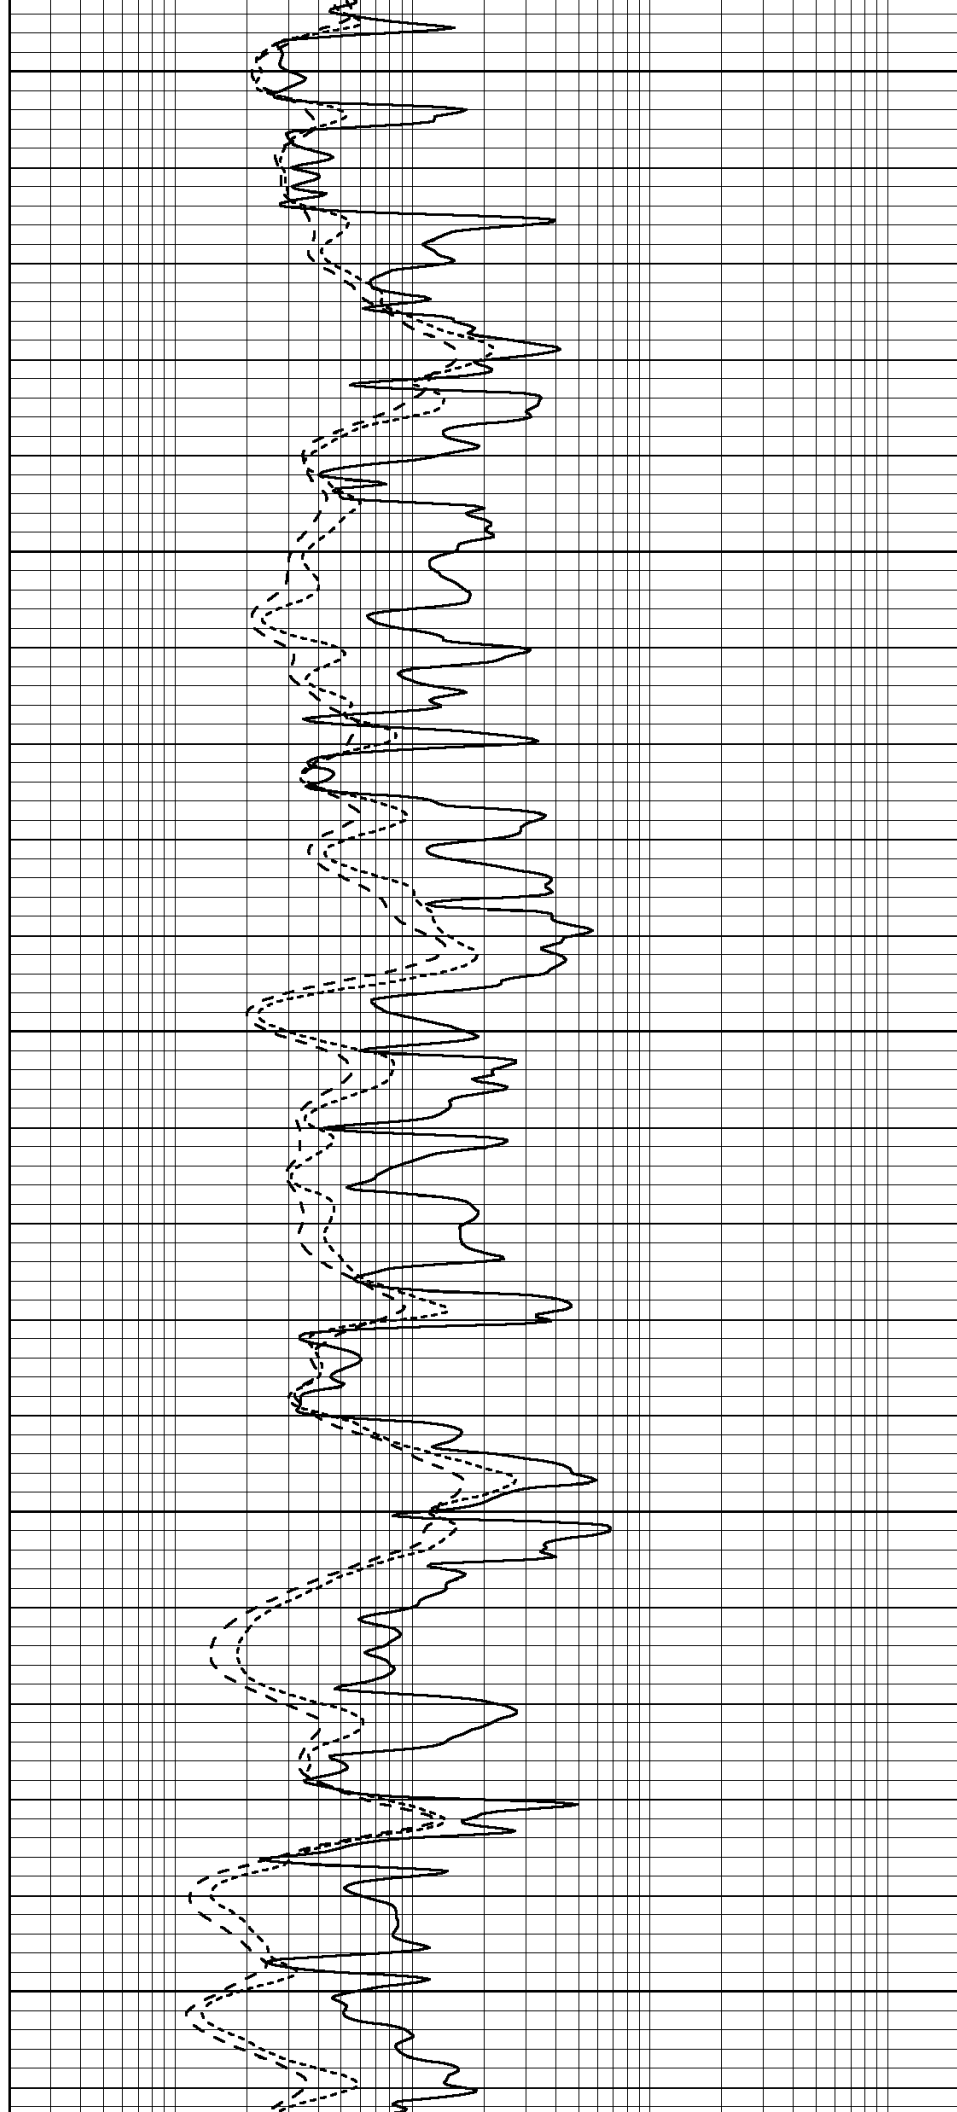

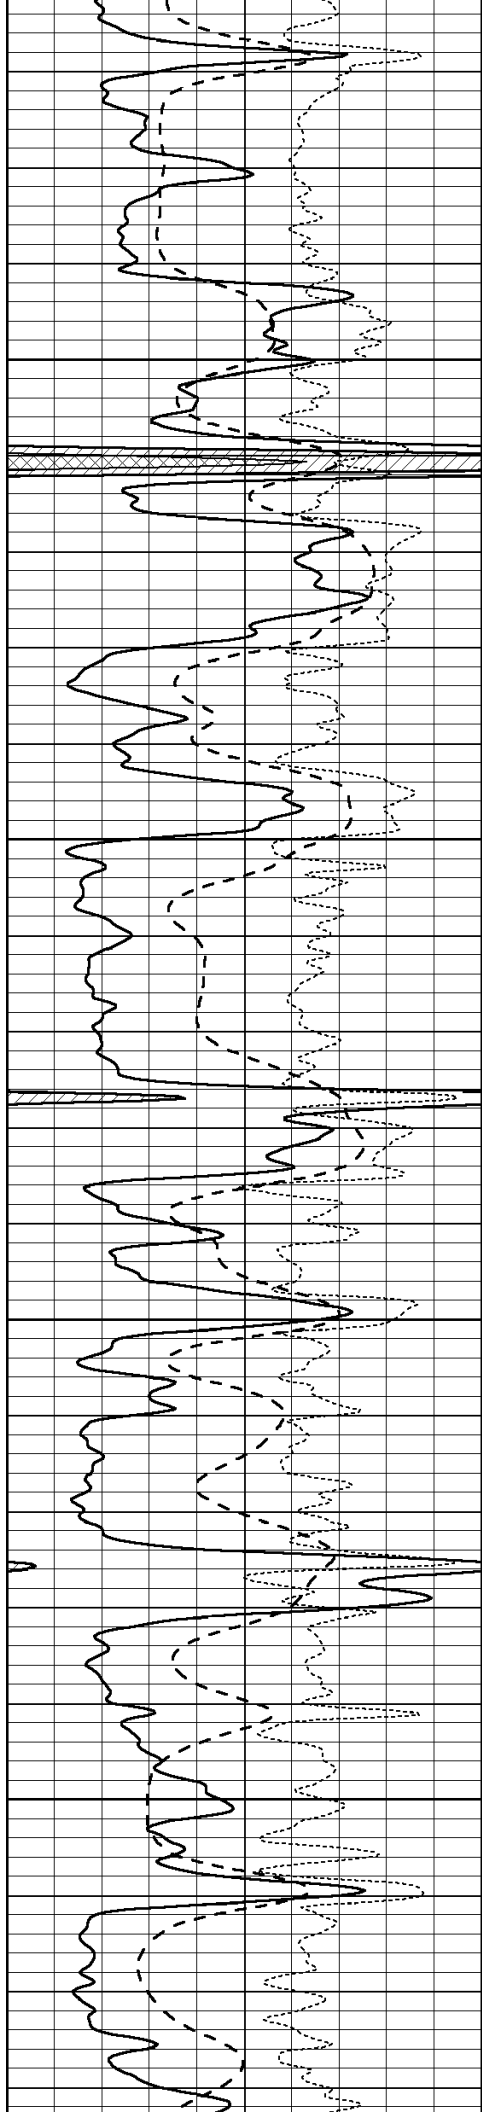



3800

3850

3900

3950

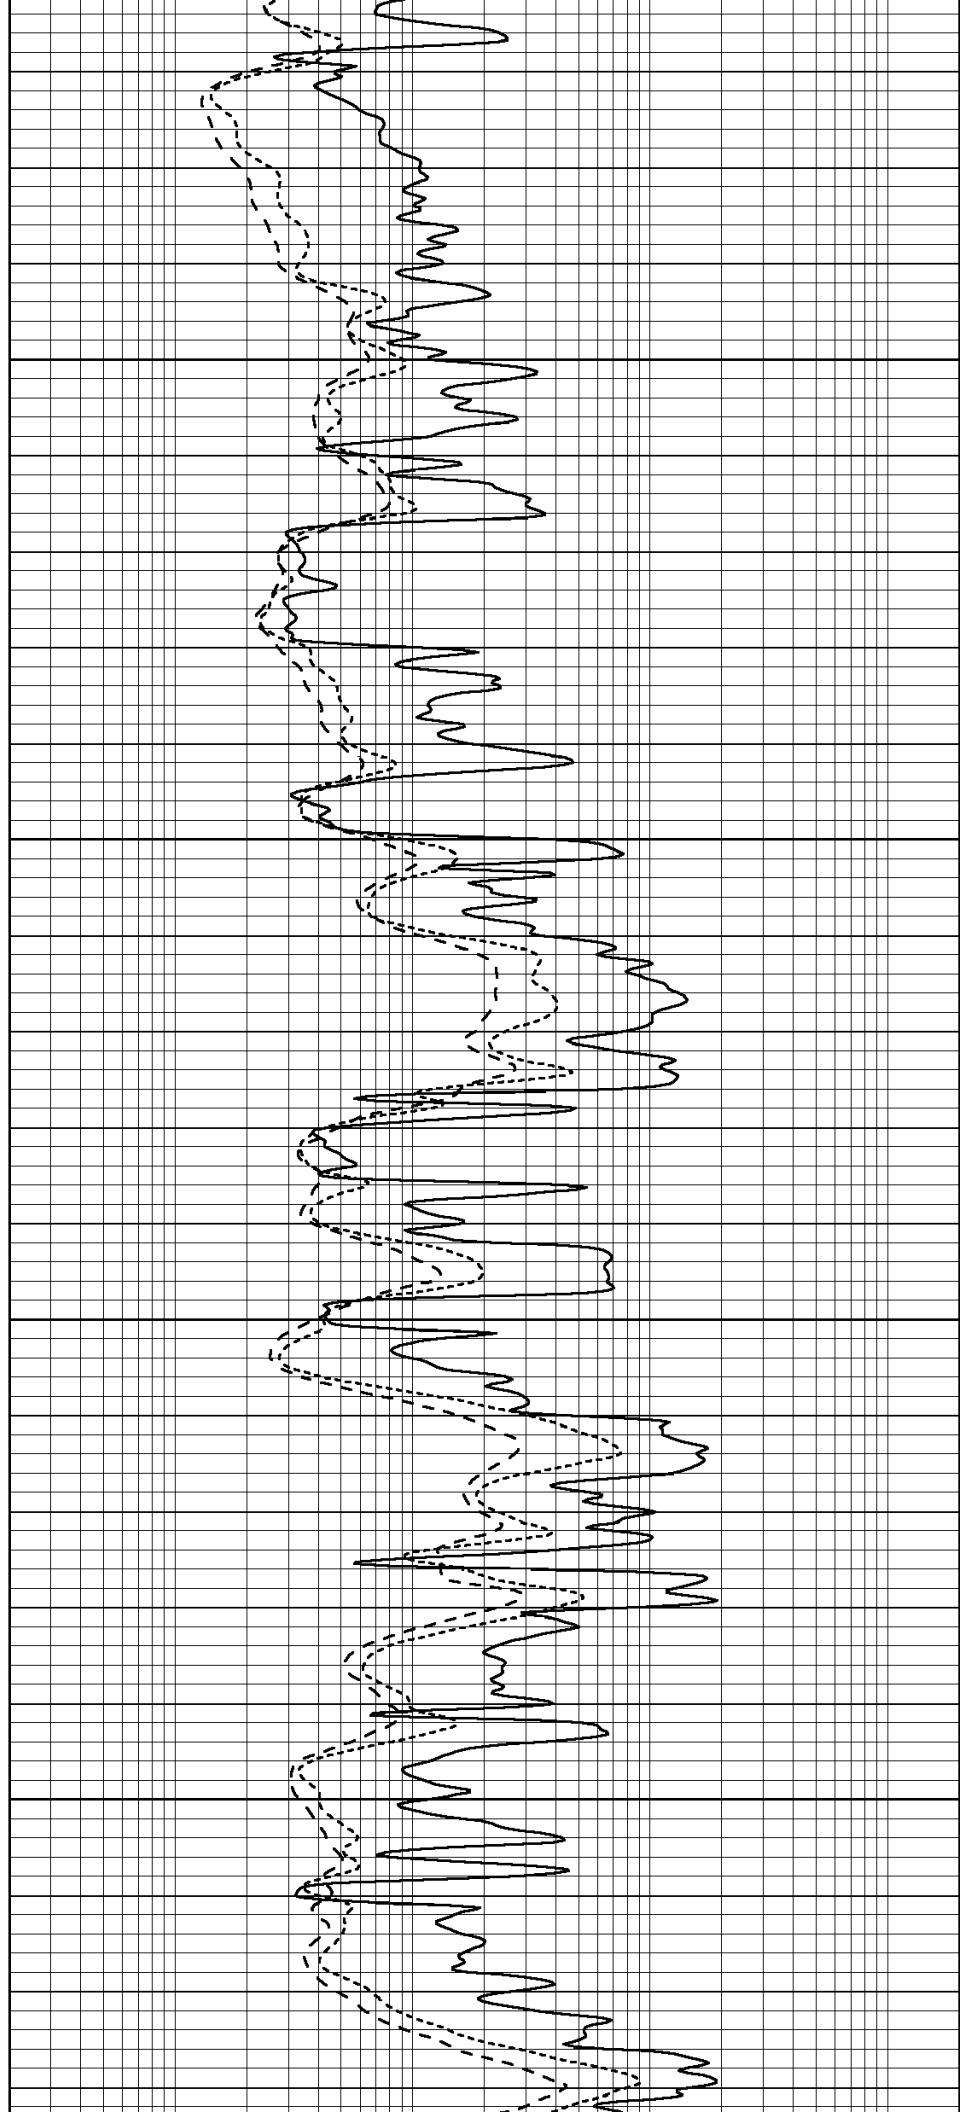

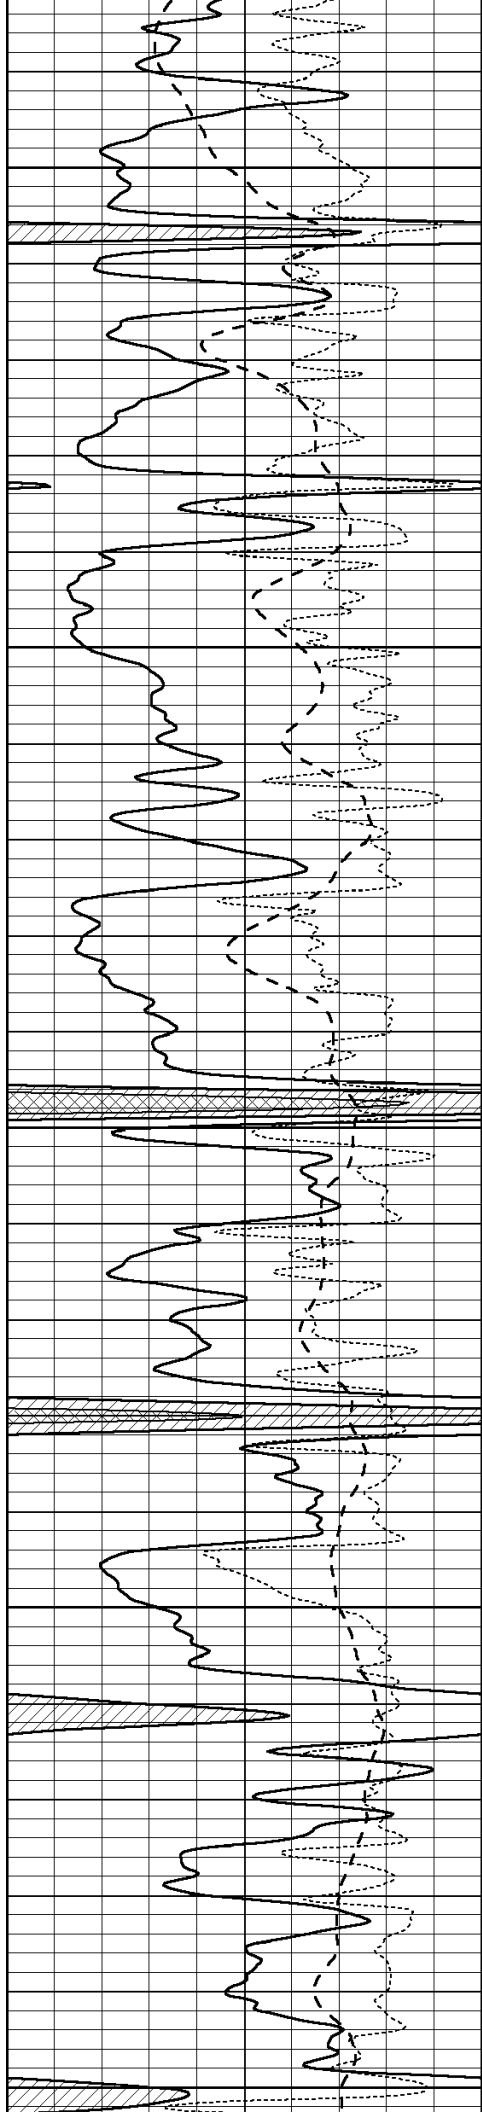


4000


4050

4100

4150

4200

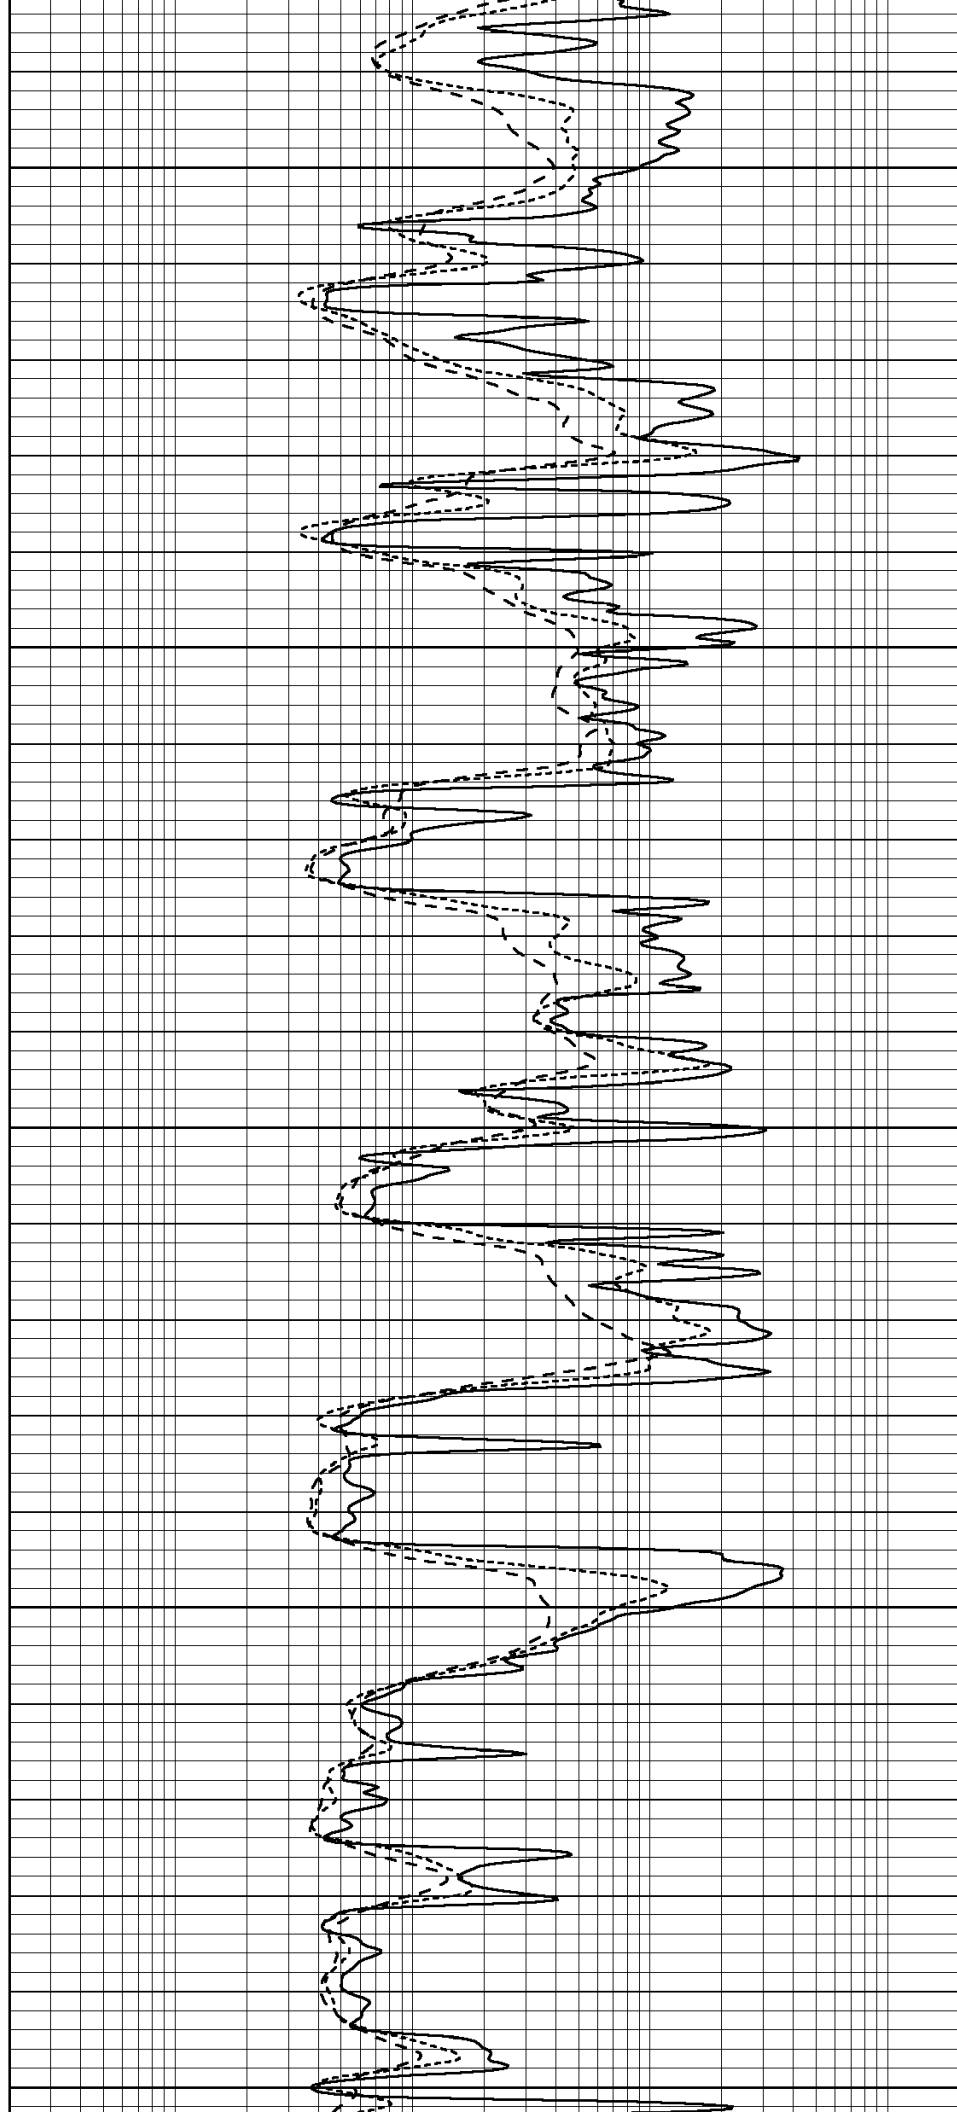

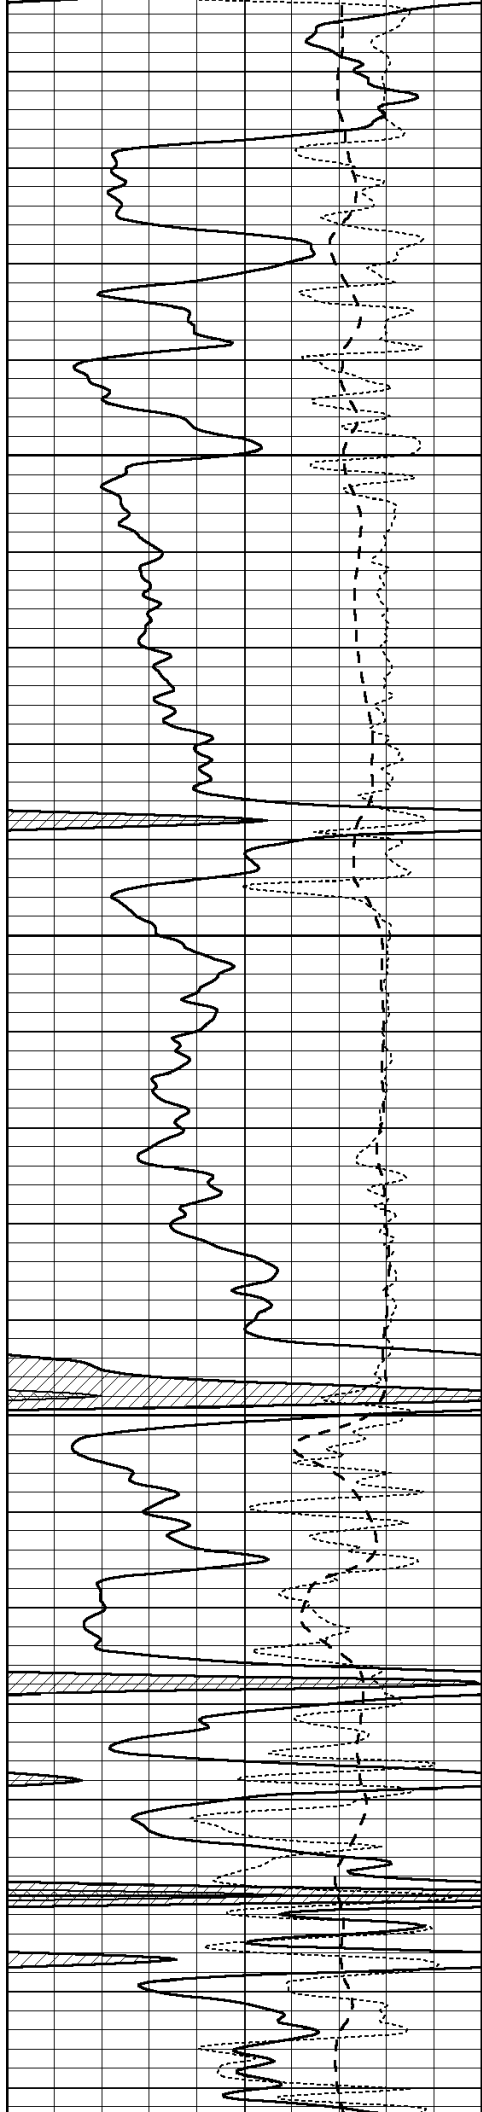



4250

4300

4350

4400

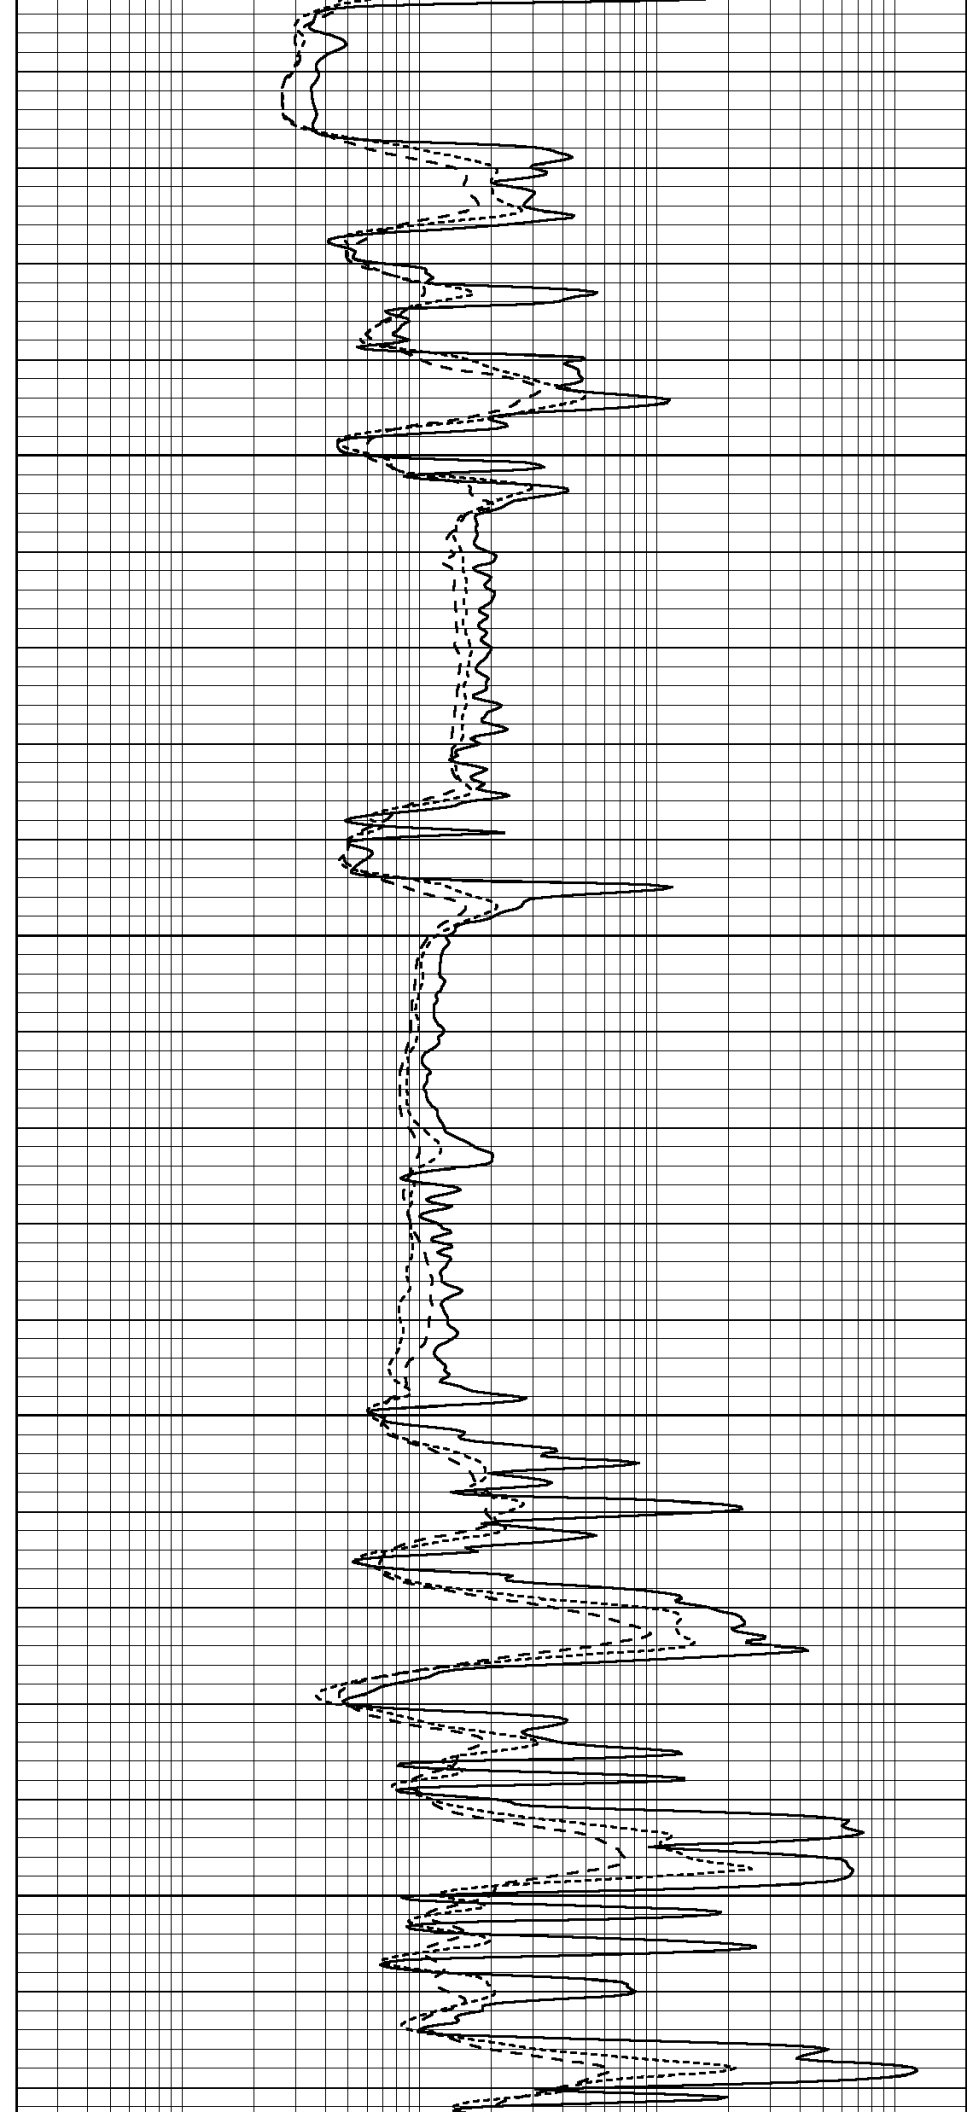

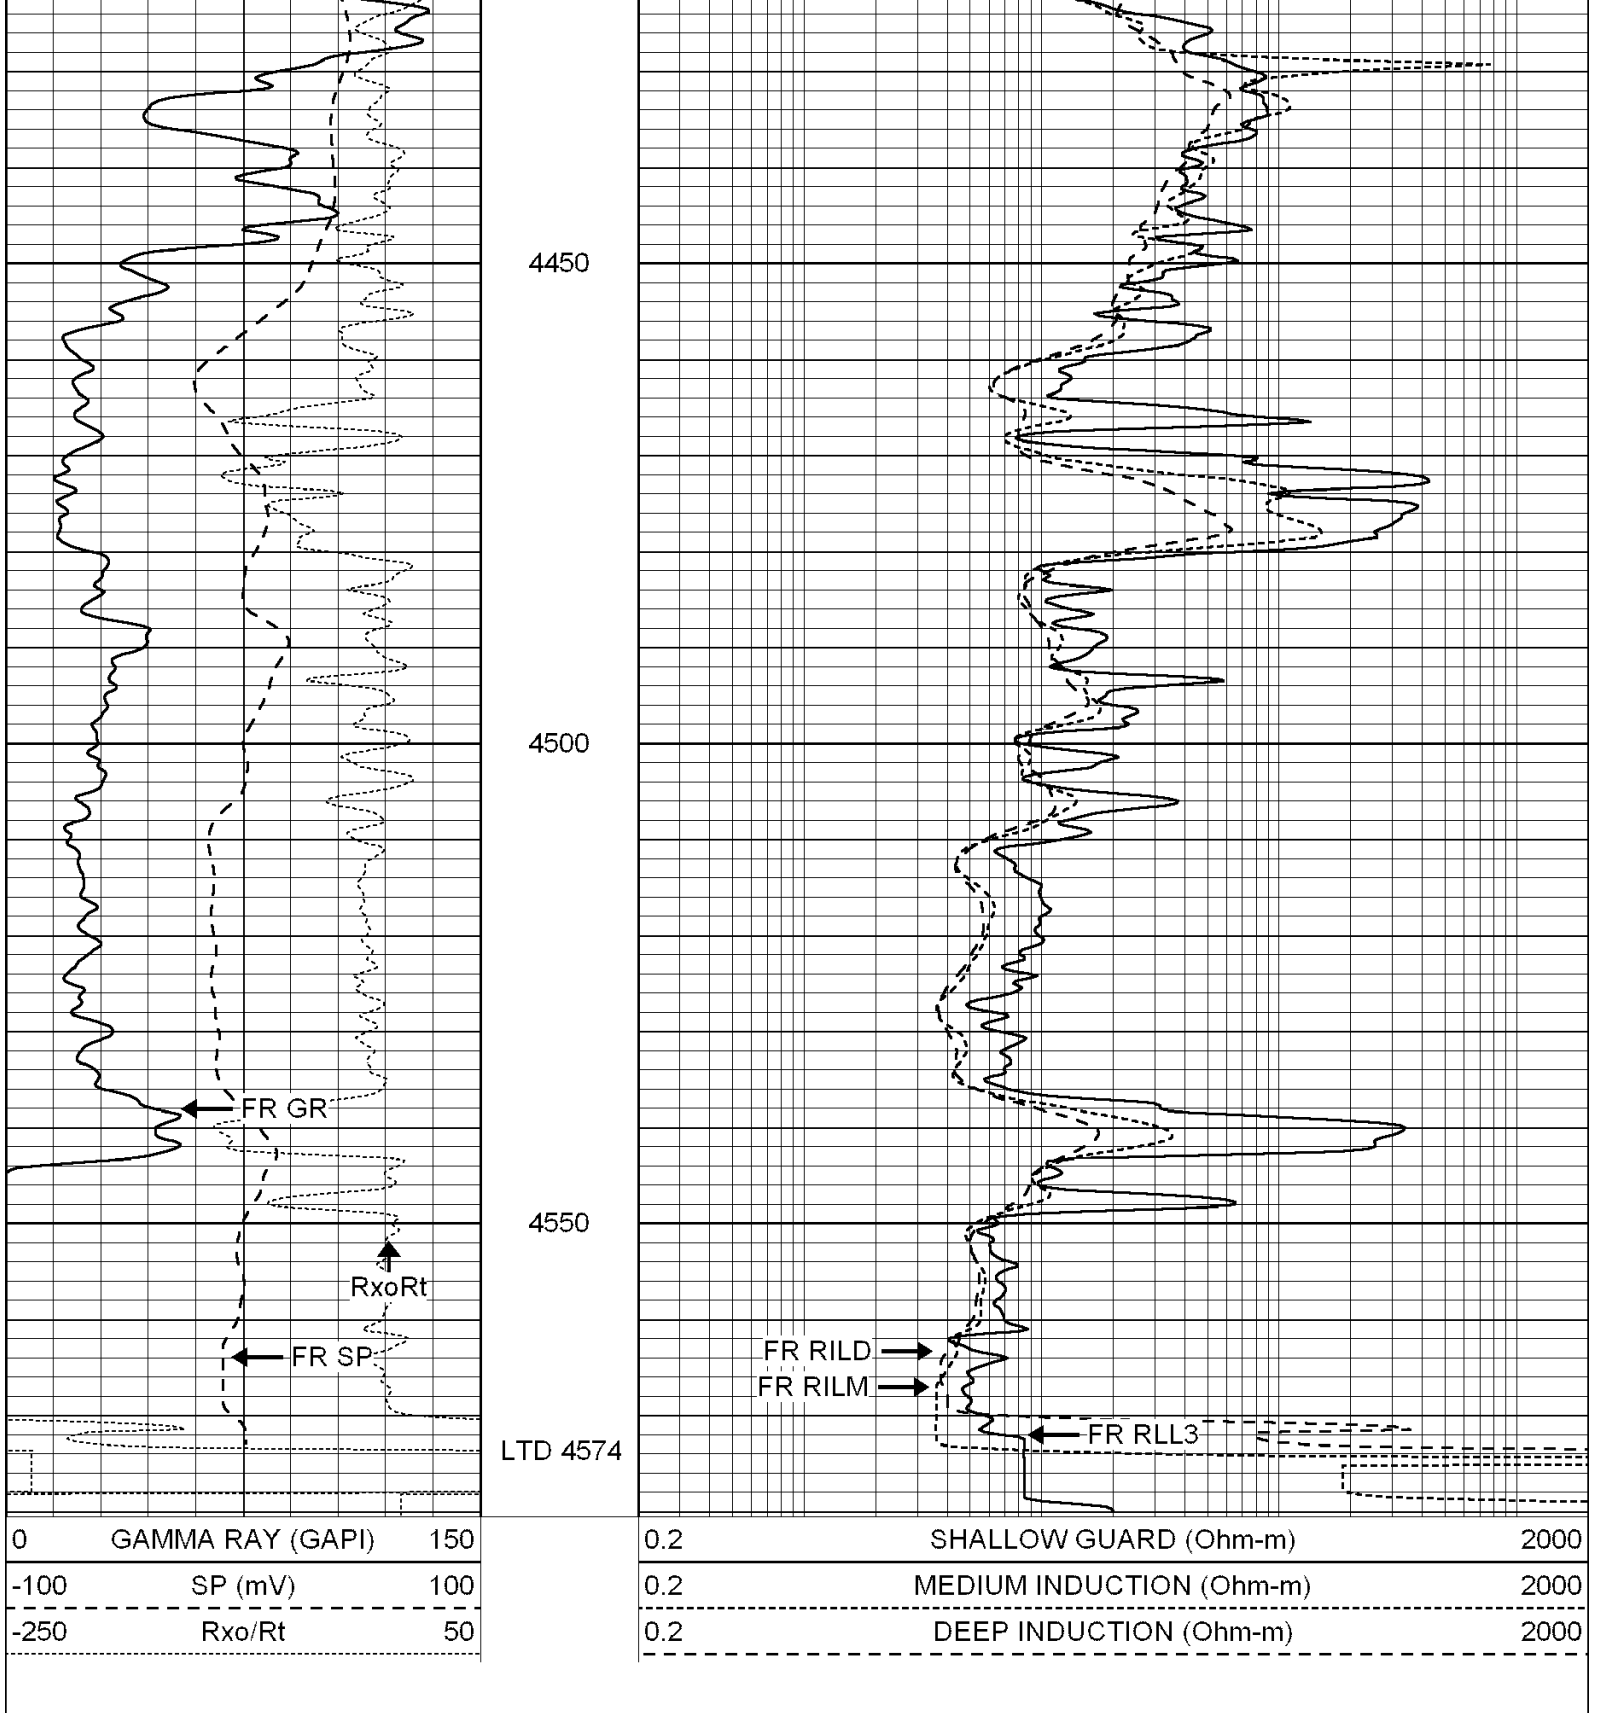


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 005106ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: _dil
 Dataset Creation: Sat Mar 27 20:57:24 2010 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

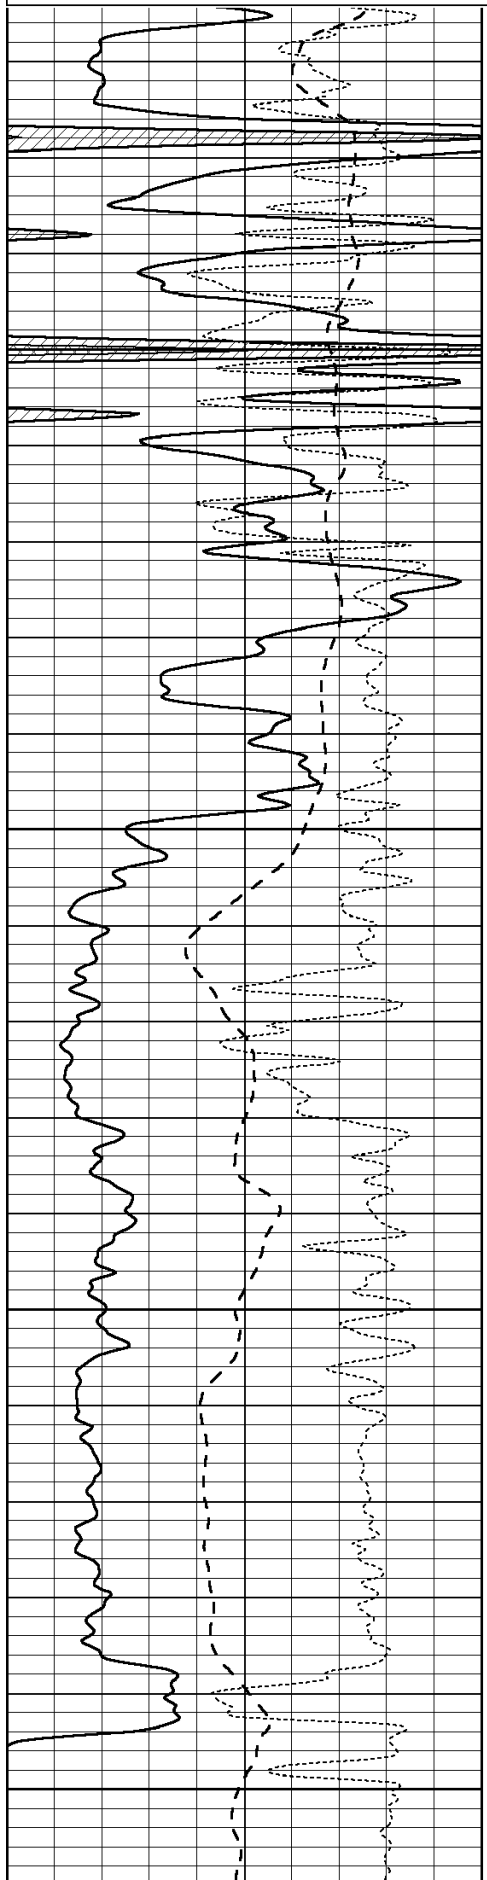



4400

4450

4500

4550

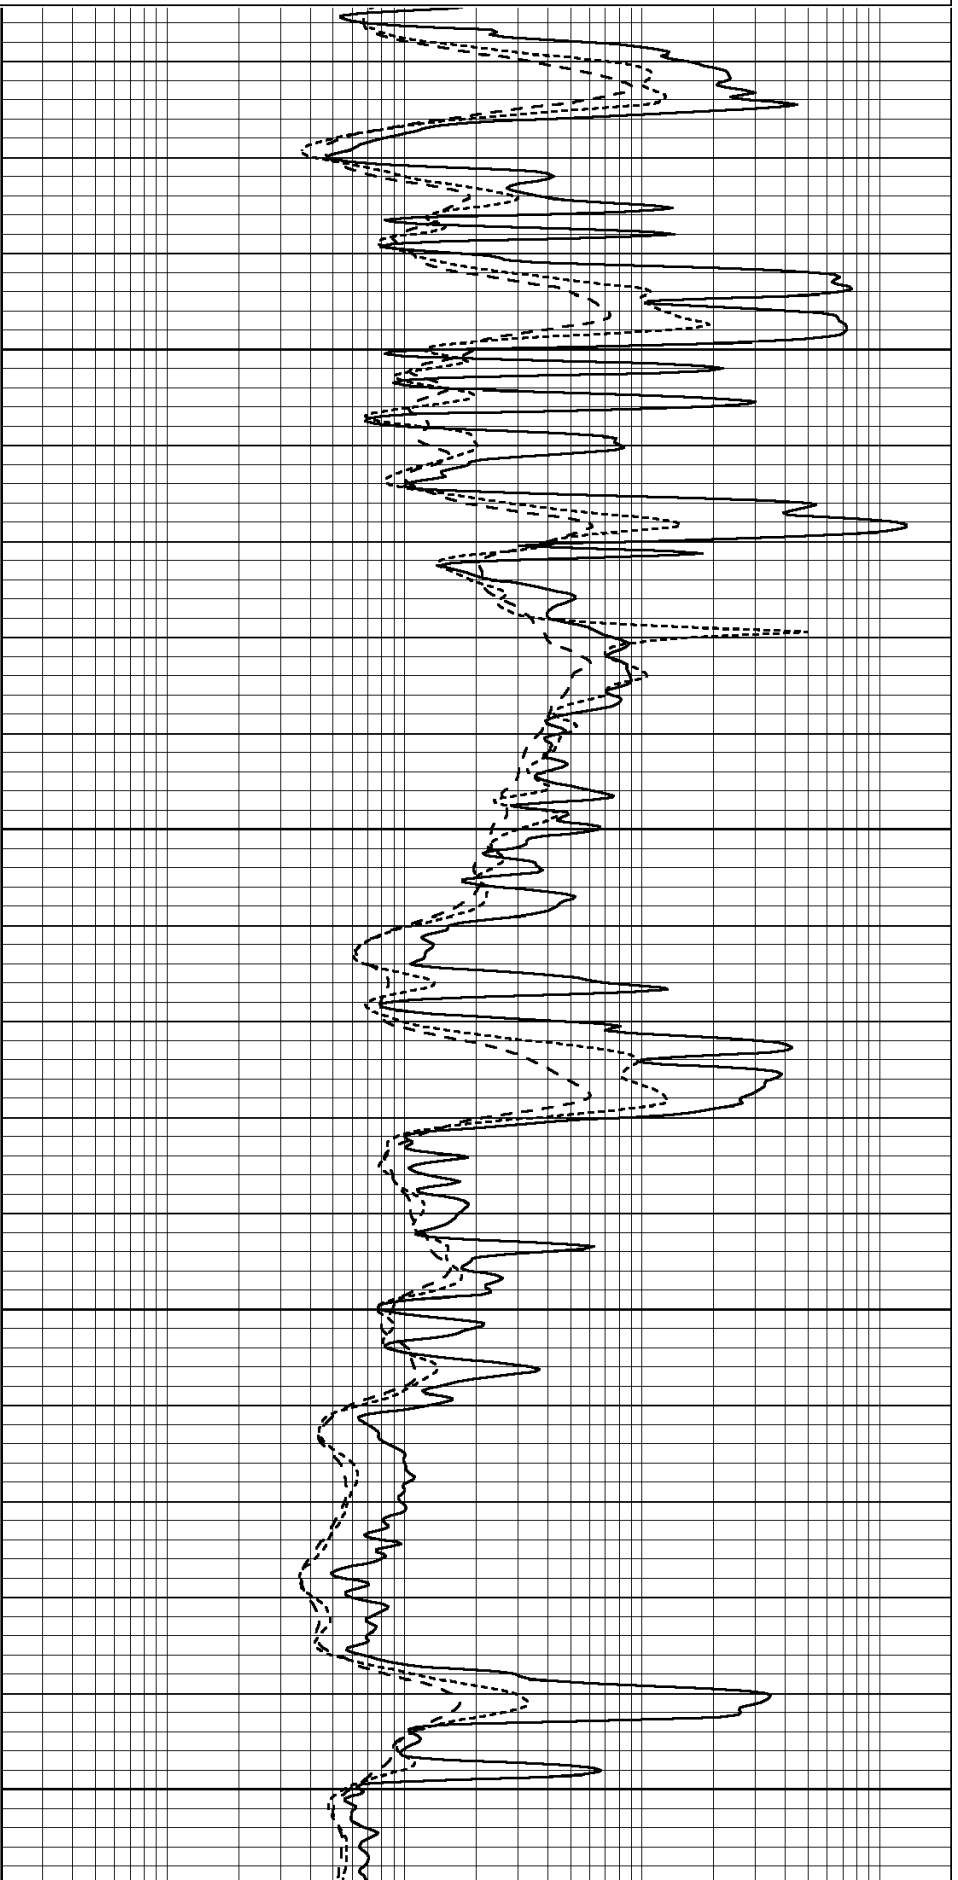

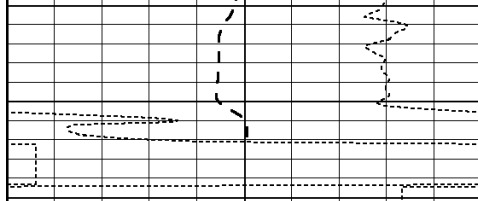

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50



0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 005106ddn.db
 Dataset Pathname: pass2.1
 Dataset Creation: Sat Mar 27 20:57:24 2010 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Fri Aug 01 06:33:19 2008
 Downhole Cal Performed: Mon Jul 28 11:08:27 2008
 After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

Loop:	Readings				References			Results	
	Air	Loop			Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730	
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619	
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739	

Downhole Calibration

	Readings				References			Results	
	Zero	Cal			Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000	
LL3		7.500	V		1500.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-6.500	V		3800.000	mmho-m			

After Survey Verification

	Readings				Targets			Results	
	Zero	Cal			Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			

Compensated Density Calibration Report

Serial-Model: GEAR4-GEARHART
 Source / Verifier: 143 / 143
 Master Calibration Performed: Mon Mar 22 11:13:58 2010

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.710	g/cc	861.09	413.41	cps
Aluminum	2.600	g/cc	196.82	293.14	cps
Spine Angle = 76.89			Density/Spine Ratio = 0.587		
	Size		Reading		
Small Ring	8.00	in	1.66	V	
Large Ring	14.00	in	2.72	V	

Compensated Neutron Calibration Report

Serial Number: 5I
 Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Tue Nov 10 08:32:36 2009

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 276.0 cps

Sensitivity: 0.5535 GAPI/cps