



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Berexco, Inc.		
15-093-21,853-00-00	Well Patterson Unit #2-23		
	Field Patterson		
	County Kearny	State	Kansas
	Location	2067' FSL & 1224' FEL	
	Sec: 23	Twp: 22 S	Rge: 38 W
Permanent Datum	Ground Level	Elevation 3321	Other Services CNL/CDL DIL/BHCS
Log Measured From	Kelly Bushing	13 Ft. Above Perm. Datum	K.B. 3334 D.F. 3321
Drilling Measured From	Kelly Bushing		
Date	03/15/2010		
Run Number	Two		
Depth Driller	4950		
Depth Logger	4952		
Bottom Logged Interval	4951		
Top Log Interval	3700		
Casing Driller	8.625 @ 1700		
Casing Logger	1694		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	5.300		
Density / Viscosity	9.7 50		
pH / Fluid Loss	9.0 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.44 @ 55		
Rmf @ Meas. Temp	.33 @ 55		
Rmc @ Meas. Temp	.59 @ 55		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.19 @ 128		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	128		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Evan Mayhew		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Lakin, 6 W to K rd, 10 N to end of BT, 4 W to F rd,
2 1/2 N, W into (through elec.fence gate)

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

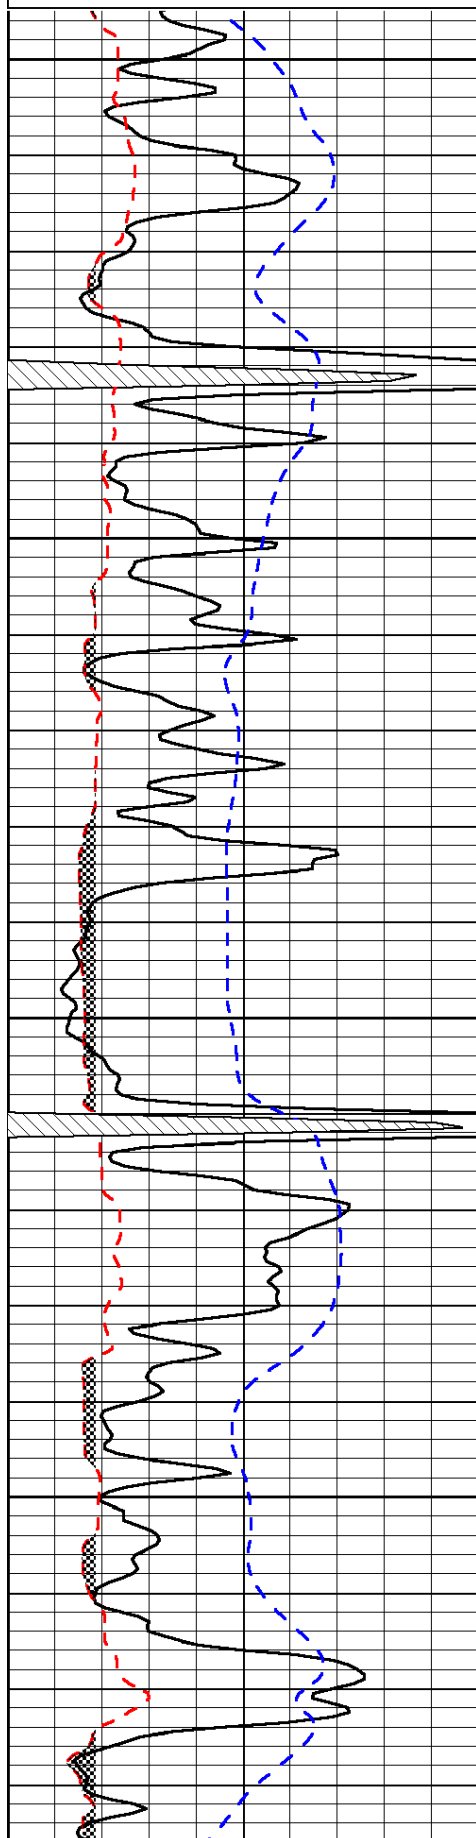


3700

3750

3800

3850

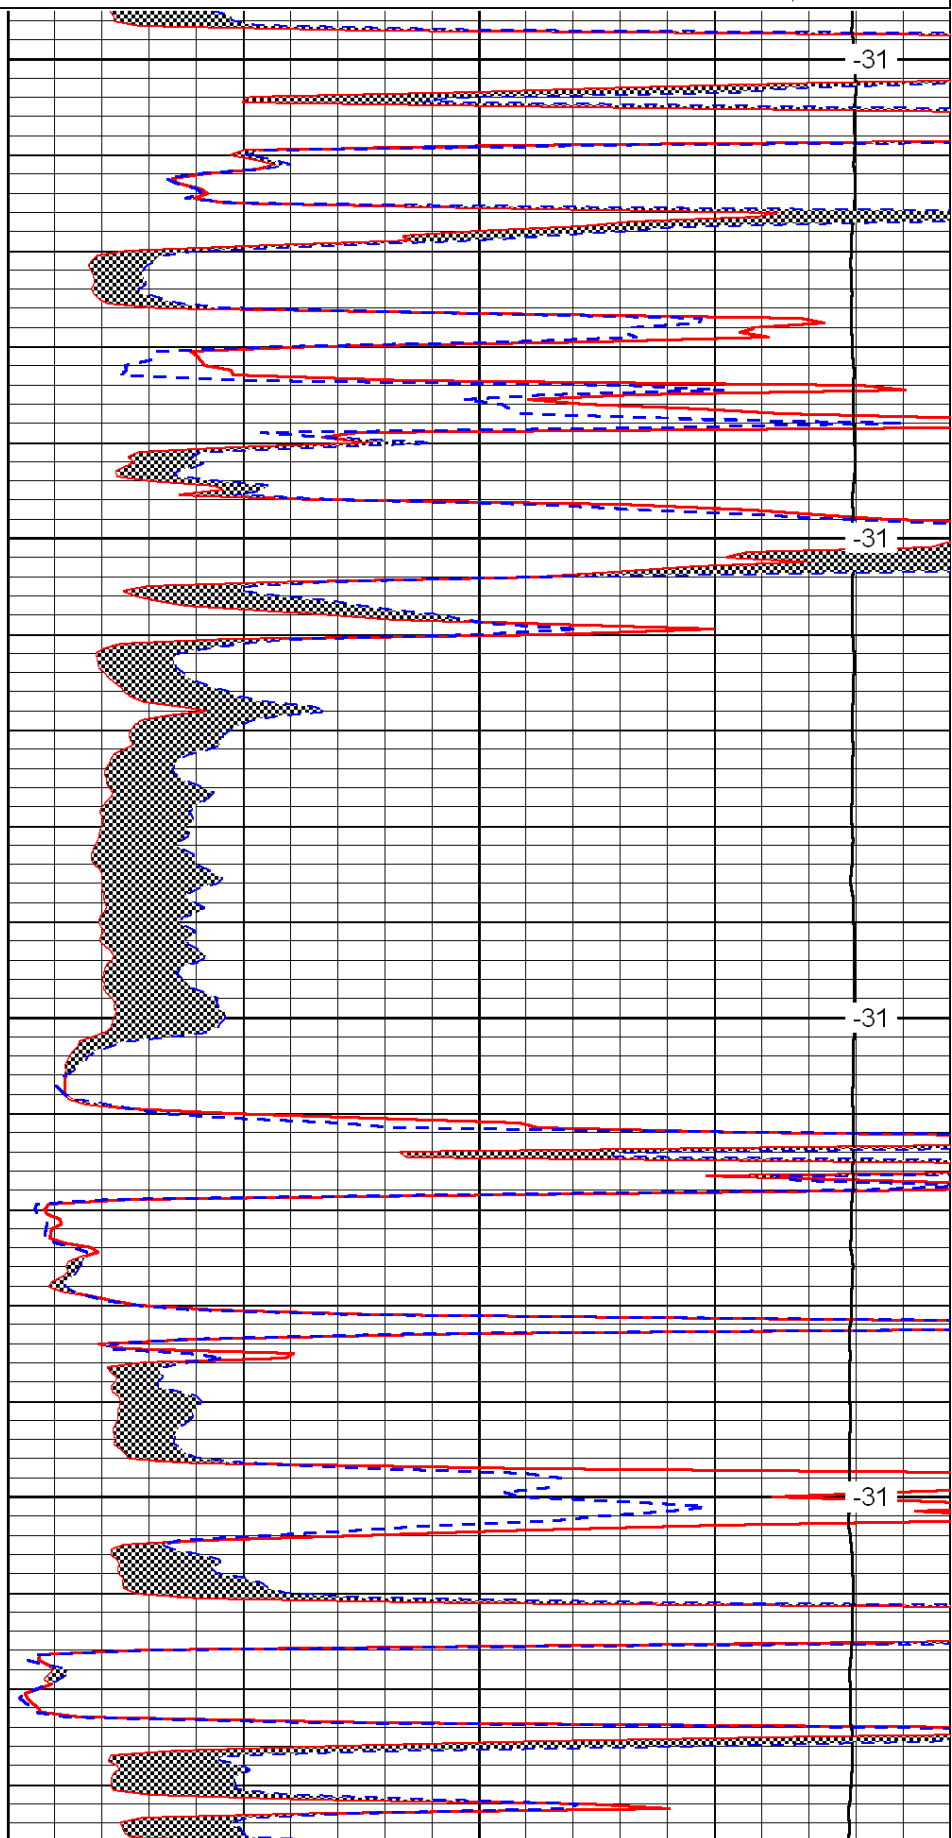


-31

-31

-31

-31

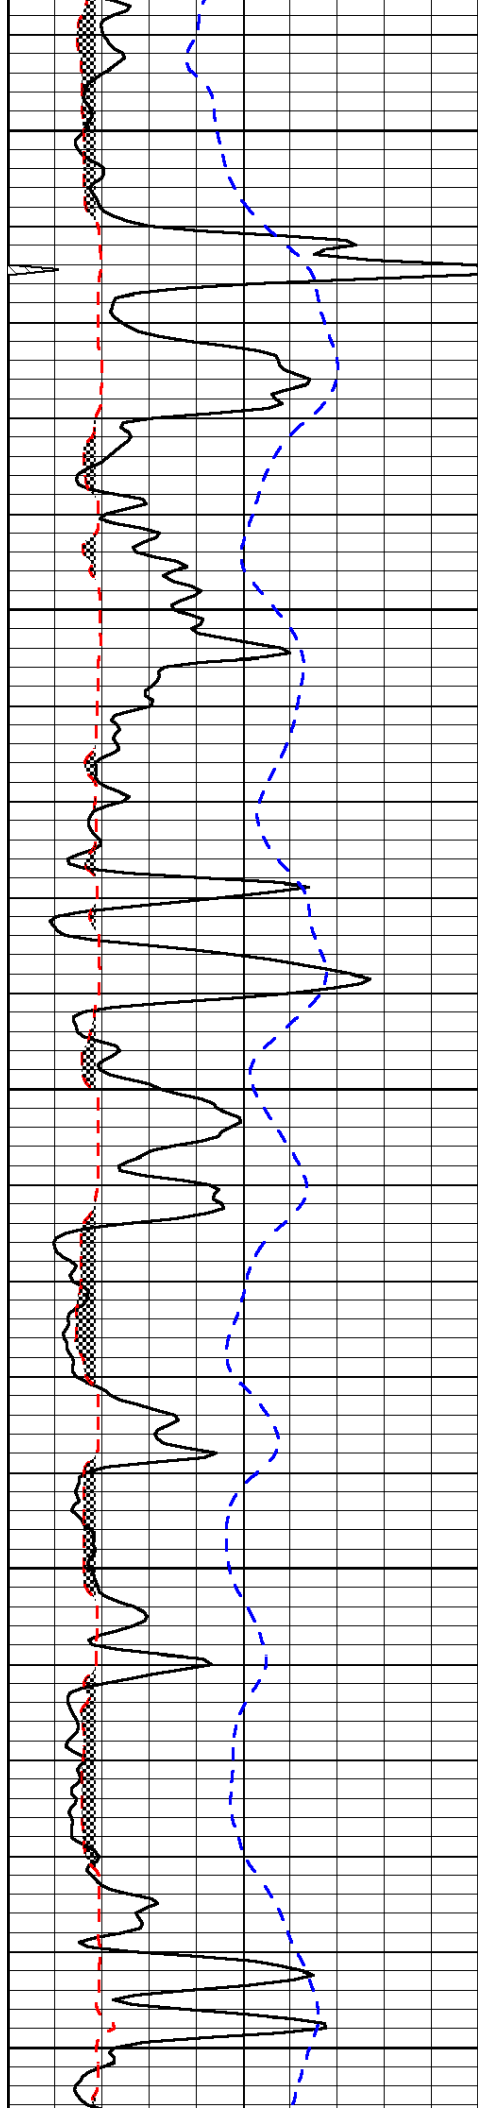


3900

3950

4000

4050

4100

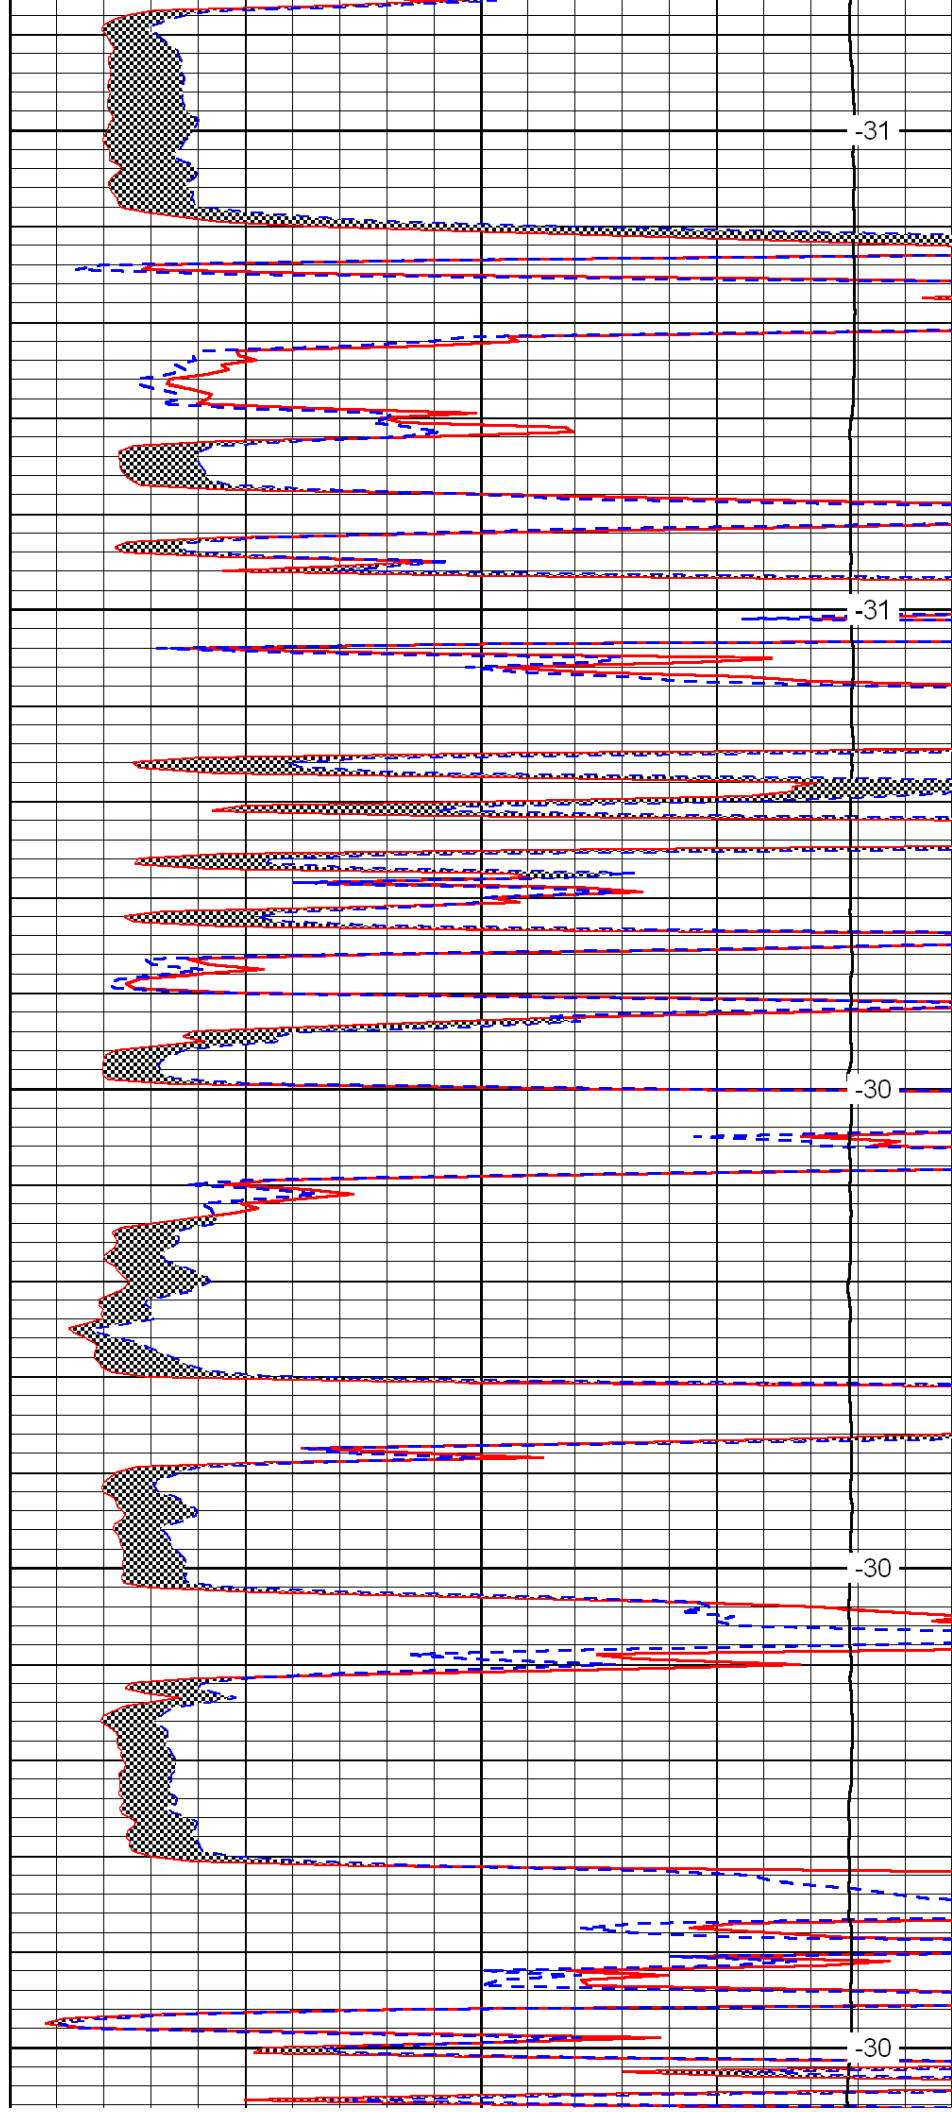


-31

-31

-30

-30

-30

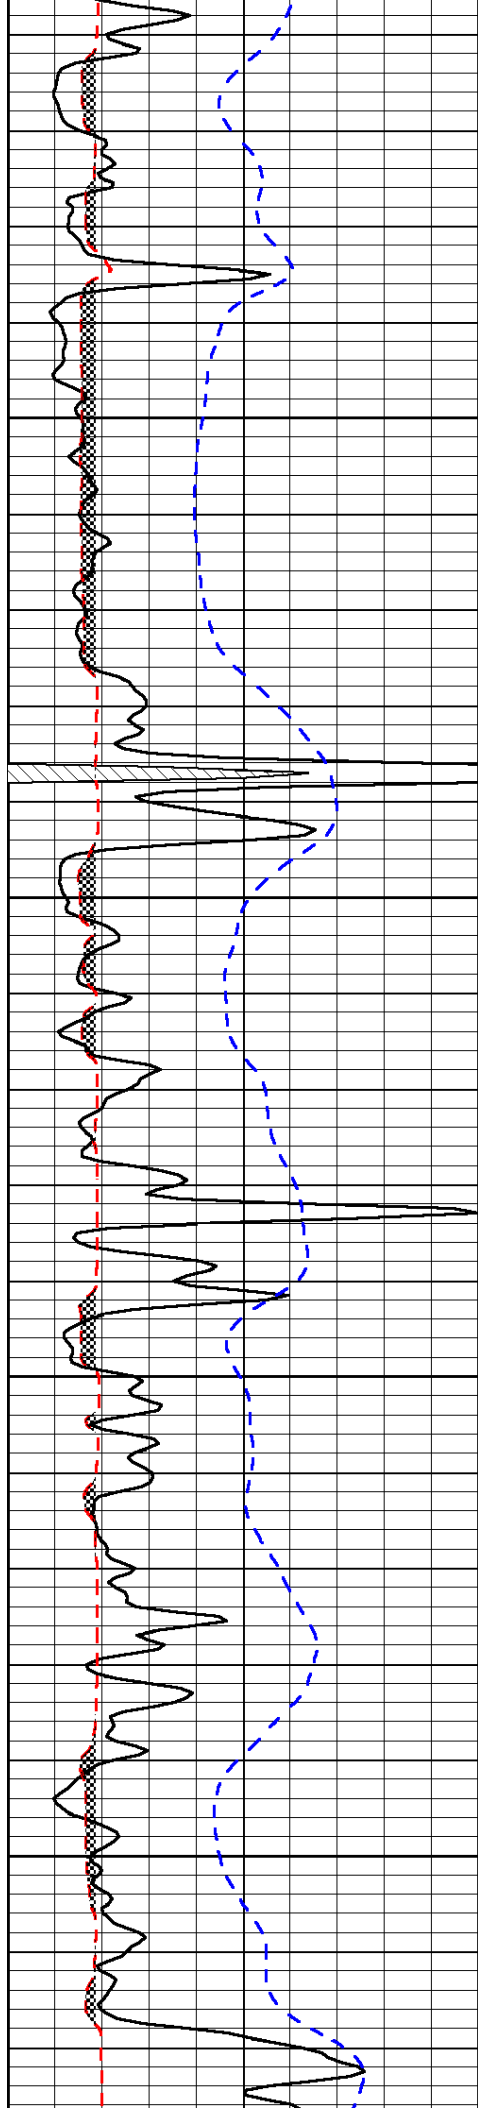



4150

4200

4250

4300

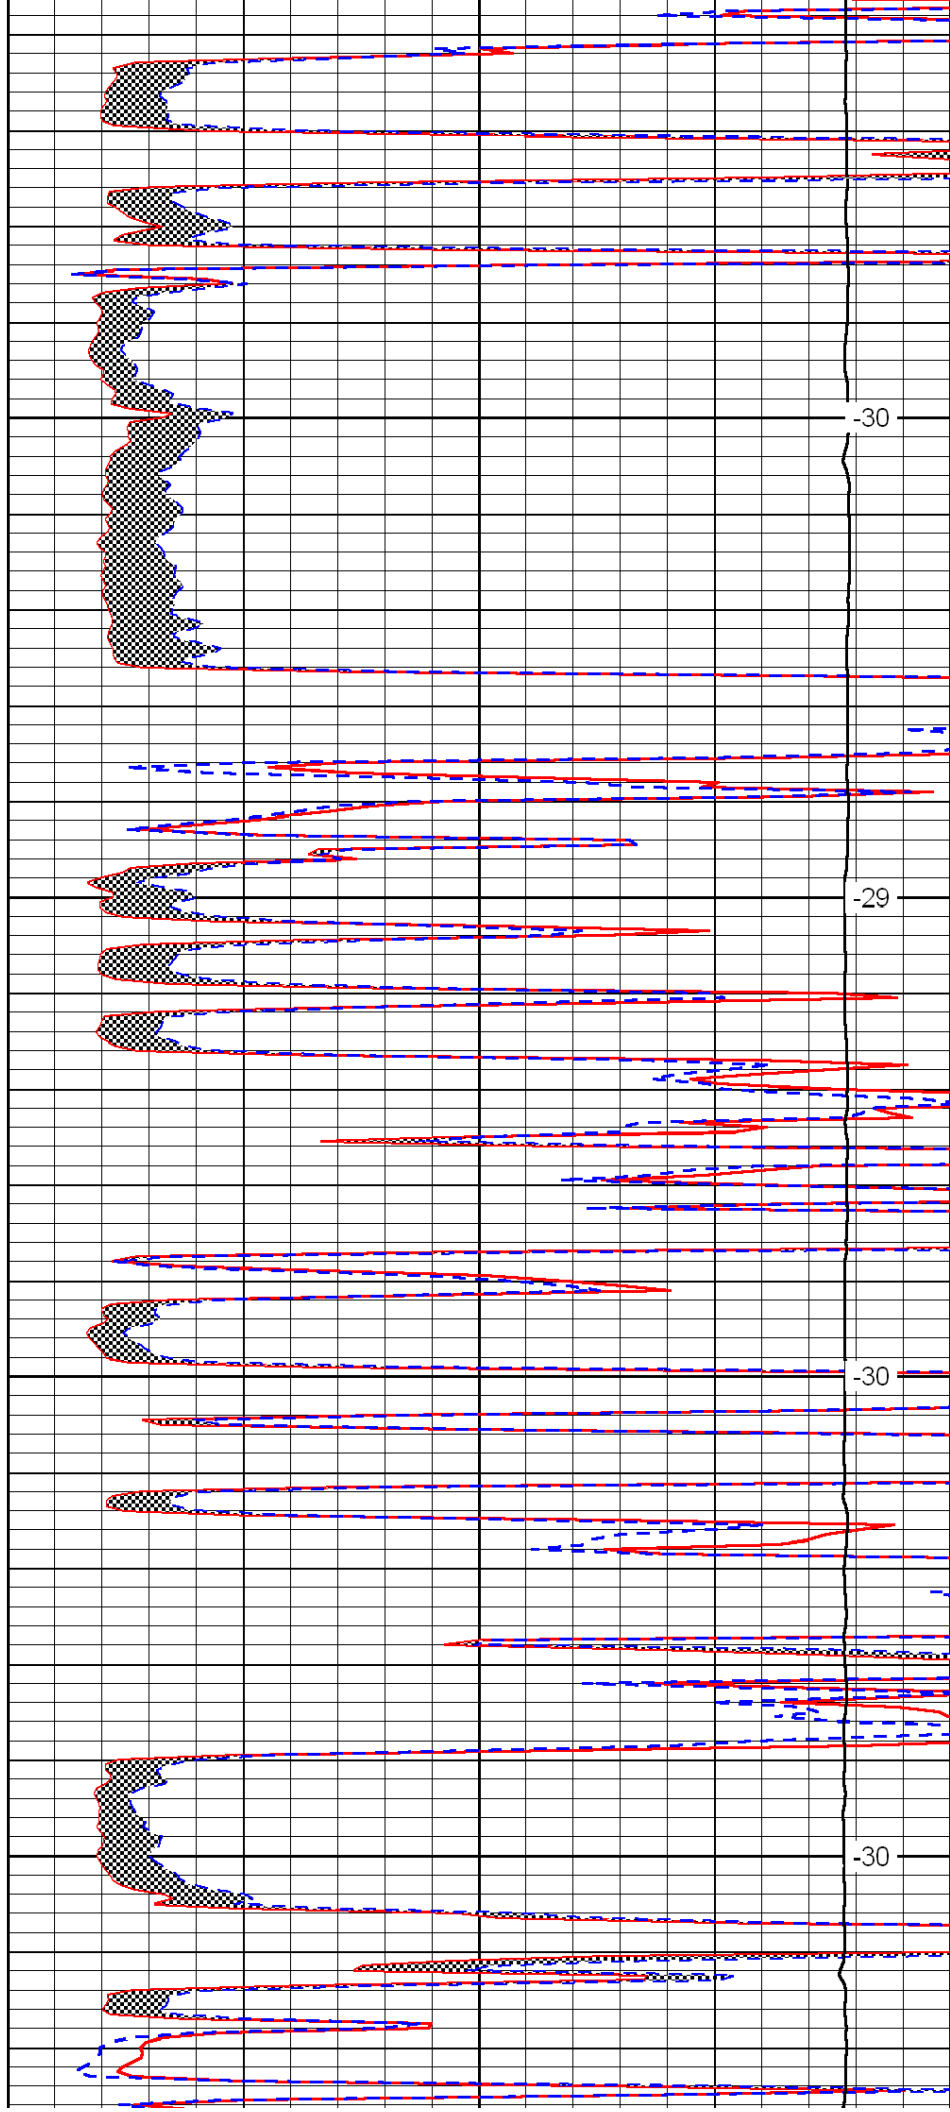

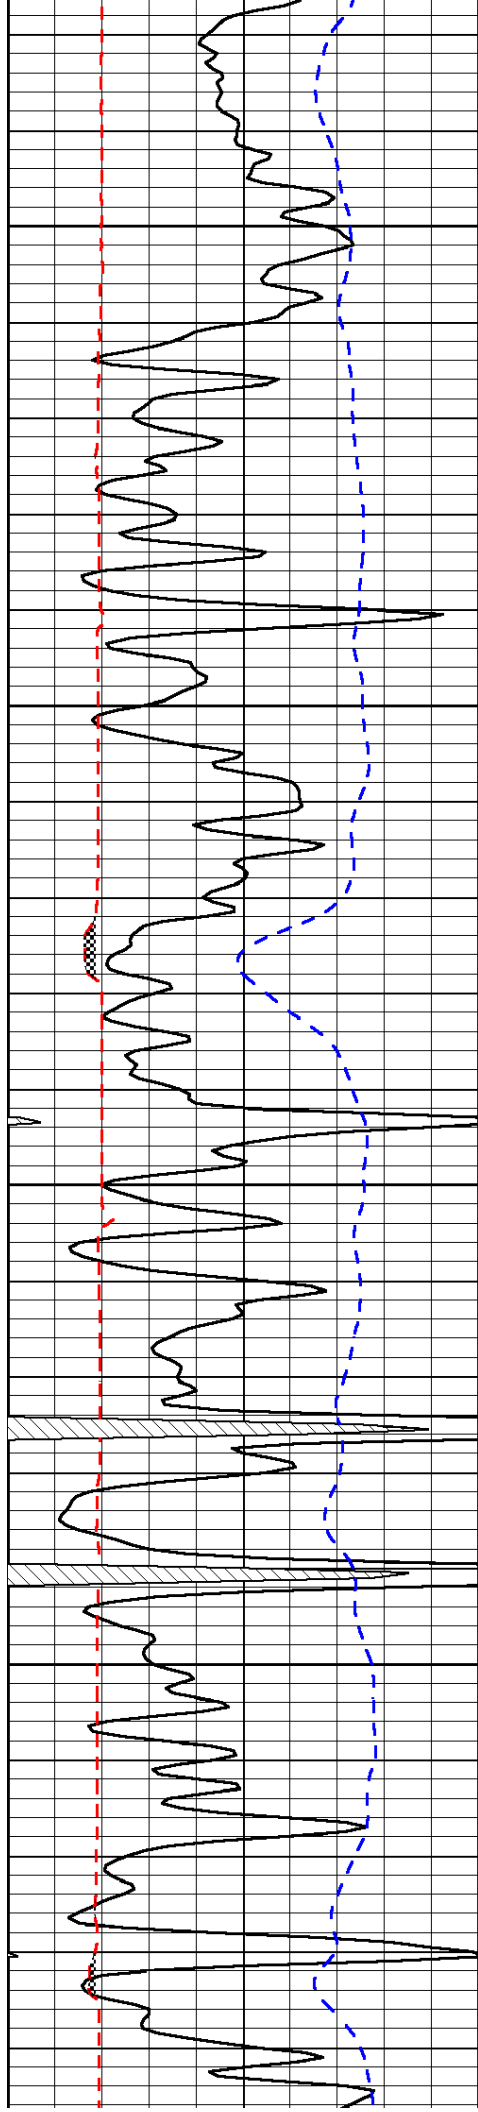


4350

4400

4450

4500


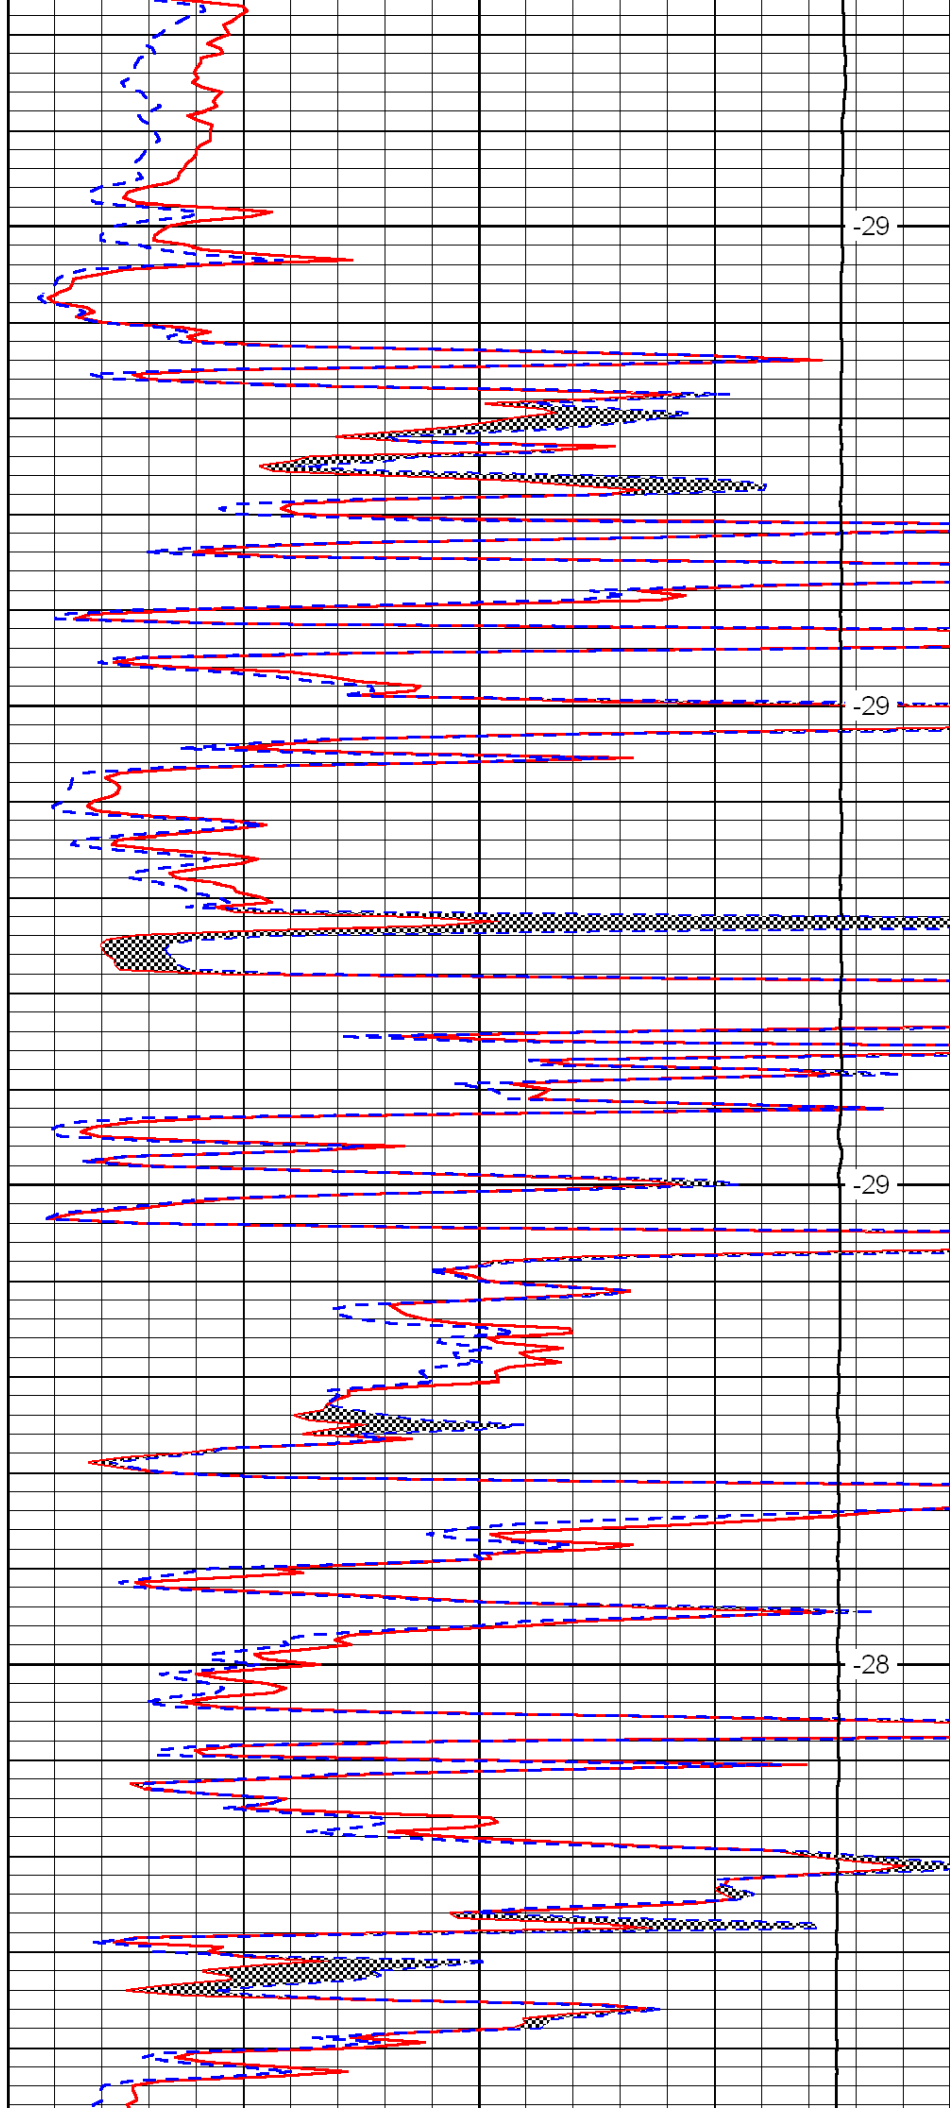




-29

-29

-29

-28

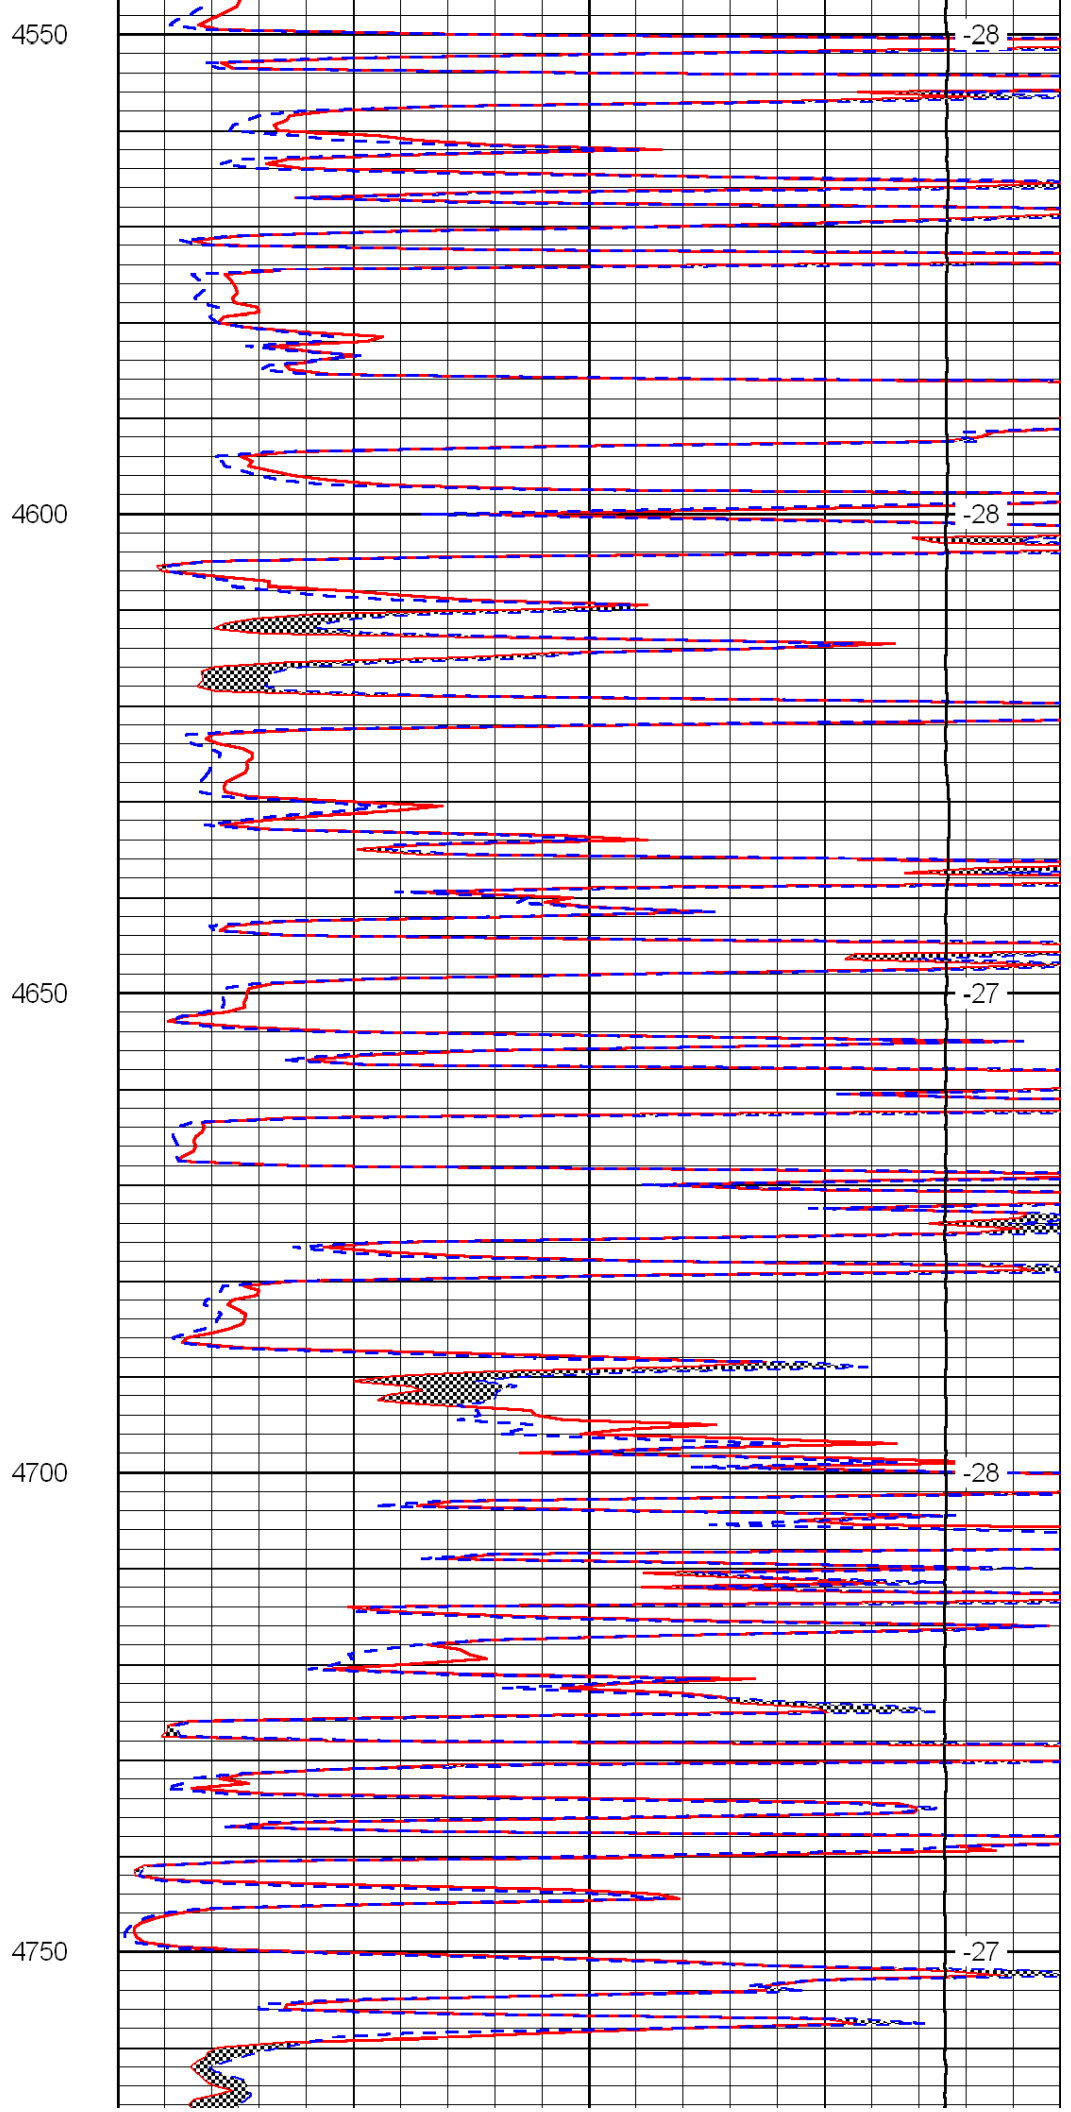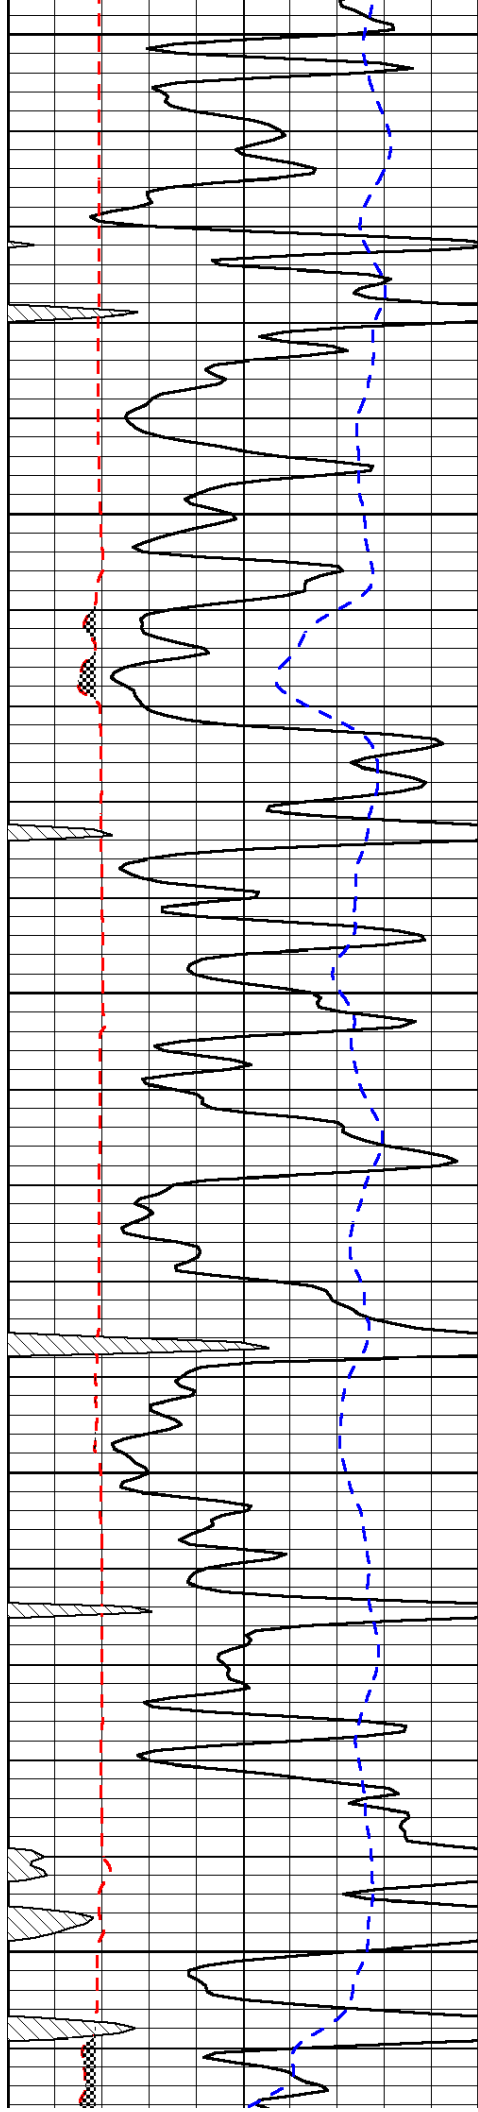

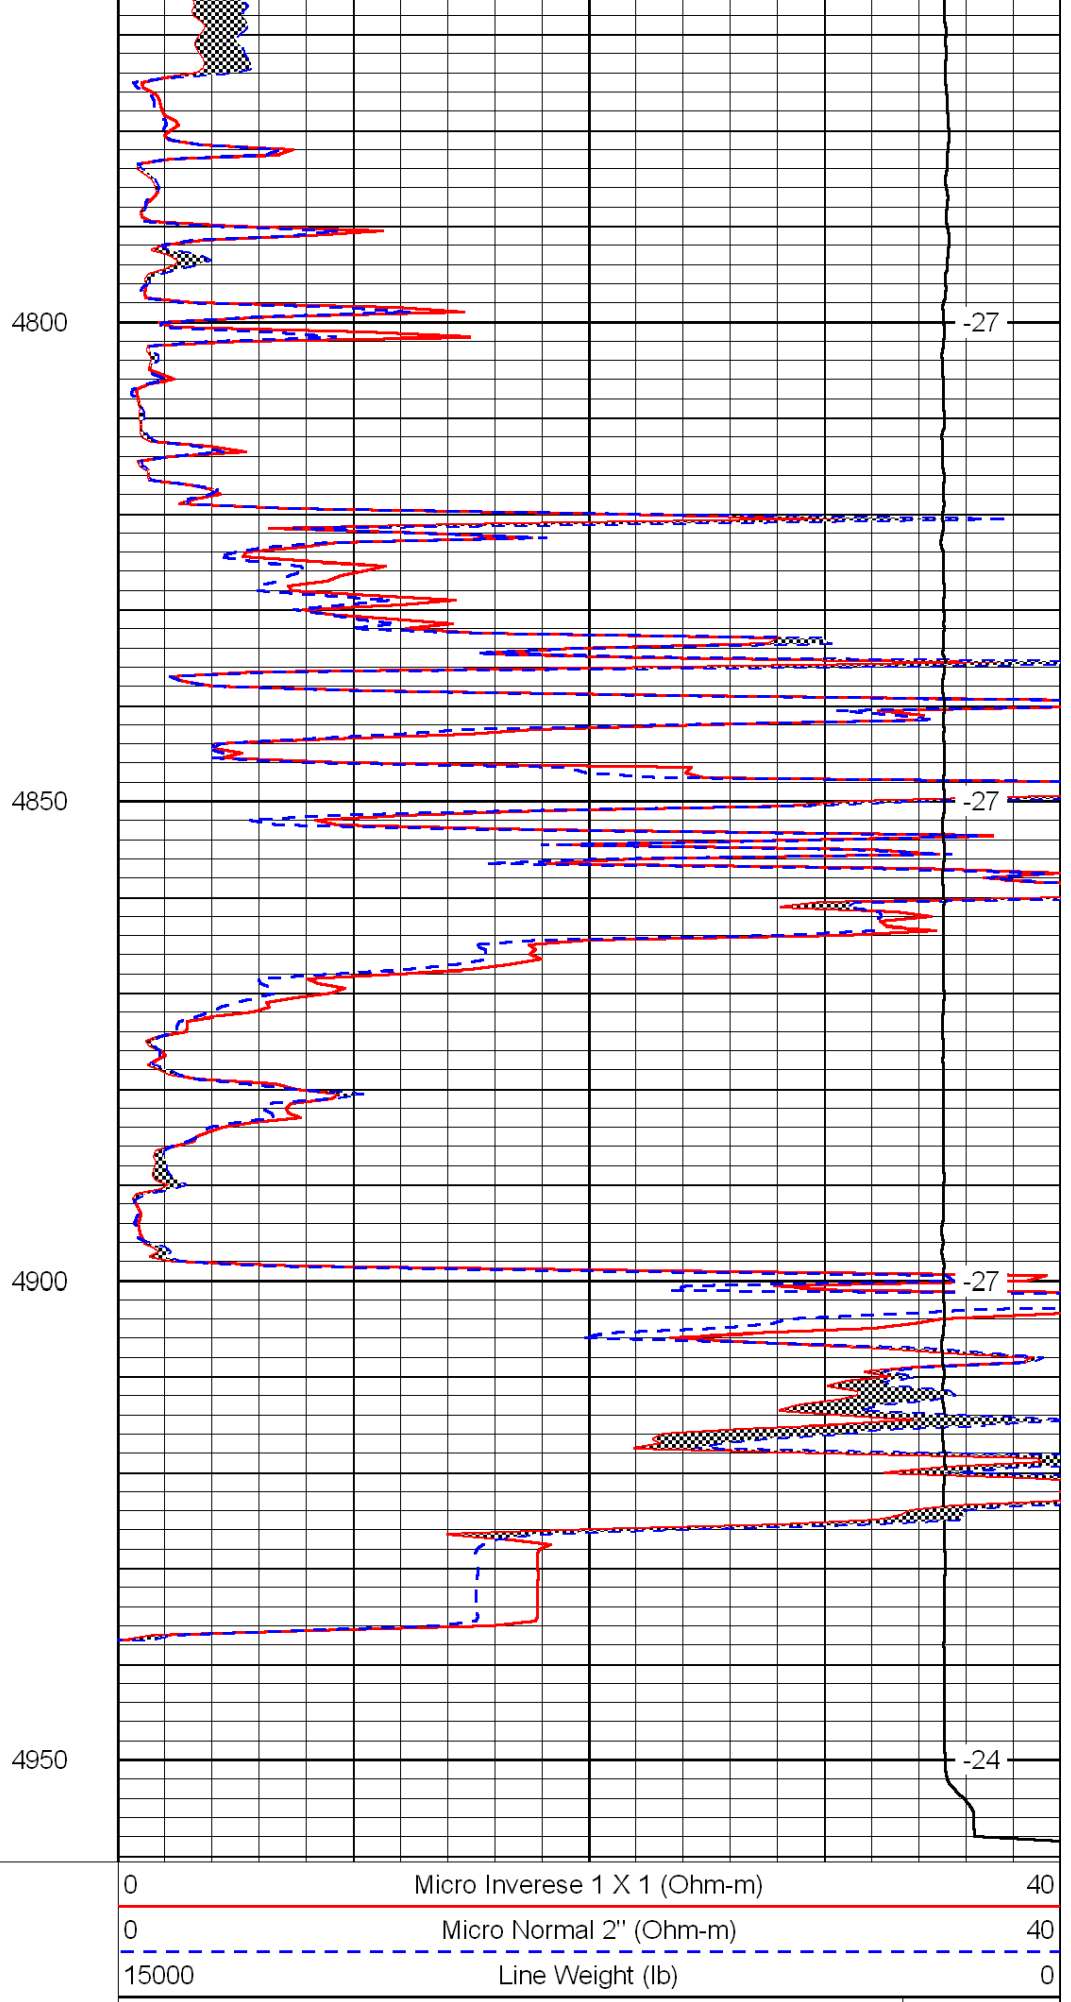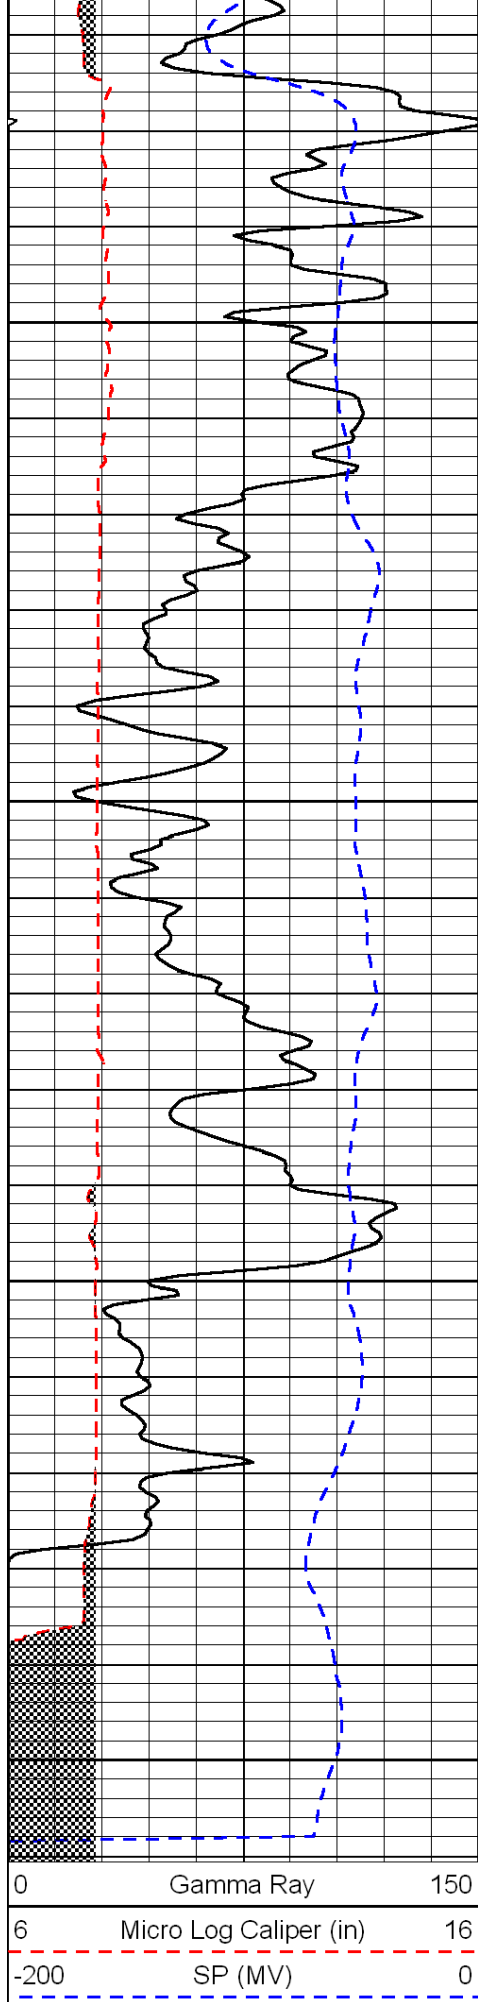

LSPD
(ft/min)