



**SUPERIOR**  
Hays,  
Kansas

**DUAL  
INDUCTION  
LOG**

Company DAYSTAR PETROLEUM, INC.  
Well LINGO # 1-30  
Field WILDCAT  
County HODGEMAN  
State KANSAS

Company DAYSTAR PETROLEUM, INC.  
Well LINGO # 1-30  
Field WILDCAT  
County HODGEMAN State KANSAS

Location: API #: 15-083-21621  
1980' FNL & 2310' FEL  
SEC 30 TWP 22S RGE 22W  
Permanent Datum GROUND LEVEL Elevation 2328  
Log Measured From KELLY BUSHING 7' A.G.L.  
Drilling Measured From KELLY BUSHING  
Other Services  
CDL/CNL  
SONIC/MEL  
Elevation  
K.B. 2335  
D.F.  
G.L. 2328

Date	1-22-10		
Run Number	ONE		
Depth Driller	4675		
Depth Logger	4676		
Bottom Logged Interval	4674		
Top Log Interval	3750	2300 - 2900	
Casing Driller	312		
Casing Logger	312		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2 / 59		
pH / Fluid Loss	9.5 / 7.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.60 @ 74F		
Rmf @ Meas. Temp	0.45 @ 74F		
Rmc @ Meas. Temp	0.72 @ 74F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.360 @ 122F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	3:30 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	JOSH AUSTIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES  
785-628-6395  
THANK YOU FOR YOUR BUSINESS  
DIRECTIONS: HANSTON, 3W, 2N, 1/2W, S INTO.



SUPERIOR  
Hays,  
Kansas


**MAIN SECTION**


Database File: 004788ddn.db  
 Dataset Pathname: pass3.1A  
 Presentation Format: dil2  
 Dataset Creation: Fri Jan 22 17:01:23 2010  
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100


0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50


1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

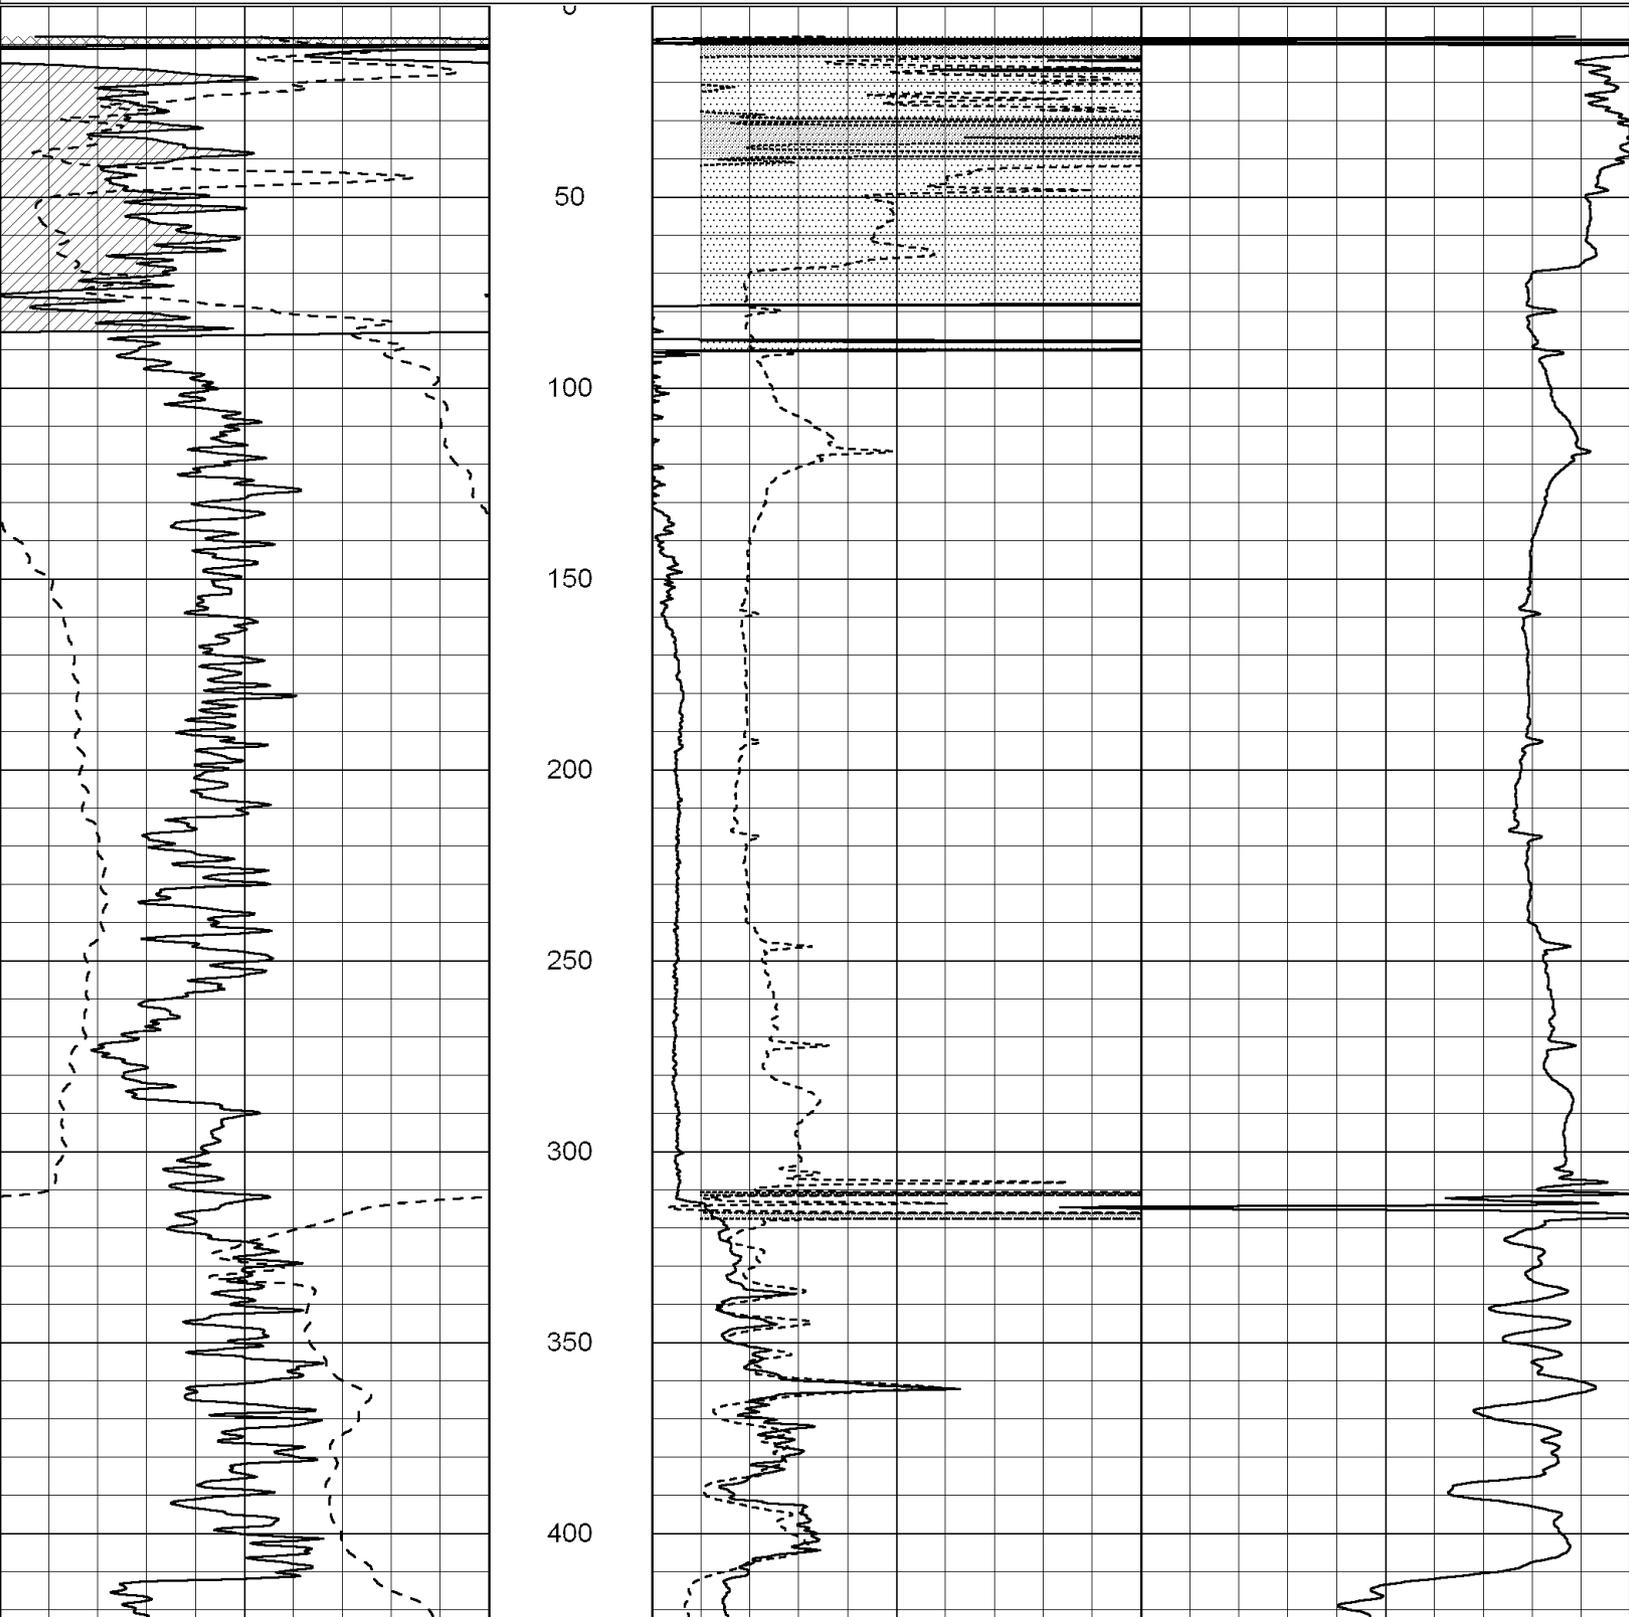

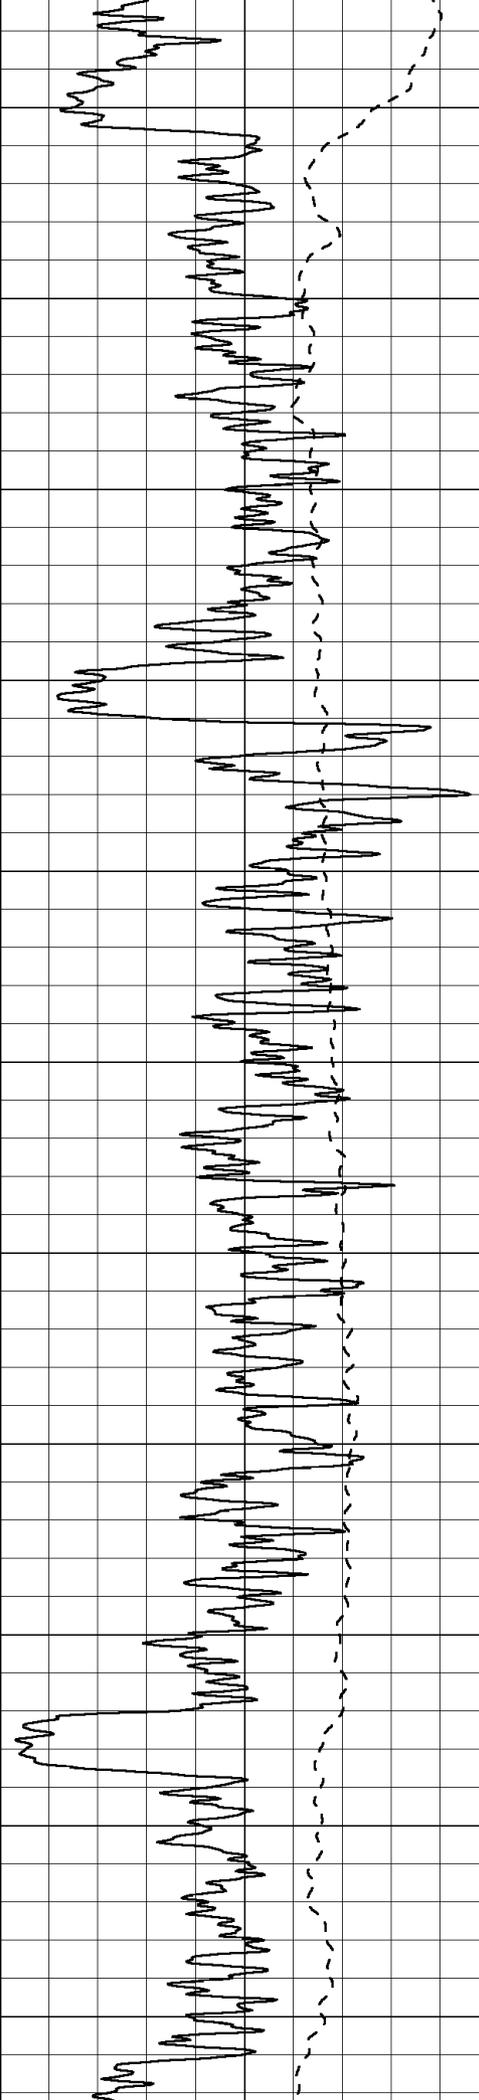


450  
500  
550  
600  
650  
700  
750  
800  
850  
900  
950


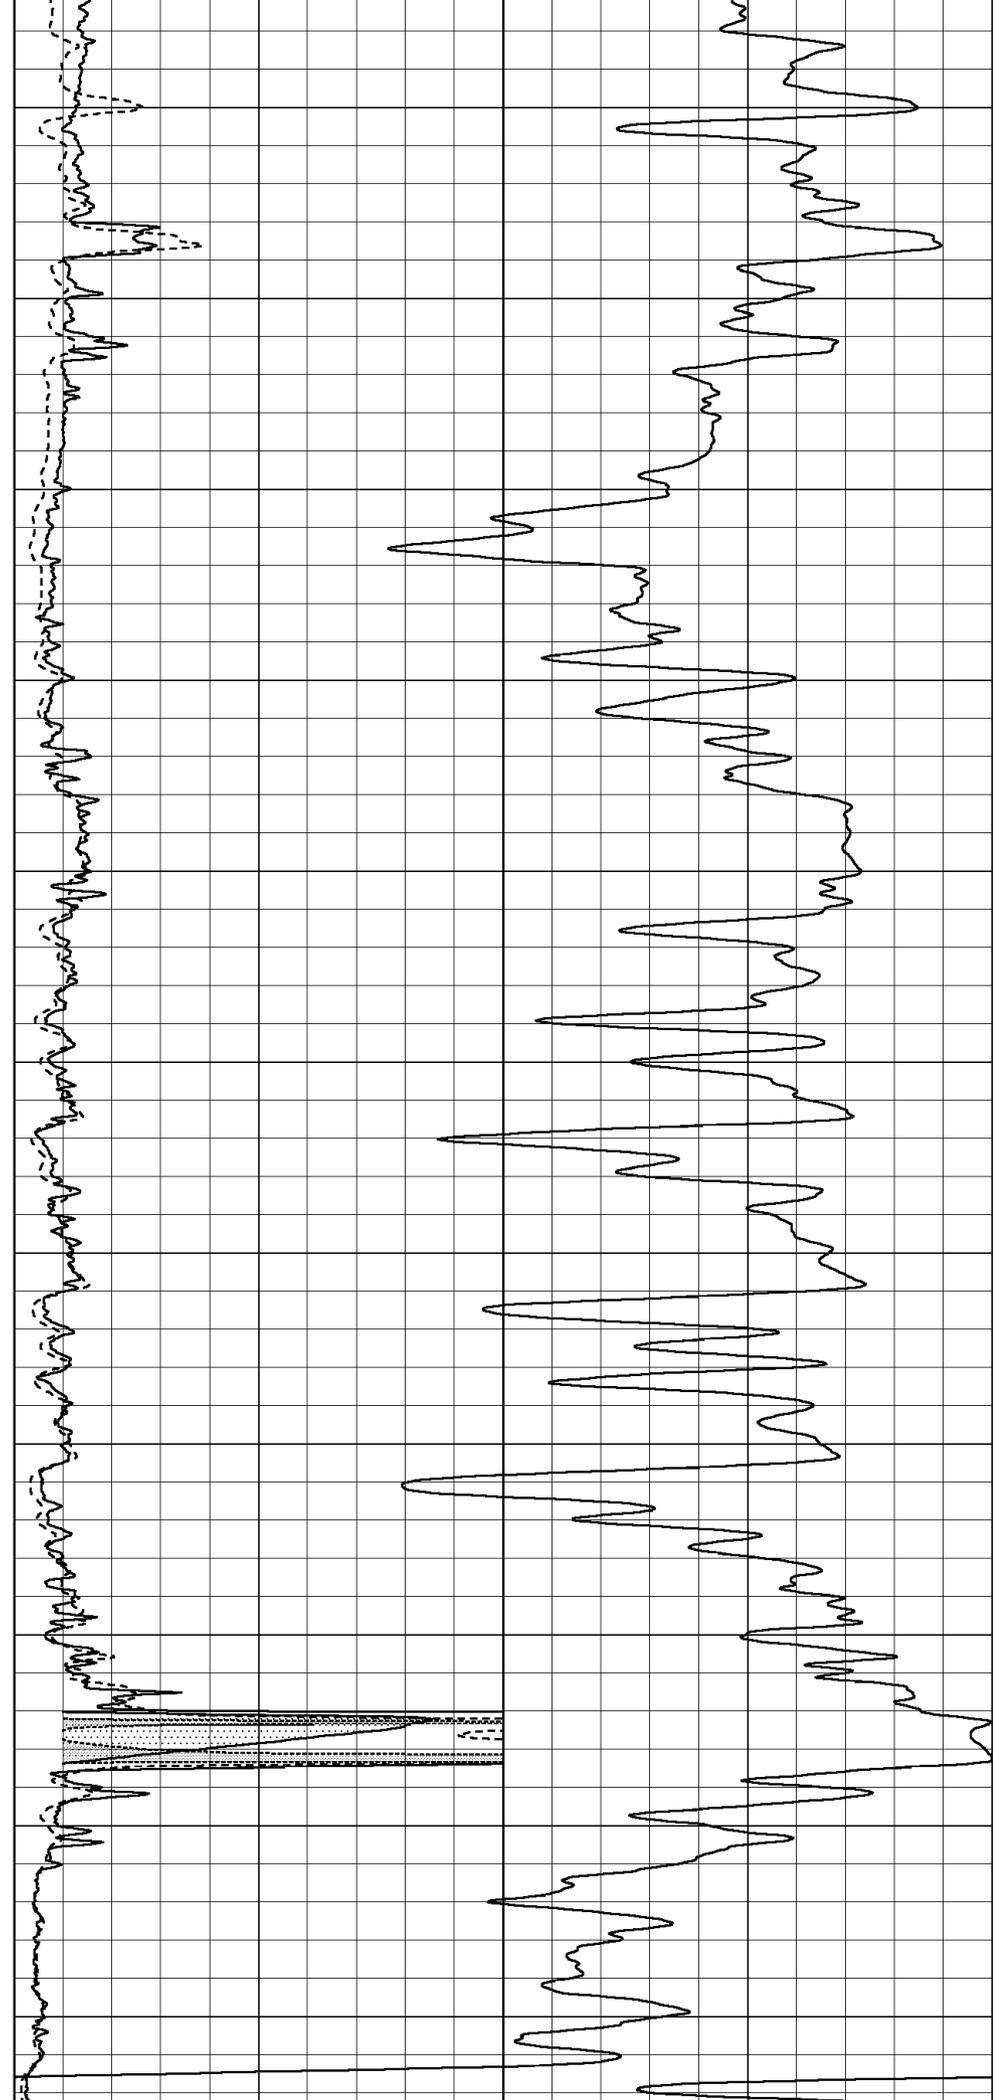


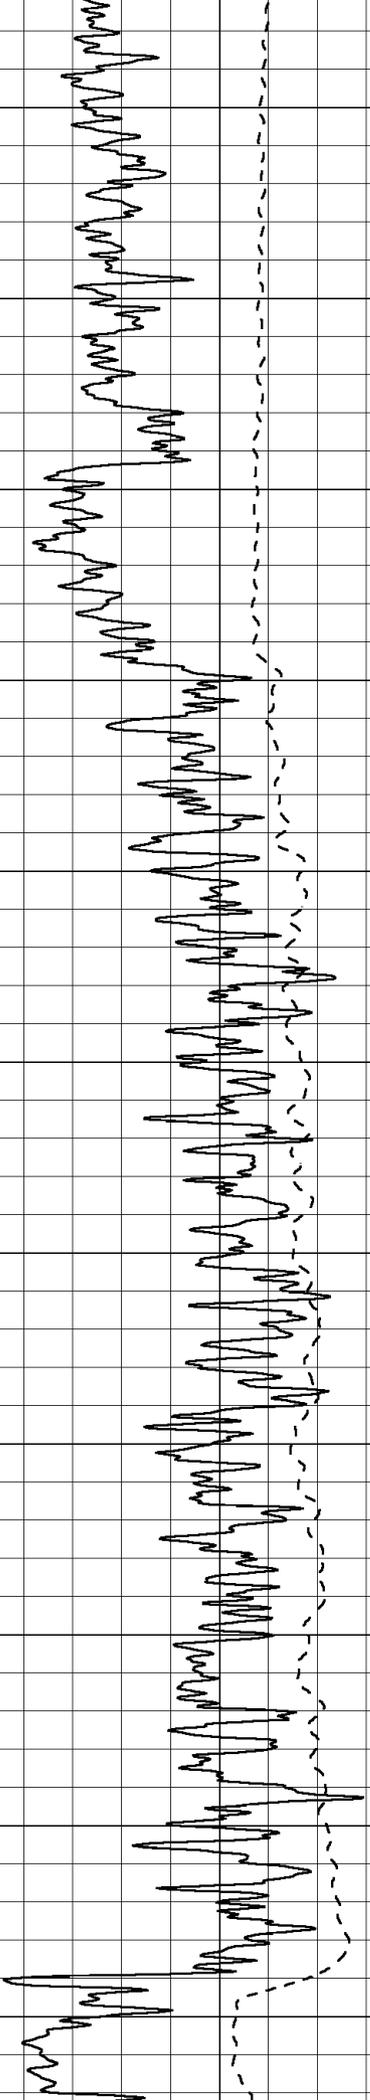


1000  
1050  
1100  
1150  
1200  
1250  
1300  
1350  
1400  
1450  
1500

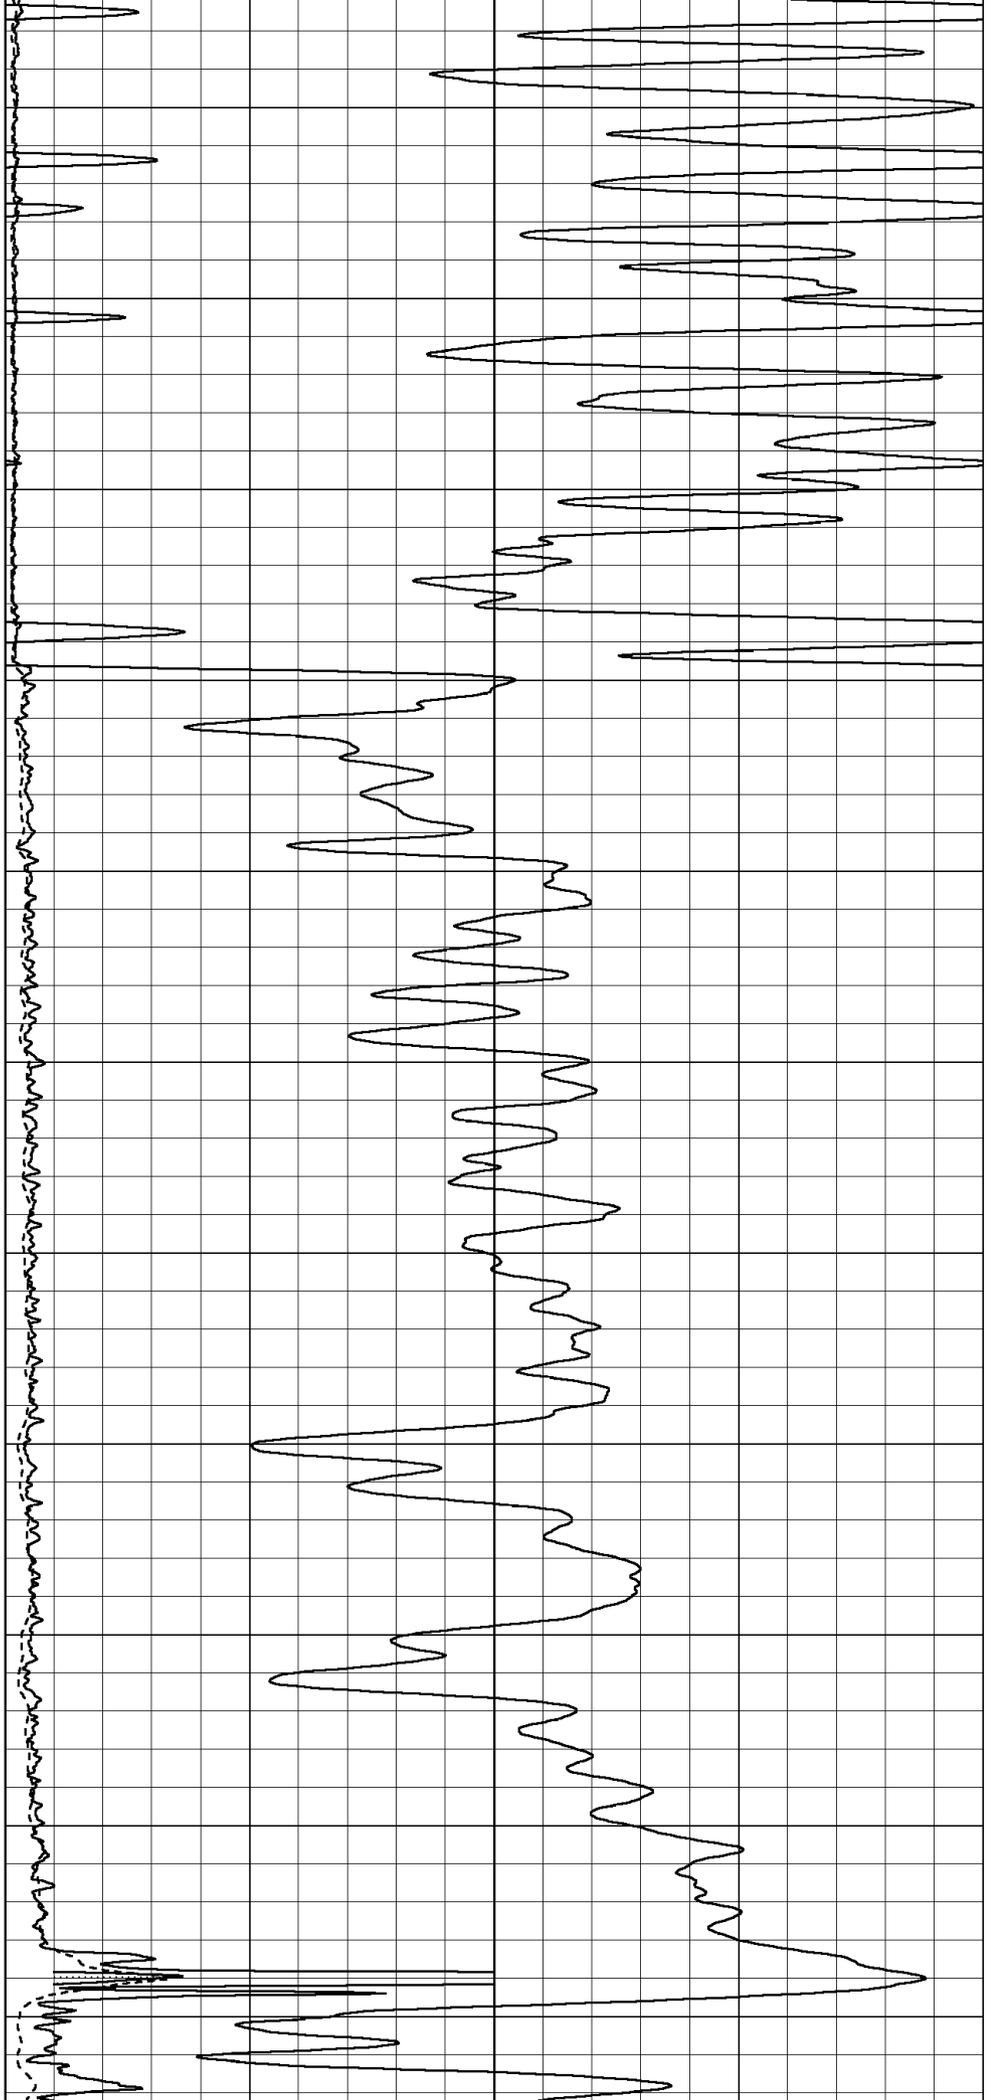

1550  
1600  
1650  
1700  
1750  
1800  
1850  
1900  
1950  
2000  
2050

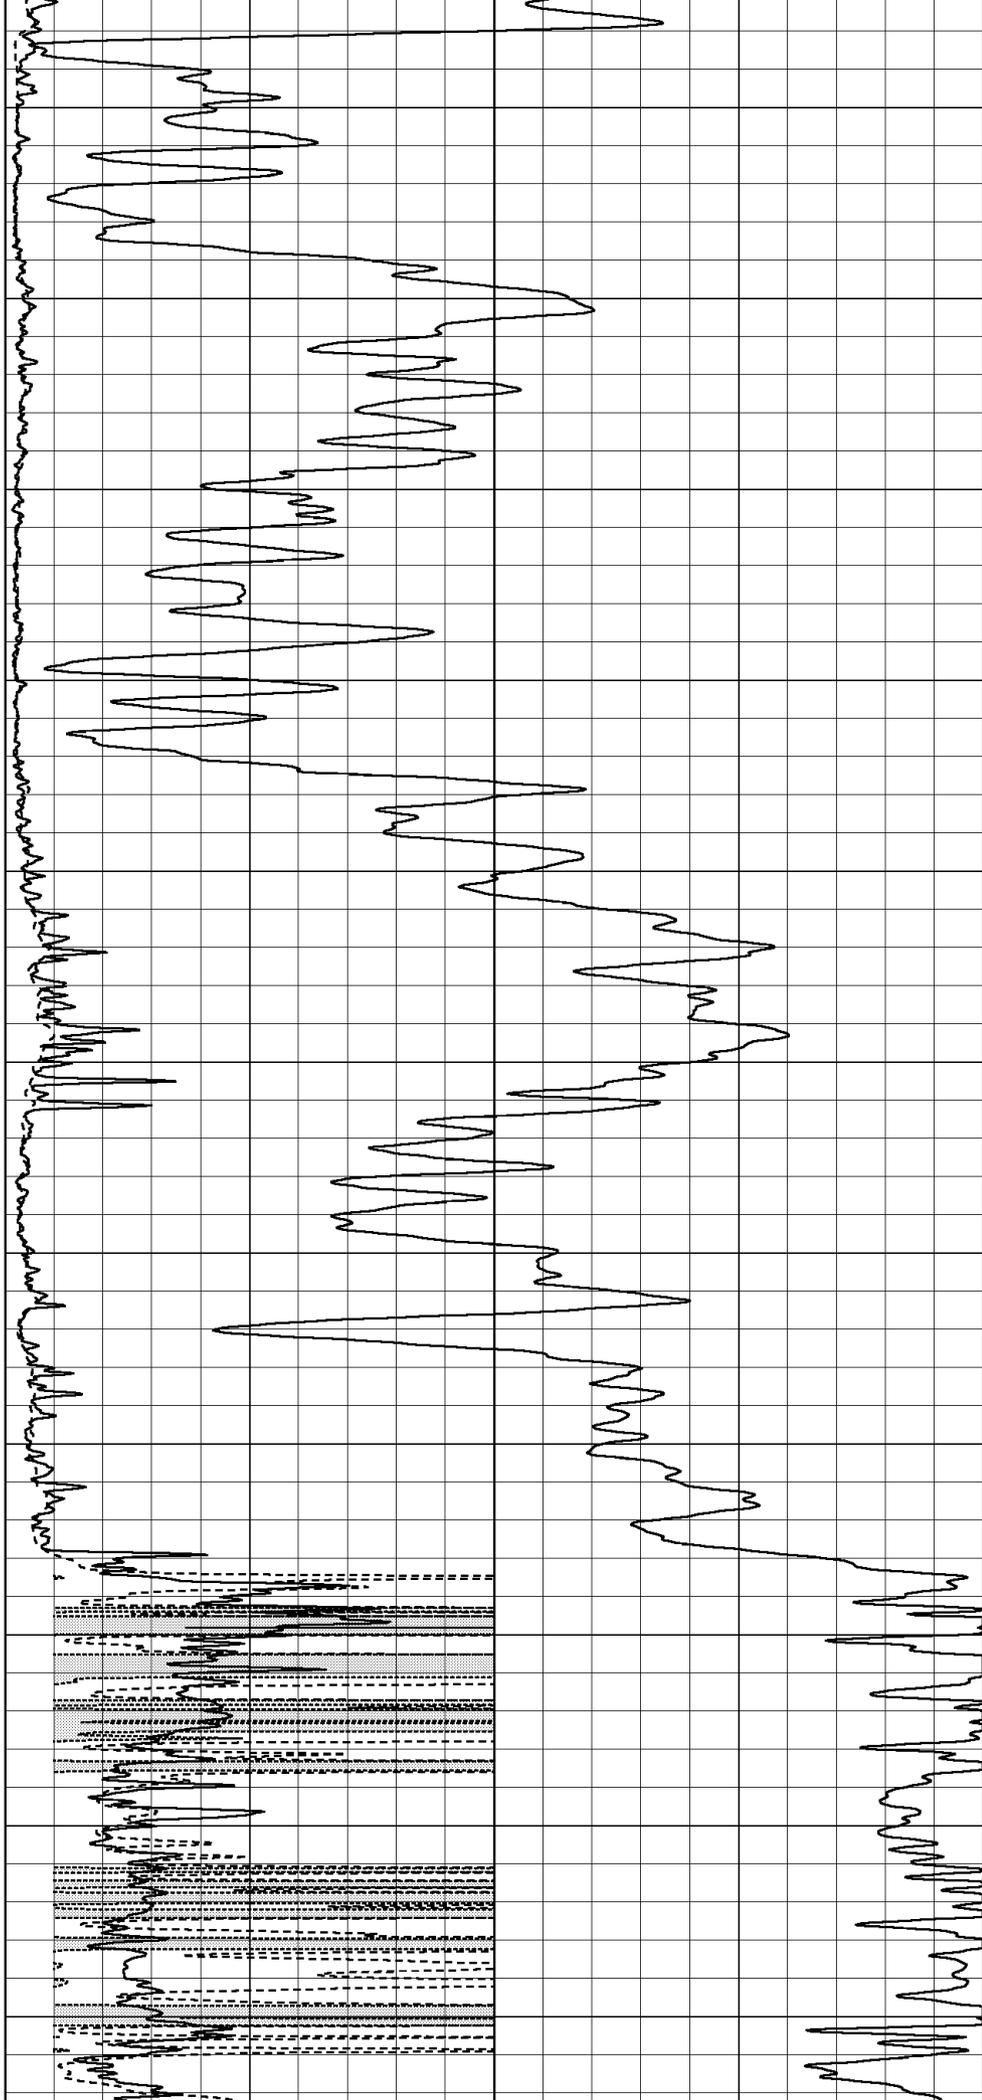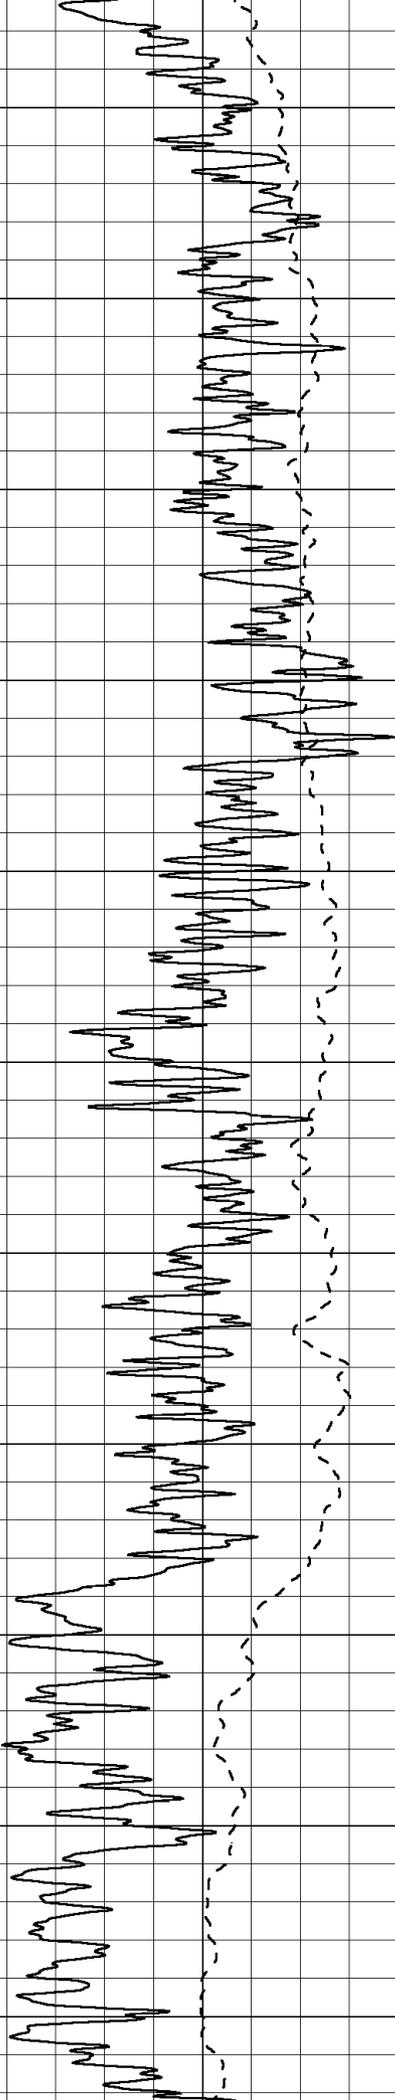

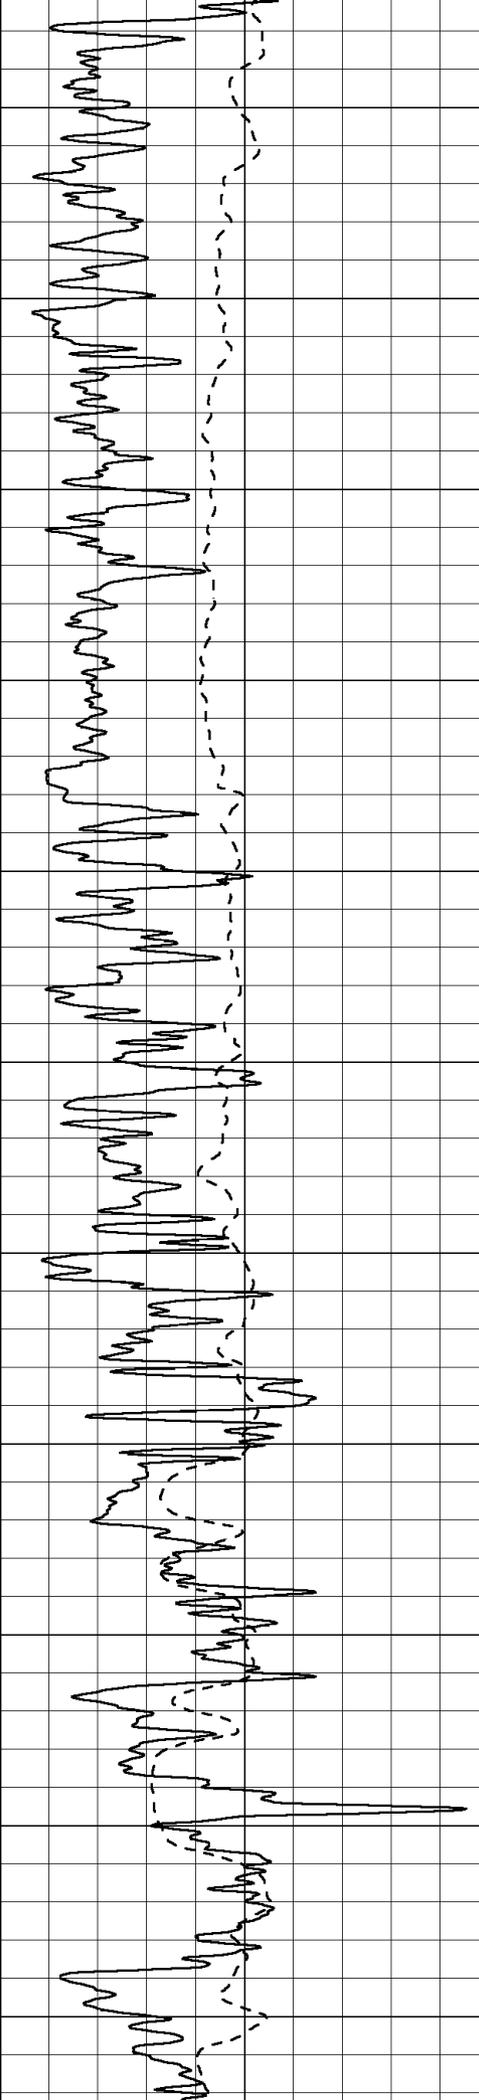

2100

2150

2200

2250

2300

2350



2400



2450


2500

2550

2600

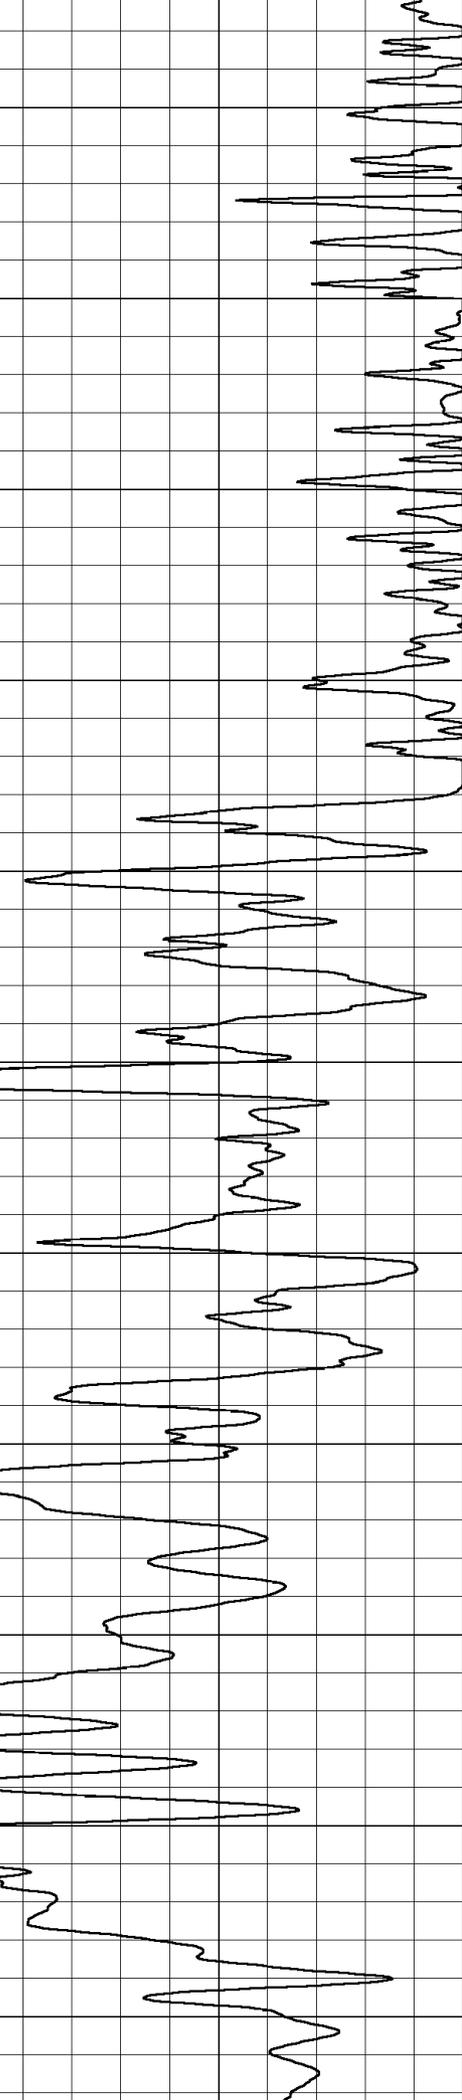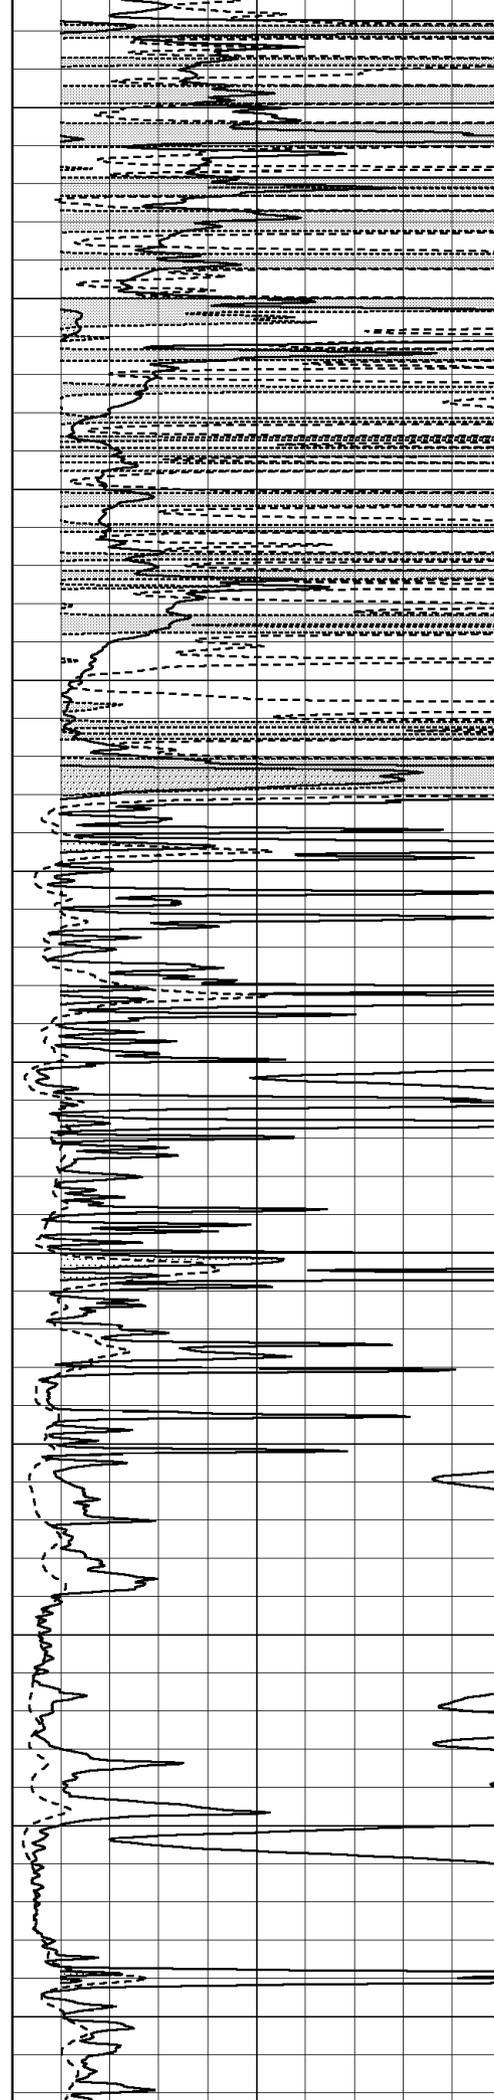

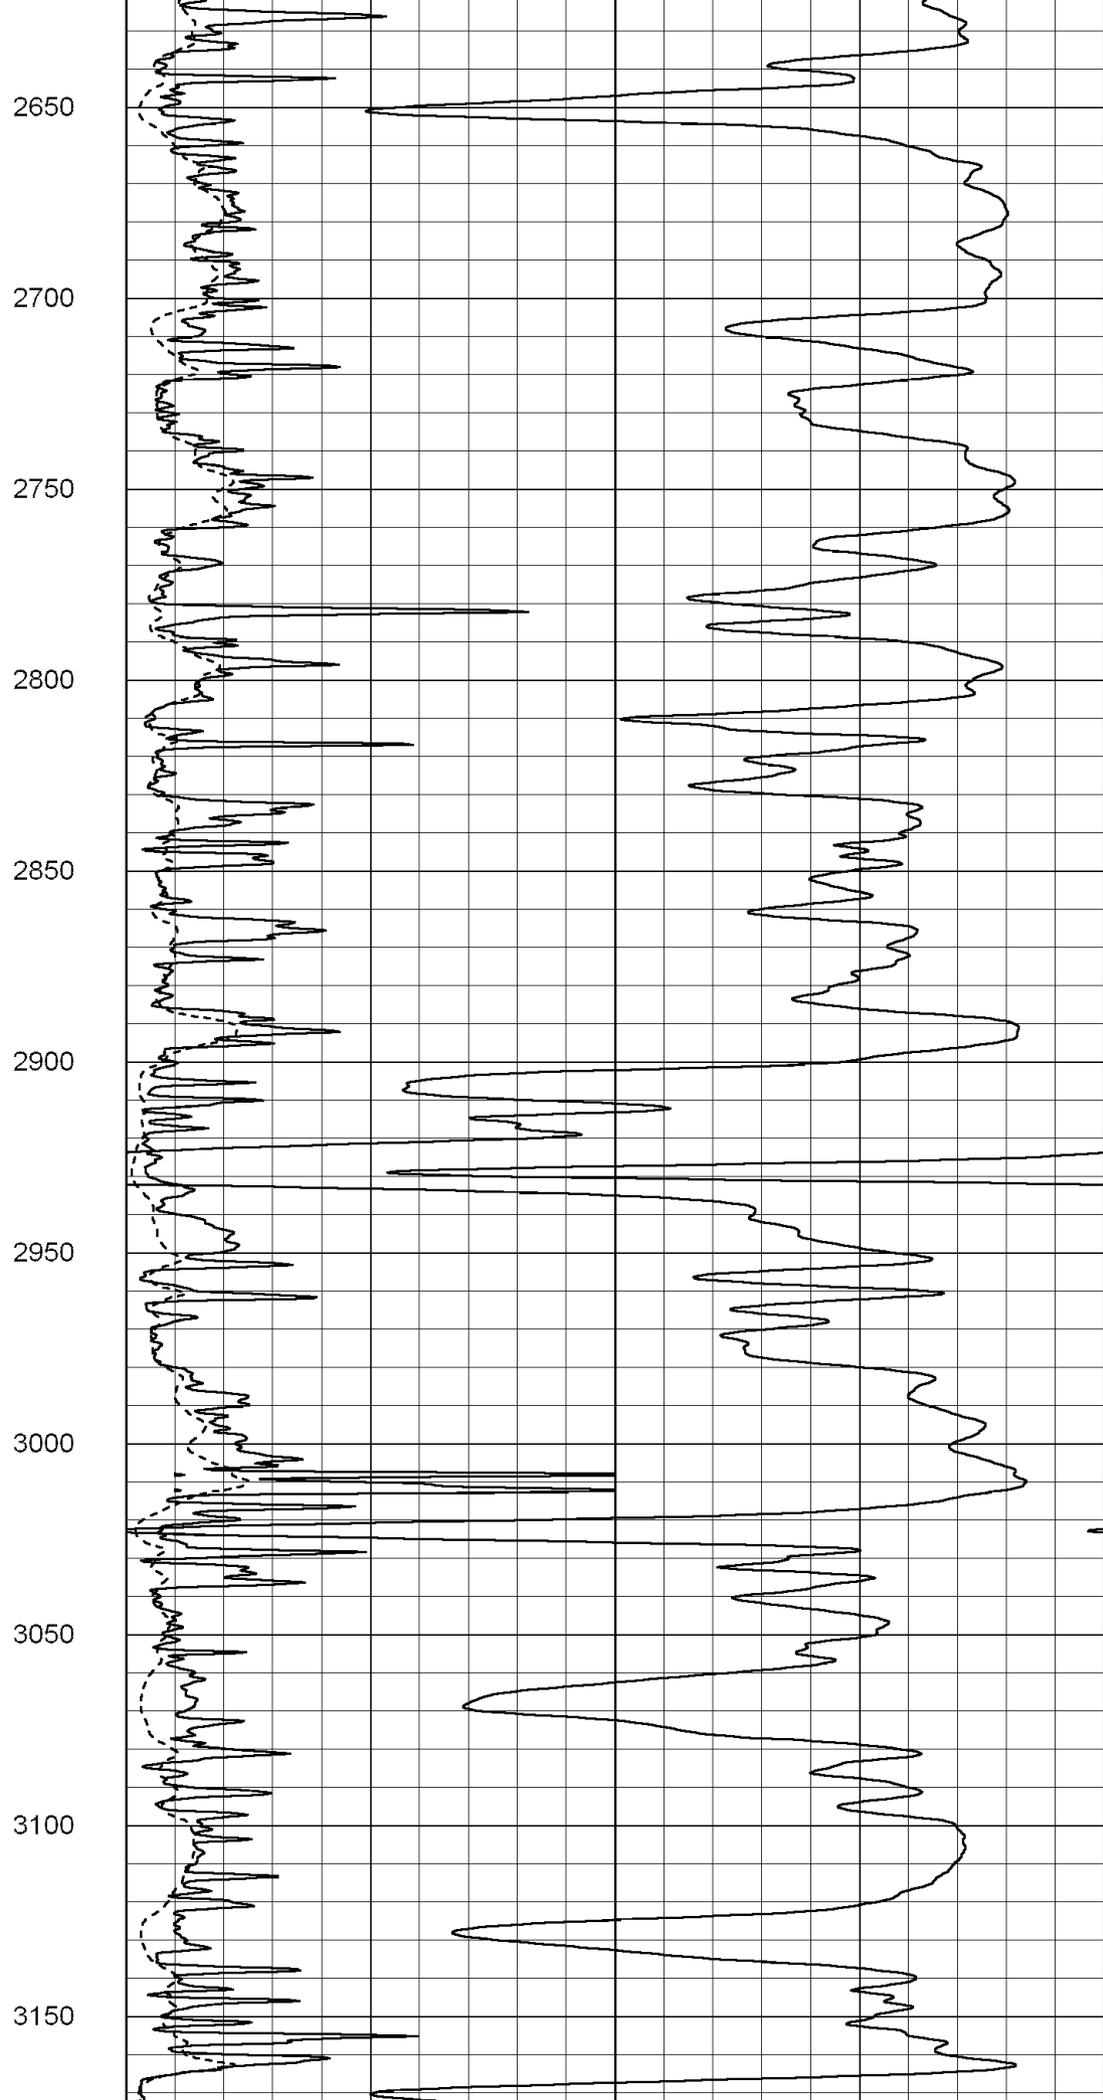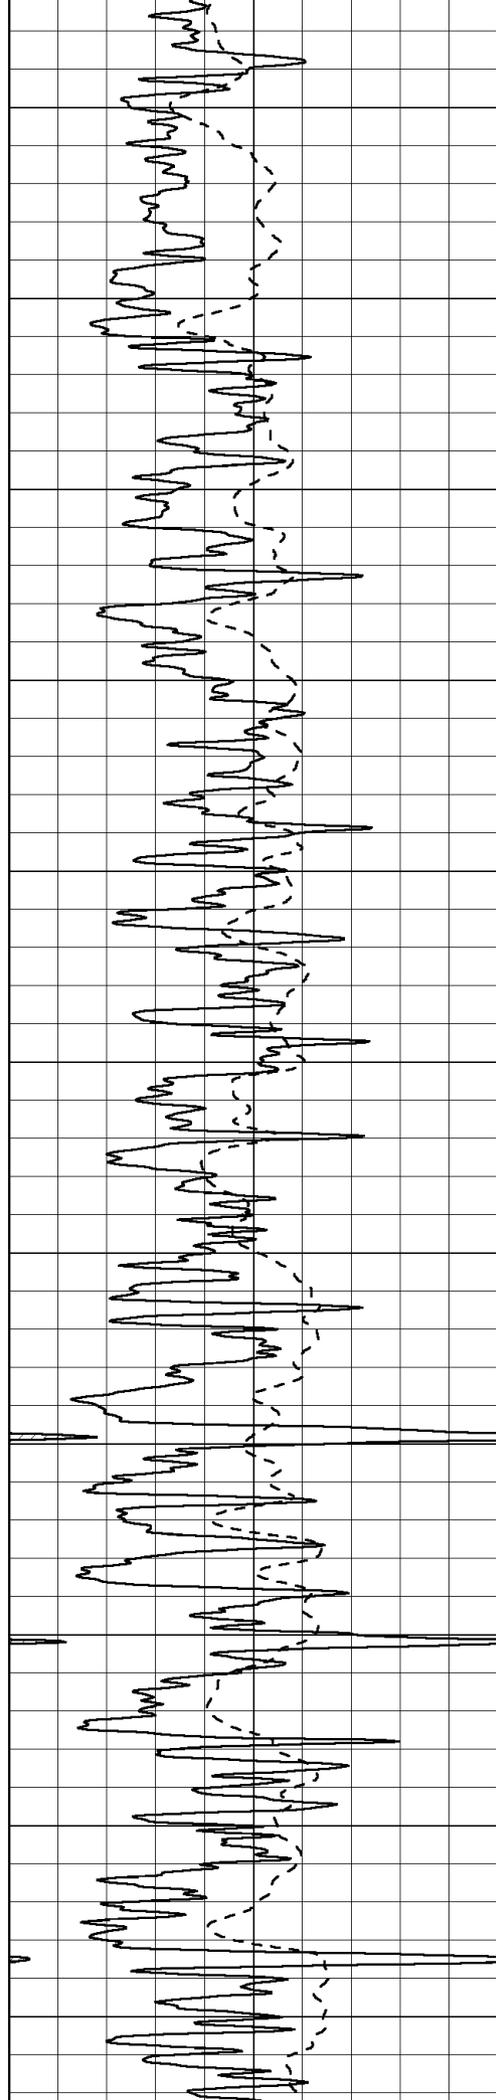

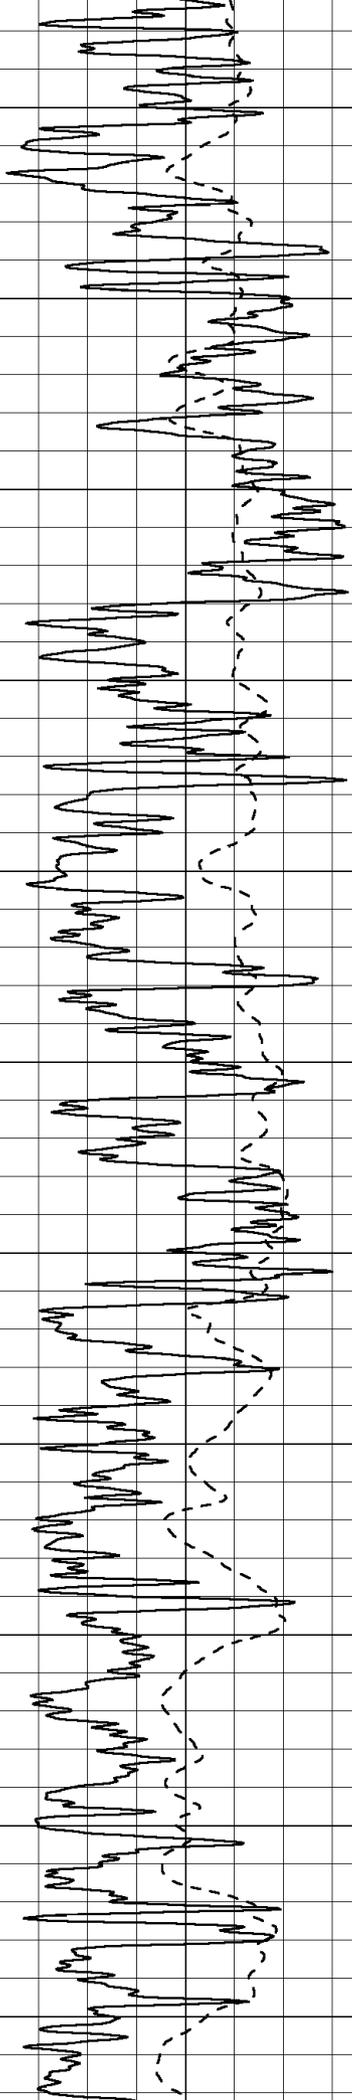

3200

3250

3300

3350

3400

3450


3500



3550


3600

3650

3700

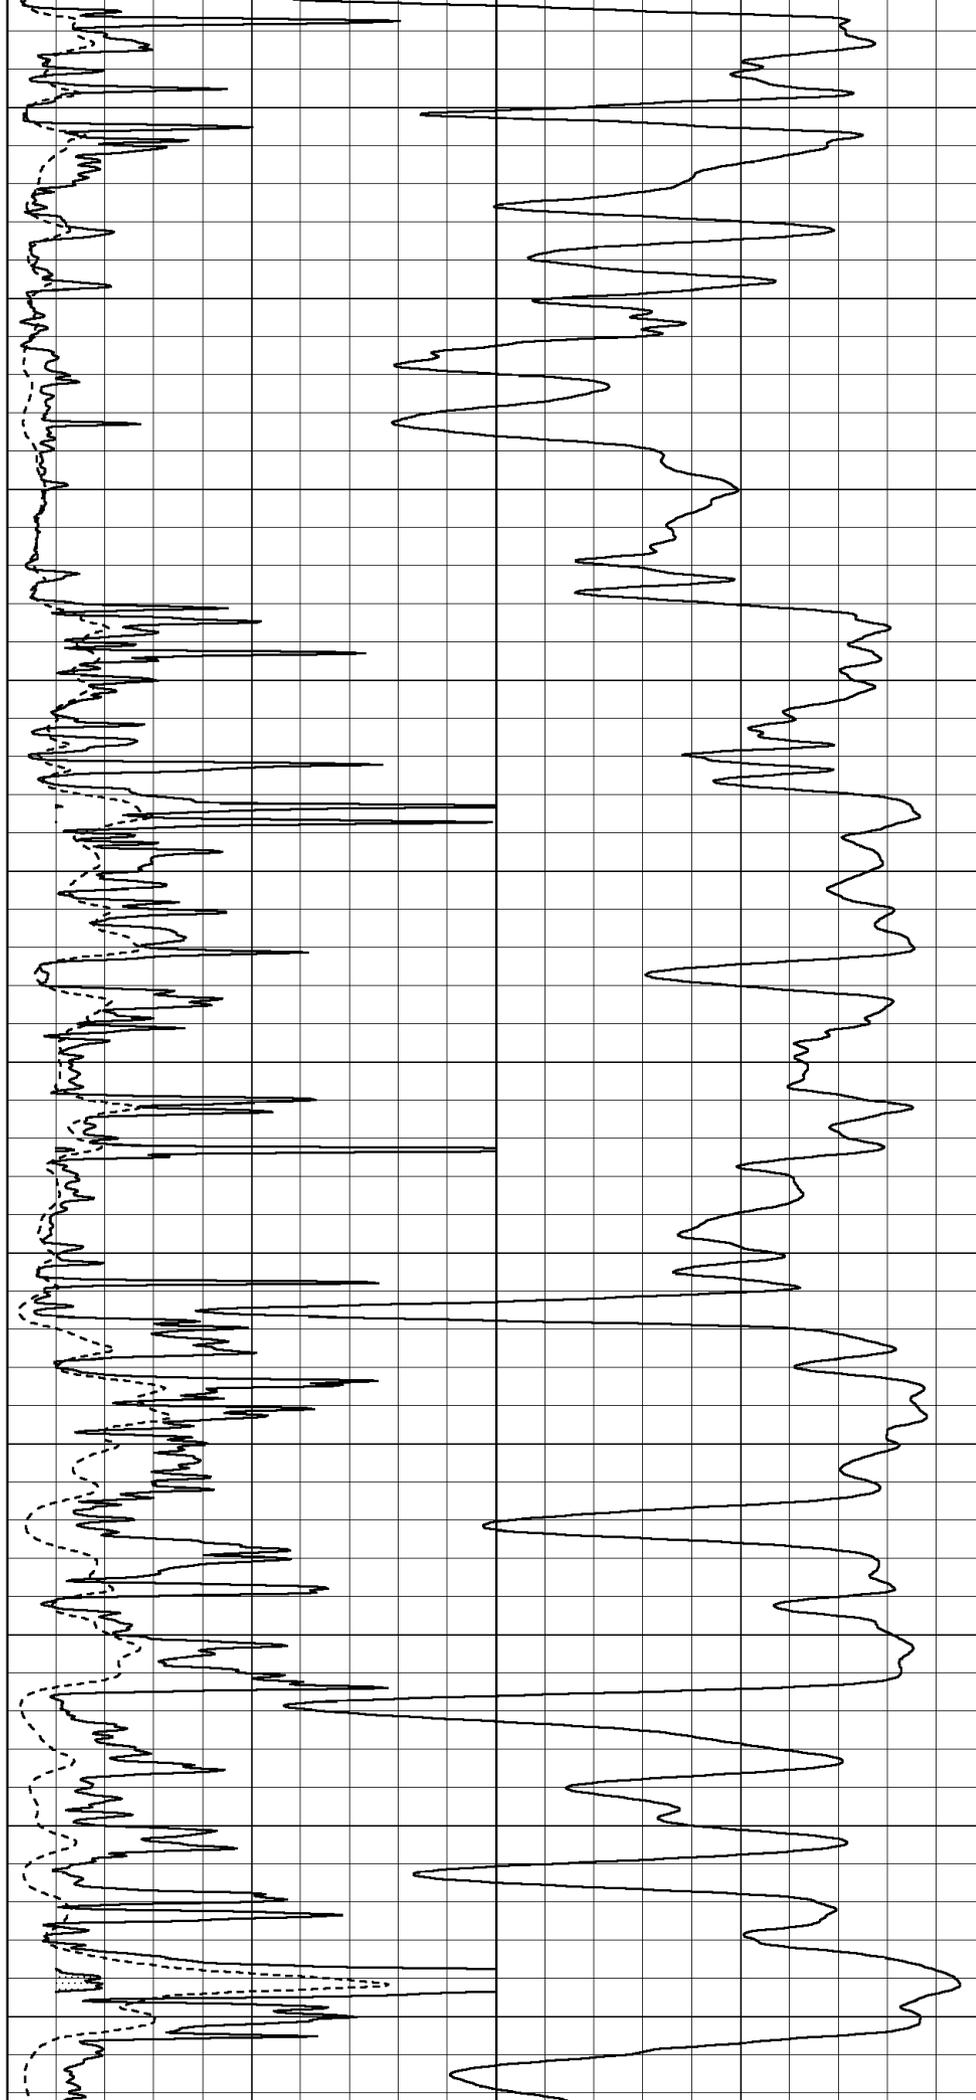

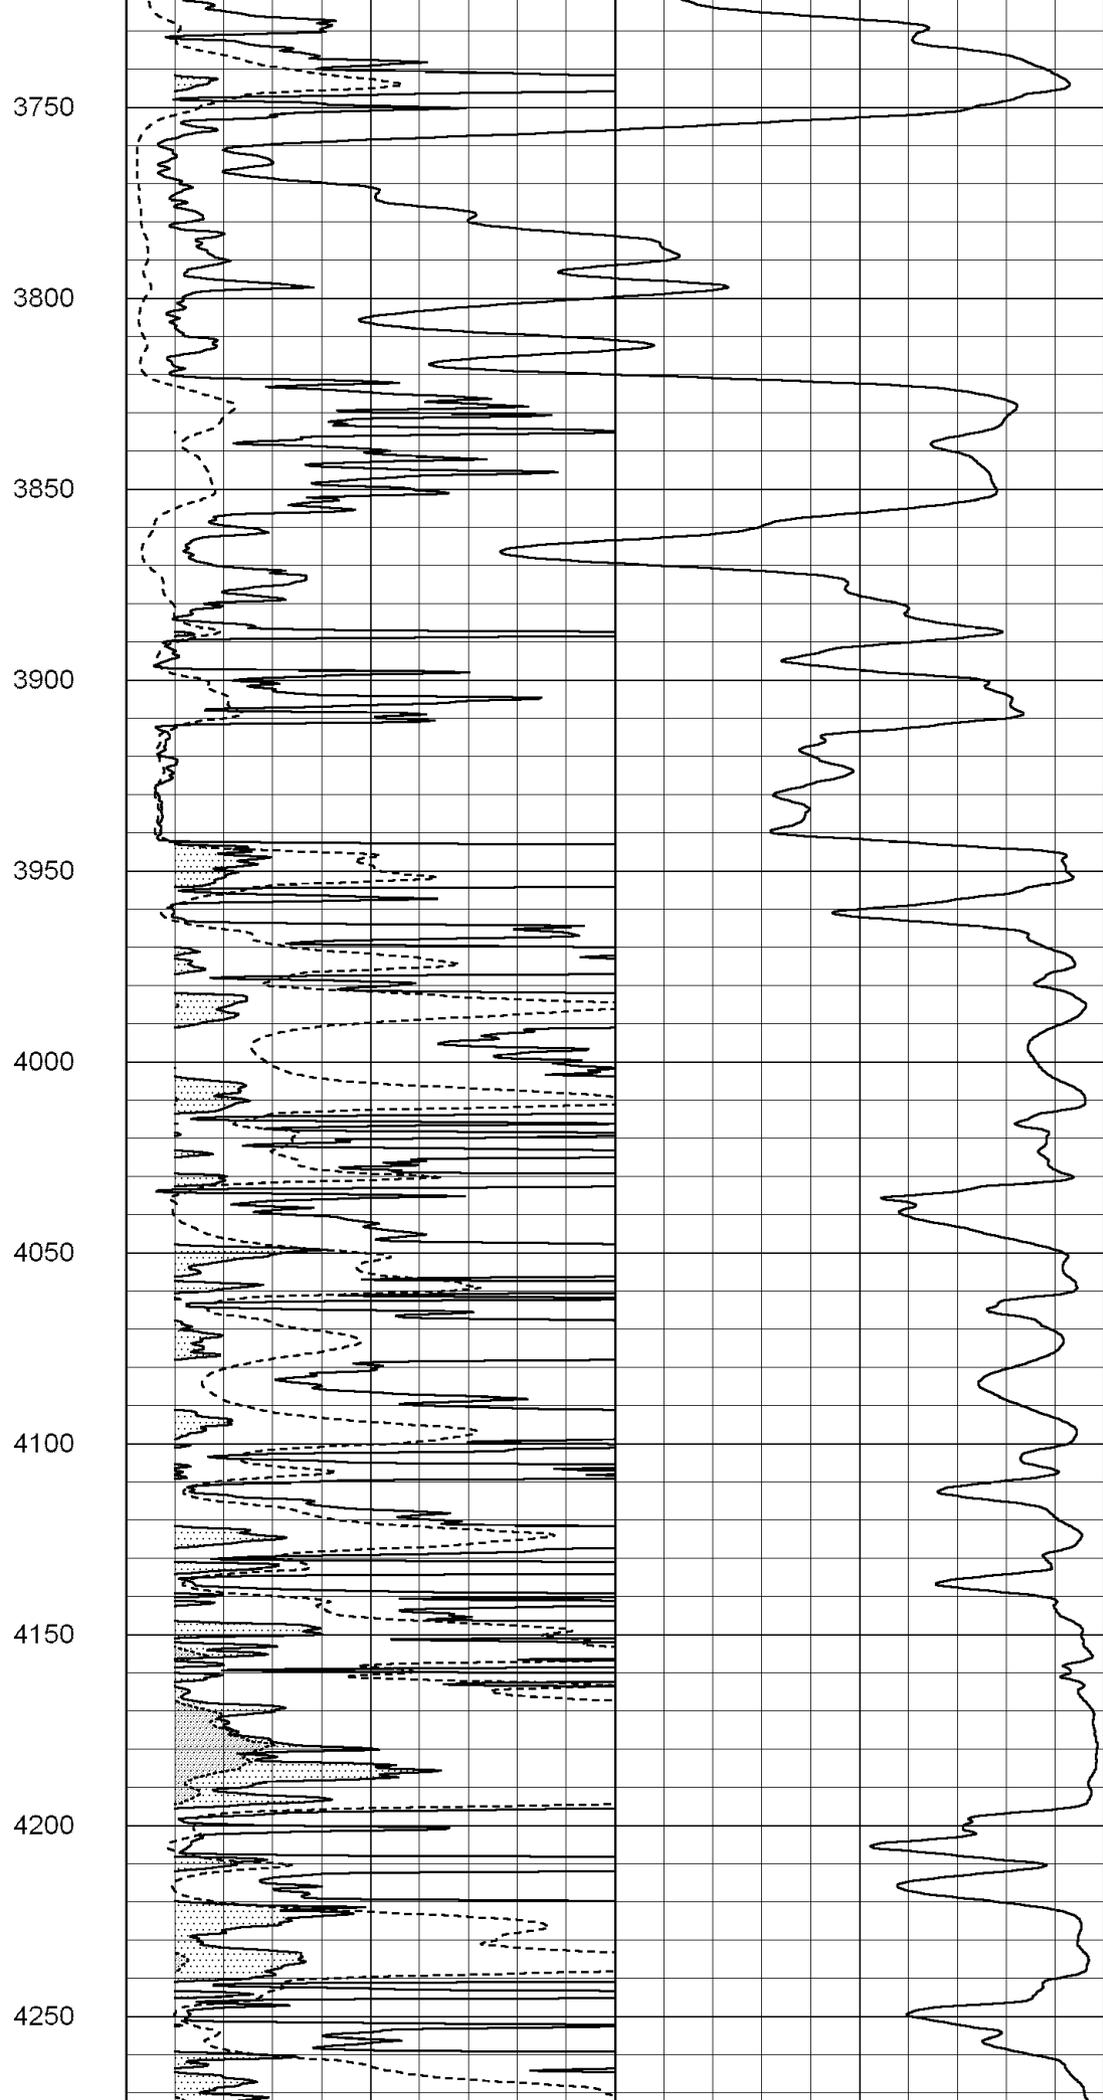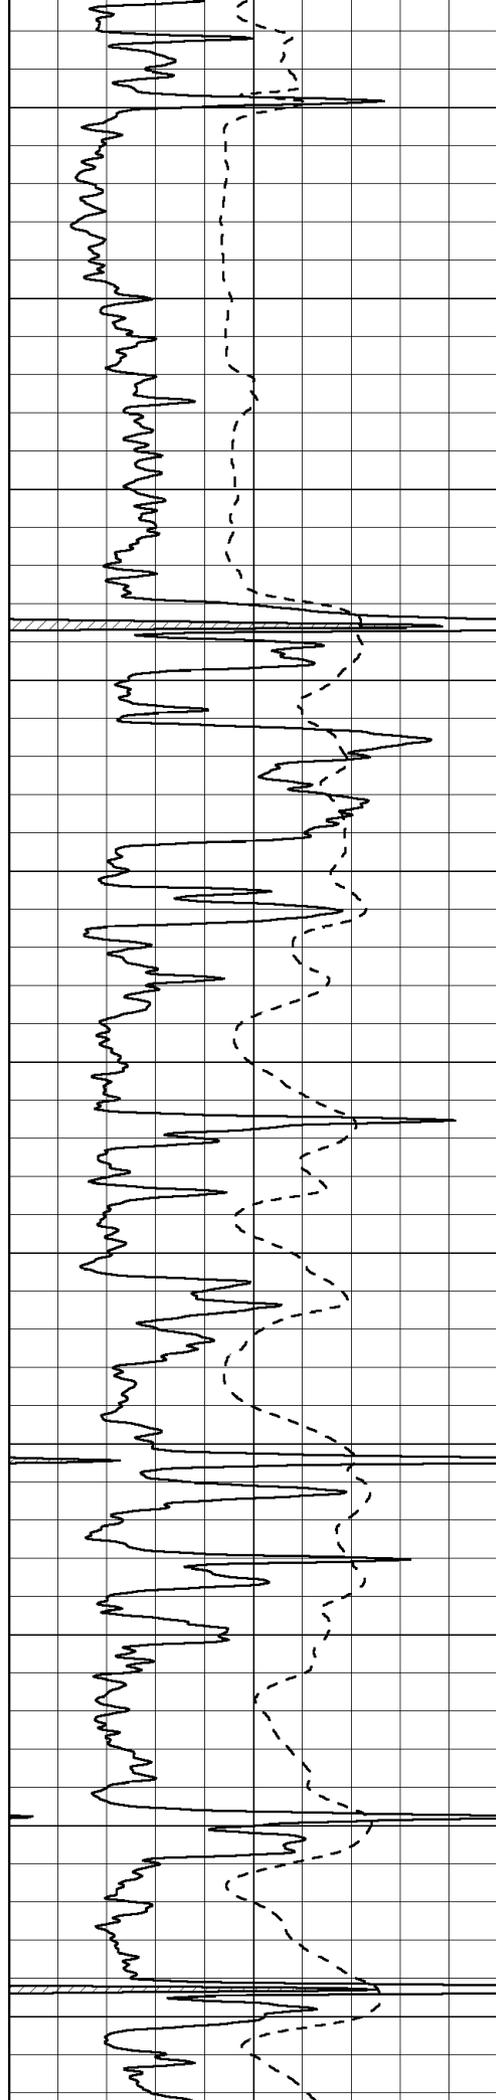

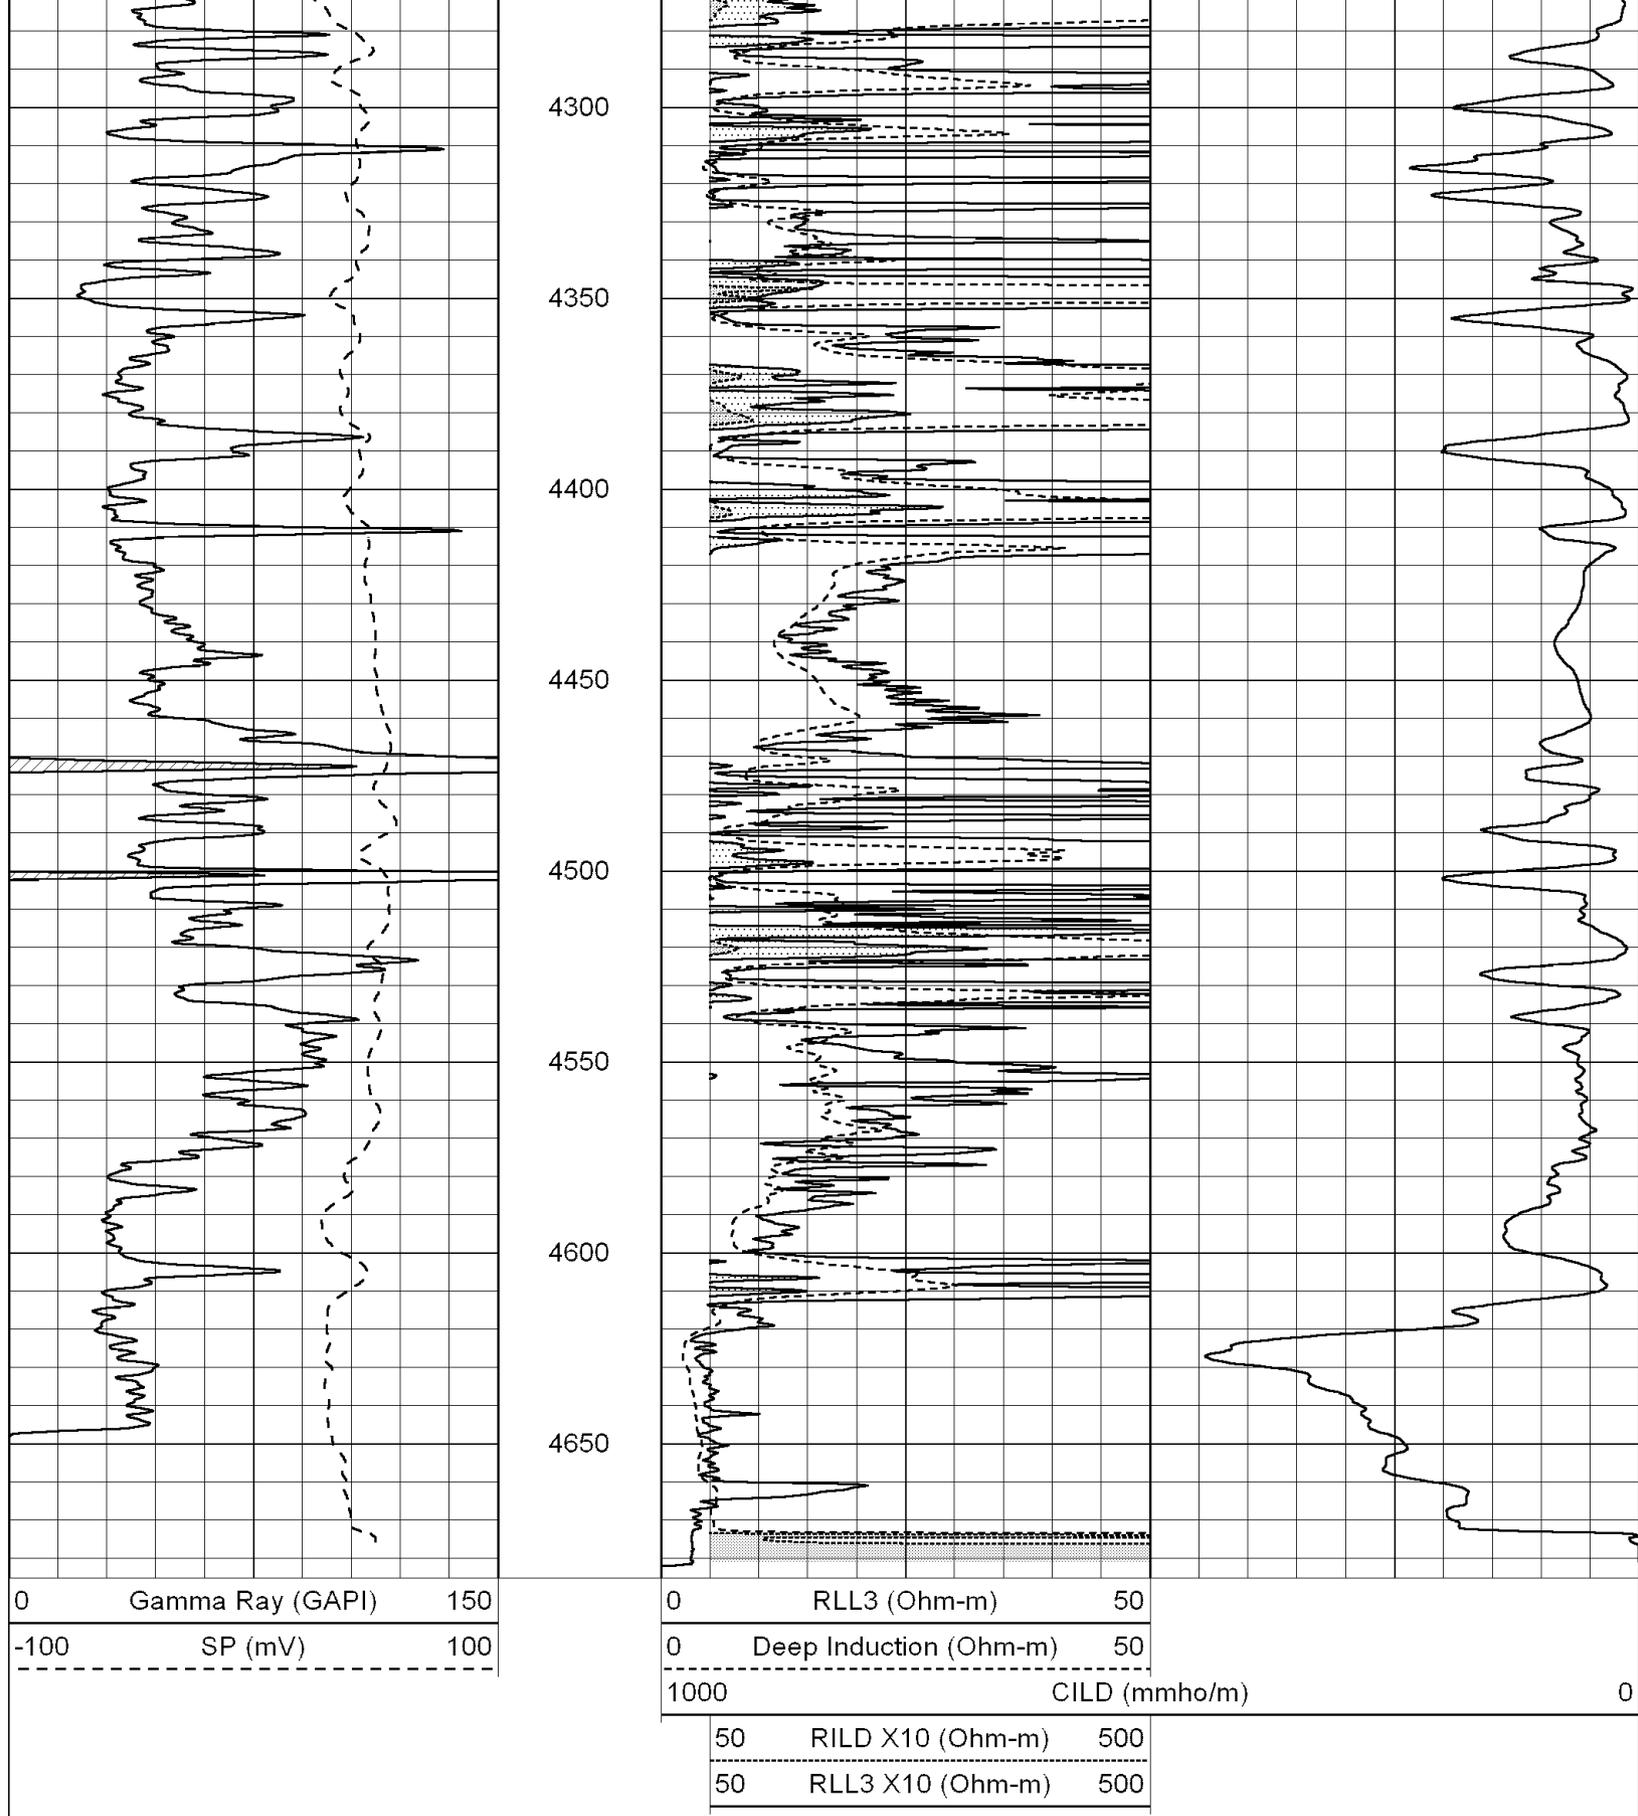


SUPERIOR  
Hays,  
Kansas

# MAIN SECTION


Database File: 00478600m.db  
 Dataset Pathname: pass3.1A  
 Presentation Format: dil  
 Dataset Creation: Fri Jan 22 17:01:23 2010  
 Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	RxoRt	50


0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

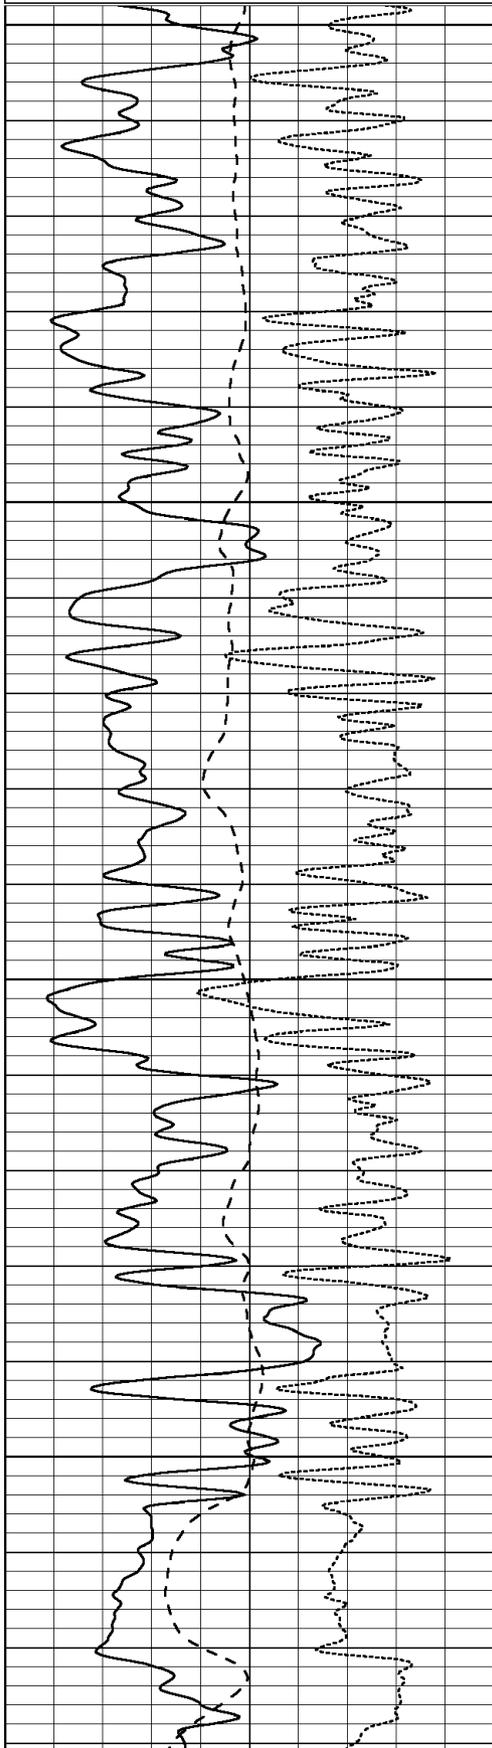

2300  
 2350  
 2400  
 2450

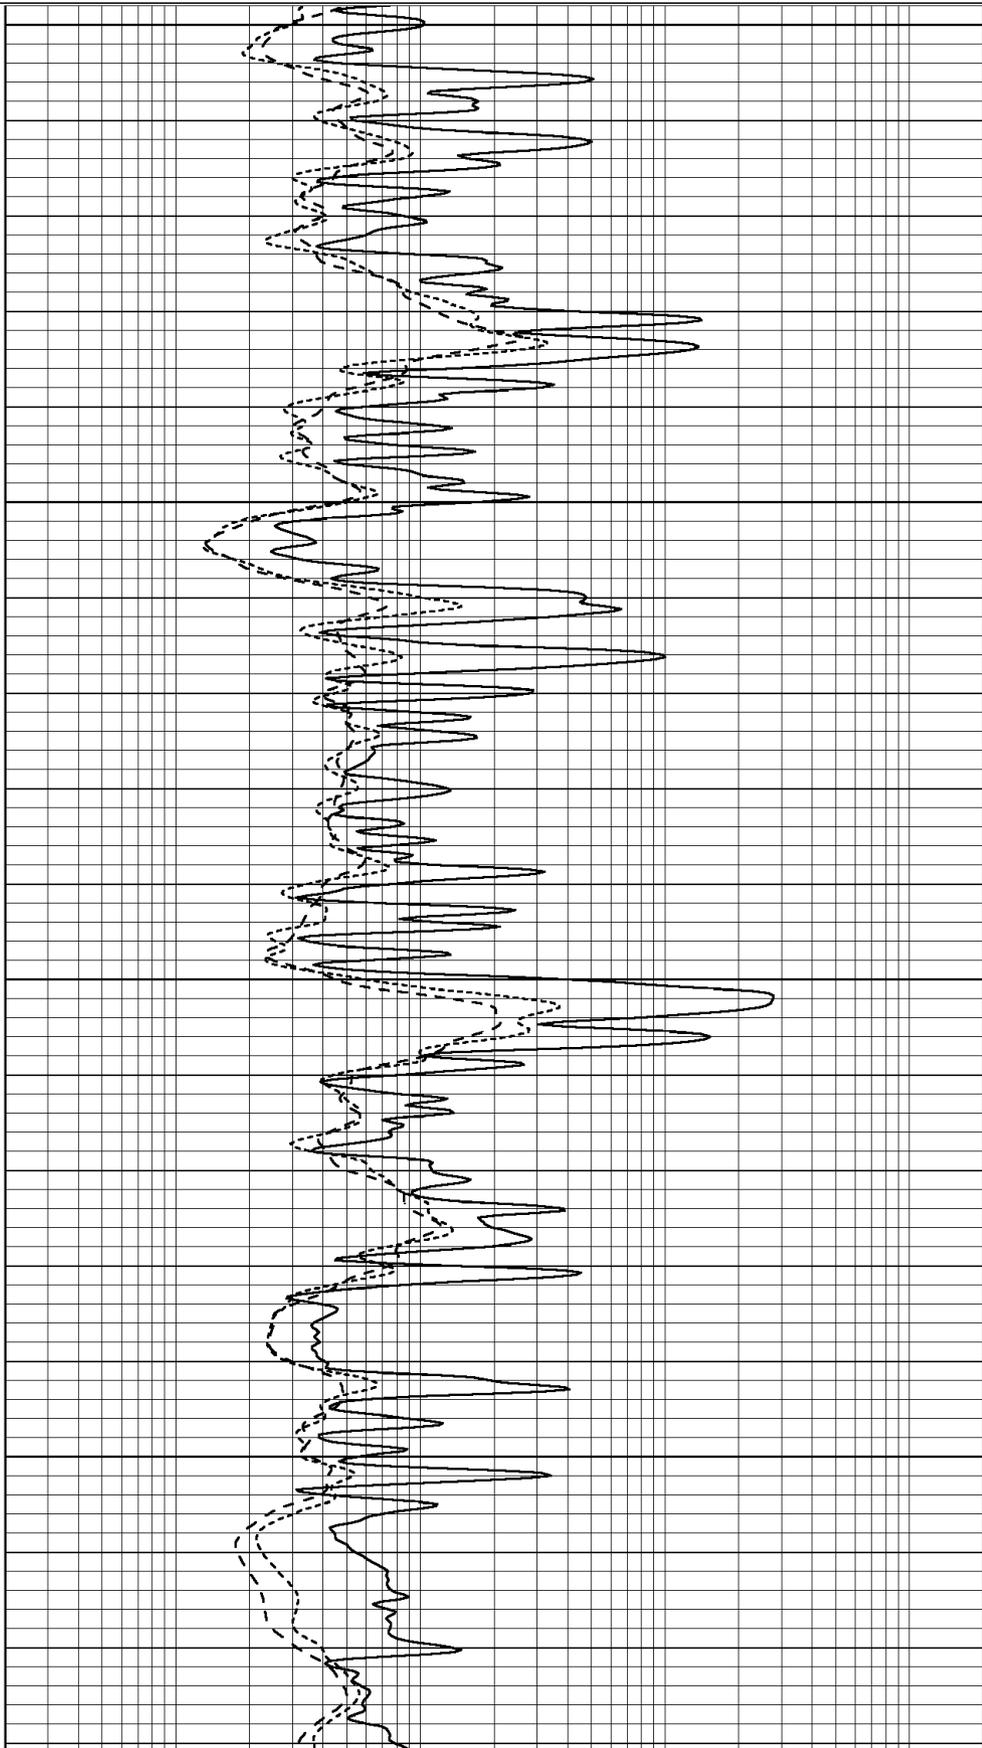


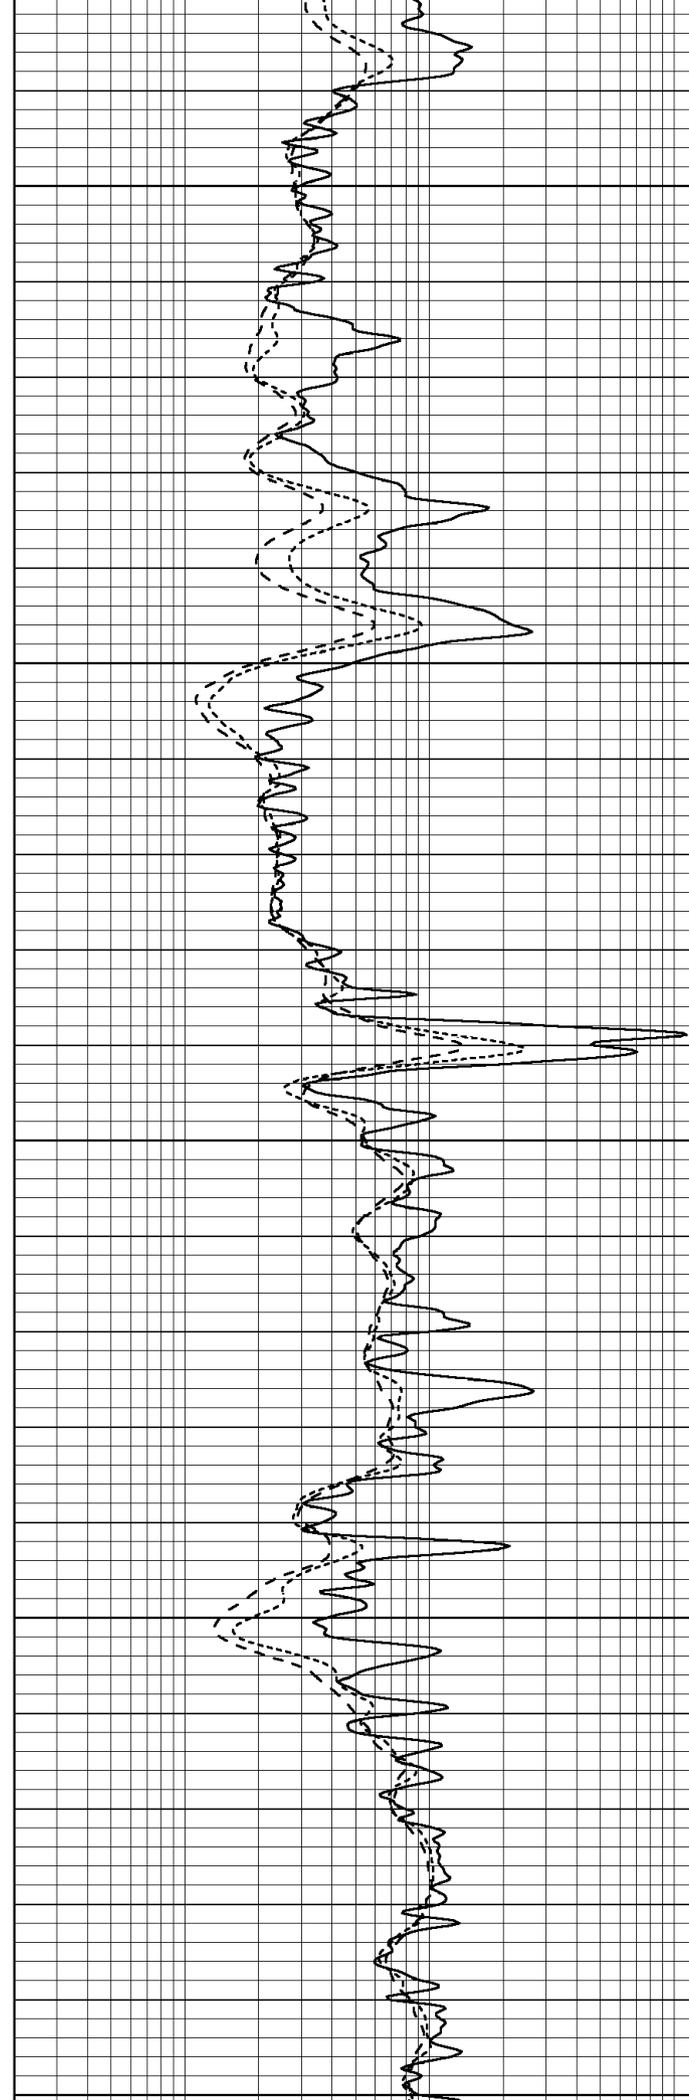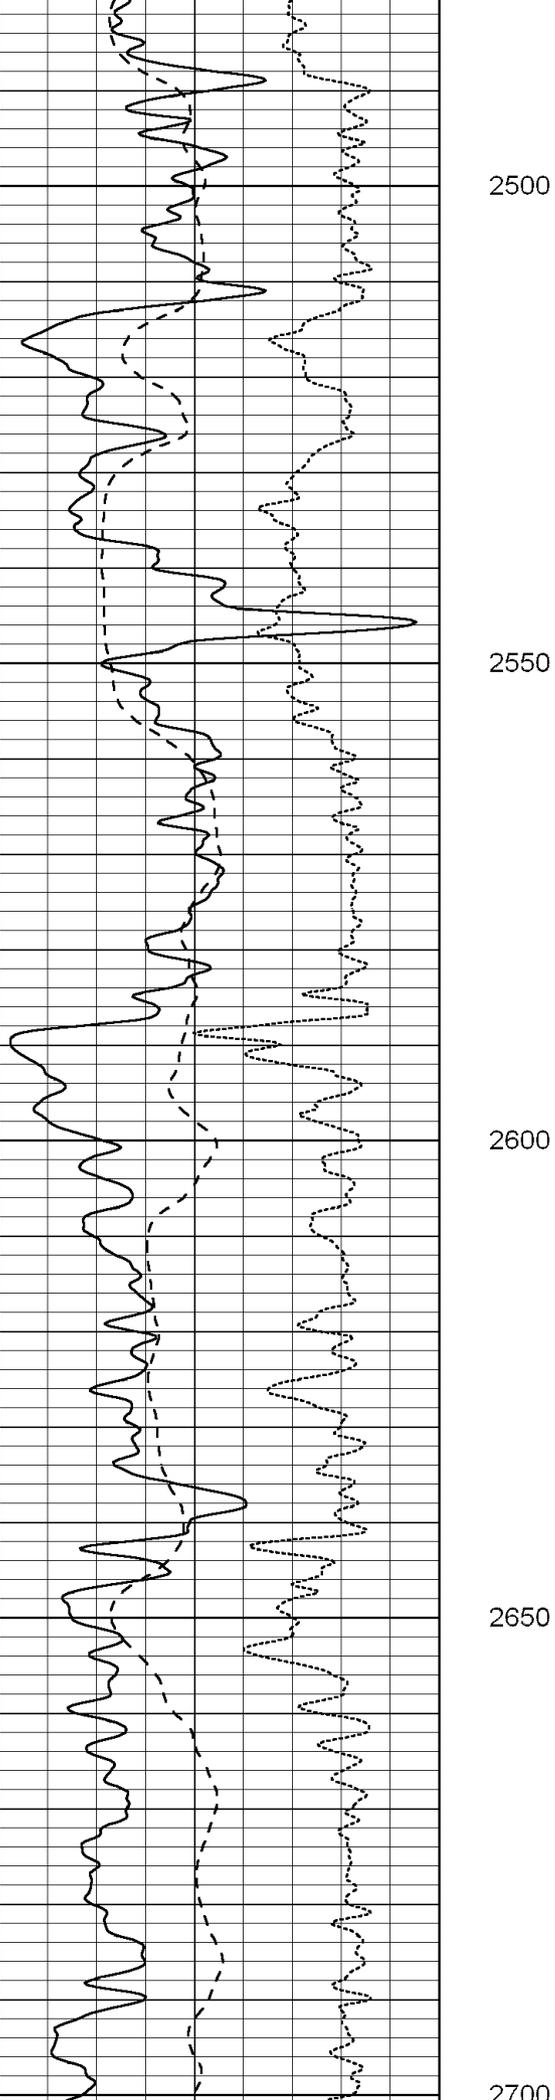

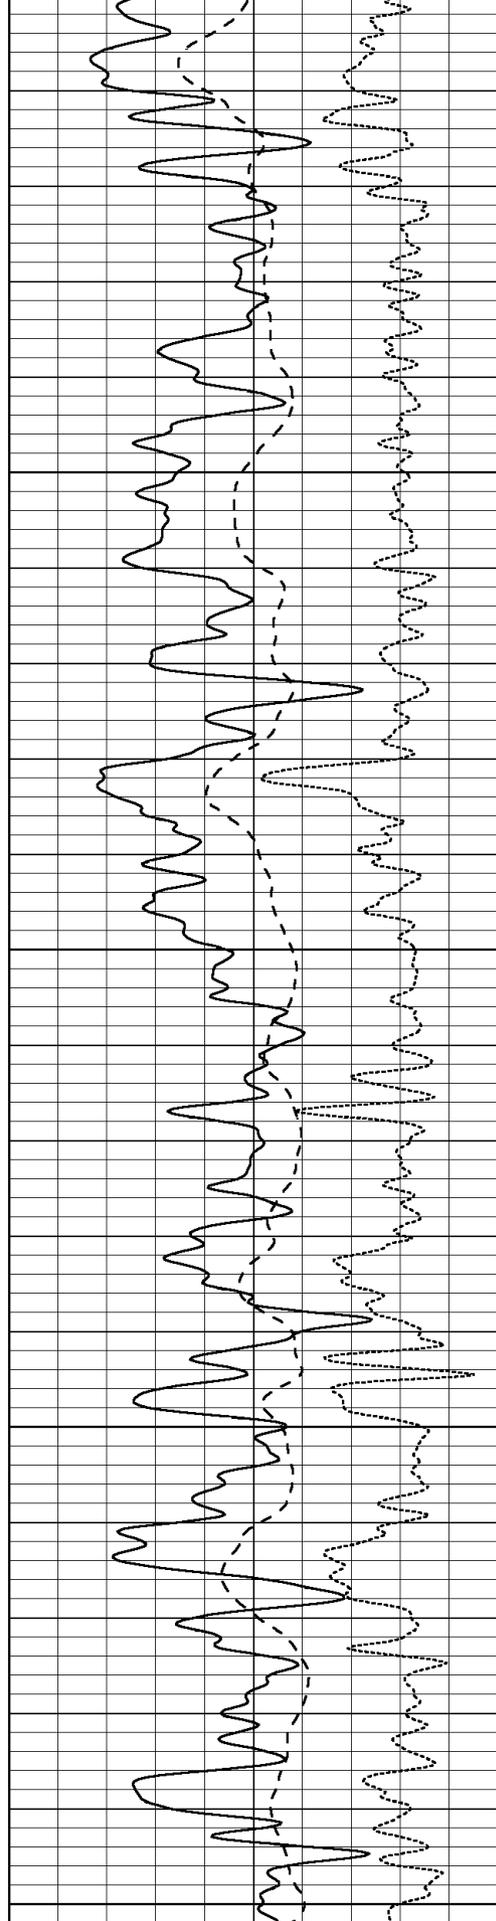

2700  
2750  
2800  
2850  
2900

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	RxoRt	50

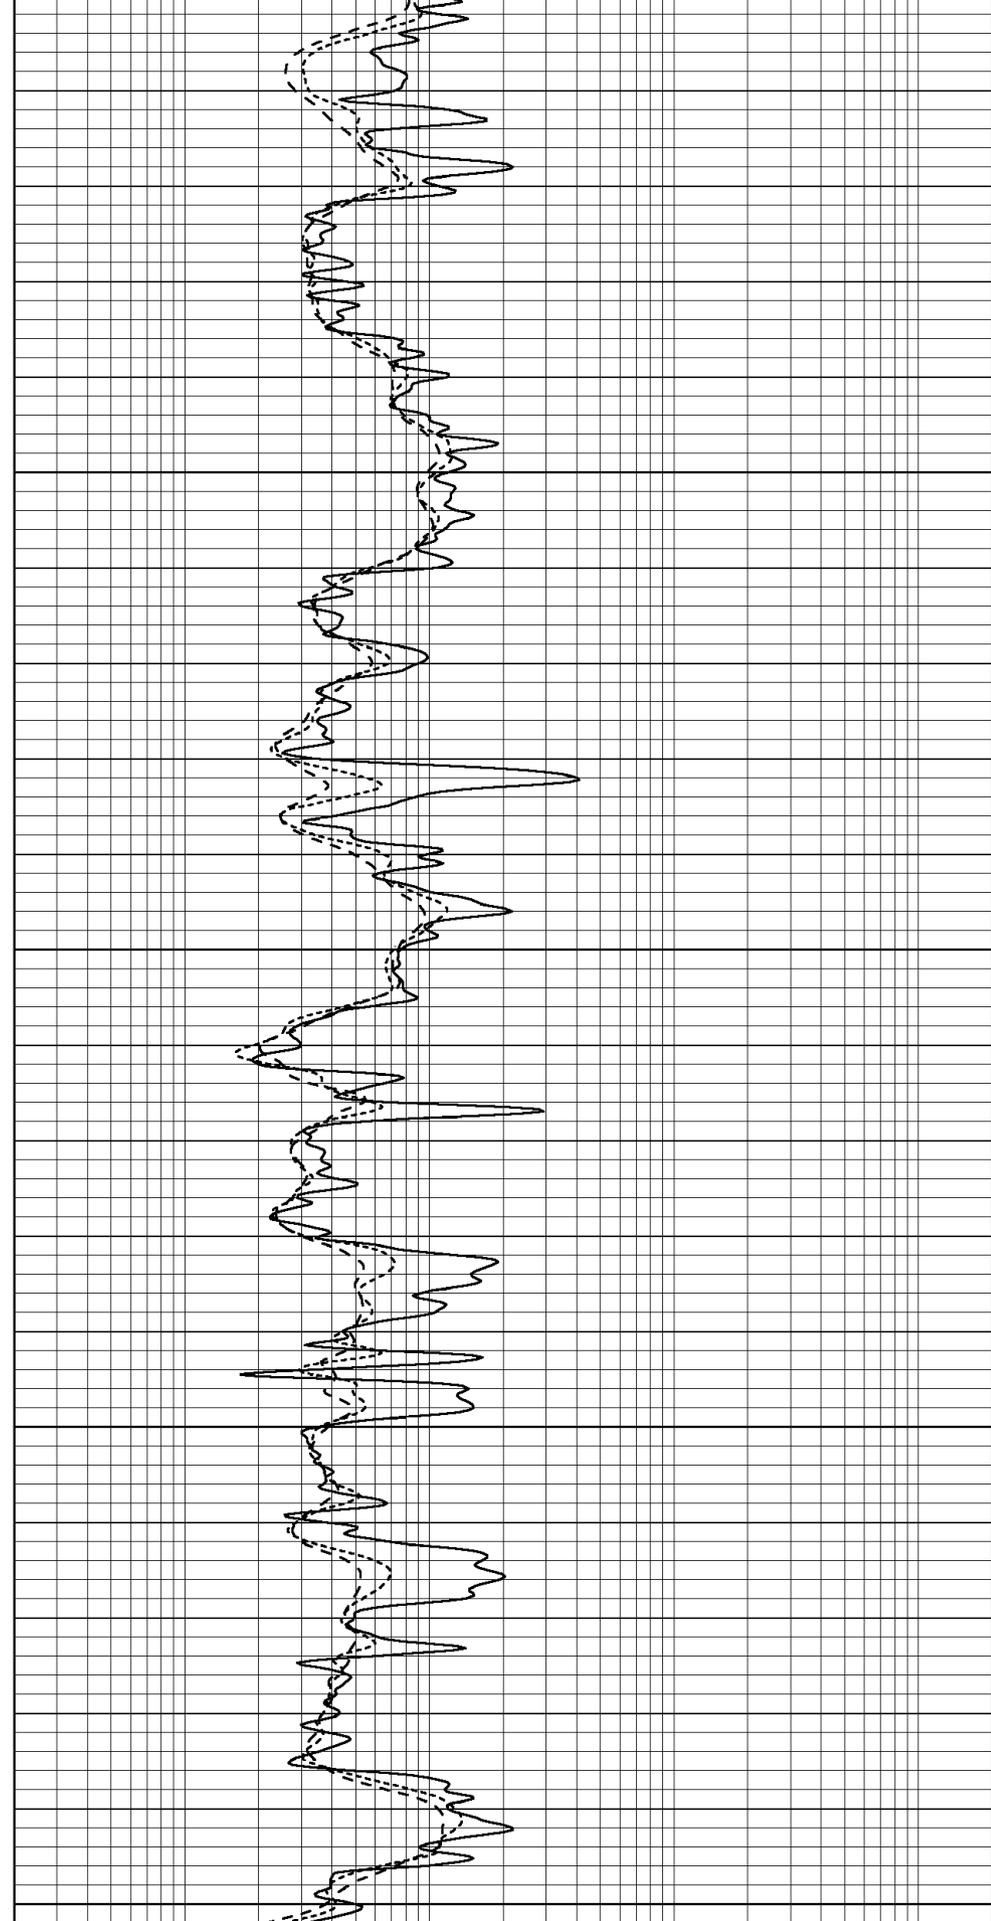

0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




SUPERIOR  
Hays,  
Kansas


# MAIN SECTION

Database File: 004788ddn.db  
 Dataset Pathname: pass3.1A  
 Presentation Format: dil  
 Dataset Creation: Fri Jan 22 17:01:23 2010  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	RxoRt	50

0.2	RLL3 (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

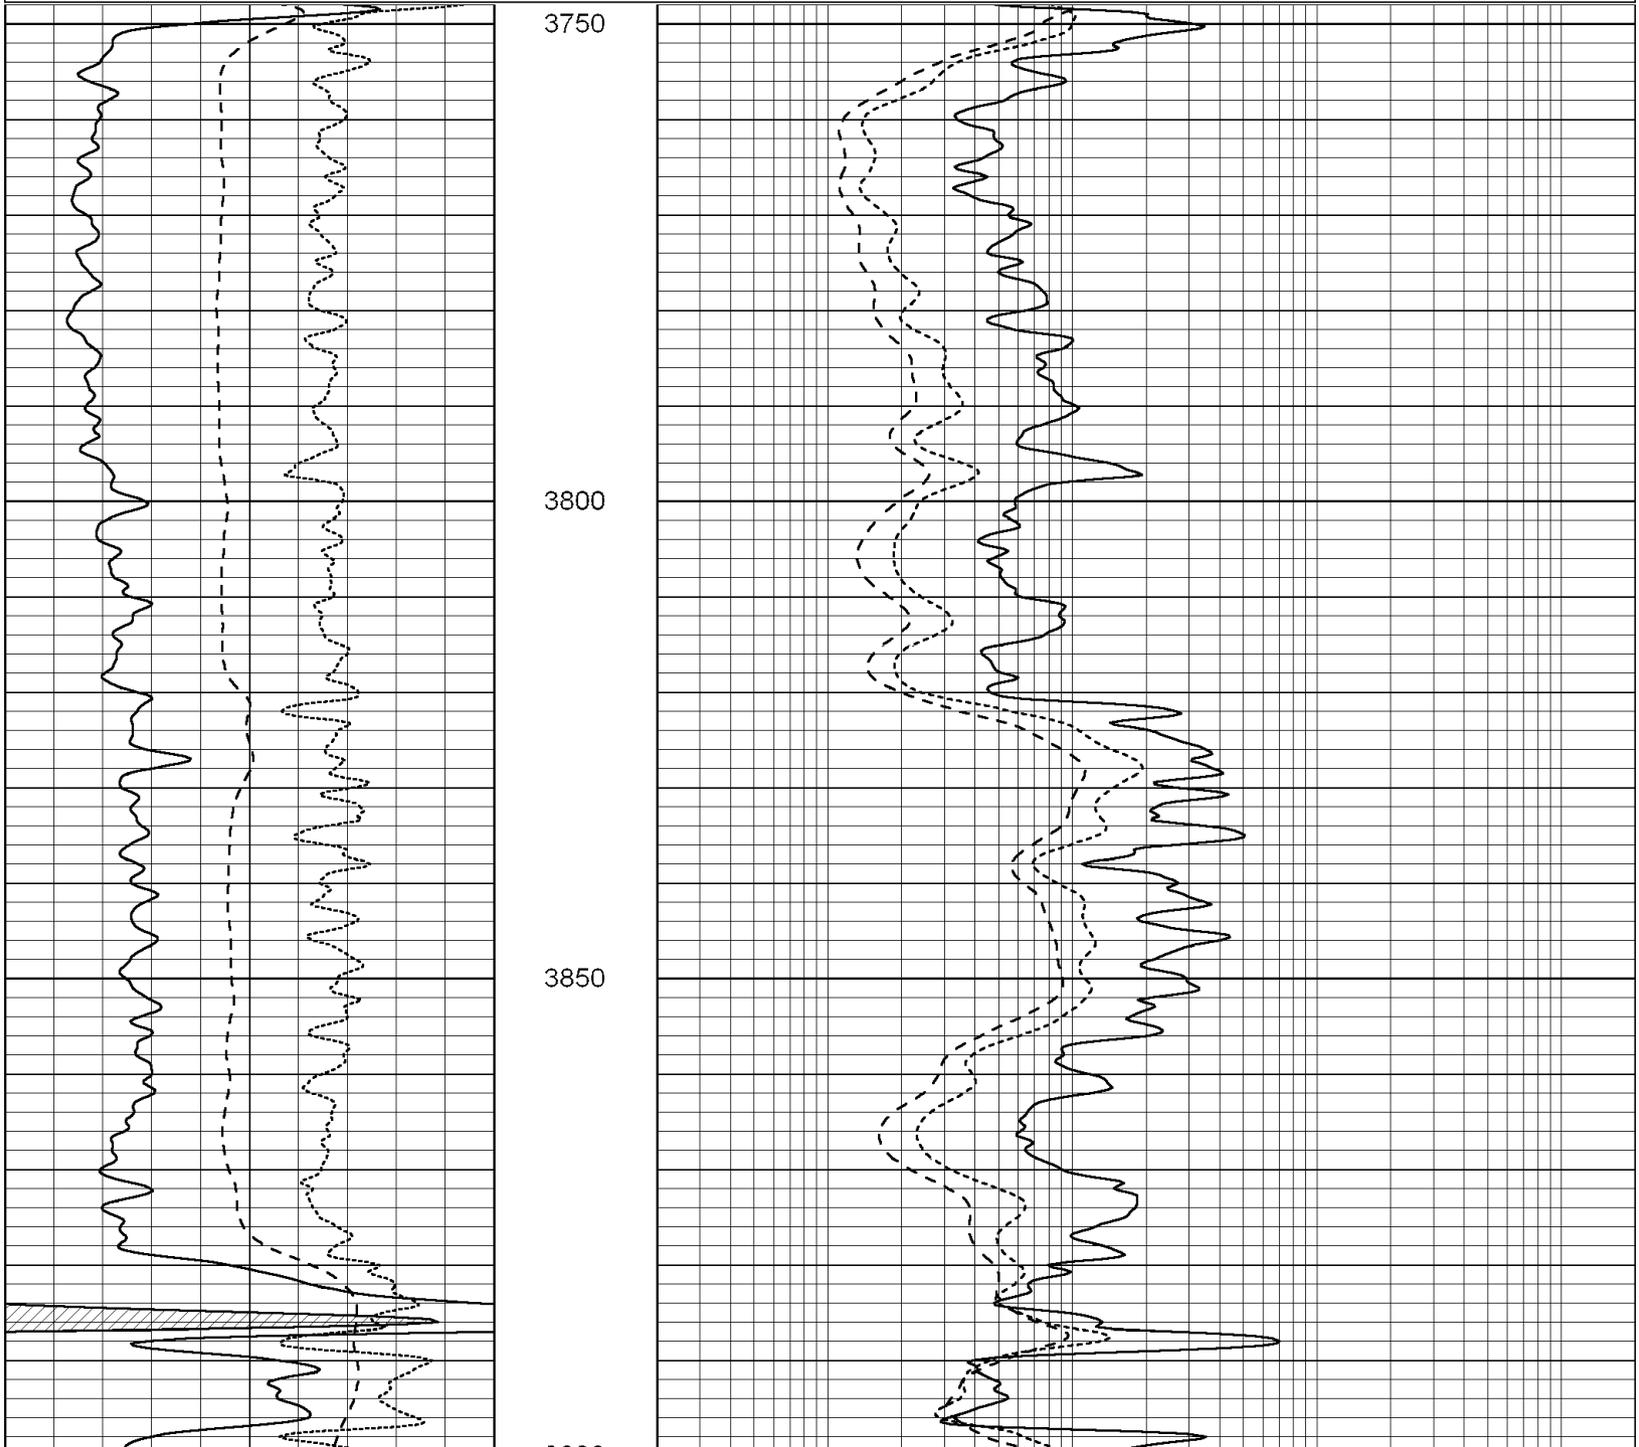

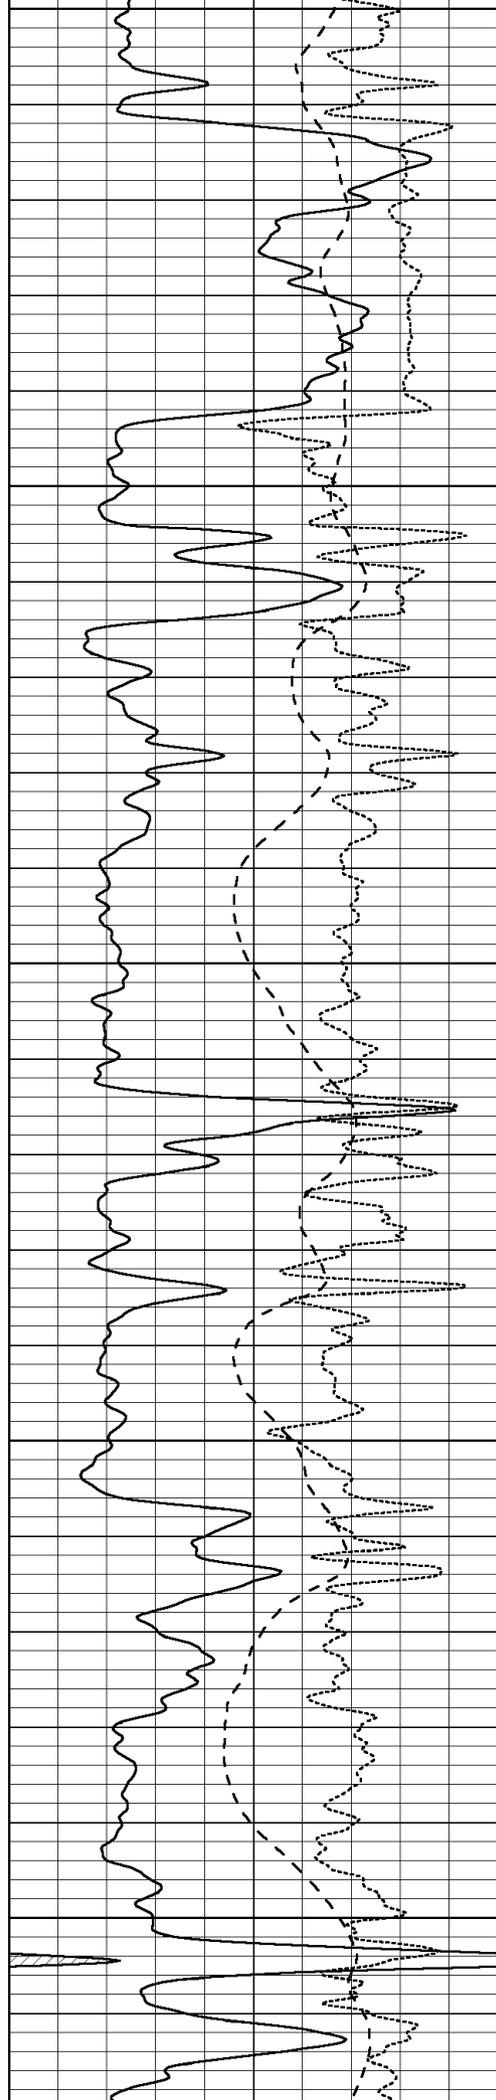


3900


3950

4000

4050

4100

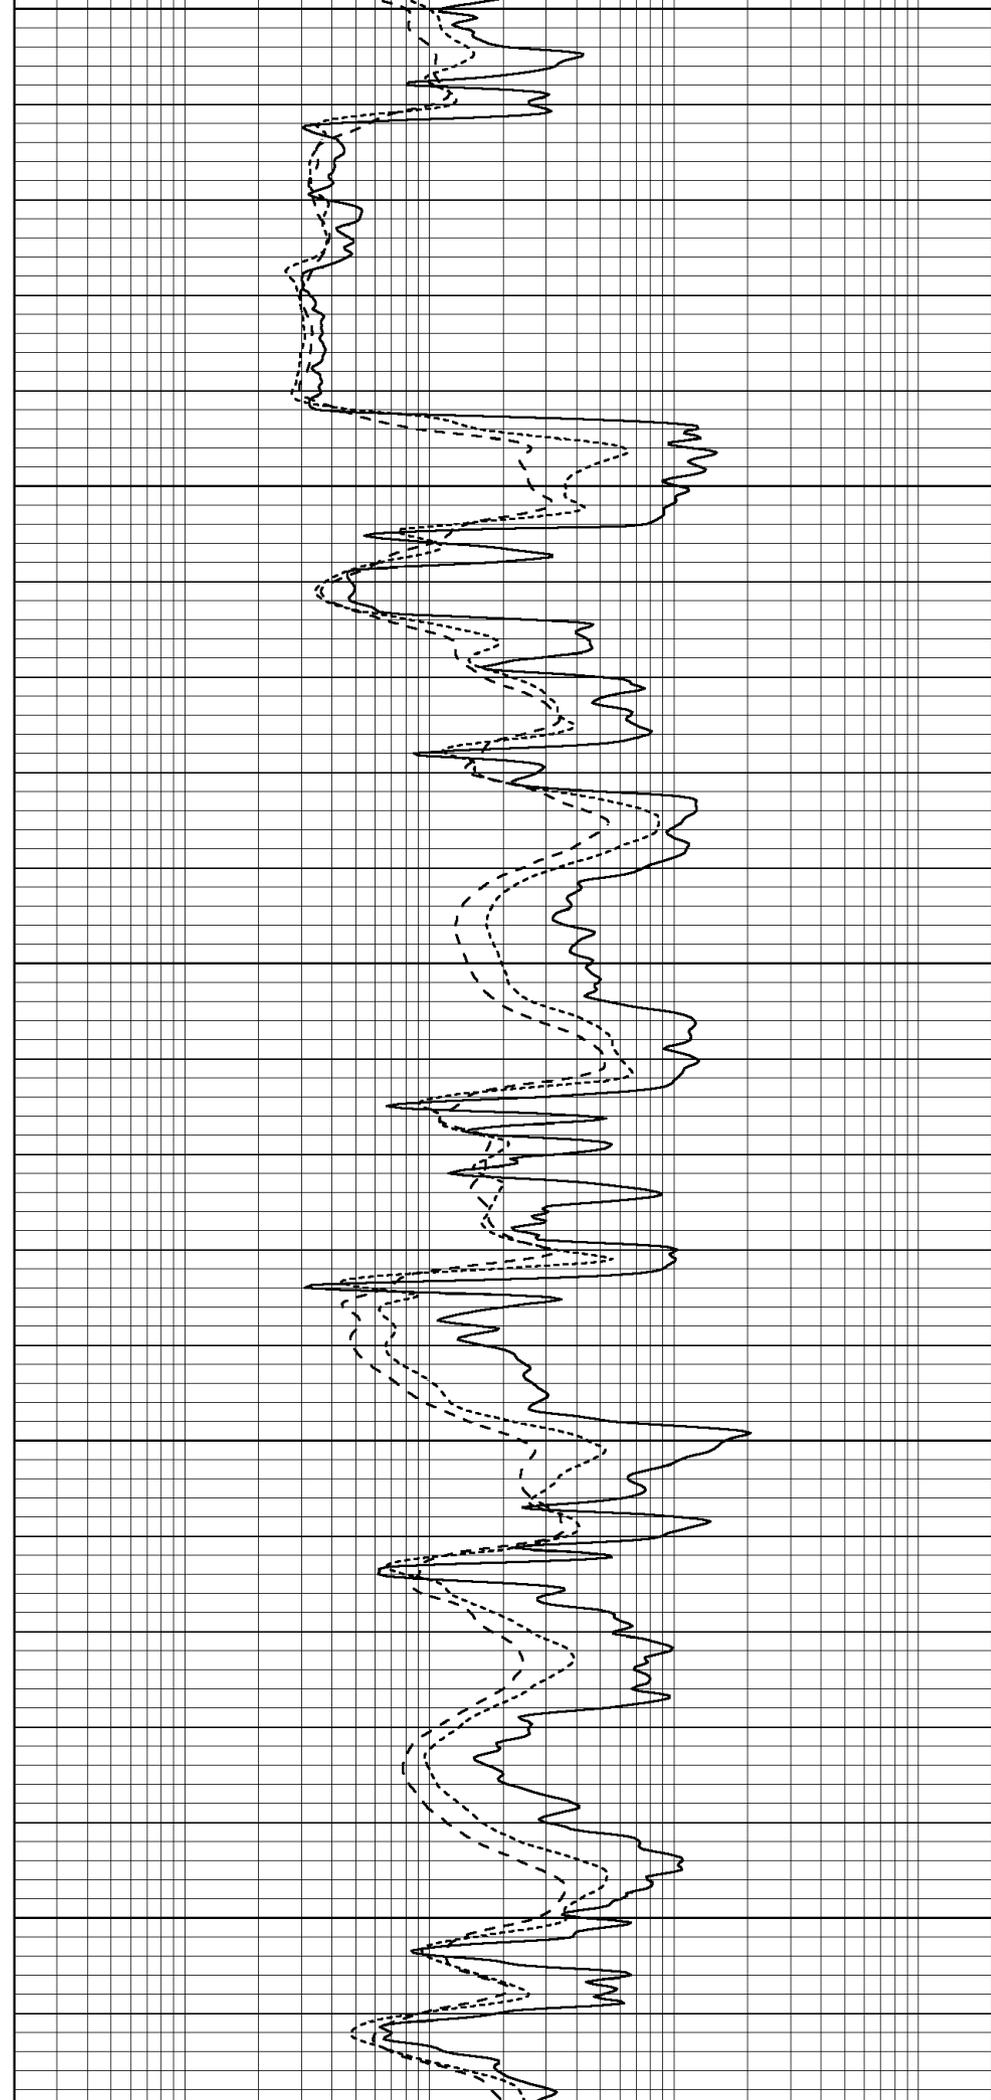

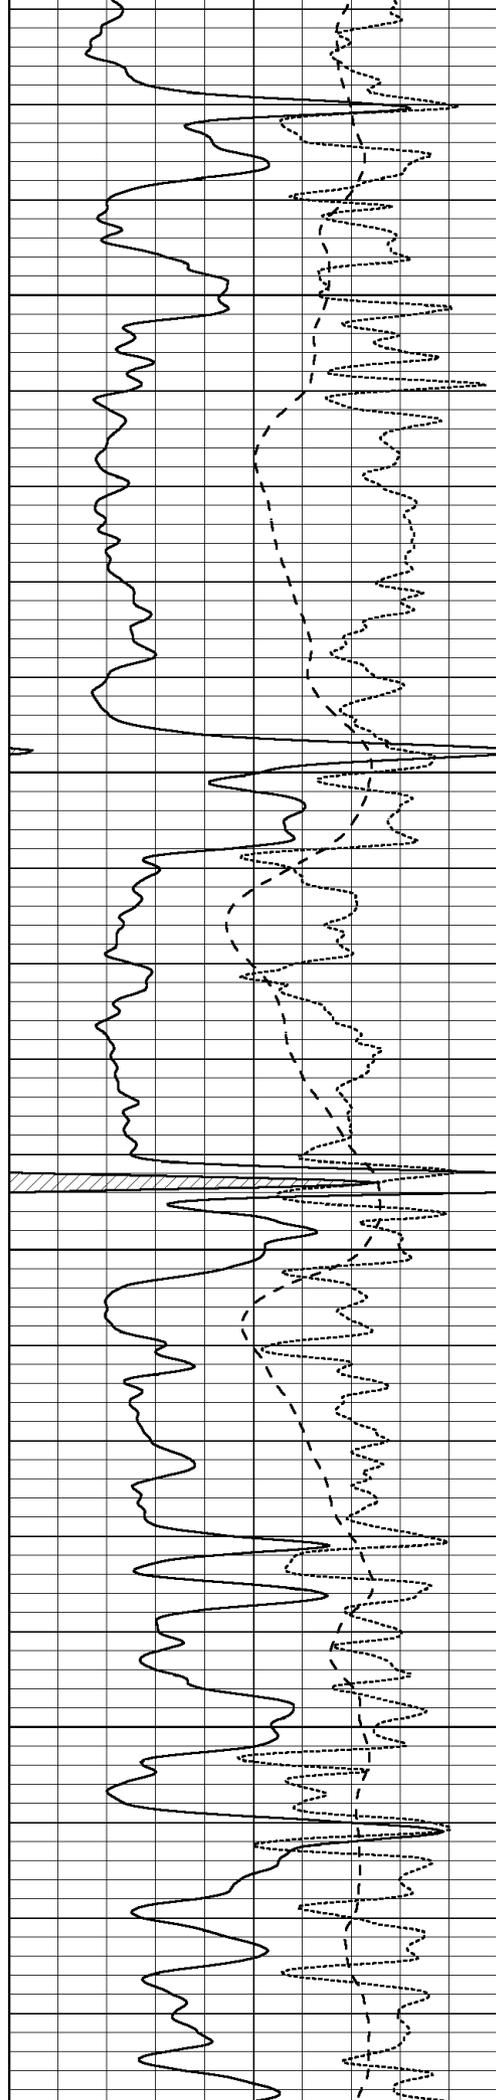



4150

4200

4250

4300

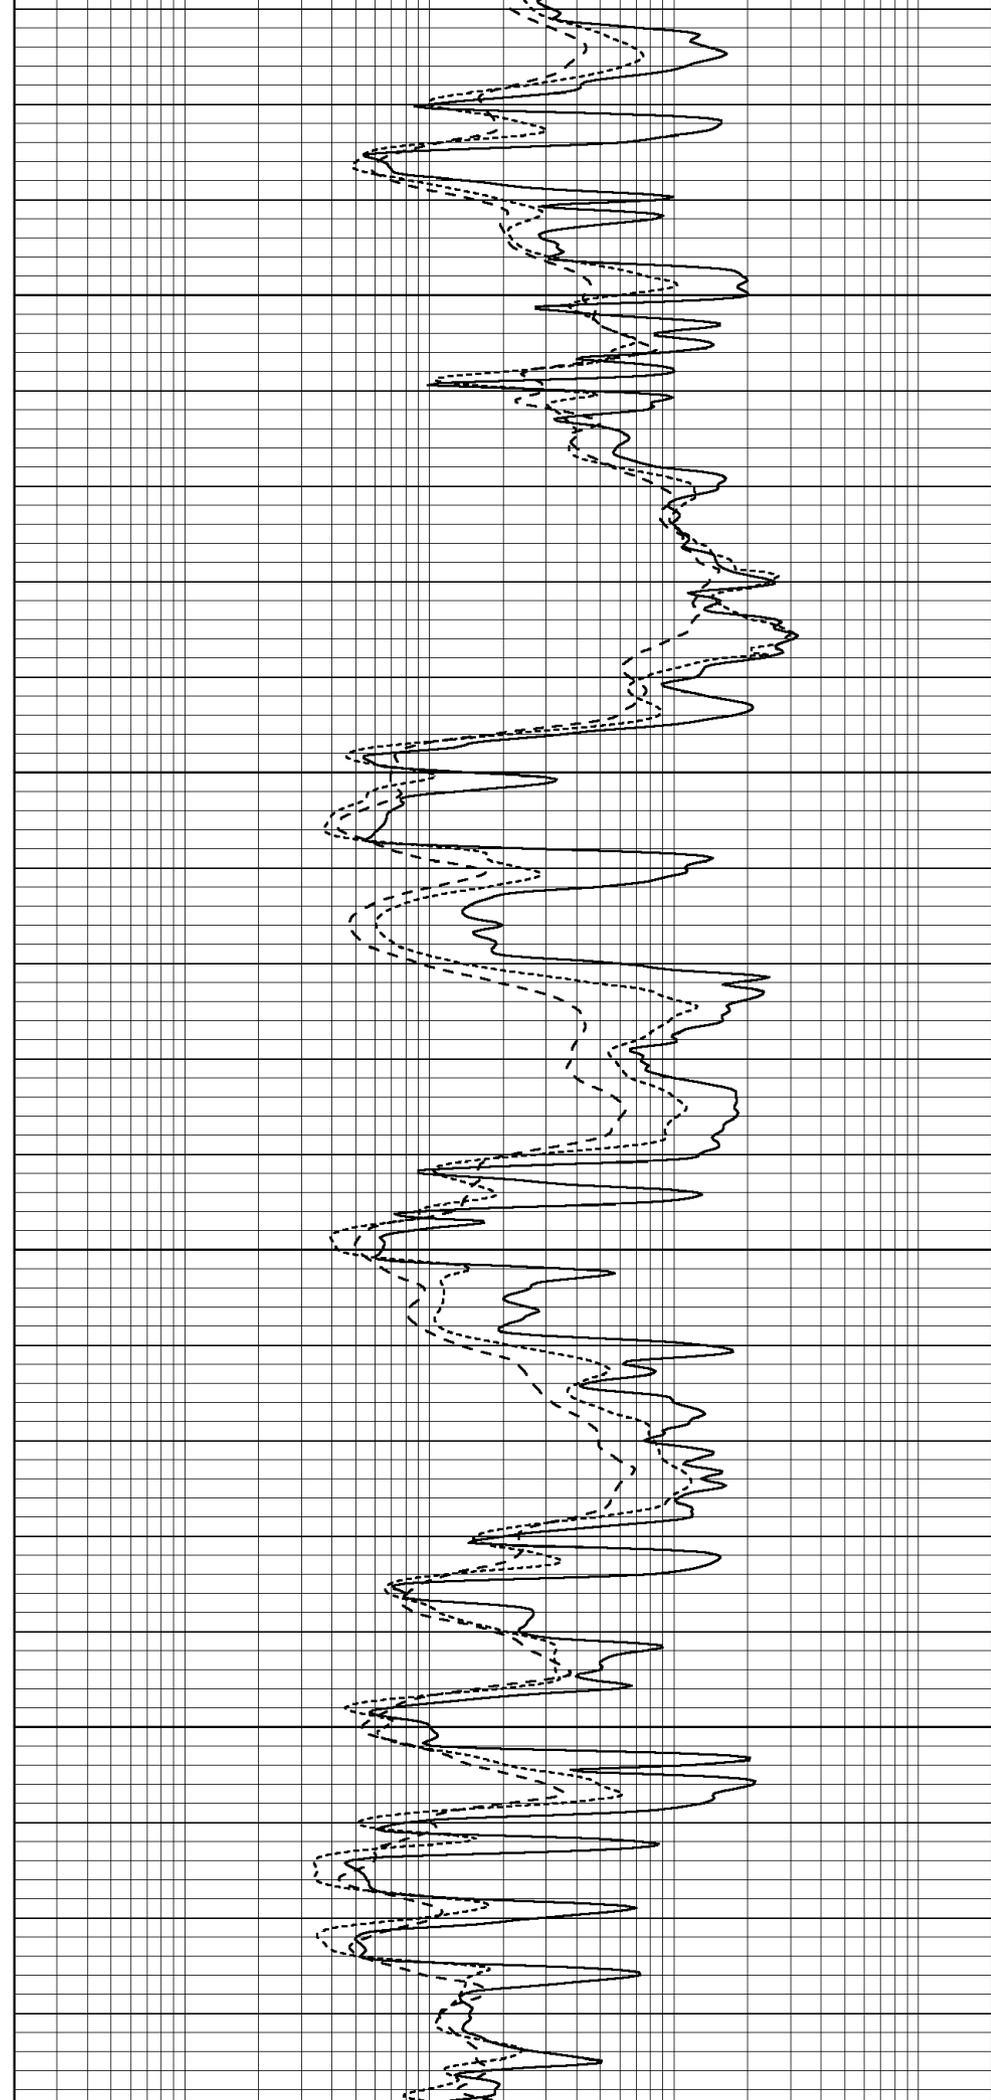

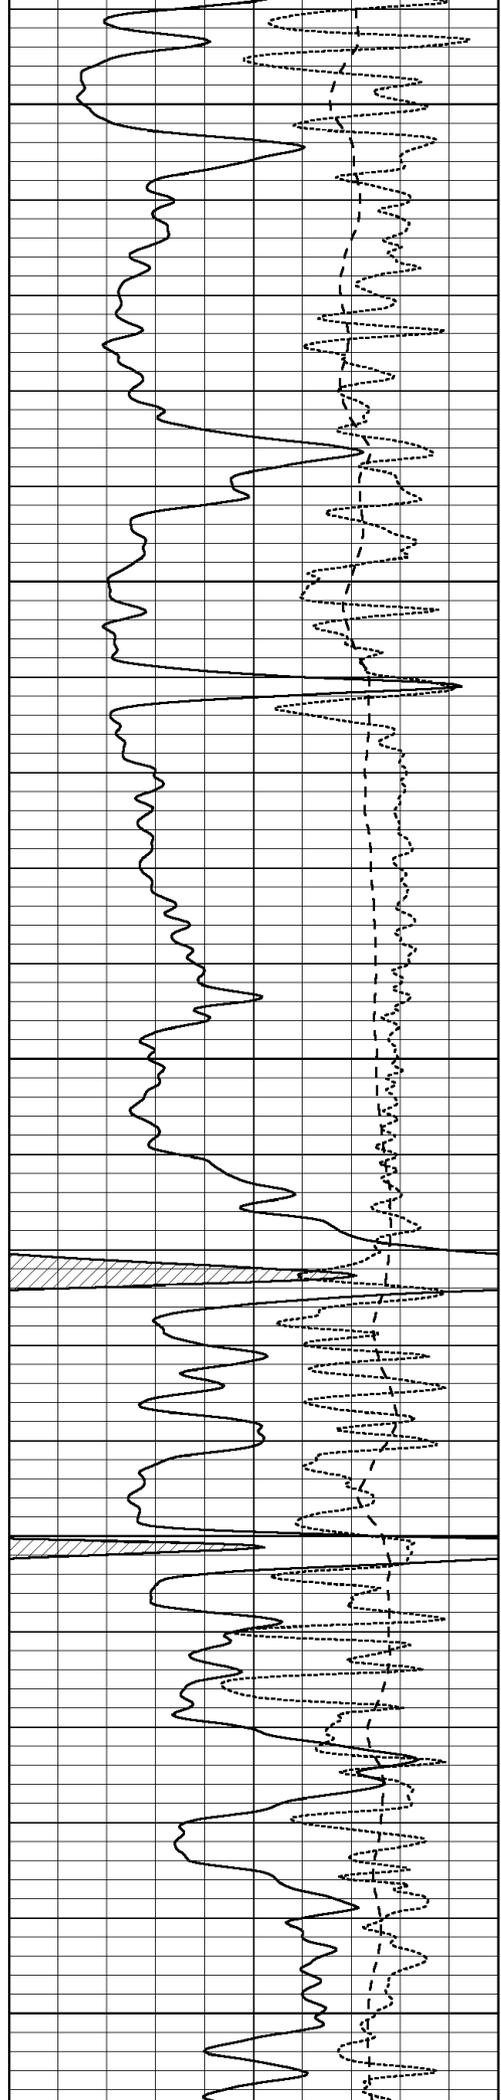


4350


4400

4450

4500

4550

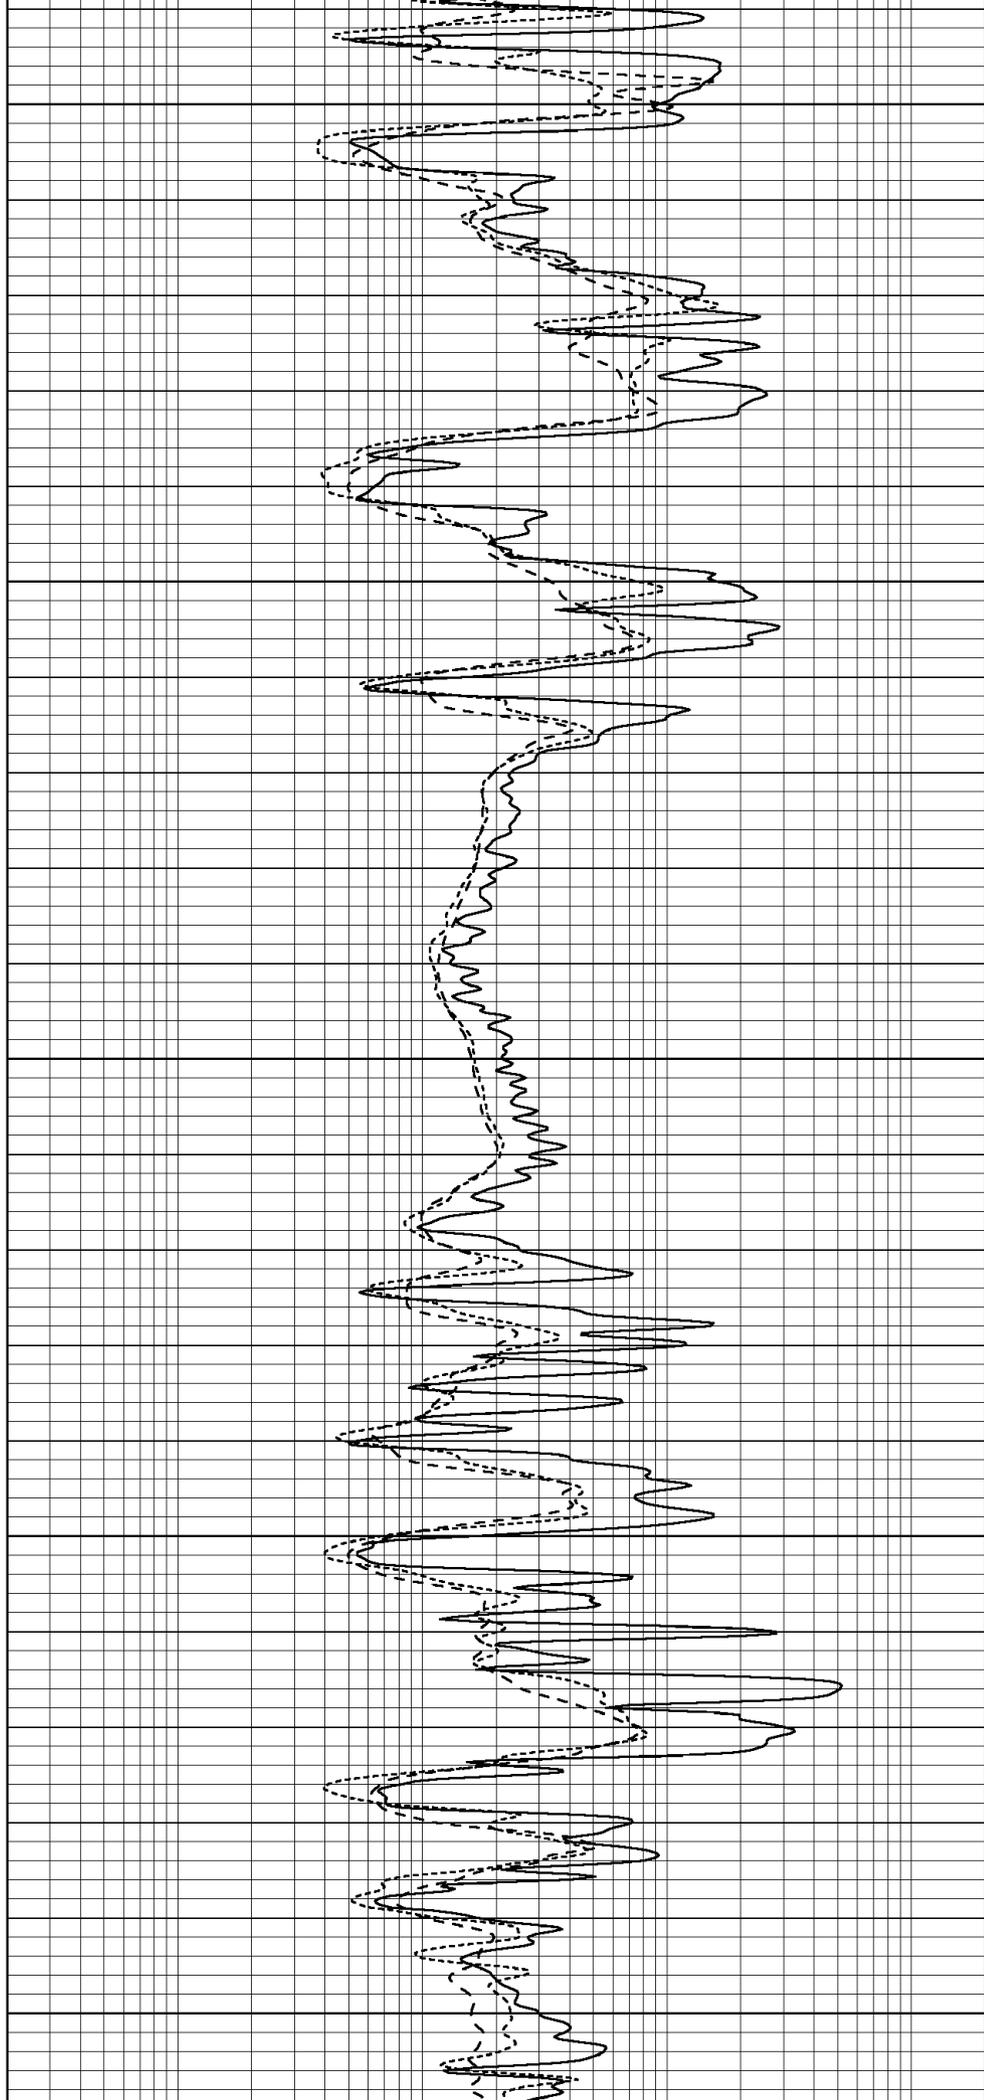

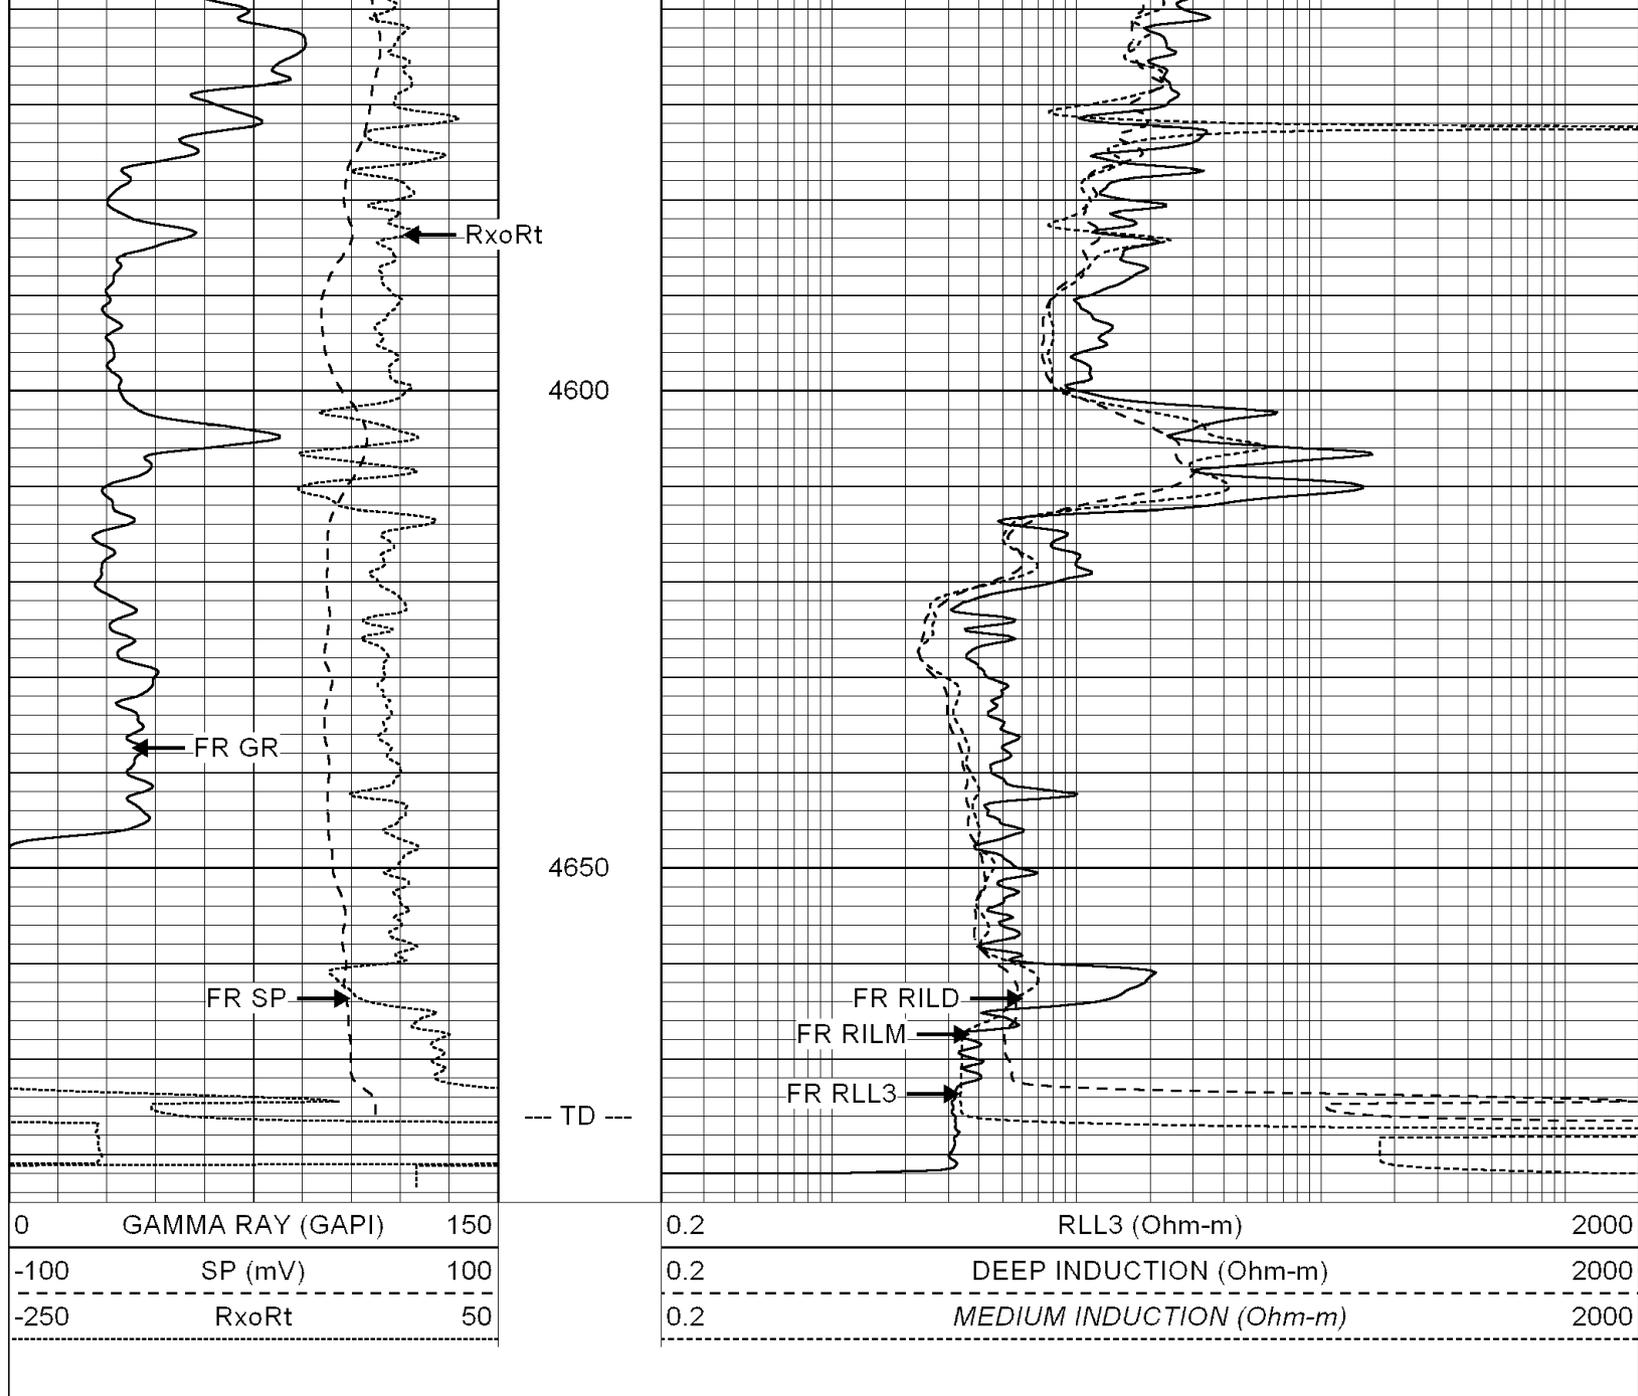



SUPERIOR  
Hays,  
Kansas

# REPEAT SECTION

Database File: 004788ddn.db  
 Dataset Pathname: pass2.A  
 Presentation Format: dil  
 Dataset Creation: Fri Jan 22 17:21:13 2010 by Calc Open-Cased 090629  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	RLL3 (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	RxoRt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000



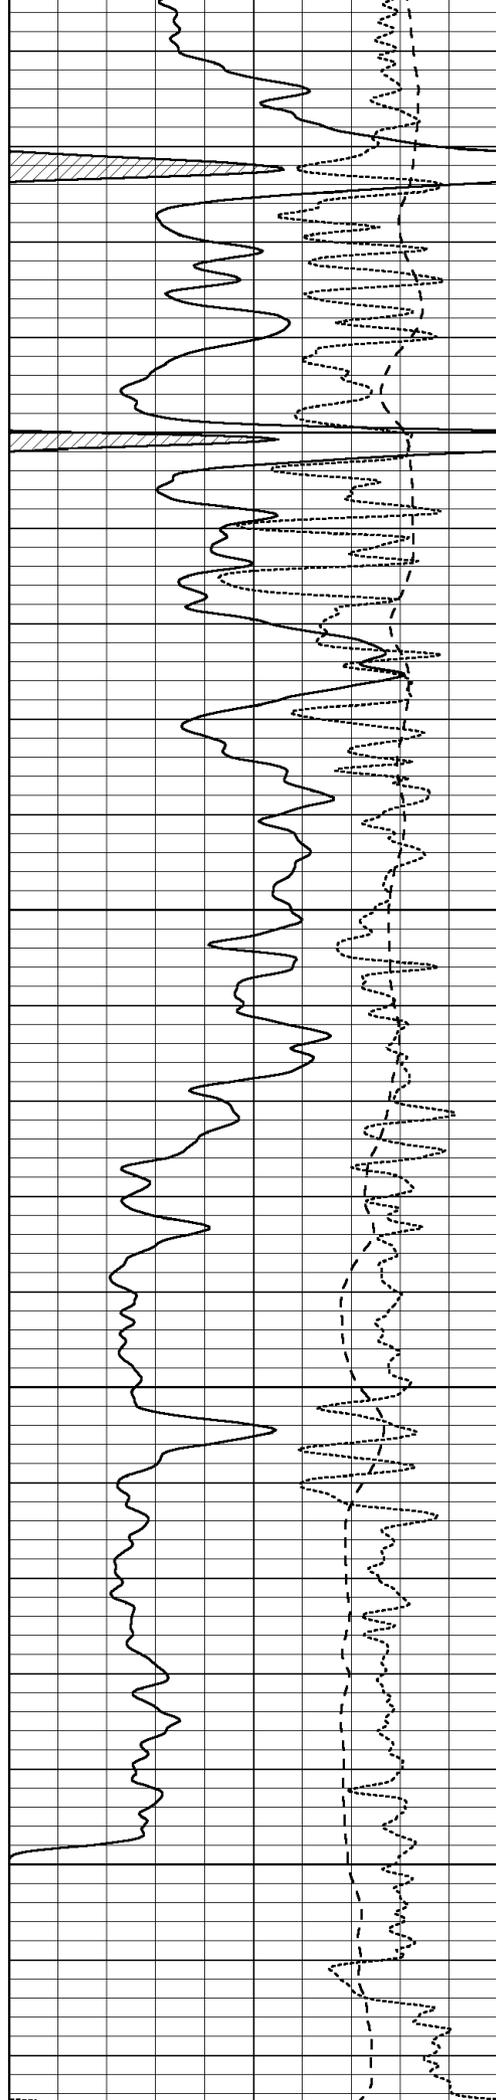


4500

4550

4600

4650

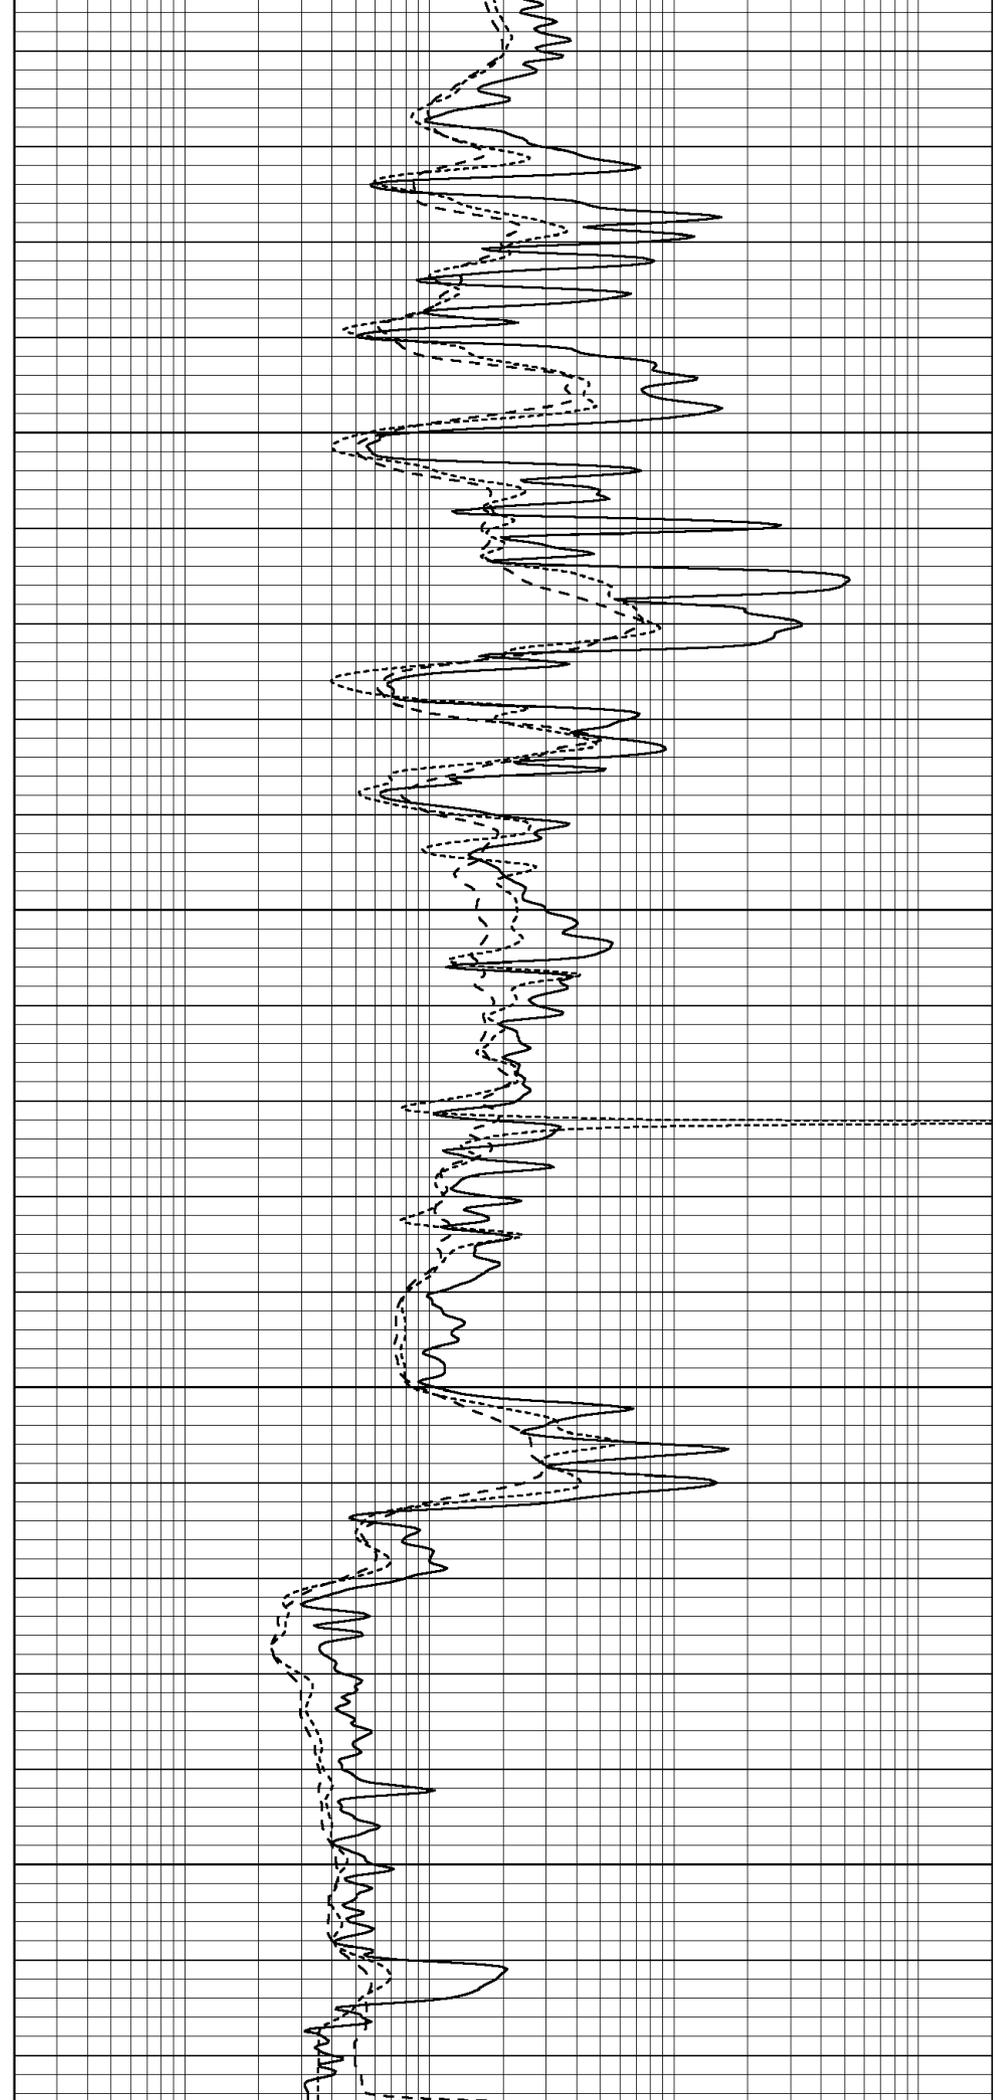

0	GAMMA RAY (GAPI)	150	0.2	RLL3 (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	RxoRt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000

### Calibration Report

Database File: 004788ddn.db  
 Dataset Pathname: pass3.1A  
 Dataset Creation: Fri Jan 22 17:01:23 2010

### Dual Induction Calibration Report

Serial-Model: DIL5-GEAR  
 Performed: Fri Jan 22 15:05:36 2010

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.004	0.654	V	0.000	400.000	mmho/m	560.000	-9.000
Medium	-0.005	0.737	V	0.000	462.500	mmho/m	540.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.006	0.655	V	0.000	400.000	mmho/m	615.668	-3.483
Medium	0.010	0.747	V	0.000	462.500	mmho/m	627.607	-6.064

### Compensated Density Calibration Report

Serial-Model: GEAR1-GEARHART  
 Source / Verifier: 147 / 147  
 Master Calibration Performed: Fri Jan 22 15:40:06 2010

#### Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.710	g/cc	1006.91	528.07	cps
Aluminum	2.600	g/cc	233.49	355.80	cps
Spine Angle = 74.88			Density/Spine Ratio = 0.588		
	Size		Reading		
Small Ring	7.90	in	3.68	V	
Large Ring	14.00	in	6.06	V	

### Compensated Neutron Calibration Report

Serial Number: NEU\_11  
 Tool Model: G

#### CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

### Gamma Ray Calibration Report

Serial Number: GR5

Serial Number: CR3  
Tool Model: OPEN  
Performed: Fri Jan 22 15:30:42 2010

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps  
Calibrator Reading: 1.0 cps

Sensitivity: 0.6000 GAPI/cps