



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-151-22,344-00-00

Company Nash Oil & Gas, Inc.

Well Mabel No. 2

Field Haynesville East Pool

County Pratt State Kansas

Location 330' FSL & 2310' FEL

Sec: 36 Twp: 26S Rge: 11W

Other Services
CNL/CDL
DIL

Elevation

Permanent Datum Ground Level Elevation 1760
Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1767
D.F. 1760
G.L. 1760

Date 10/28/2009

Run Number Two

Depth Driller 4329

Depth Logger 4336

Bottom Logged Interval 4335

Top Log Interval 3300

Casing Driller 8.625 @ 475

Casing Logger 473

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 7.000

Density / Viscosity 9.3 53

pH / Fluid Loss 10.0 9.6

Source of Sample Flowline

Rm @ Meas. Temp .75 @ 65

Rmf @ Meas. Temp .56 @ 65

Rmc @ Meas. Temp 1.01 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT .40 @ 121

Operating Rig Time 3 Hours

Max Rec. Temp. F 121

Equipment Number 10

Location Hays

Recorded By Jason Wellbrock

Witnessed By Scott Alberg


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Preston 1 1/2 S, 4 3/4, E, N Into

Database File: nashhd.db
Dataset Pathname: dil/nash2in
Presentation Format: micro
Dataset Creation: Thu Oct 29 00:17:16 2009
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
2.875	mcal (GAPI)	7.875
-200	SP	0

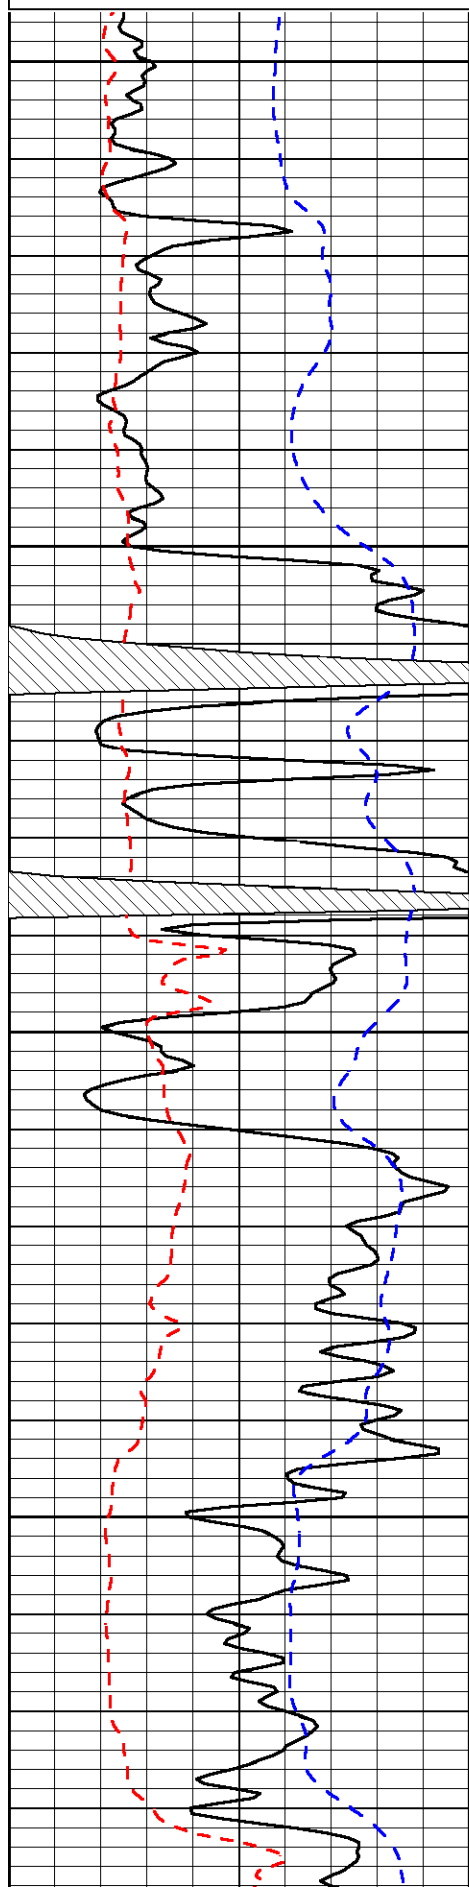


3300

3350

3400

3450

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD


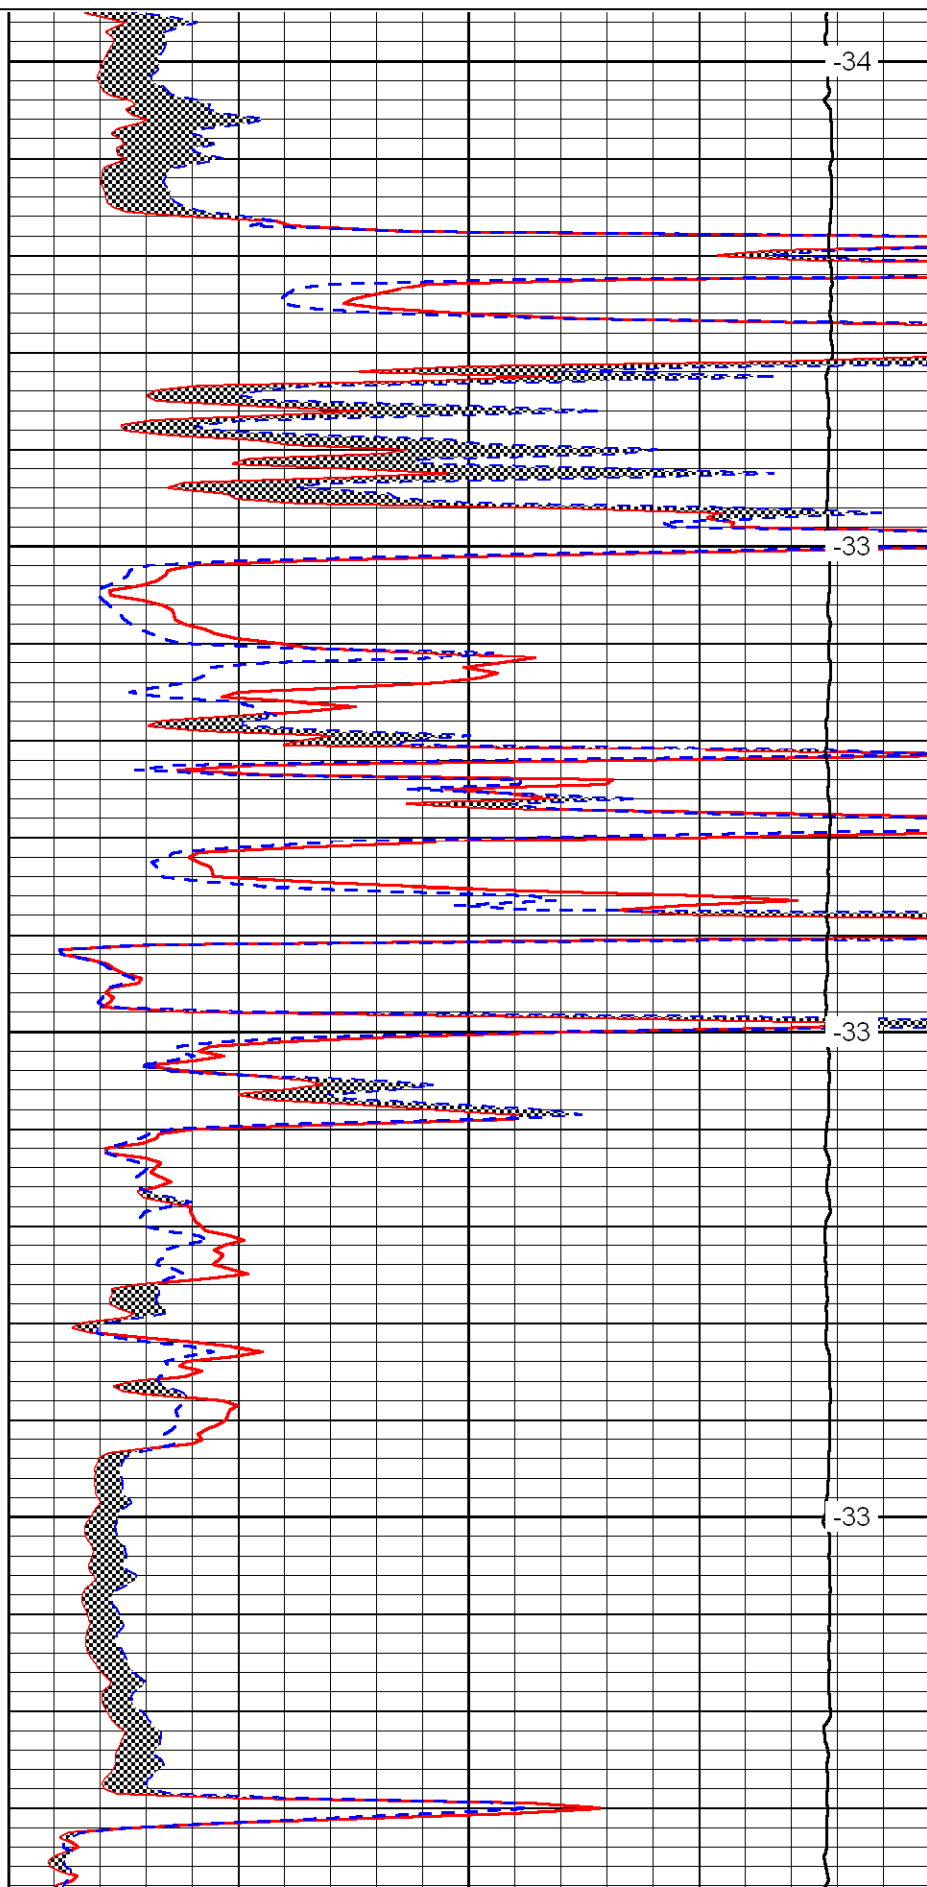



34

33

33

33

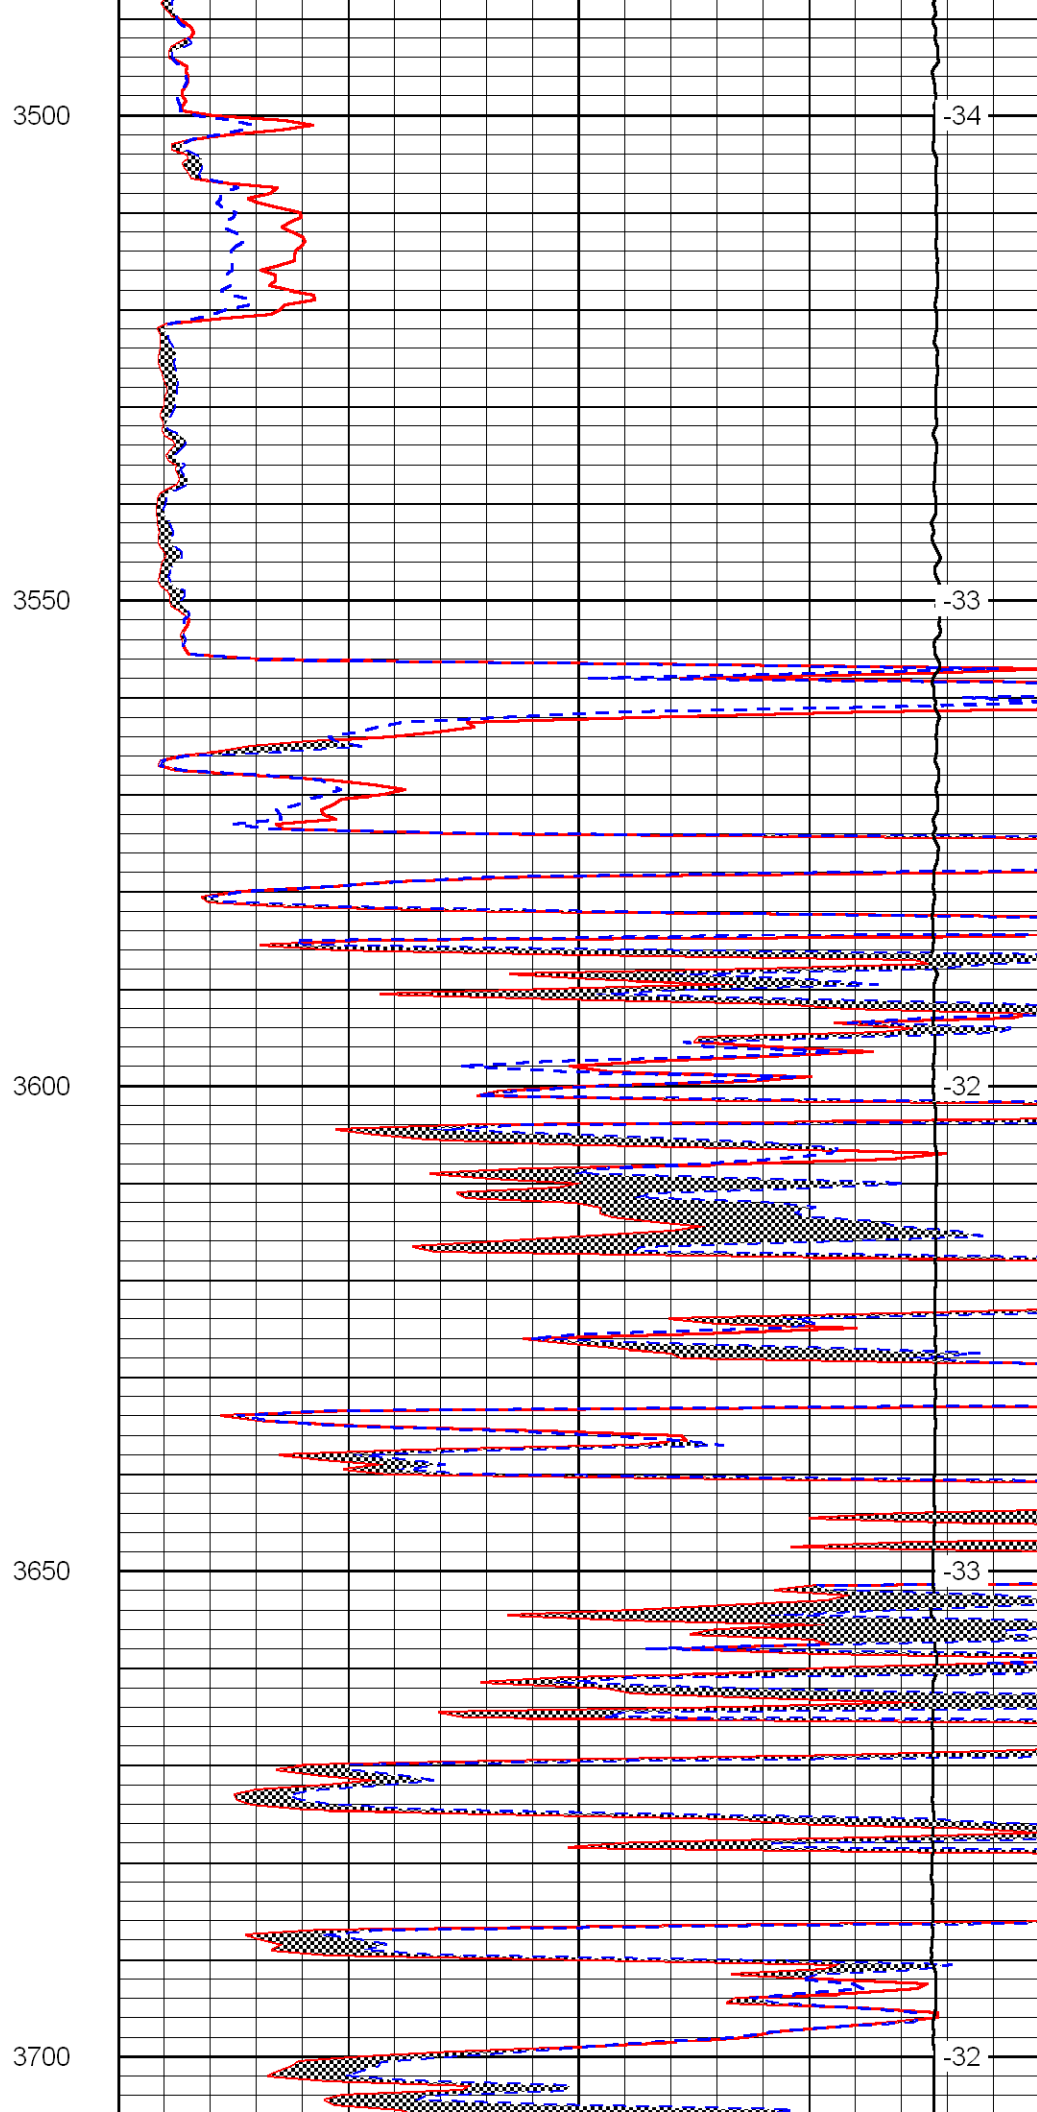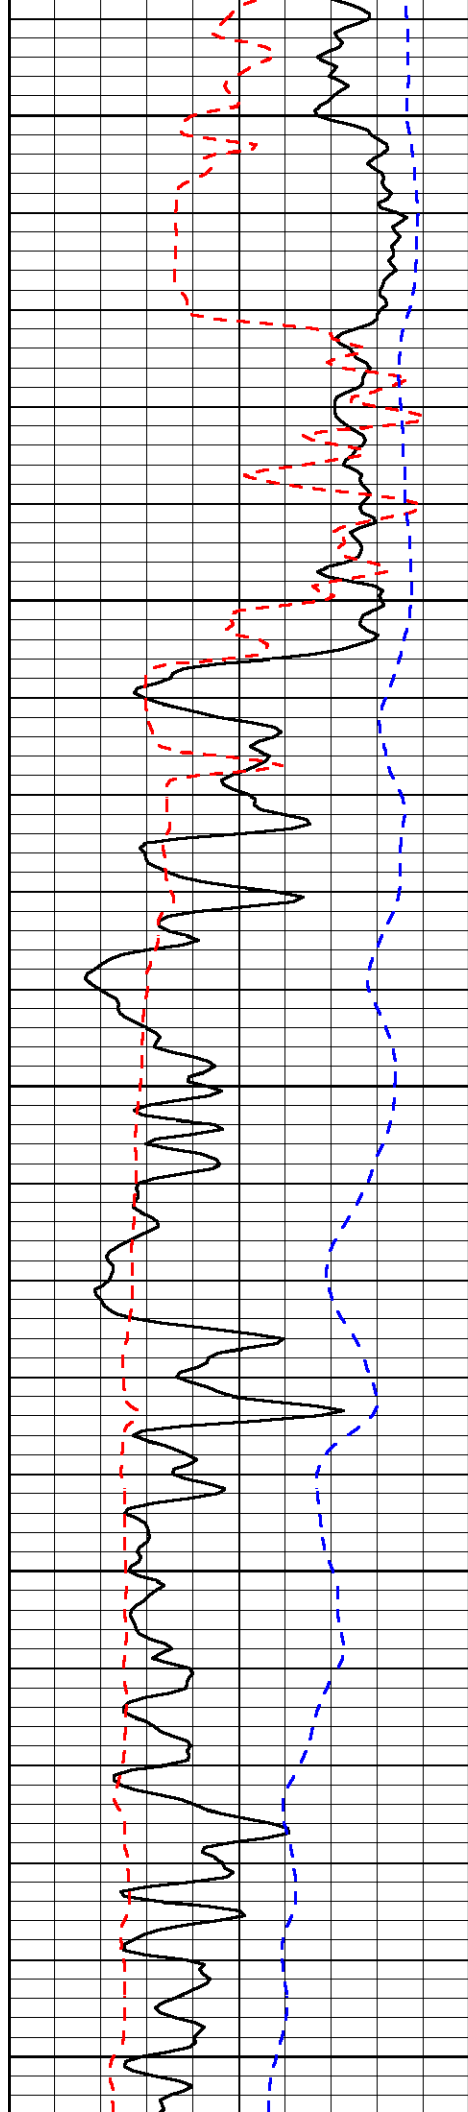

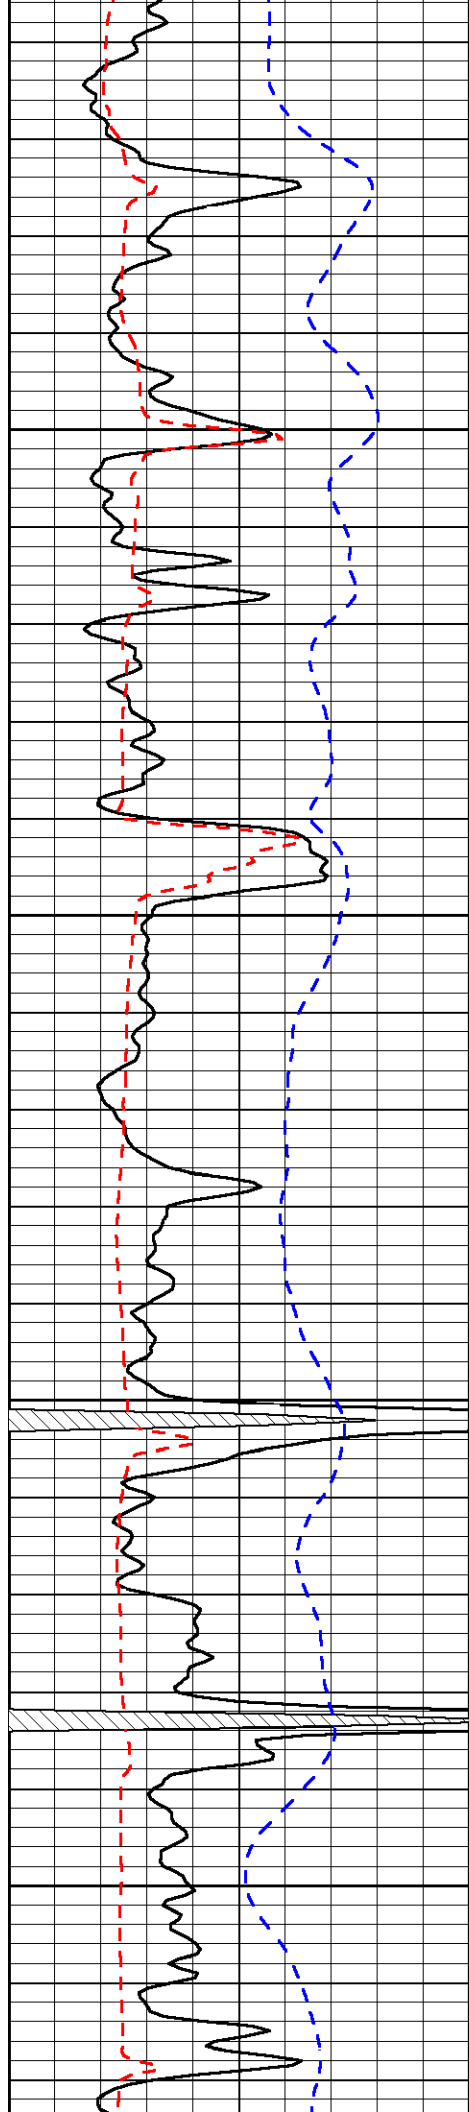


3750

3800

3850

3900

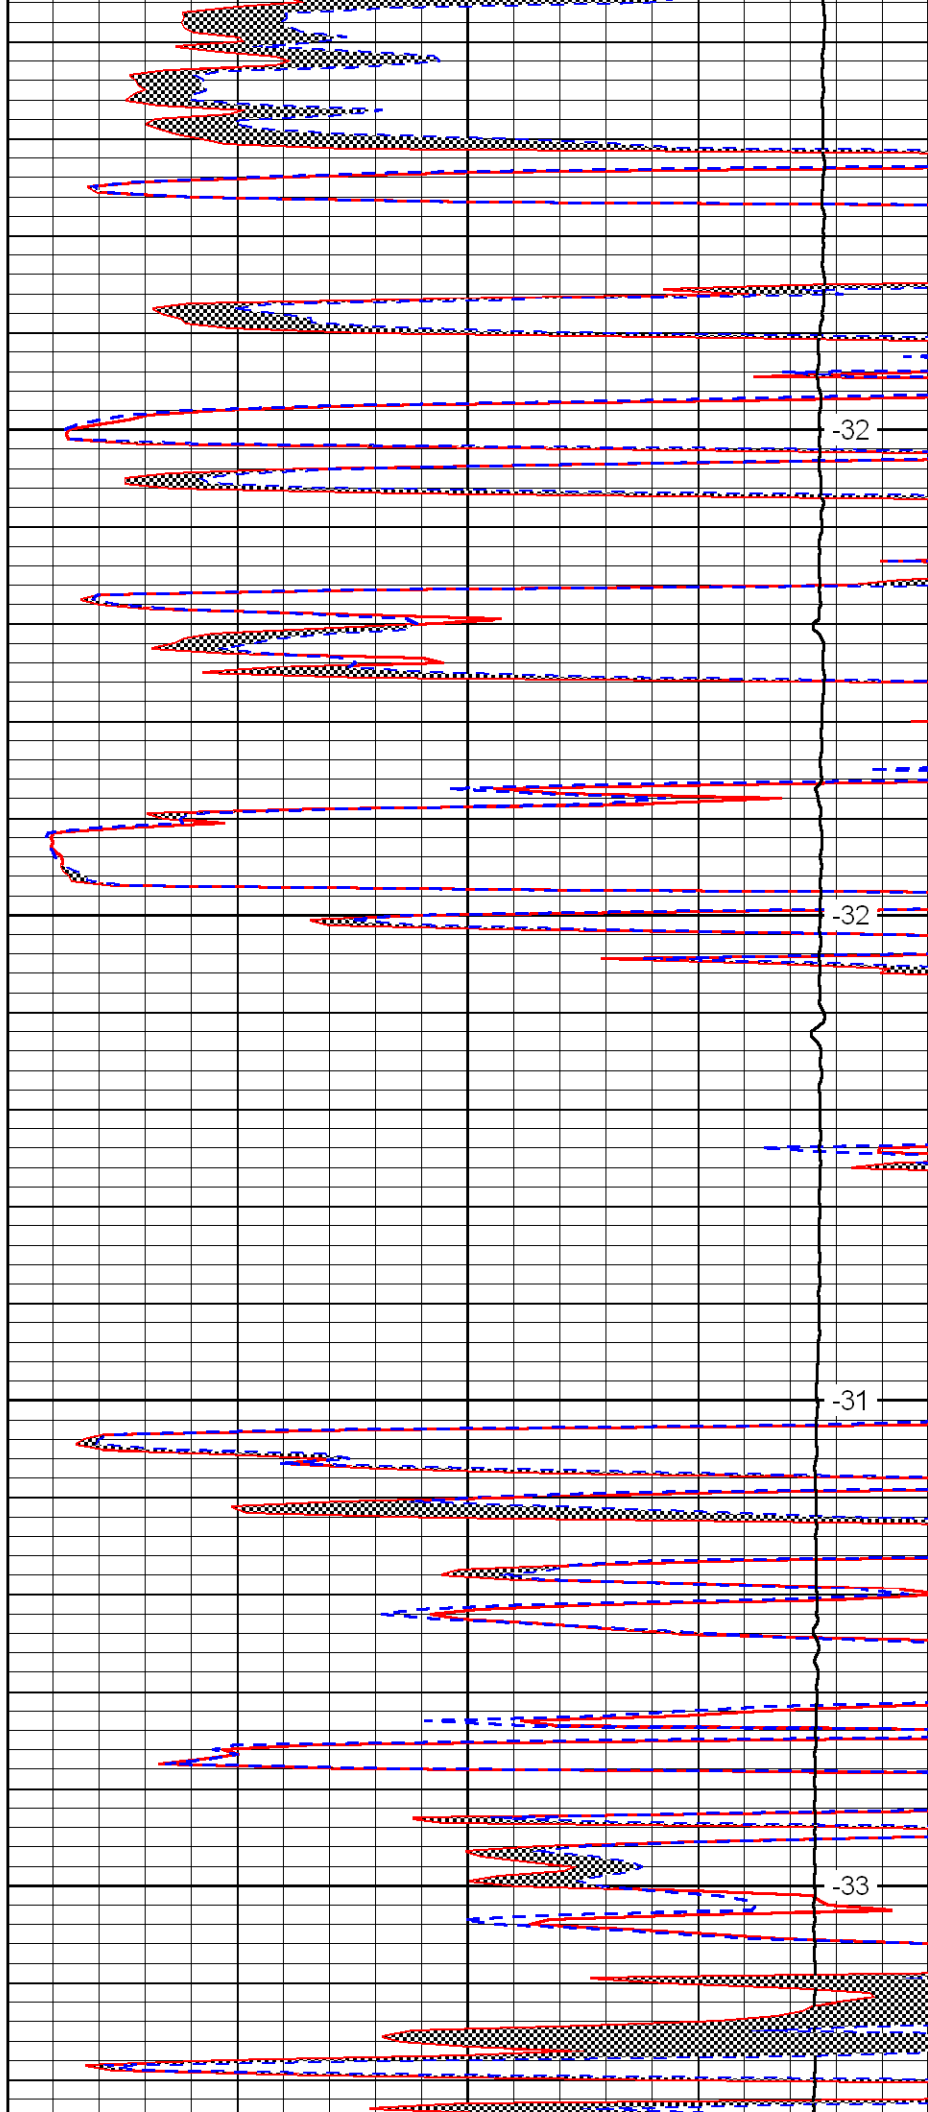


-32

-32

-31

-33

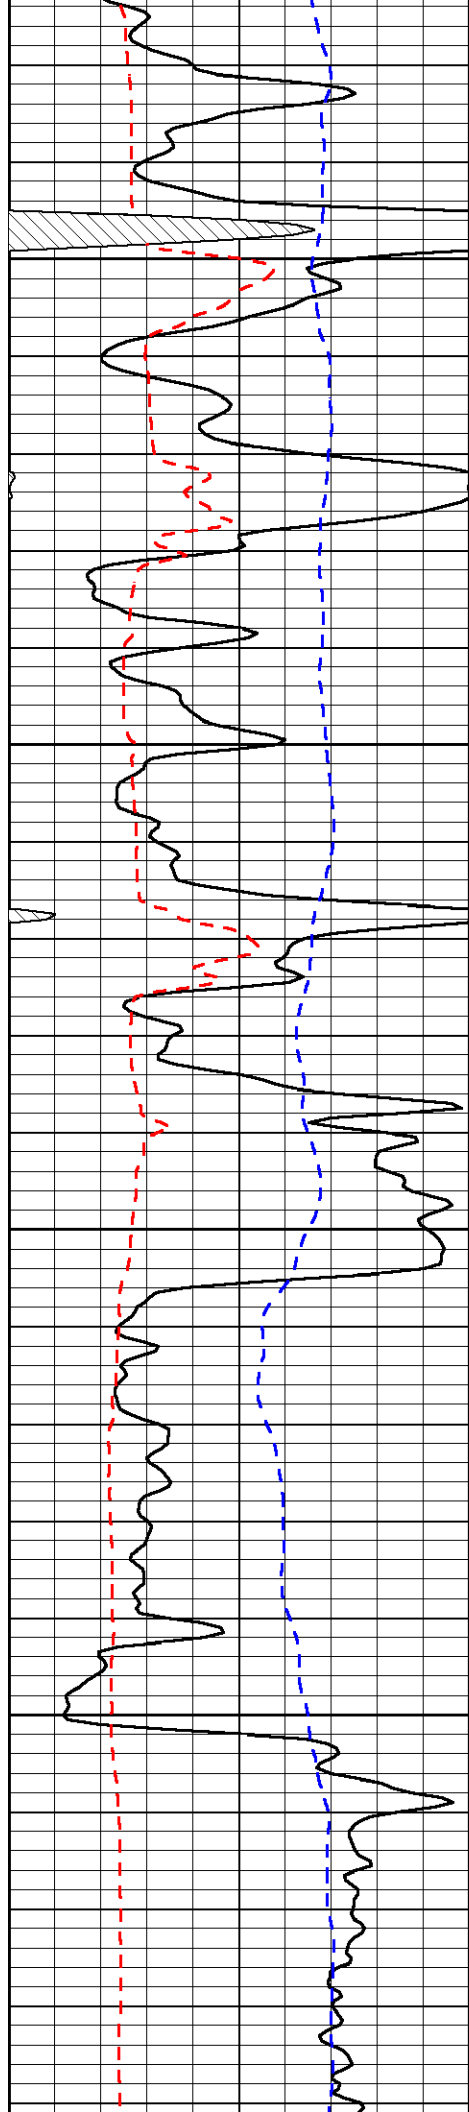




3950

4000

4050

4100

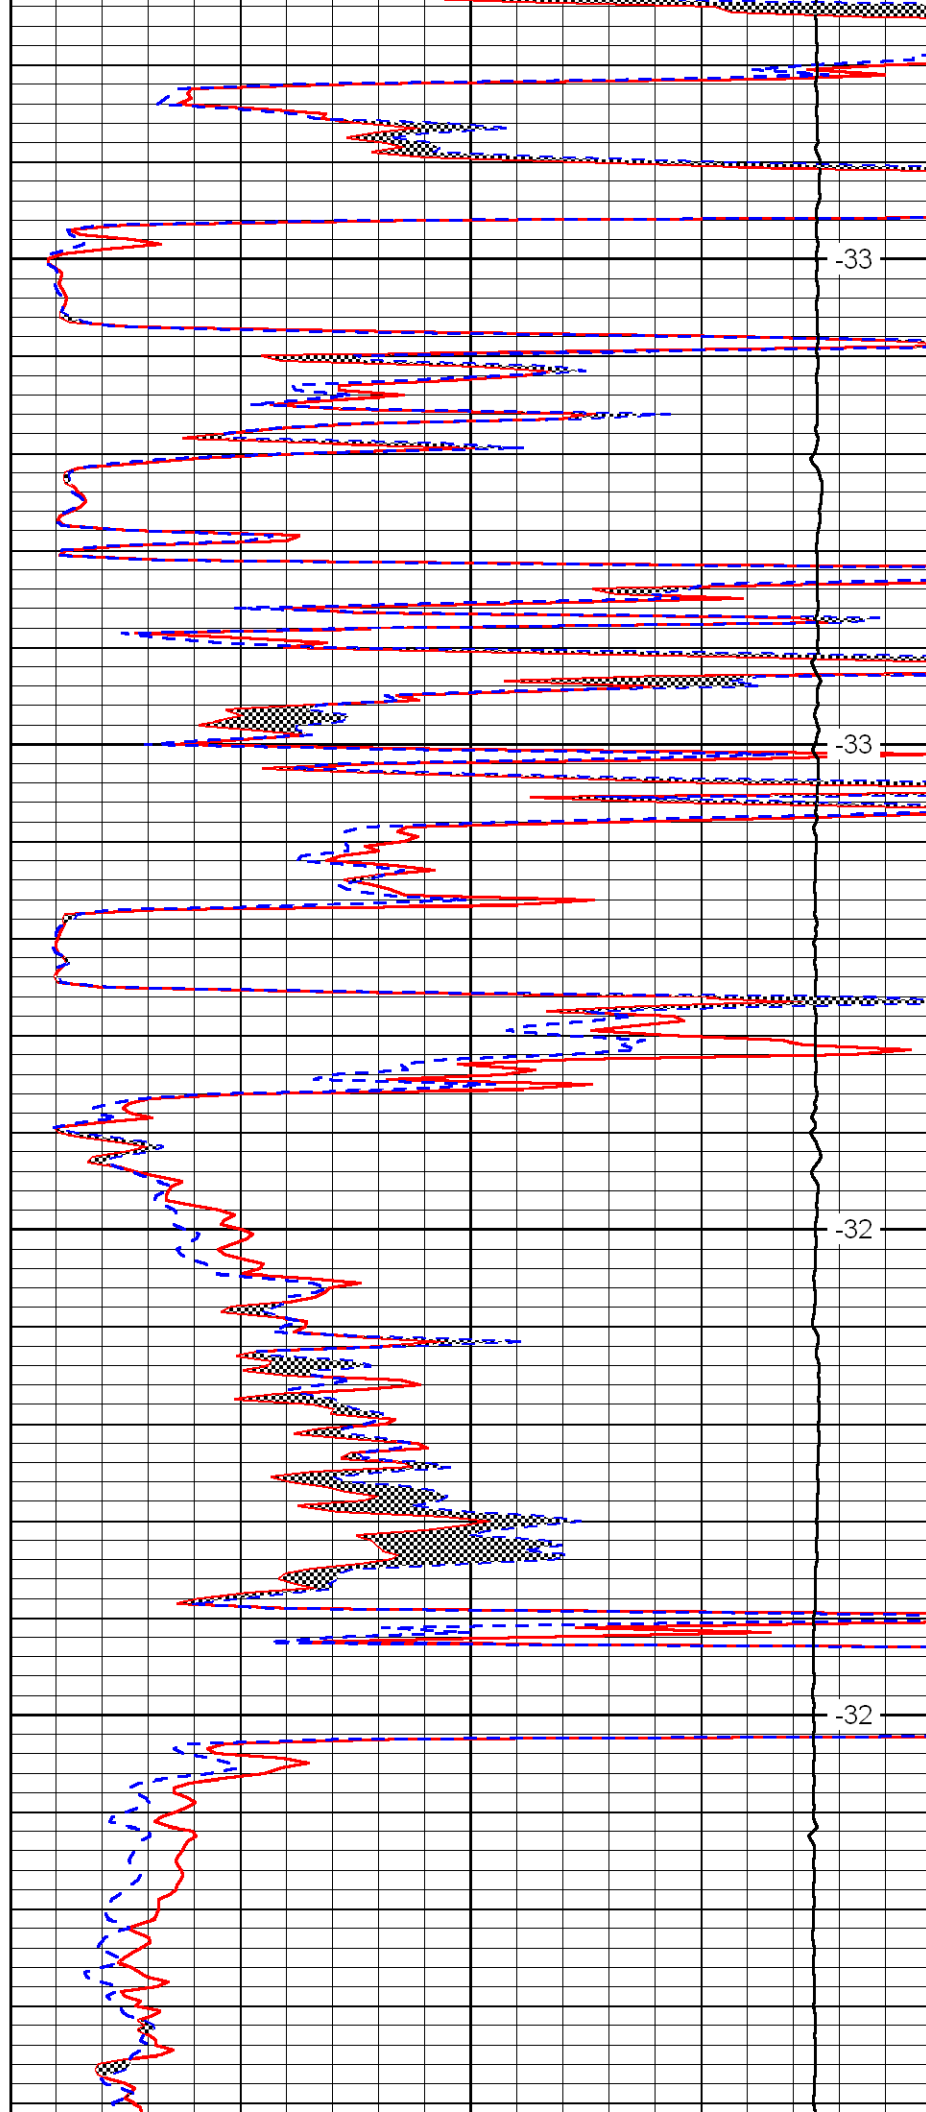

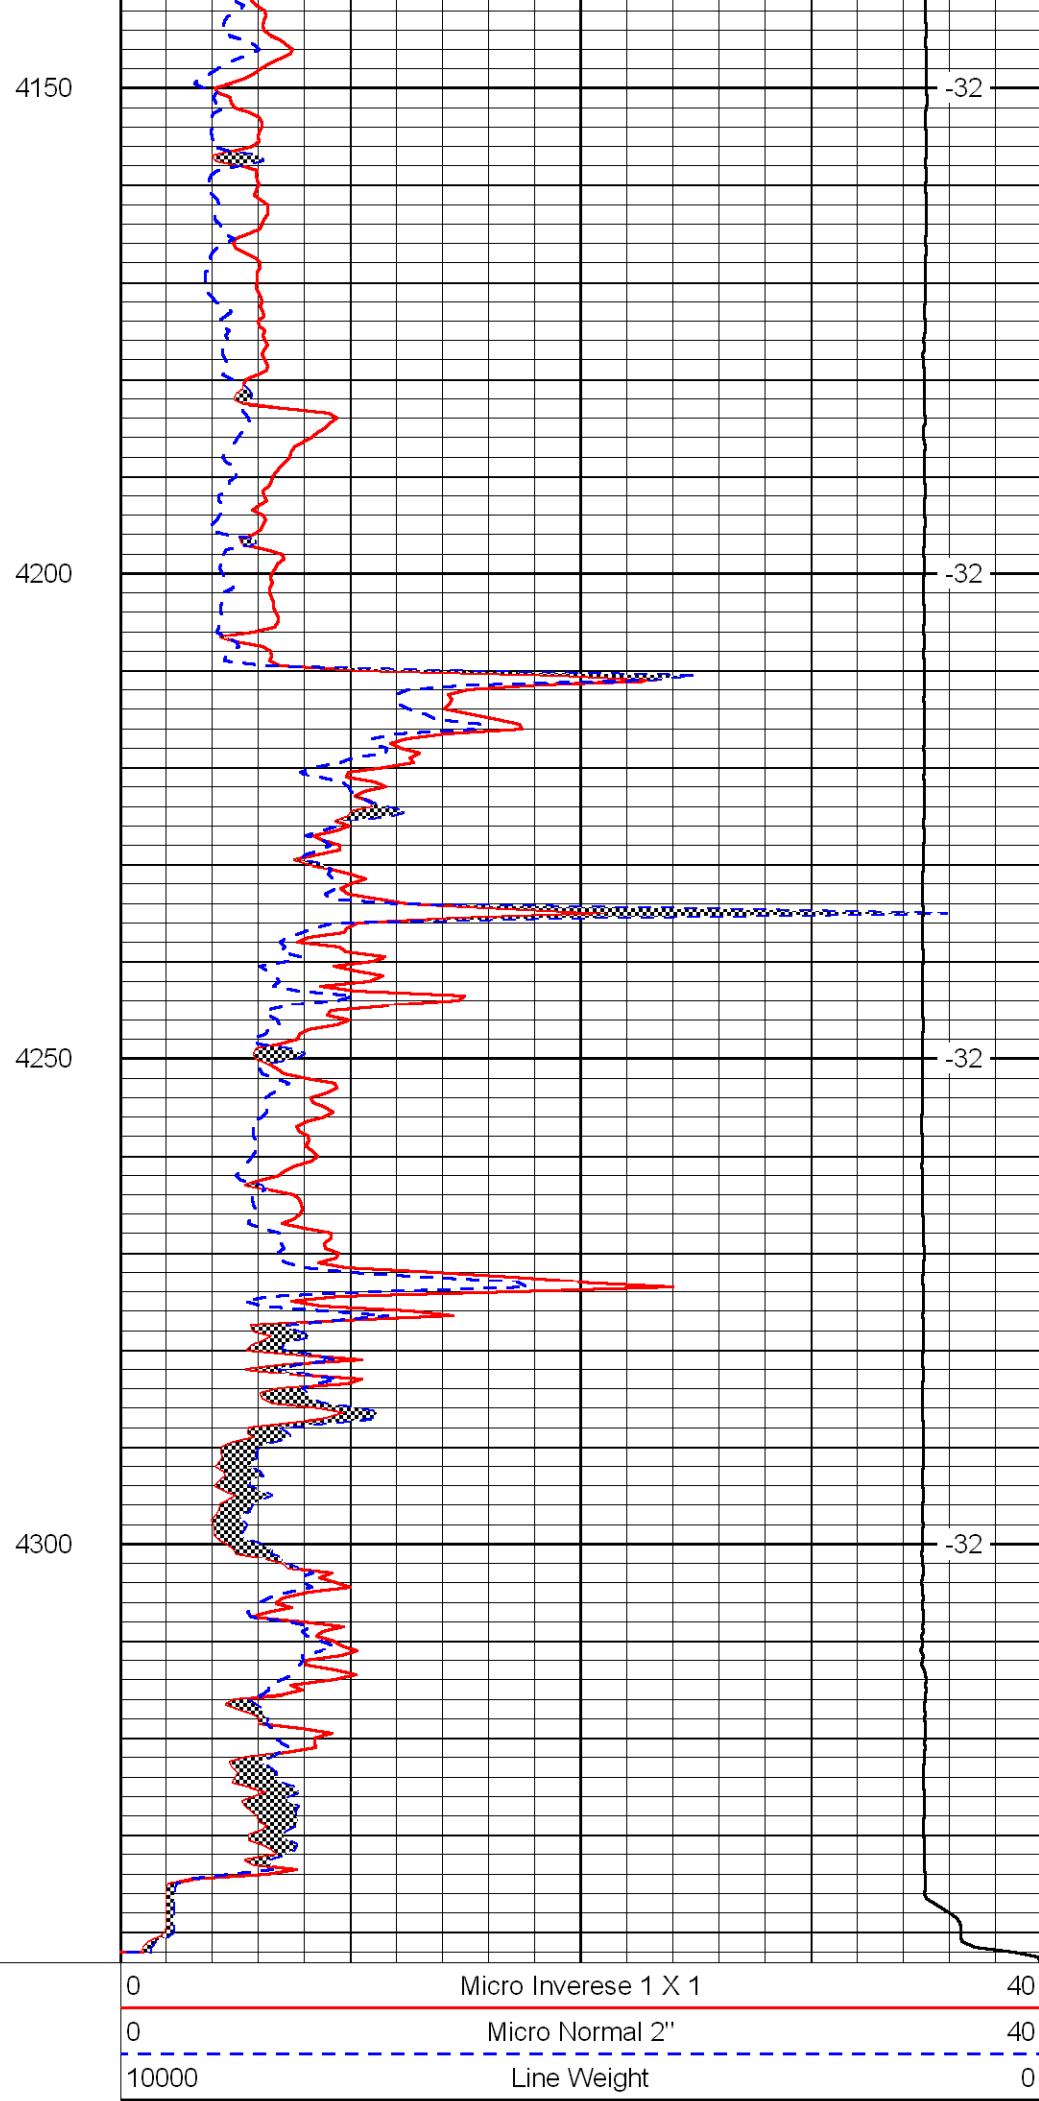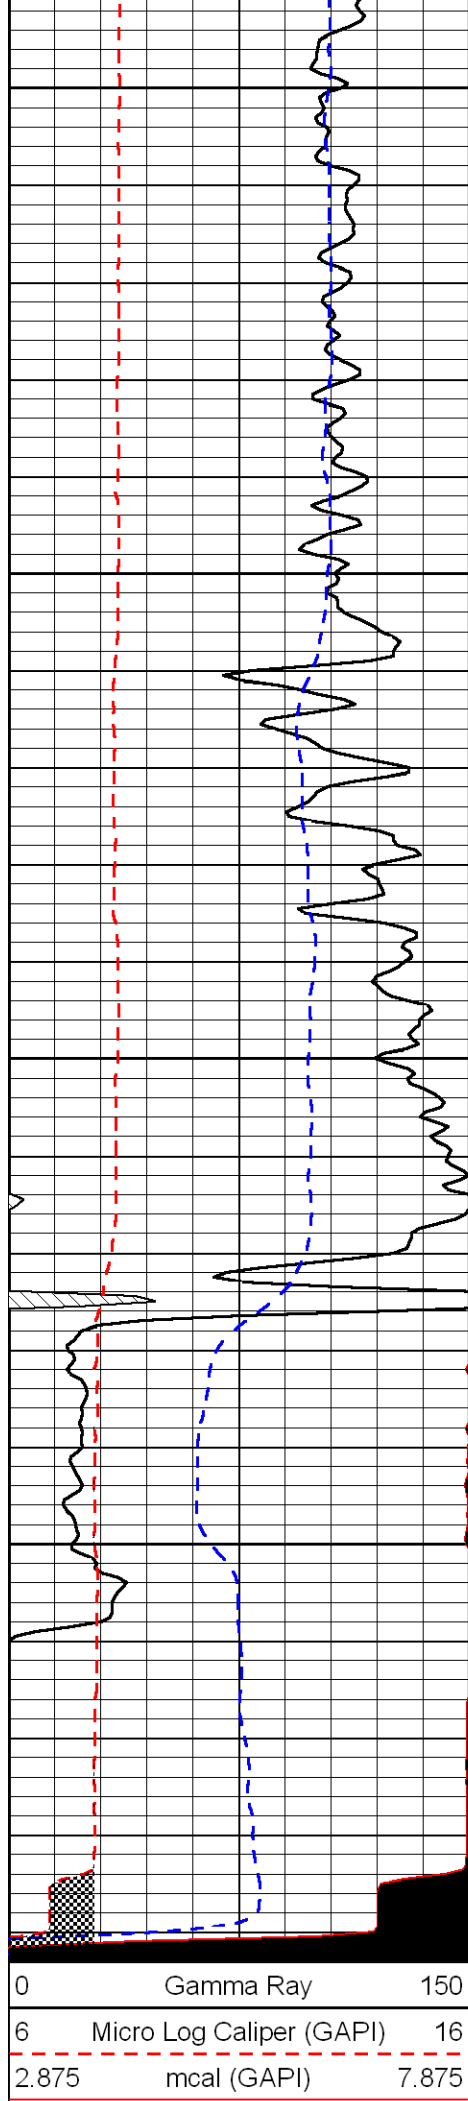

-200 SP 0

LSPD