

P

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
500 INSURANCE BUILDING
212 NORTH MARKET
WICHITA 2, KANSAS

RECEIVED
STATE CORPORATION COMMISSION
DEC 24 1959 12-24-59
CONSERVATION DIVISION
Wichita, Kansas

WELL PLUGGING APPLICATION FORM
File One Copy

15-039-00137-00-00

Lease Owner (Applicant) Burch Drilling Co., Inc.
Address 1011 Union Center, Wichita, Kansas

Lease (Farm Name) Gritz Well No. 1

Well Location SW SW SE Sec. 25 Twp. 5S Rge. 27W (E) (W)

County Decatur Field Name (if any) _____

Total Depth 3910' Oil Well Gas Well Input Well SWD Well D & A X

Was well log filed with application? yes If not, explain: _____

Date and hour plugging is desired to begin 12-18-59

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of person on the lease in charge of well for owner Louis ~~SKXX~~ Schreiber
Address WaKeeney, Kansas

Plugging Contractor Burch Drilling Co., Inc. License No. _____
Address 1011 Union Center, Wichita, Kansas

Invoice covering assessment for plugging this well should be sent to Burch Drilling Co., Inc.
Address aa

and payment will be guaranteed by applicant.

Signed Earl M. Burch
Earl M. Burch, President
Applicant or Acting Agent

Date: December 23, 1959

WELL LOG

Burch Drilling Co., Inc.
 # 1 Gritz
 SW SW SE, Section 25-5S-27W
 Decatur County, Kansas

Set 217' 8 5/8" casing with 165 sacks.
 Commenced: December 12, 1959
 Completed: December 18, 1959
 ELEVATION: 2614 Kelly bushing

D & A

Tops

1722 Shale & Shells
 1760 Shale
 2258 Shale & Sand
 2294 Anhydrite
 2540 Shale
 2654 Shale & Lime
 2840 Shale & Lime Streaks
 3720 Lime & Shale
 3770 Lime
 3830 Lime & Chert
 3910 Lime

ANHYDRITE 2255 (-359)
 HEEBNER 3668 (-1054)
 TORONTO 3693 (-1079)
 LANSING 3708 (-1094)
 BASE KANSAS CITY 3910 (-1296)

DST # 1 3728-3763 Open 1 hour.
 Recovered 25' Mud. IBHP (30 min)
 790#, IFP & FFP 0#, FBHP (30 min)
 360#.

DST # 2 3763-3840. Open 1 hour.
 Recovered 75' watery mud. IBHP
 (30 min) 780#, IFP 25#, FFP 50#,
 FBHP (30 min) 570#.

3910 Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 DEC 24 1959
 CONSERVATION DIVISION
 Wichita, Kansas
 12-24-59

STATE OF KANSAS, COUNTY OF SEDGWICK:

I, Earl M. Burch, President of BURCH DRILLING CO., INC. being duly sworn on oath, state: That I have knowledge of the facts, statements and matters herein contained and that the same are true and correct.

Earl M. Burch

Subscribed and sworn to before me this 23rd day of December, 1959.

Shirley Ann Ann
 Notary Public

My commission expires: March 12, 1963.

State of Kansas



15-039-00137-00-00

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market

WICHITA, KANSAS

JEWEL M. OGDEN, Director

GEORGE DOCKING Governor
HARRY G. WILES Chairman
MARION BEATTY Commissioner
RICHARD C. BYRD Commissioner
RAYMOND B. HARVEY Secretary
J. ROBERT WILSON Counsel

WELL PLUGGING AUTHORITY December 28, 1959

Well No. 1
Lease Gritz
Description SW SW SE 25-5-27W
County Decatur

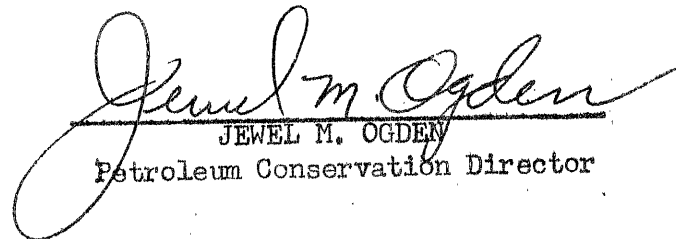
Burch Drilling Co. Inc.
1011 Union Center
Wichita, Kansas

Gentlemen:

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

This authority is void after 90 days from the above date.

Very truly yours,


JEWEL M. OGDEN
Petroleum Conservation Director

Mr. Fabricius
is hereby assigned to supervise the plugging of the above named well.

In the event you need any further information regarding this well feel free to write or call me at any time.

J. Lewis Brock
Western Kansas Field Supervisor
P. O. Box 569
Great Bend, Kansas
Phone: GL-33022