

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION

FORM CP-1

Rev. 03/92

130 S. Market, Room 2078
Wichita, Kansas 67202

WELL PLUGGING APPLICATION FORM

(PLEASE TYPE FORM and File ONE Copy)

API #: 15-095-21938-0000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spu or completion date

WELL OPERATOR: McCoy Petroleum Corporation KCC LICENSE # 5003
(owner/company name) (operator's)

ADDRESS: 8080 E. Central, Suite 300 CITY: Wichita
STATE: Kansas ZIP CODE: 67206 CONTACT PHONE: 316-636-2737
LEASE: Whitmer A WELL#: #3-10 Section 10 Township 30s Range 9w
N/2 S/2 NW SPOT LOCATION/QQQQ COUNTY: Kingman

1650 FEET (in exact footage) FROM North LINE OF SECTION (NOT Lease Line)
1320 FEET (in exact footage) FROM West LINE OF SECTION (NOT Lease Line)

Check One: Oil Well _____ Gas Well _____ D&A XX SWD/ENHR WELL _____ Docket # _____
CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH _____ SACKS
SURFACE CASING SIZE 8-5/8" SET AT 231' KB CEMENTED WITH 250 SACKS
PRODUCTION CASING SIZE None SET AT _____ CEMENTED WITH _____ SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS:
ELEVATION 1664 G.L. 1673 K.B. T.D. 4294 PBD _____ Anhydrite Depth ??
(Stone Corral Formation)
CONDITION OF WELL: GOOD XX POOR _____ CASING LEAK _____ JUNK IN HOLE _____

PROPOSED METHOD OF PLUGGING:
Plugged well on 01/16/05 as follows: Heavy mud in hole and between all plugs. Plugged using 120 sx of 60/40 Poz,
4% Gel . Bottom plug at 1400'/ 35 sx, 2nd plug at 300'/35 sx, top plug at 60'/25 sx cemented to surface,
rathole with 15 sx, mousehole 10 sx. Plugging completed at 11:30 am on 01/16/05. Acid Services ticket #9186.
Received plugging orders on 01/14/05 at 2:00 pm from Dave Wertz. Sterling will notify KCC of plugging on 01/18/05.
IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes (YES,NO) IS ACO-1 FILED? ? (YES,NO)
If not explain why _____

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:
Name: Lanny Saloga/Gary M. Talbott Phone#: (620) 672-9508
Address: P.O. Box 1006 City: Pratt State: Kansas
PLUGGING CONTRACTOR : Sterling Drilling Company KCC LICENSE #: 5142
(company name) (contractor's)
Address: P.O. Box 1006 City: Pratt State: Kansas Zip 67124

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) Plugged well at 1:00 am on May 30, 2002.
PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY: Operator X Agent _____

DATE: 01/16/05 AUTHORIZED OPERATOR OR AGENT: Gary M. Talbott
(signature) Gary M. Talbott, Agent for Operator

RECEIVED
JAN 18 2005
KCC WICHITA

Sterling Drilling Company, Rig #4

Box 1006, Pratt, Kansas 67124-1006
Office Phone (620) 672-9508, Fax 672-9509

SAMPLE LOG

Whitmer A #3-10

LOCATION: N/2 S/2 NW Section 10 T 30s R 9w
API: 15-095-21938-0000 Kingman County, Kansas

OWNER: McCoy Petroleum Corporation
CONTRACTOR: Sterling Drilling Company, Rig #4

COMMENCED: 01/08/05
COMPLETED: 01/16/05

TOTAL DEPTH: DRILLER 4294 FEET
LOGGER No Log FEET

Ground Elevation: 1664
KB Elevation: 1673

LOG

0 -	1 FEET	Top Soil
1 -	6 FEET	Clay
6 -	20 FEET	Sand and Gravel
20 -	68 FEET	Sandy Clay
68 -	175 FEET	Sand, Gravel and Clay
175 -	1650 FEET	Shales and Salt
1650 -	4294 FEET	Limestone/Shales

CASING RECORDS

Surface Casing:

Spud at 9:15 pm on 01/08/05. Drilled 12-1/4" hole to 235'. Ran 5 joints of new 24# 8-5/8" surface casing tally 219.69' set at 230.69' KB. Cemented with 250 sx 60/40 Poz, 2% Gel, 3% CC, 1/4#/sx Celloflake. Plug down at 4:30 pm on 01/08/05 by Acid Services, ticket #9467. Cement did circulate. Welded straps on bottom 2 jts, of SP, then tacked collars on next 3 joints.

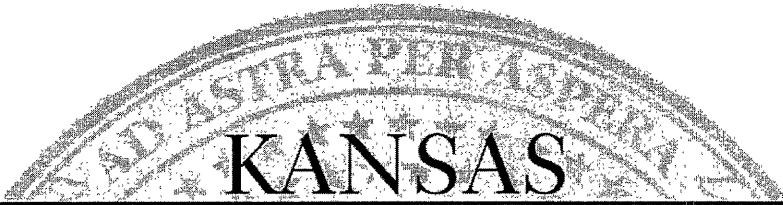
Plugging Data:

Plugged well on 01/16/05 as follows: Heavy mud in hole and between all plugs. Plugged using 120 sx of 60/40 Poz, 4% Gel. Bottom plug at 1400'/35 sx, 2nd plug at 300'/35 sx, top plug at 60'/25 sx cemented to surface, rathole with 15 sx, mousehole 10 sx. Plugging completed at 11:30 am on 01/16/05. Acid Services ticket #9186. Received plugging orders on 01/14/05 at 2:00 pm from Dave Wertz. Sterling will notify KCC of plugging on 01/18/05.

DEVIATION SURVEYS

3/4 degree(s) at 235 feet
1/2 degree(s) at 4284 feet

RECEIVED
JAN 18 2005
KCC WICHITA

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

McCoy Petroleum Corporation
8080 E. Central, Suite 300
Wichita, KS 67206

January 19, 2005

Re: WHITMER A #3-10
API 15-095-21938-00-00
N2S2NW 10-30S-9W, 1650 FNL 1320 FWL
KINGMAN COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #2
3450 N. Rock Road, Suite 601
Wichita, KS 67226
(316) 630-4000

Sincerely

David P. Williams
Production Supervisor