

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 129-20633-DD-DD (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 6/8/82

Well Operator: Colorado Interstate Gas Company KCC License #: 7117
(Owner / Company Name) (Operator's)

Address: P. O. Box 1087 City: Colorado Springs

State: Colorado Zip Code: 80944 Contact Phone: (719) 520 - 4557

Lease: Boehm Well #: 43 Sec. 16 Twp. 33 S. R. 42 East West

NE - SE Spot Location / QQQQ County: Morton

1,980' Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

660 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: Gas Storage Well

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8" Set at: 1,377' GL Cemented with: 900 Sacks

Production Casing Size: 5-1/2" Set at: 4,980' GL Cemented with: 1,025 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs: 4,910'-4,916'
All depths GL.

Elevation: 3,502' (G.L. / K.B.) T.D.: 4,984' P.B.T.D.: 4,950' Anhydrite Depth: 1,367'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): _____

See Attachment.

RECEIVED

JAN 18 2005

KCC WICHITA

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: David Veatch

Phone: (970) 376 - 1273

Address: P. O. Box 615 City / State: Fort Morgan, CO 80723

Plugging Contractor: Eagle Services, Inc. KCC License #: 7407
(Company Name) (Contractor's)

Address: 1661 West 7, Liberal, KS 67901 Phone: (620) 482 - 5637

Proposed Date and Hour of Plugging (if known?): Unknown

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 1/12/05 Authorized Operator / Agent: Anthony P. [Signature]
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

Boehm 43

15-129-20633-00-00

Needs KCC approval

Set CIBP at 4885'

Spot 10 to 20 sk cmt plug on CIBP

Use water between plugs inside production casing

Lay down tubing

WOC then tag w/ wireline to verify


Perforate casing at 1427'

Circulate cement to surface from 1427', leave 50' cement in casing.

Spot 10 sx cement plug at surface

Cut off casing and weld cap

RECEIVED
JAN 18 2005
KCC WICHITA

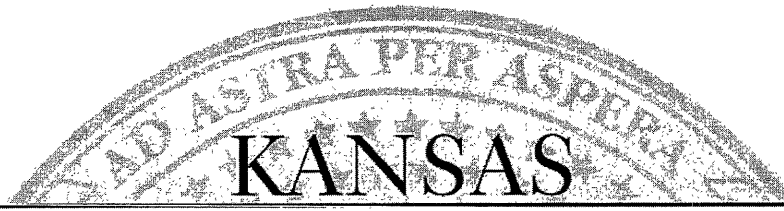

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Colorado Interstate Gas Company
PO Box 1087
Colorado Springs, CO 80944

January 19, 2005

Re: BOEHM #43
API 15-129-20633-00-00
NESE 16-33S-42W, 1980 FSL 660 FEL
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor