



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Murfin Drilling Co., Inc.		
	Well Niedens No. 1-6		
	Field Wildcat		
	County Ford	State	Kansas
15-069-20,689-00-00	Location	2055' FSL & 780' FWL	
	Sec: 6	Twp: 26 S	Rge: 24 W
	Permanent Datum	Ground Level	Elevation 2522
	Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum
	Drilling Measured From	Kelly Bushing	
Date		7/13/2010	
Run Number		Two	
Depth Driller		5130	
Depth Logger		5116	
Bottom Logged Interval		5115	
Top Log Interval		2500	
Casing Driller		8.625 @ 463	
Casing Logger		460	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		5.500	
Density / Viscosity		9.3 50	
pH / Fluid Loss		9.0 11.2	
Source of Sample		Flowline	
Rm @ Meas. Temp		.65 @ 70	
Rmf @ Meas. Temp		.49 @ 70	
Rmc @ Meas. Temp		.88 @ 70	
Source of Rmf / Rmc		Charts	
Rm @ BHT		.35 @ 129	
Operating Rig Time		6 Hours	
Max Rec. Temp. F		129	
Equipment Number		4	
Location		Hays	
Recorded By		K. Bange	
Witnessed By		Brad Rine	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

E edge of Dodge City (Flying J), 5 N on 113 rd to Garnett rd, 1 W, 1/2 S, E into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

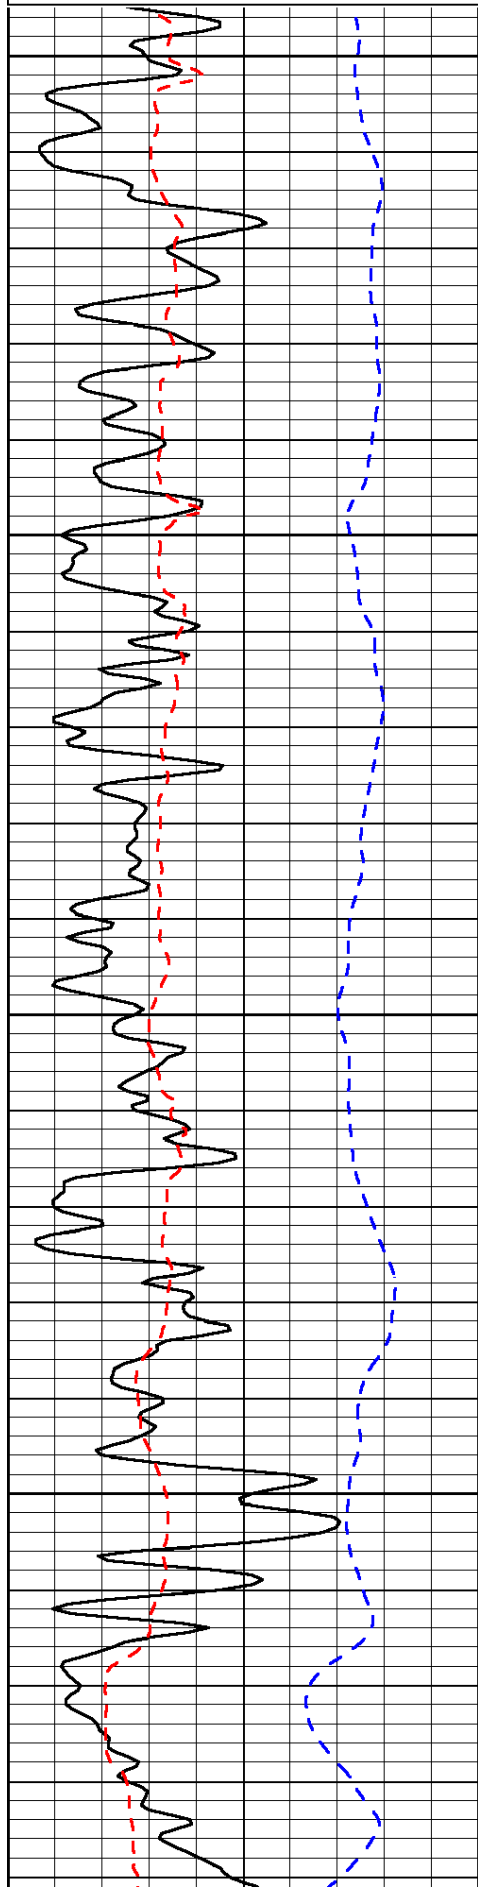


2500



2550


2600

2650

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

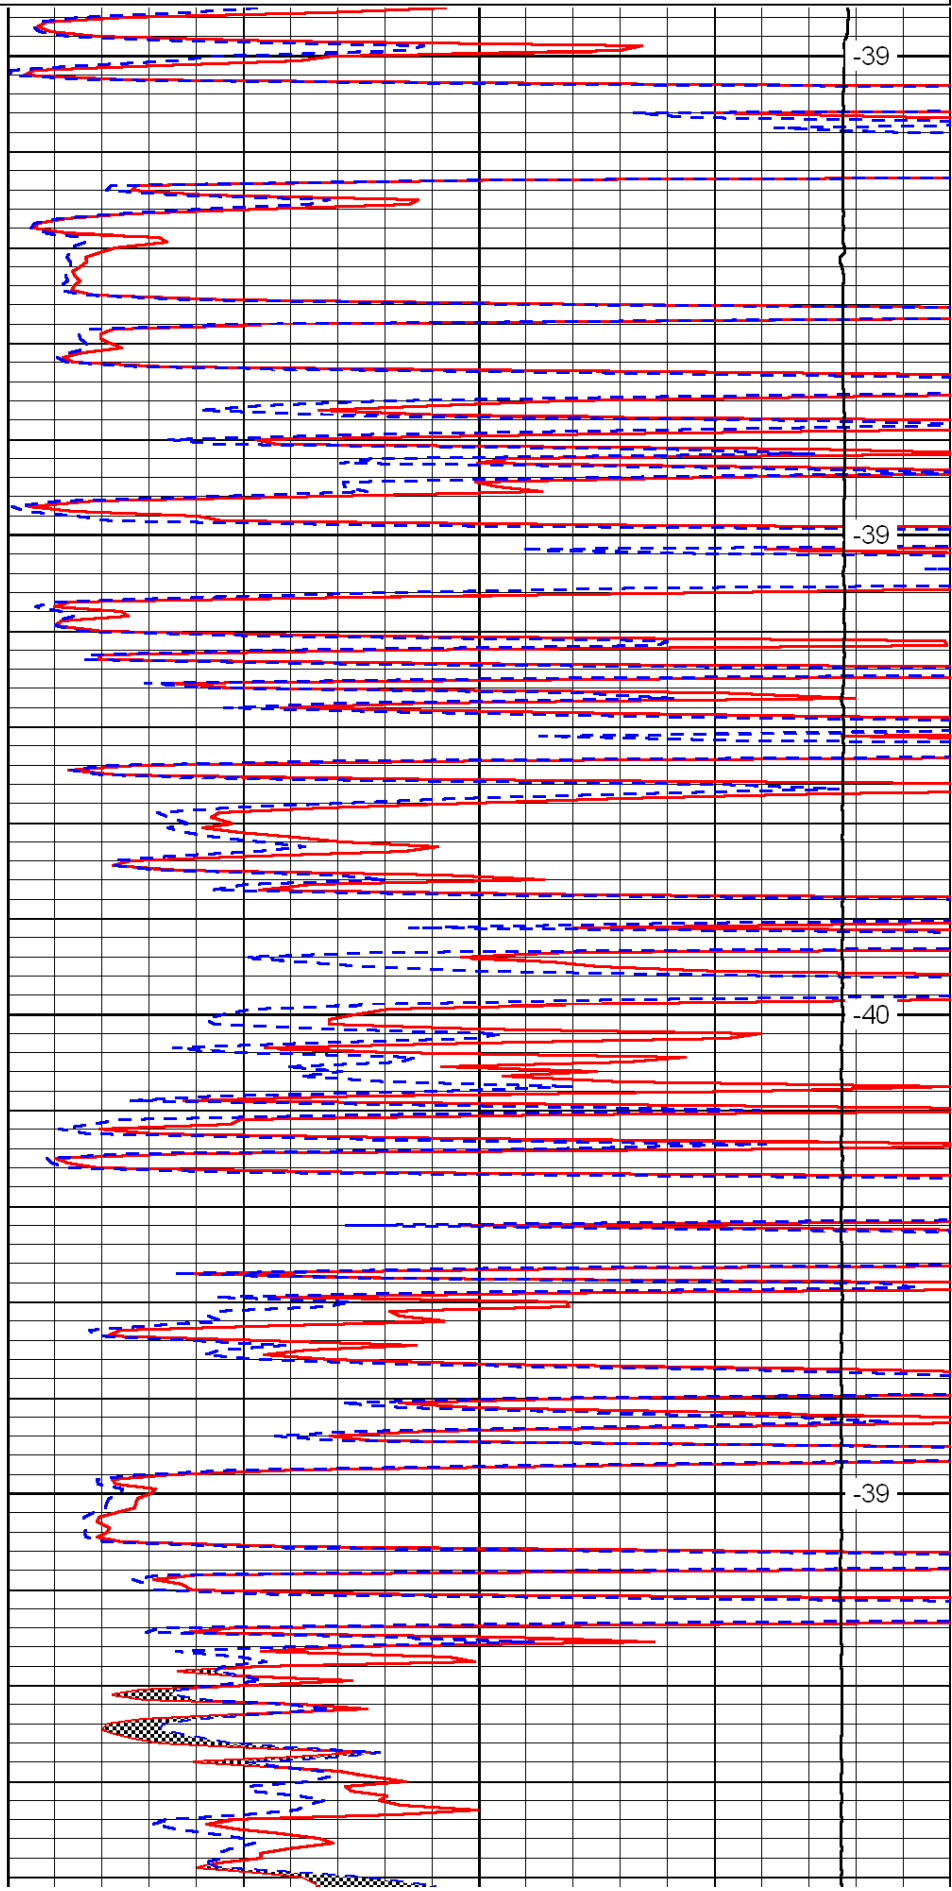

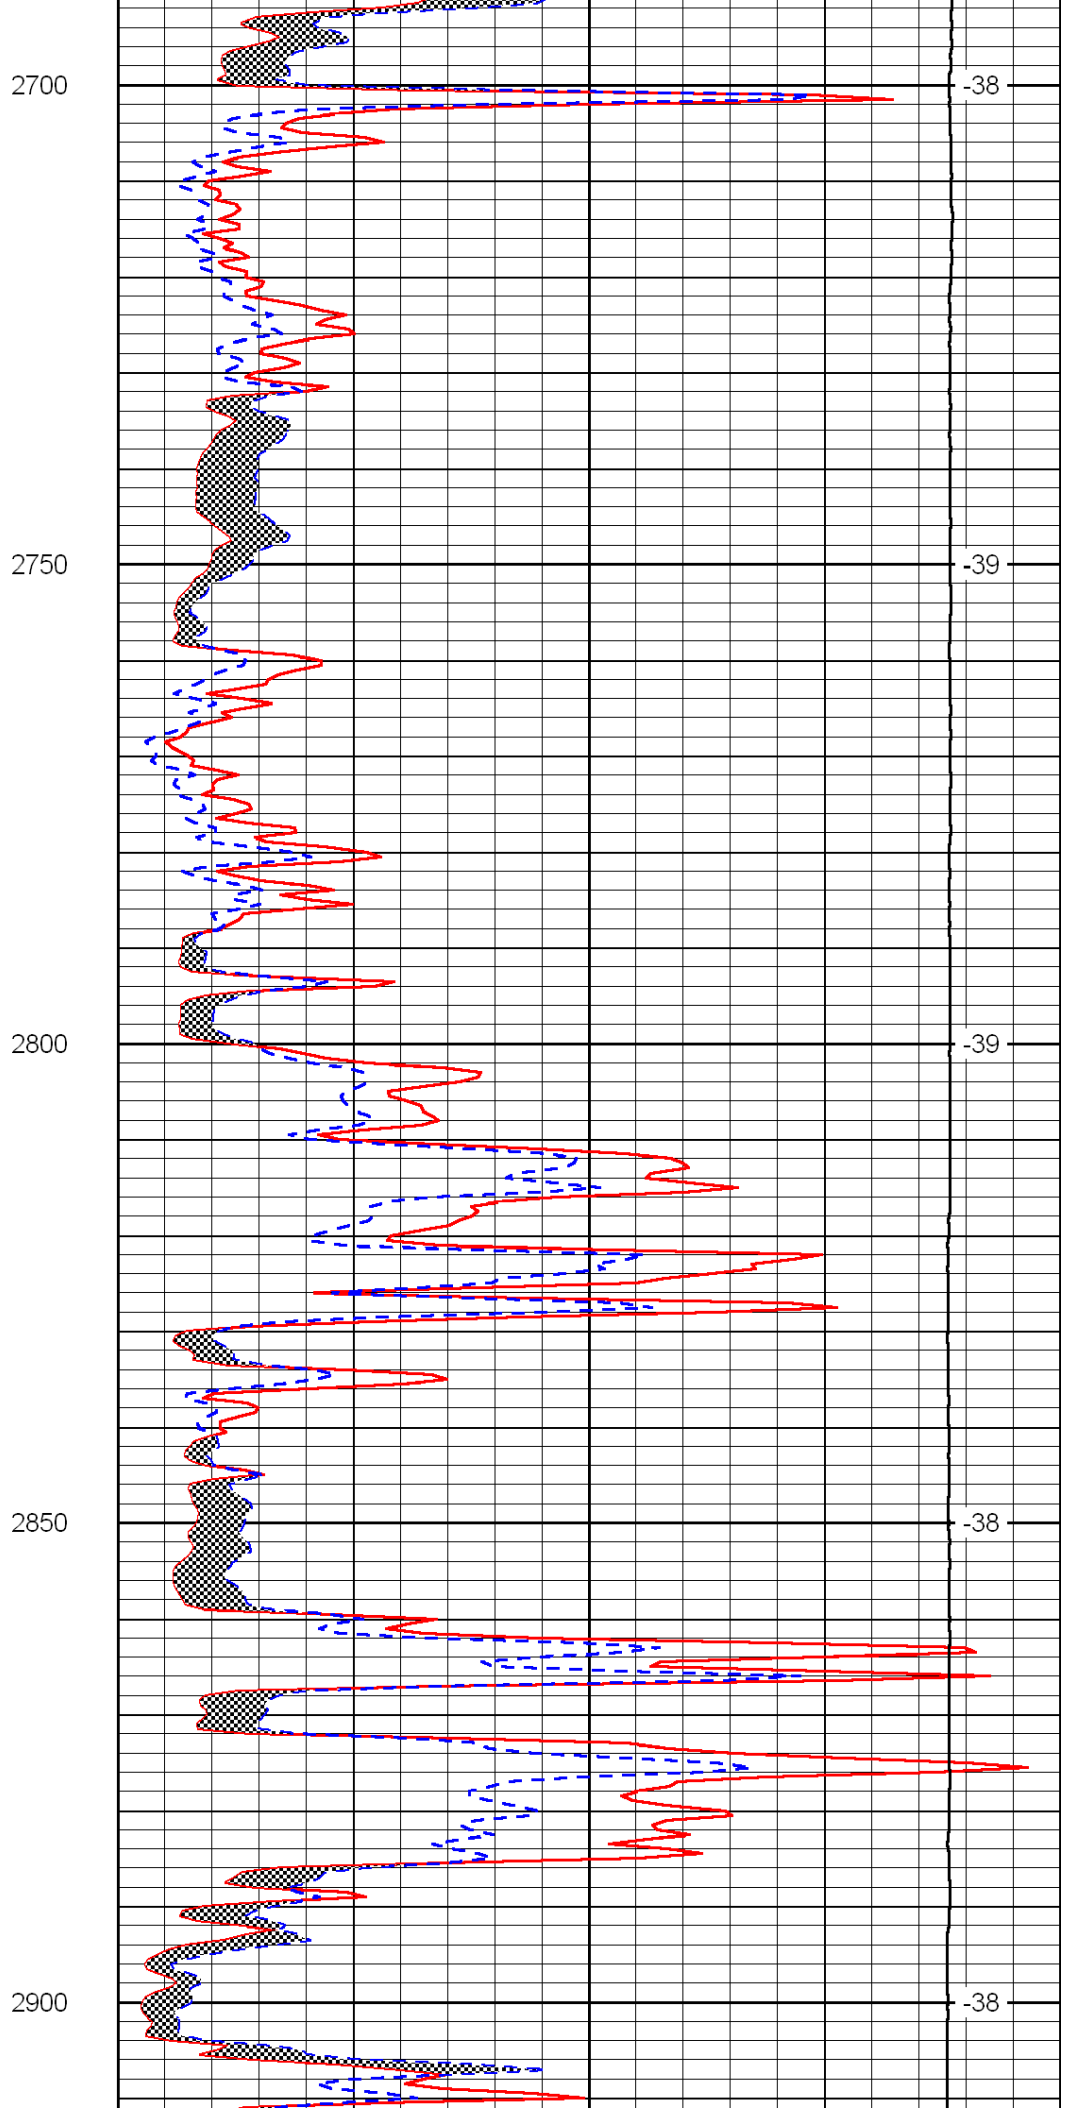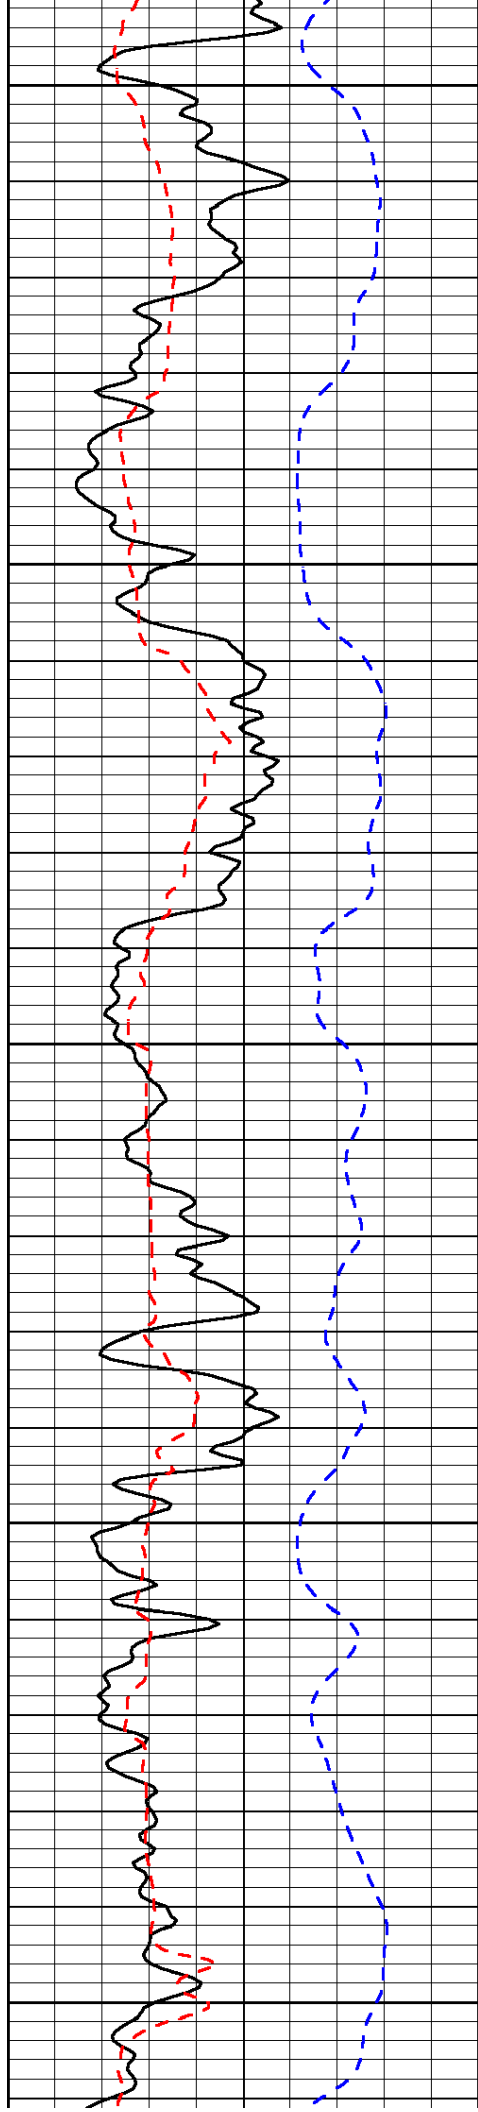

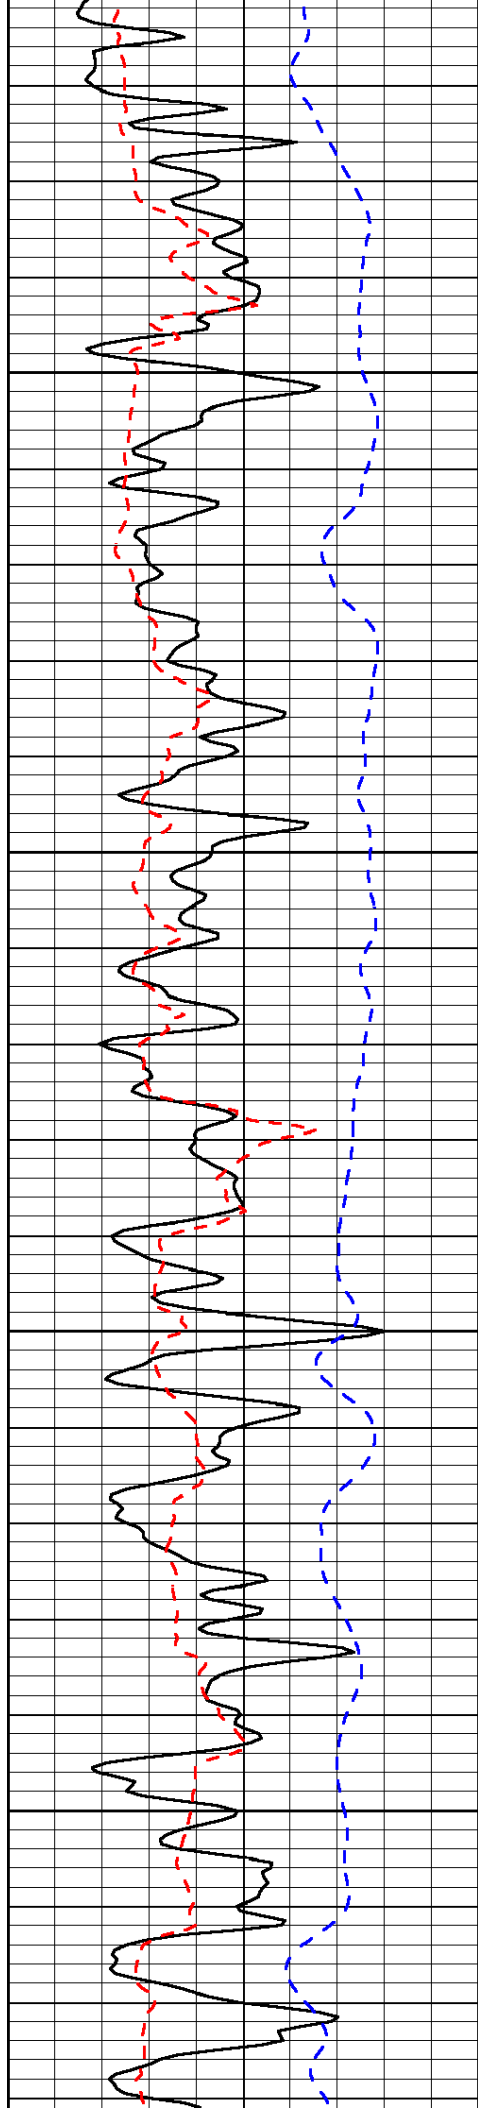


2950

3000

3050

3100


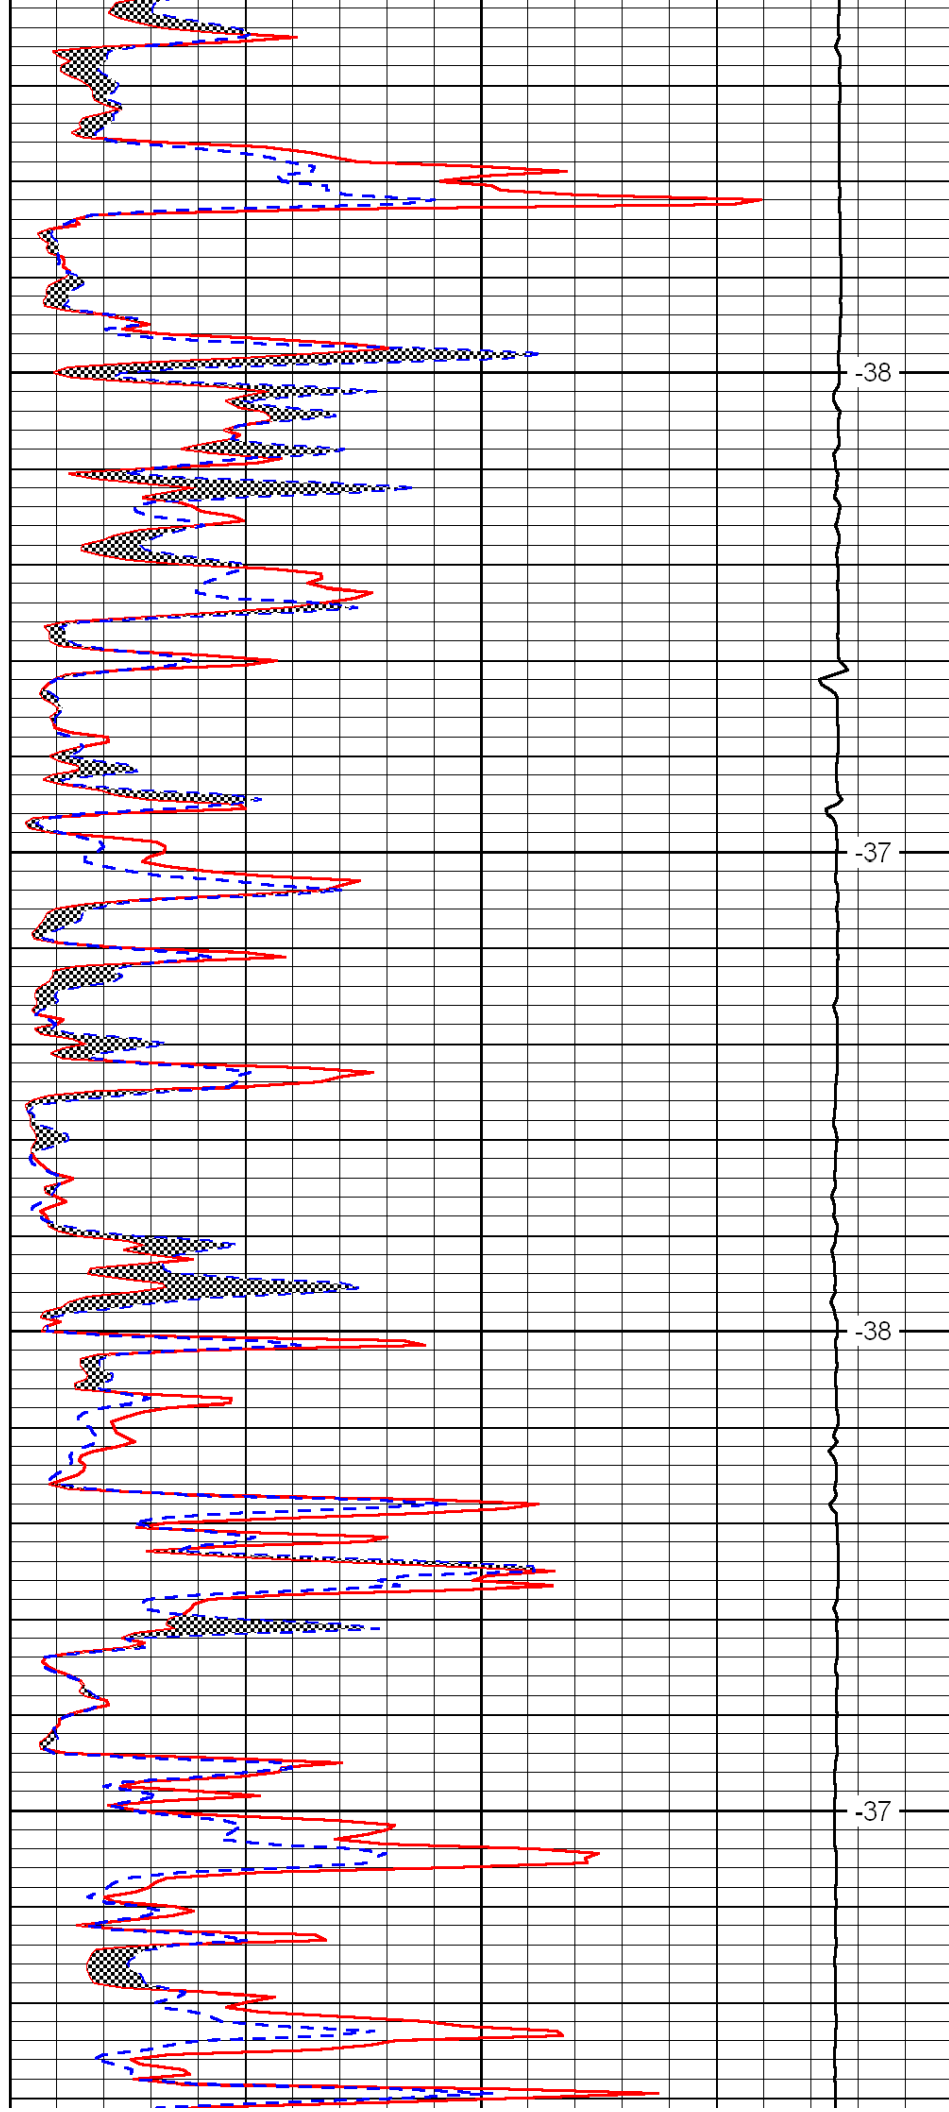




-38


-37

-38

-37

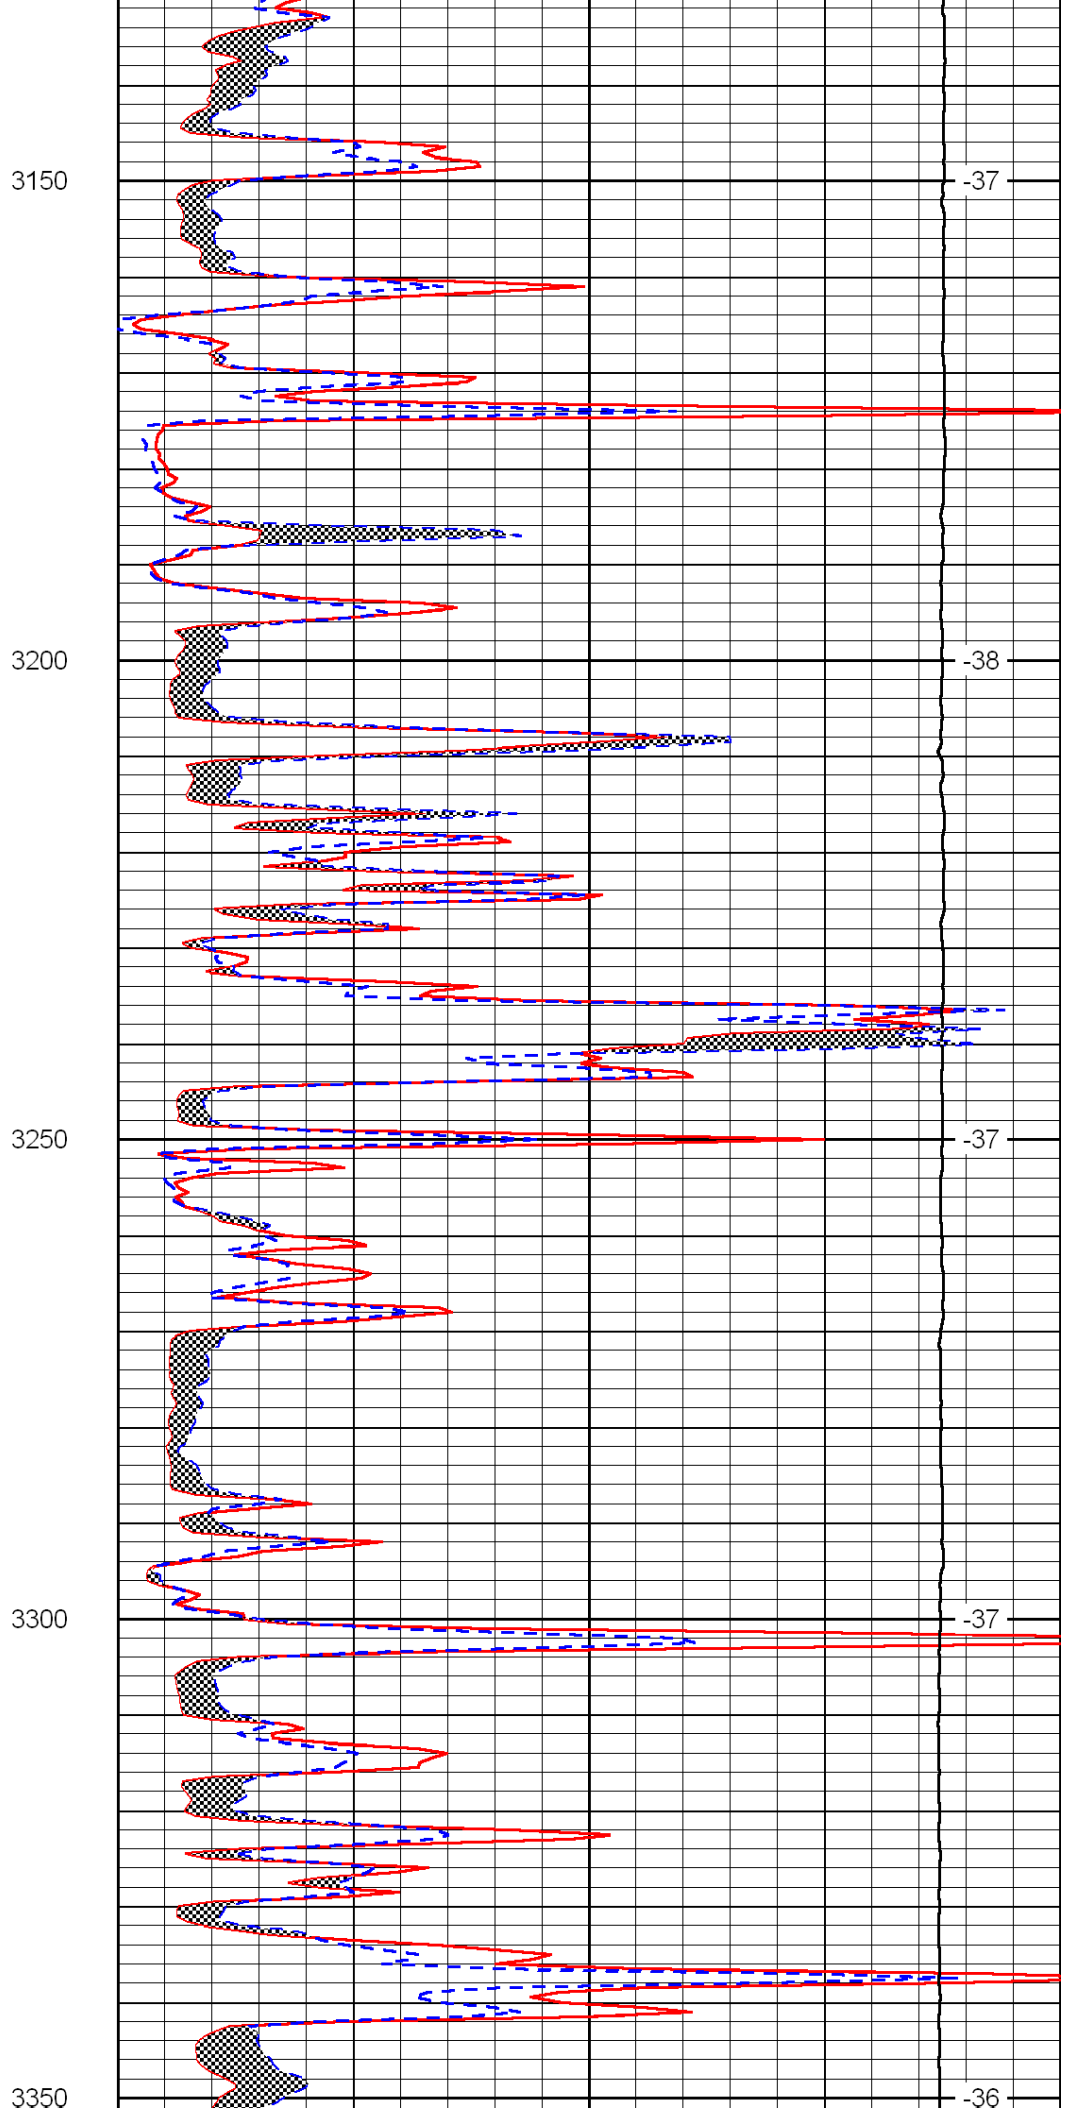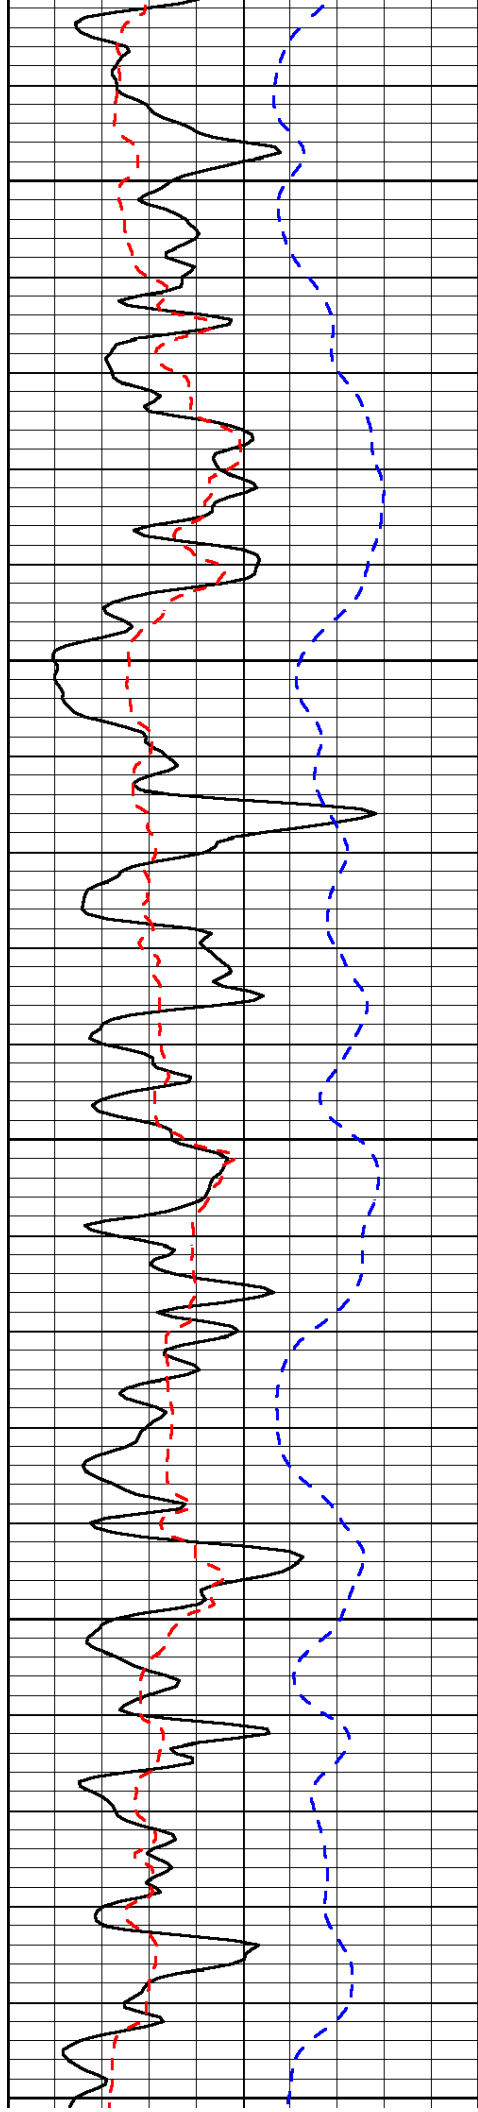

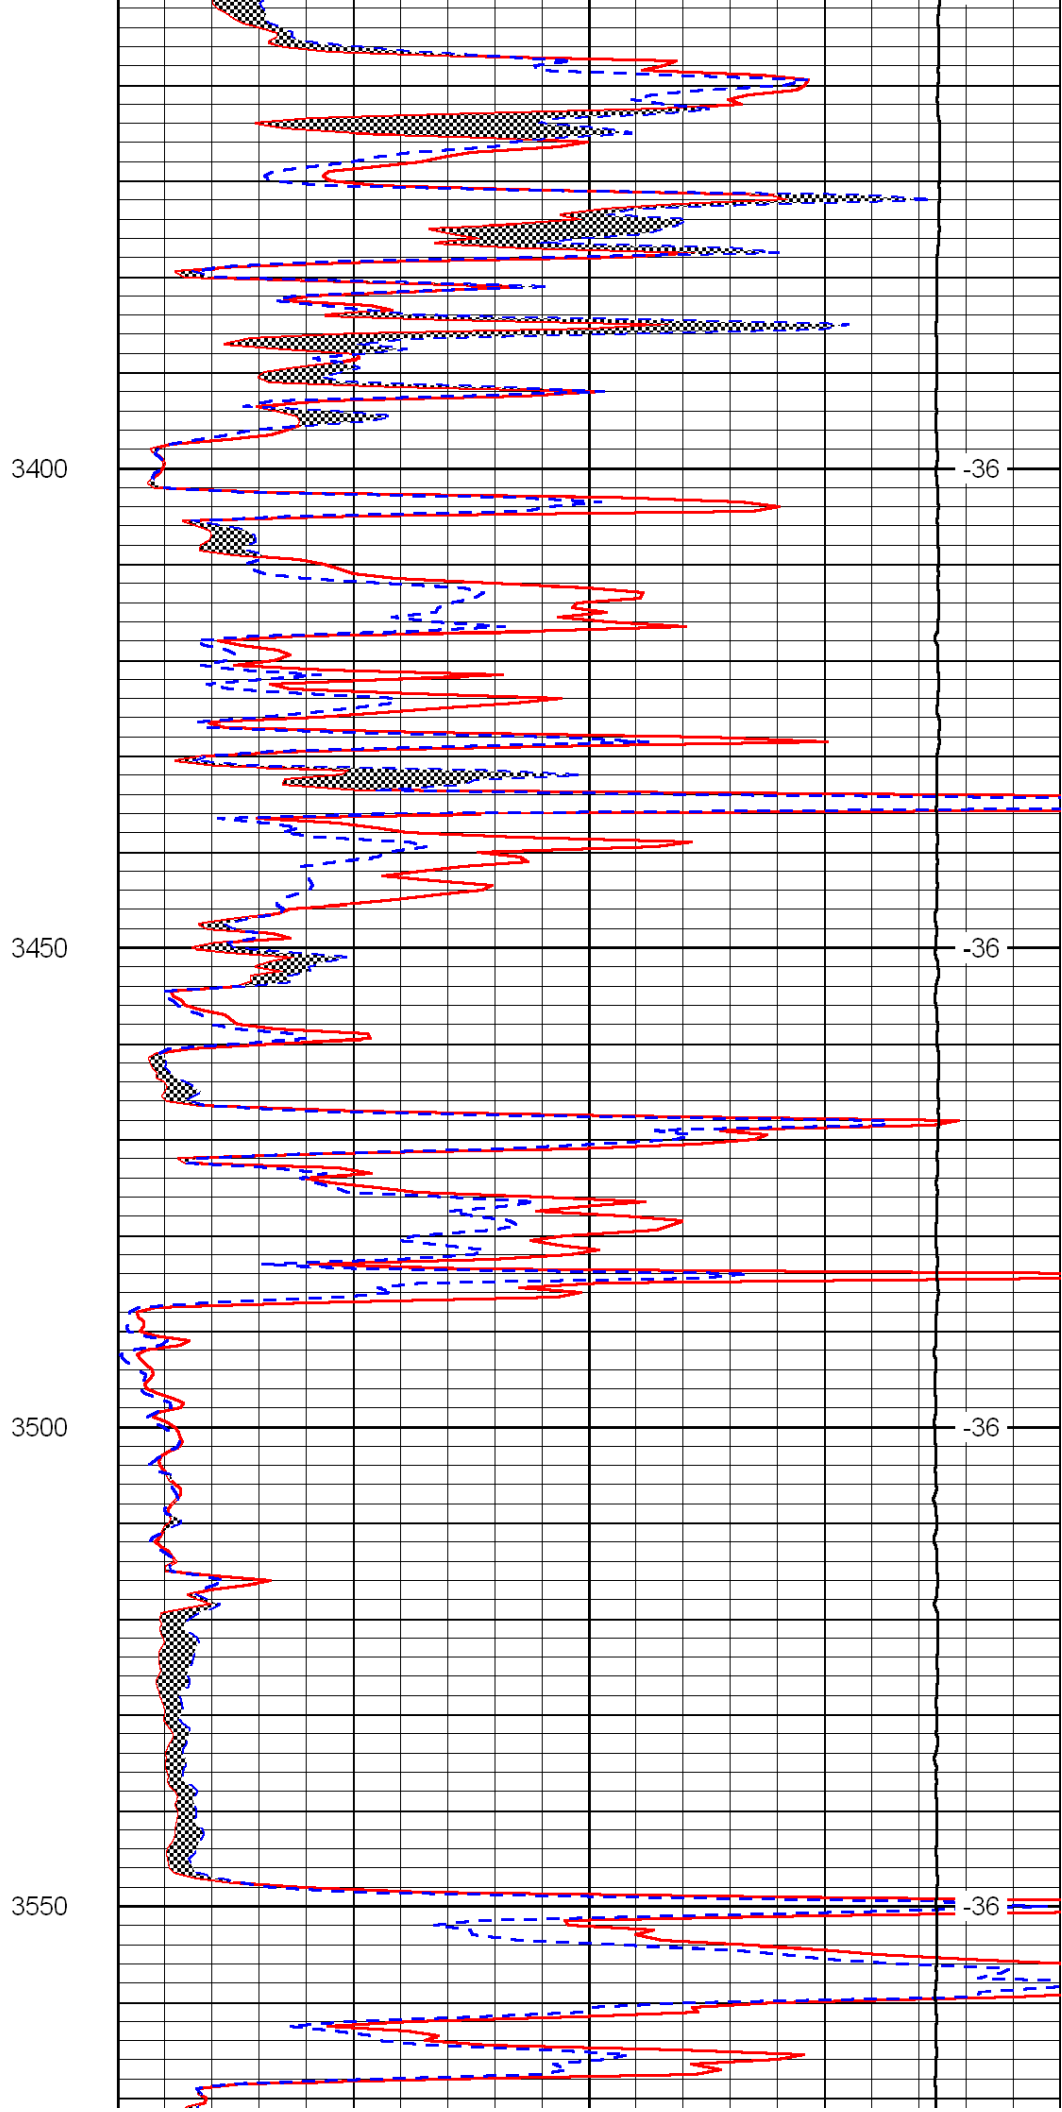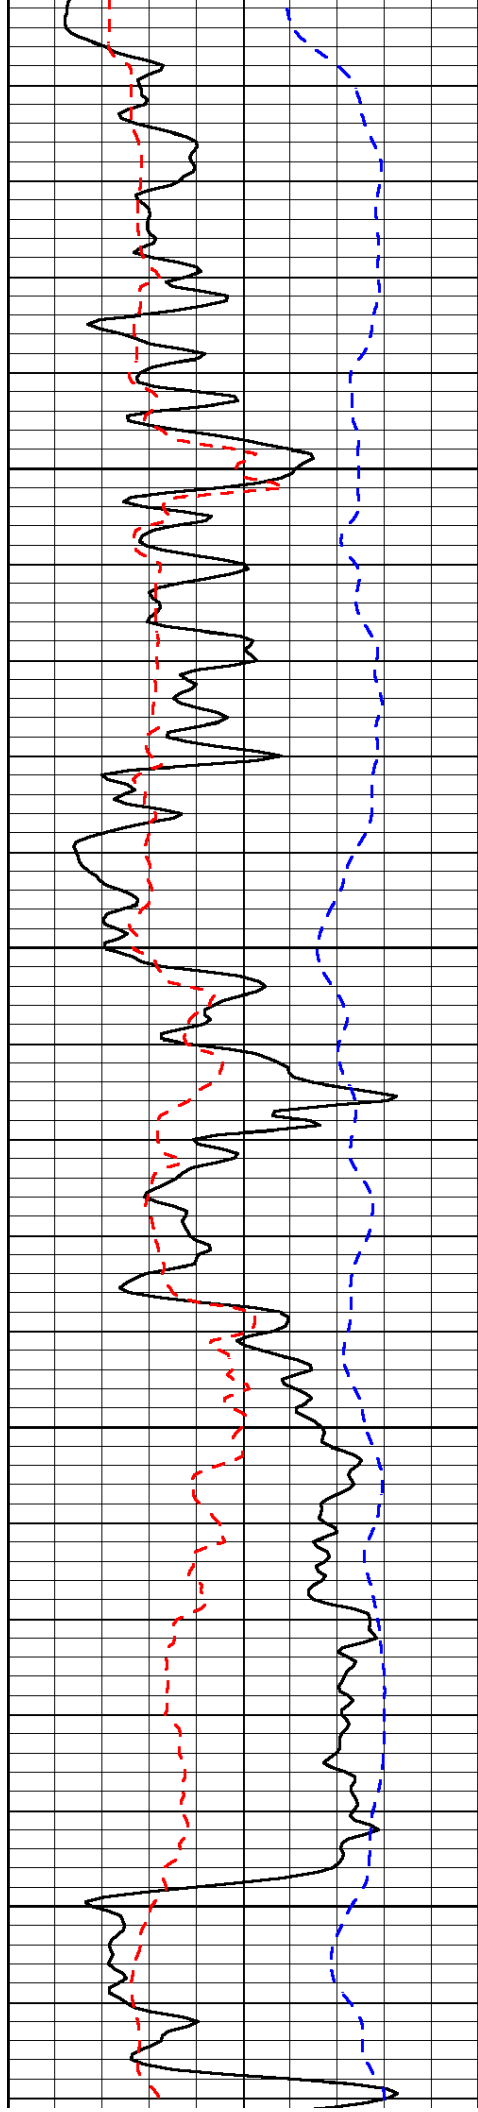

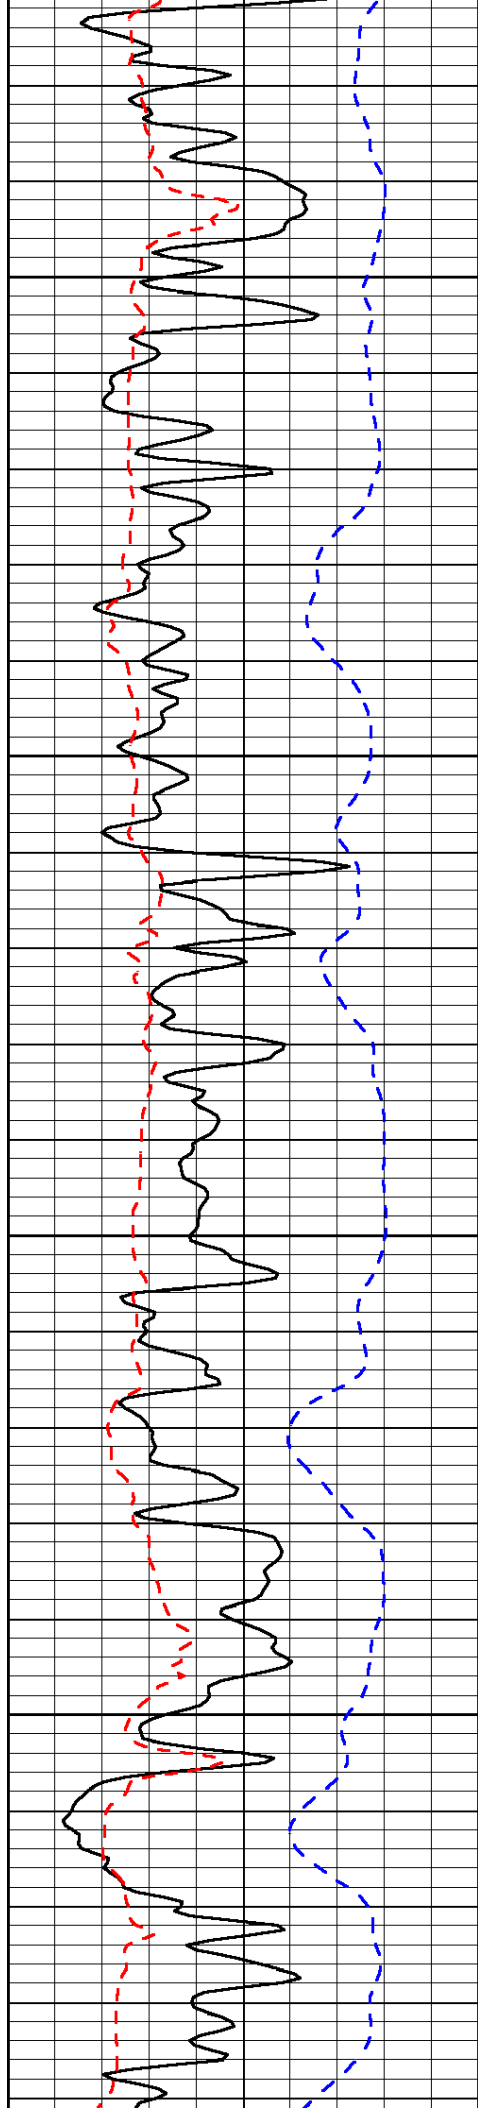



3600

3650

3700

3750

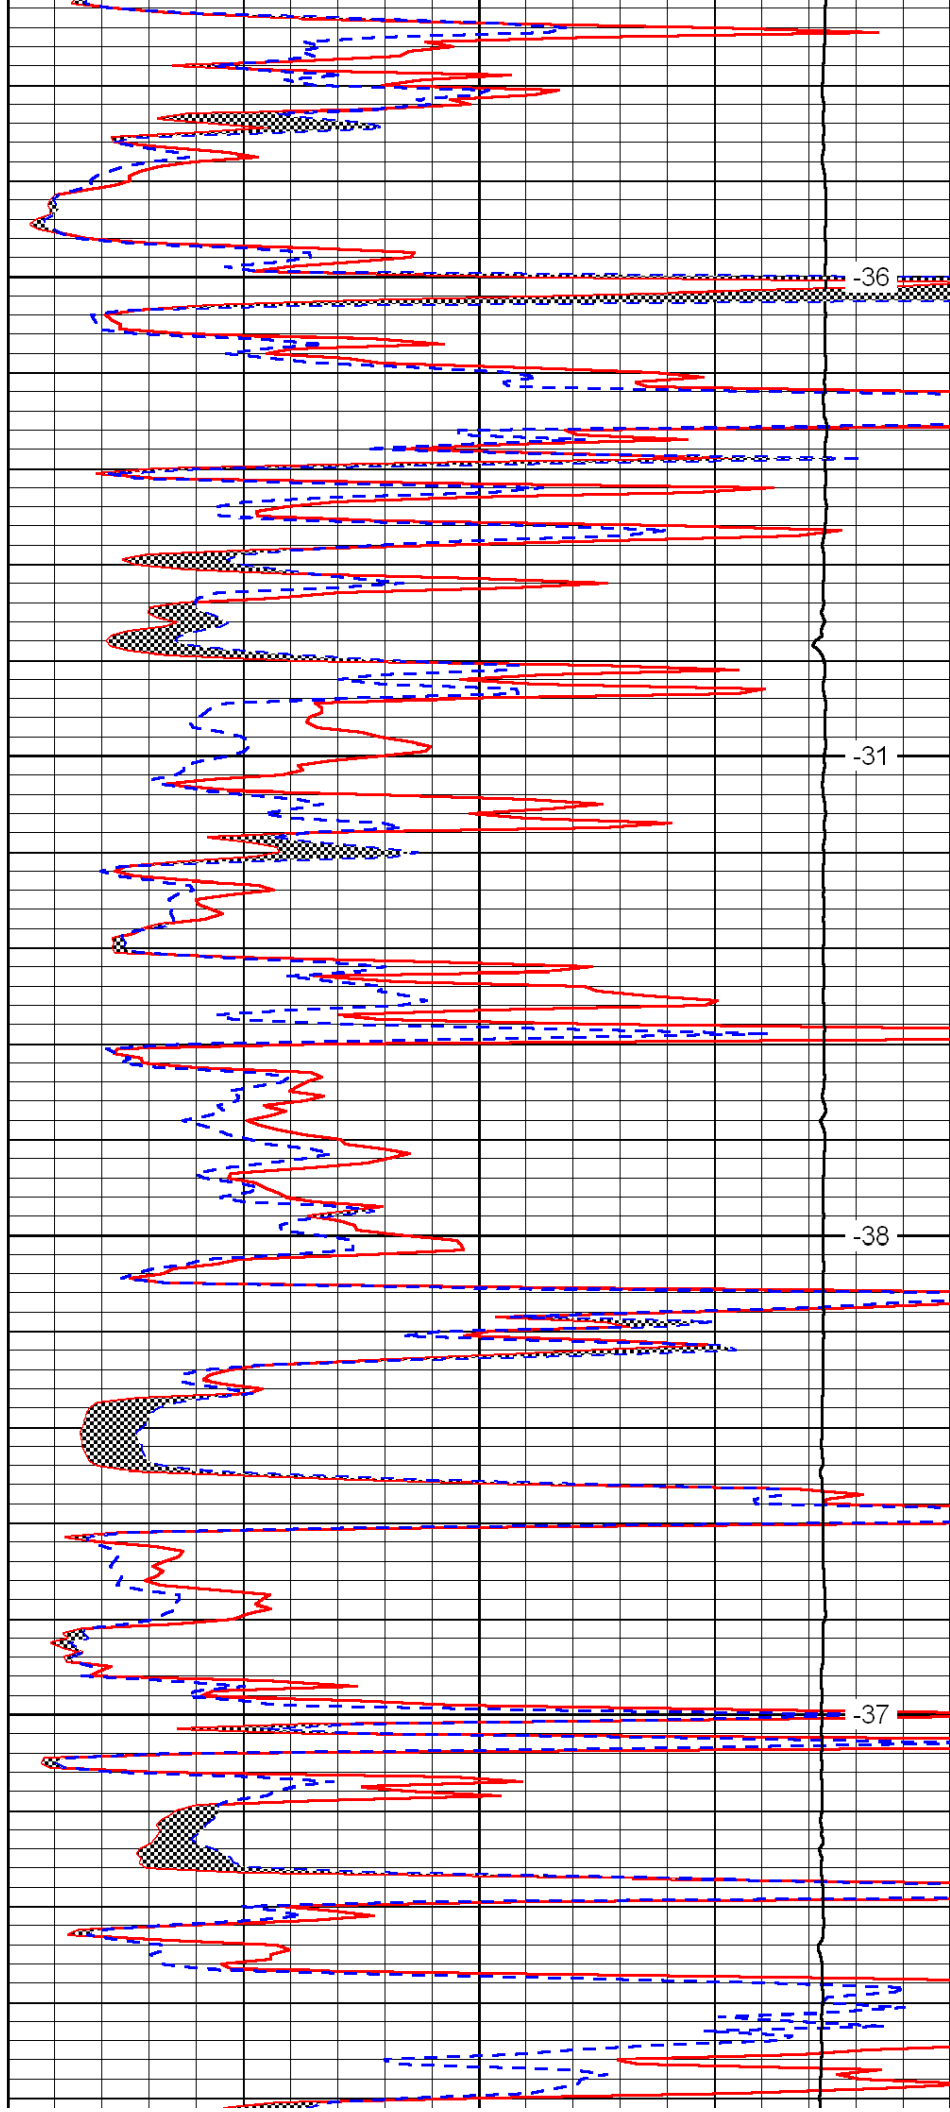

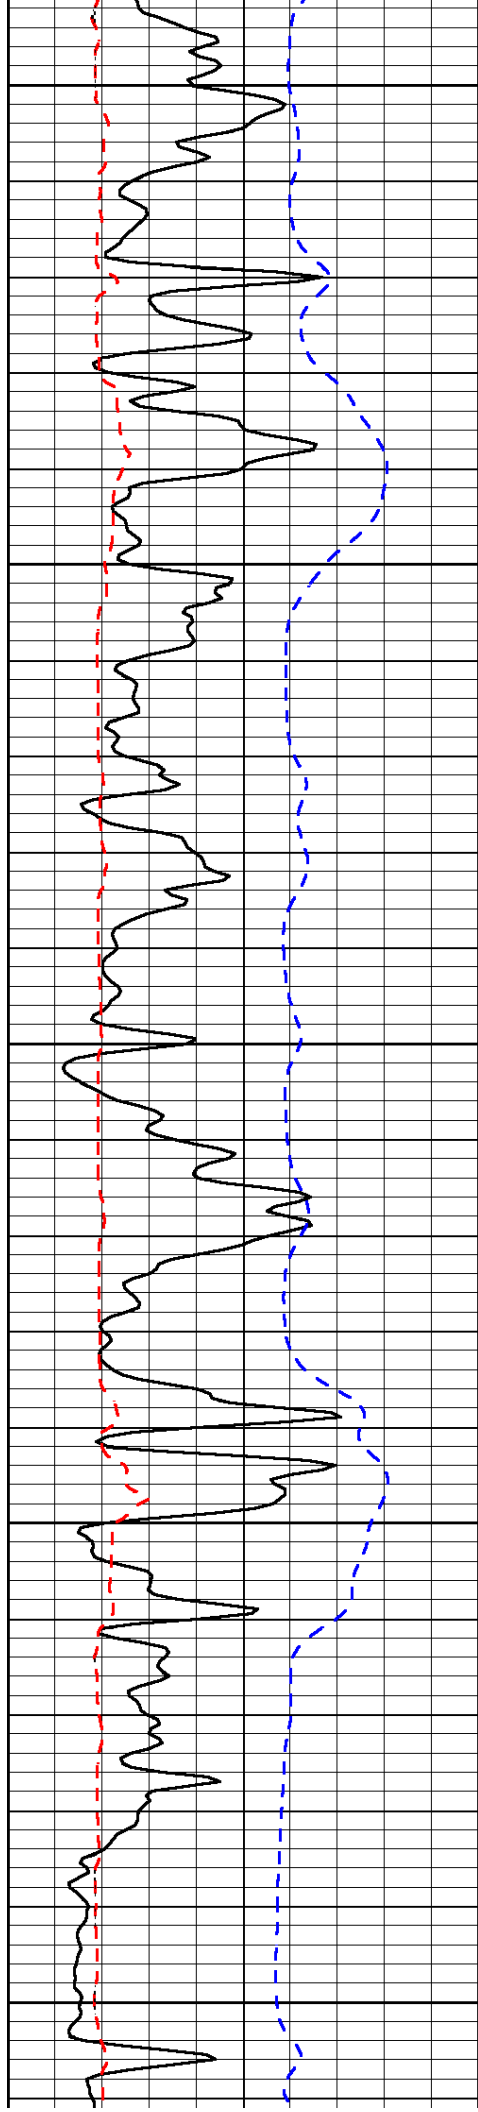


3800

3850

3900

3950

4000

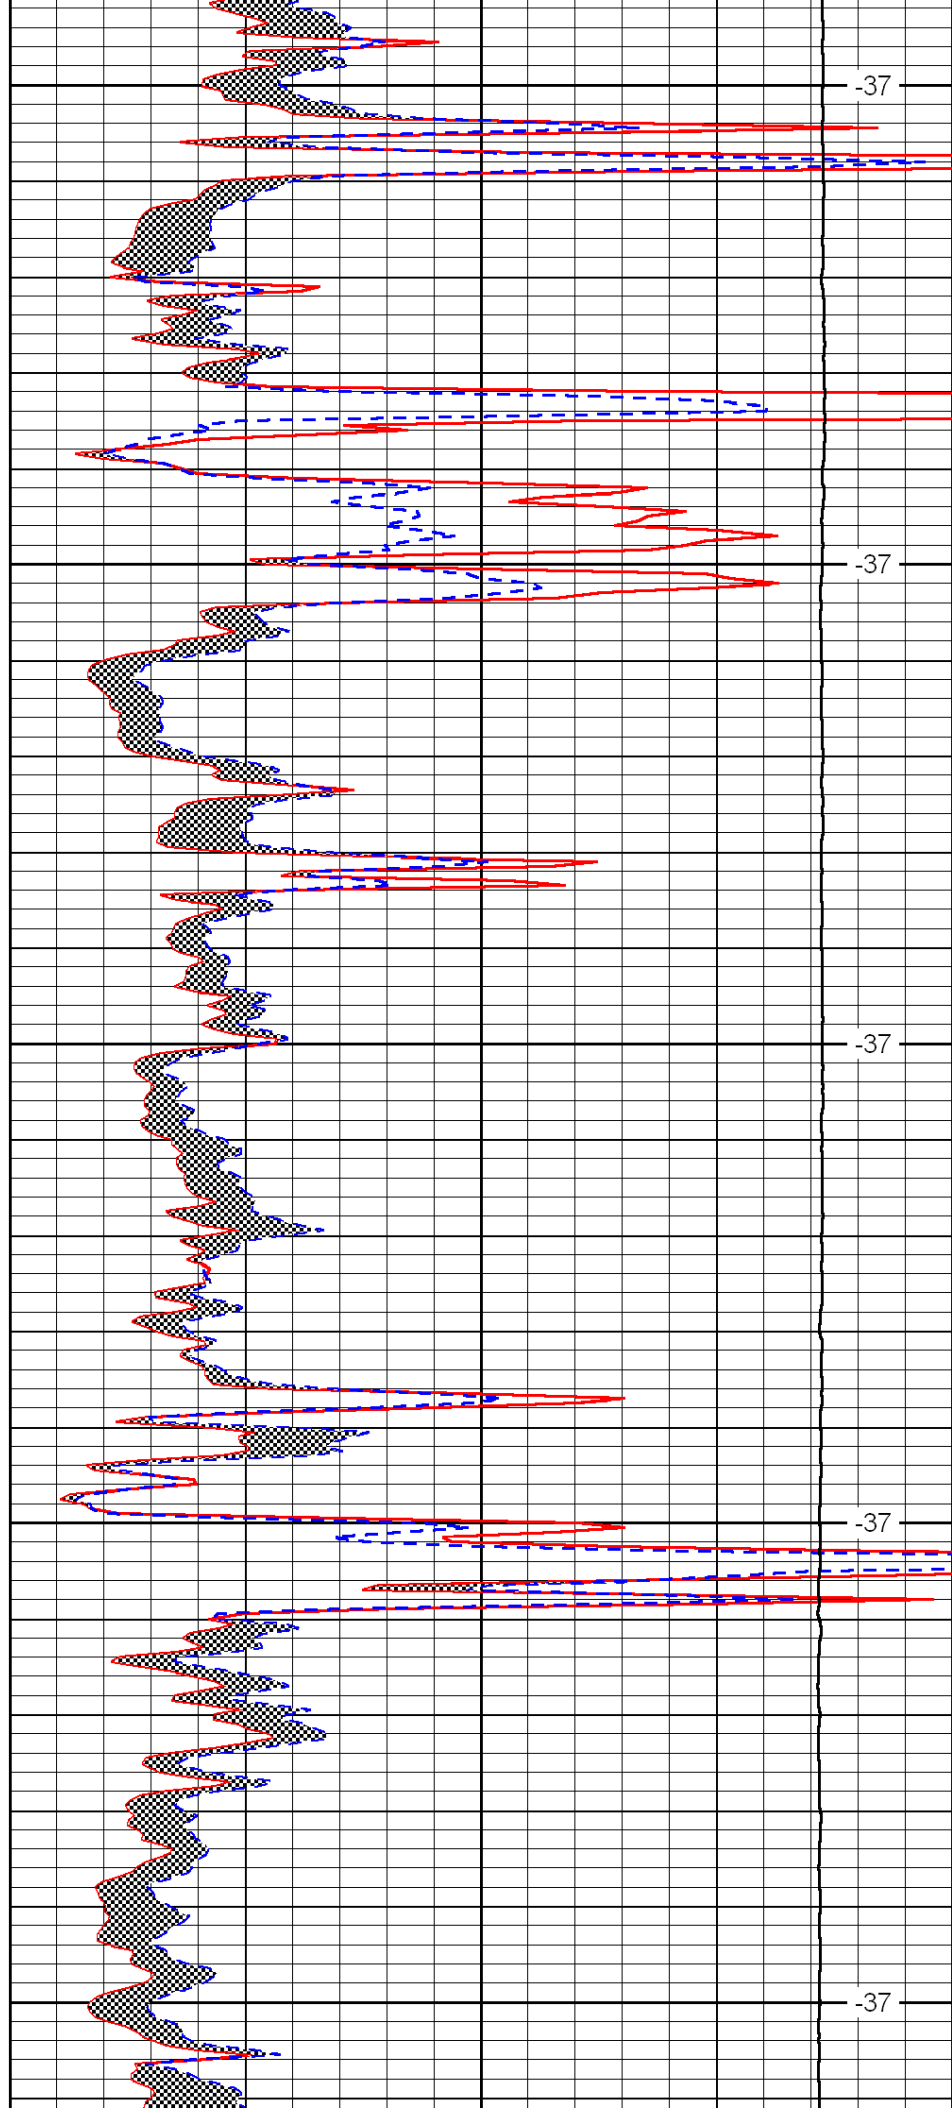


-37

-37

-37

-37

-37

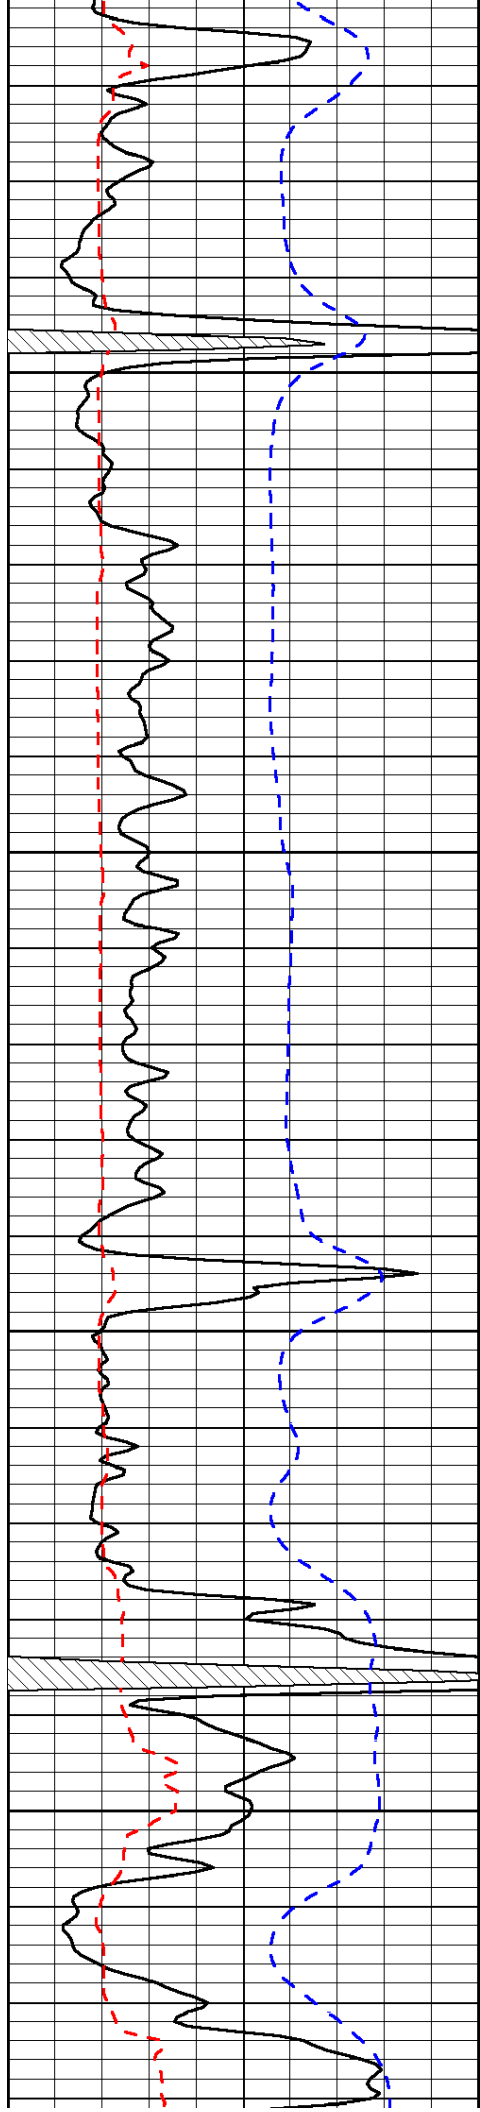


4050

4100

4150

4200


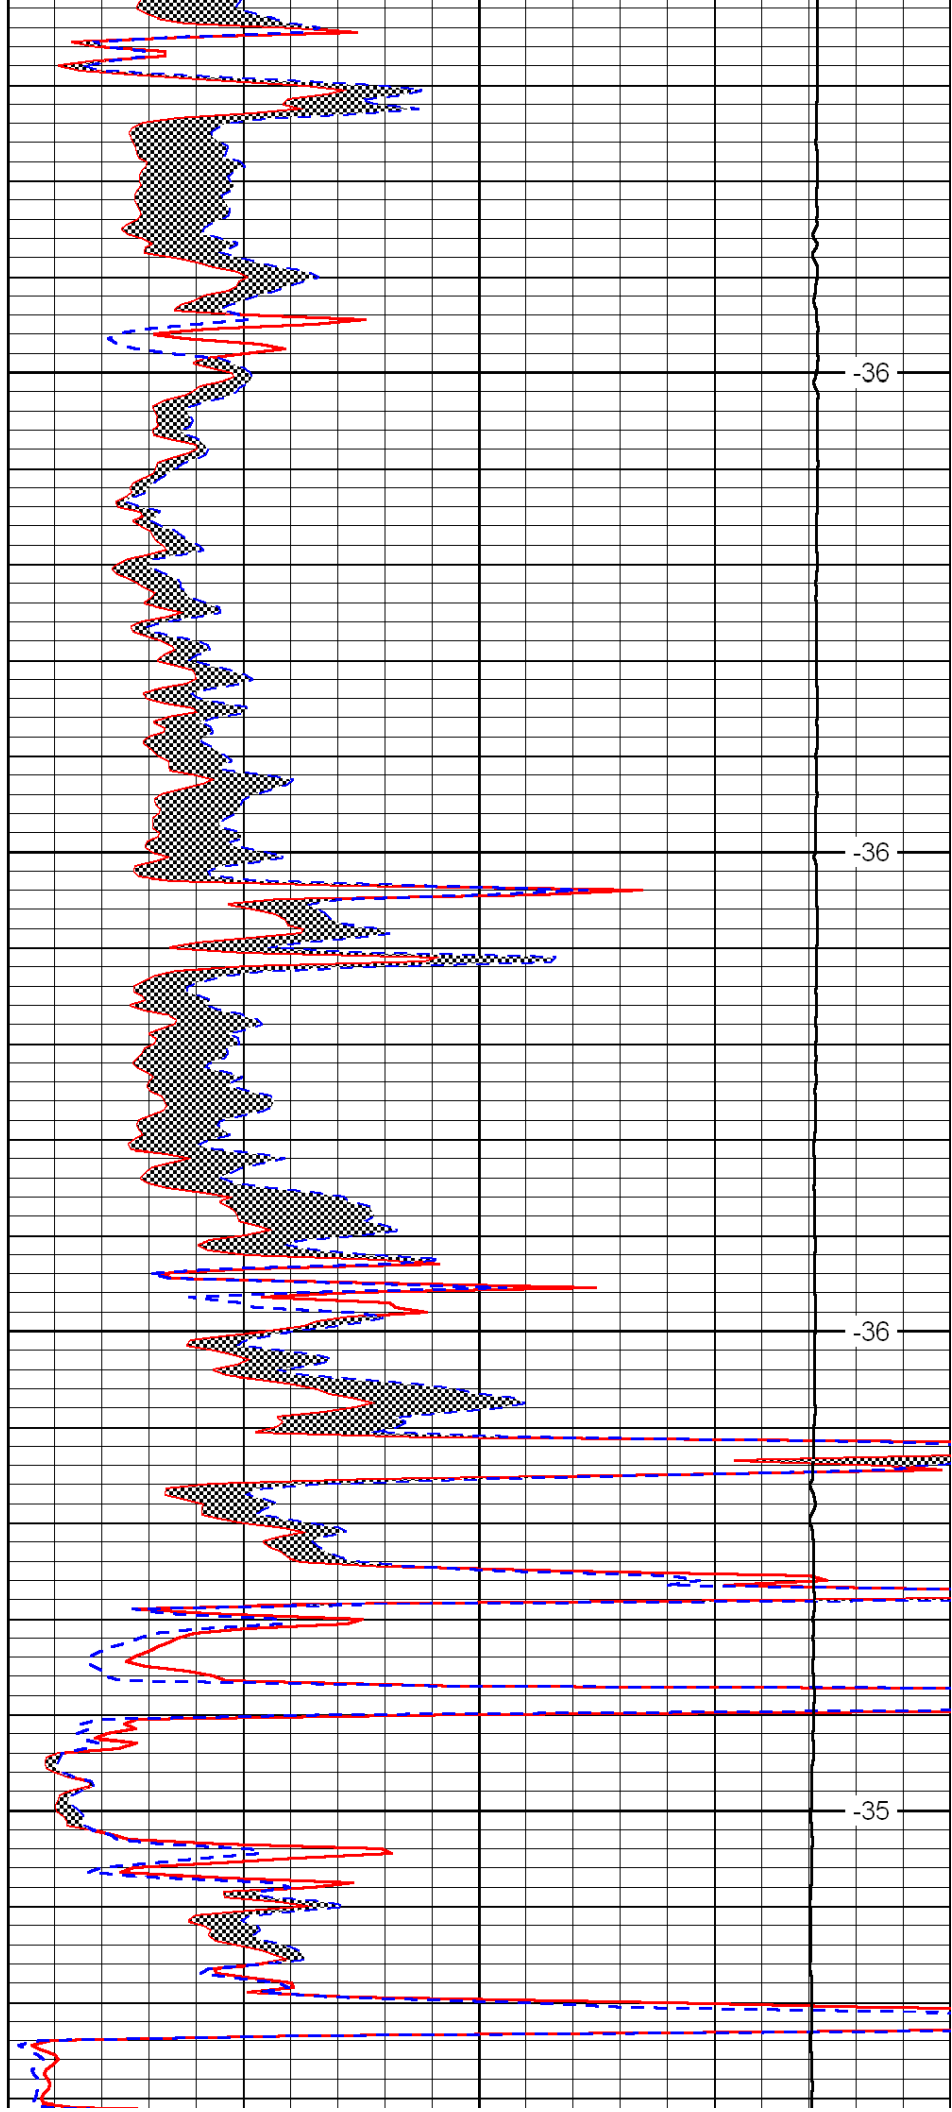



-36

-36

-36

-35

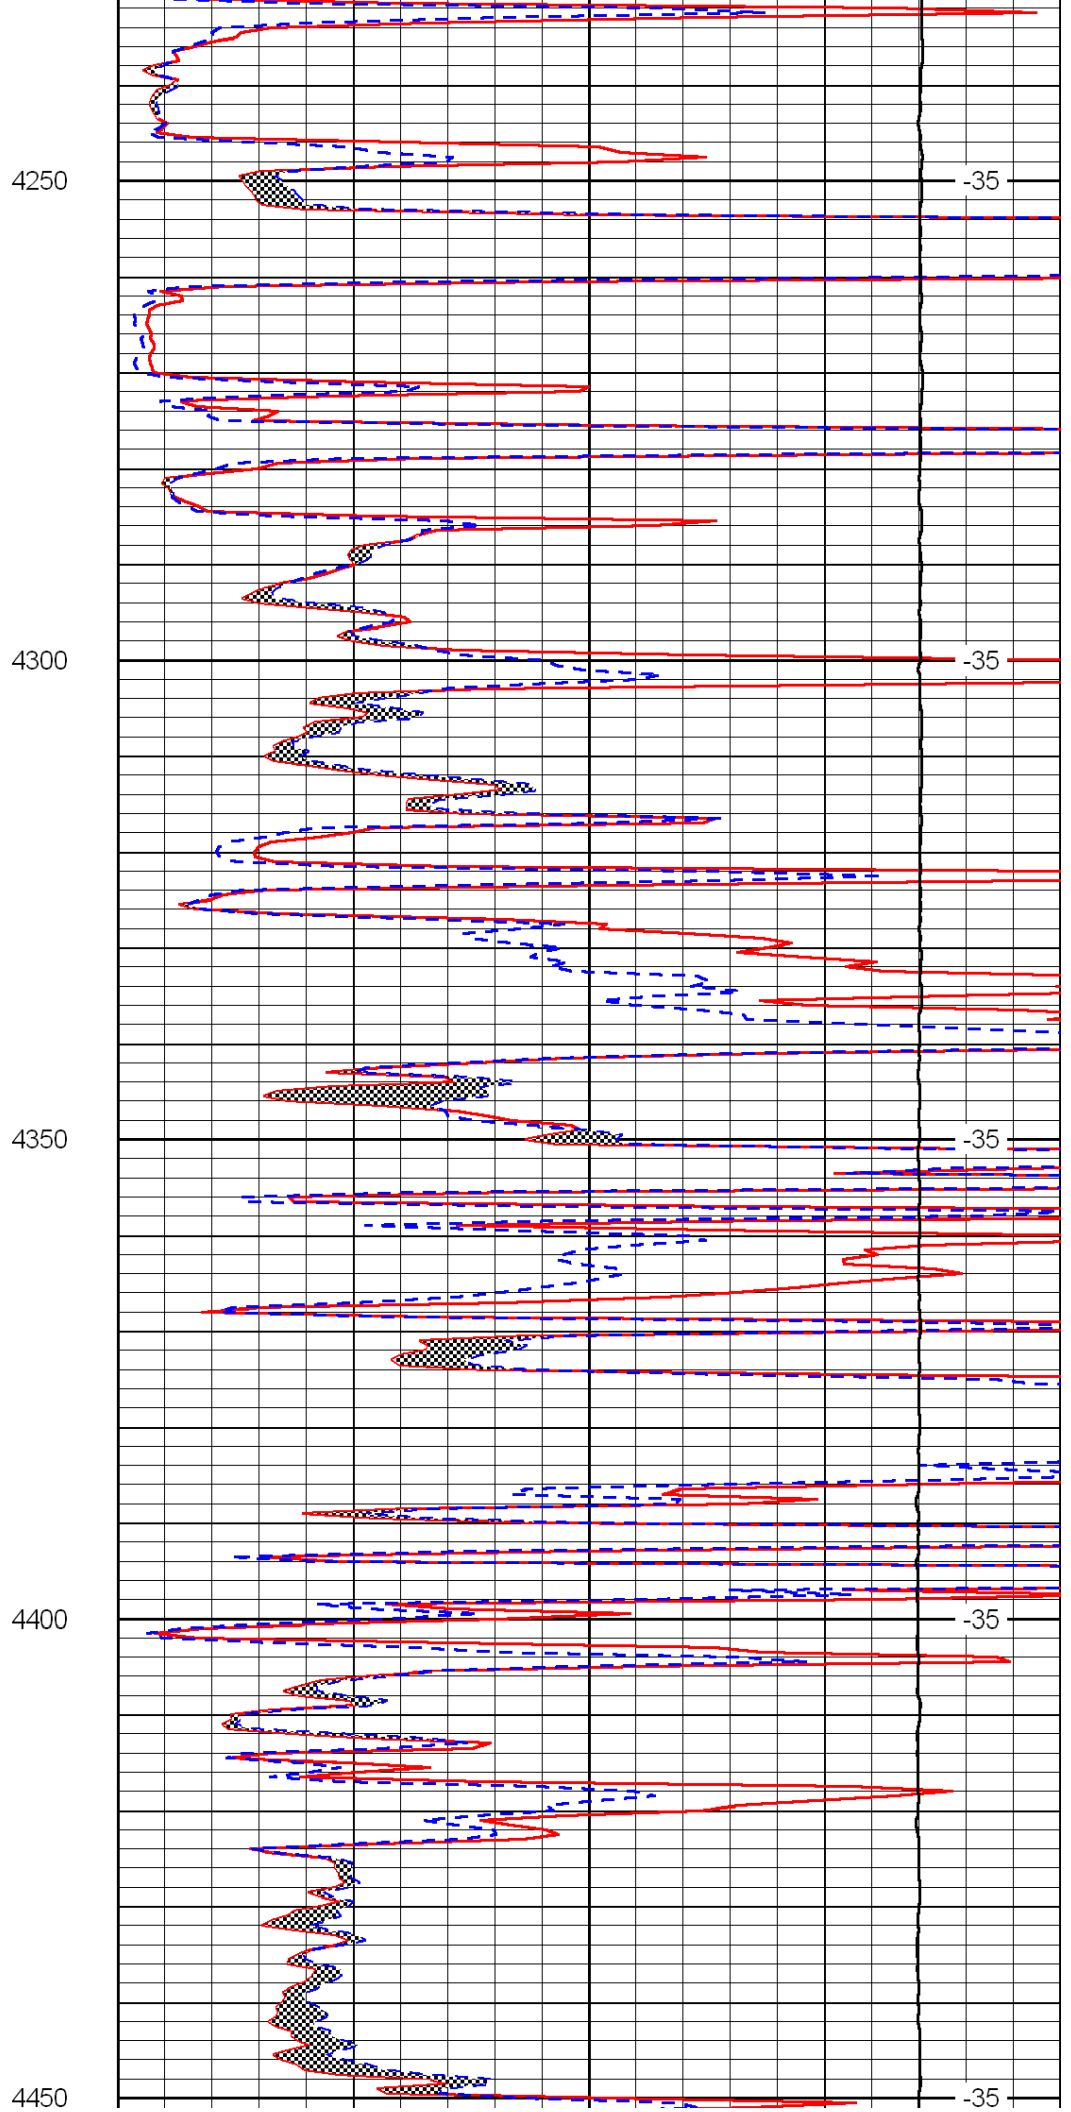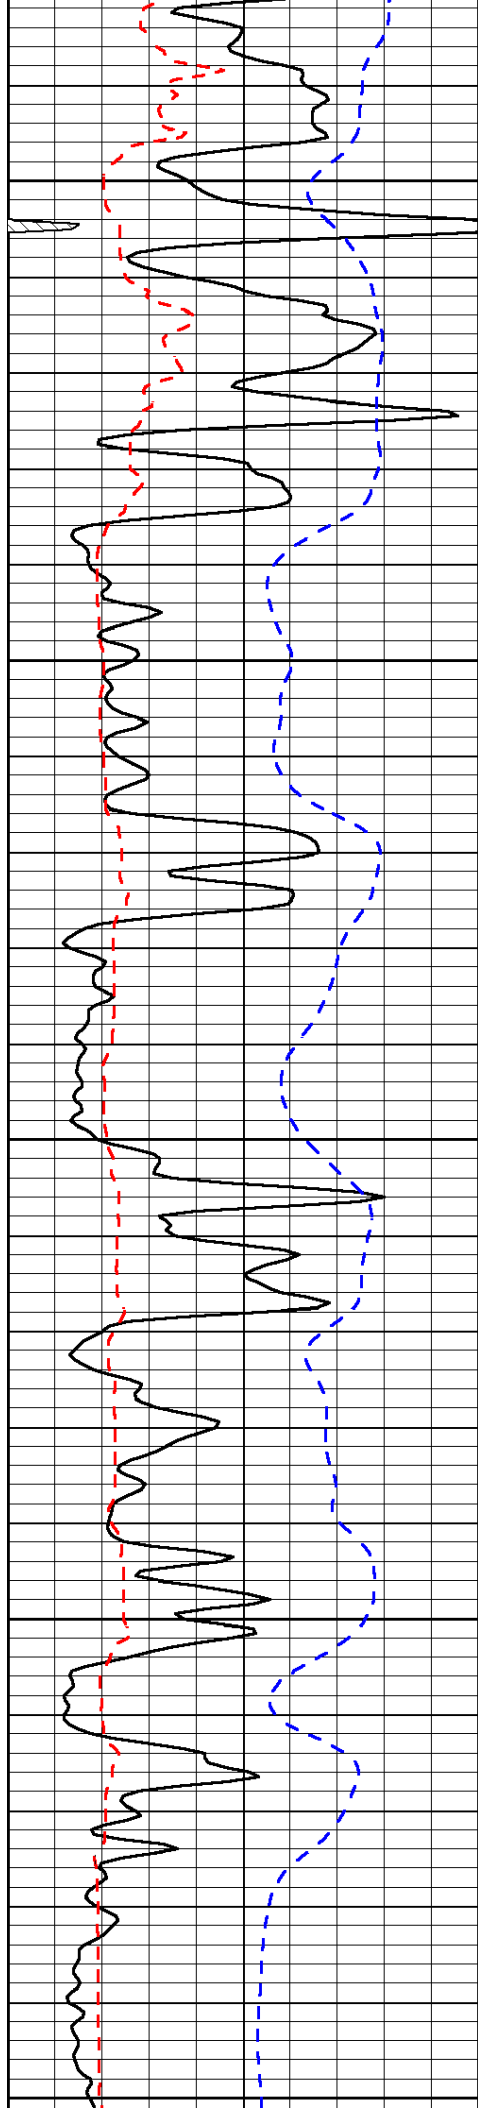

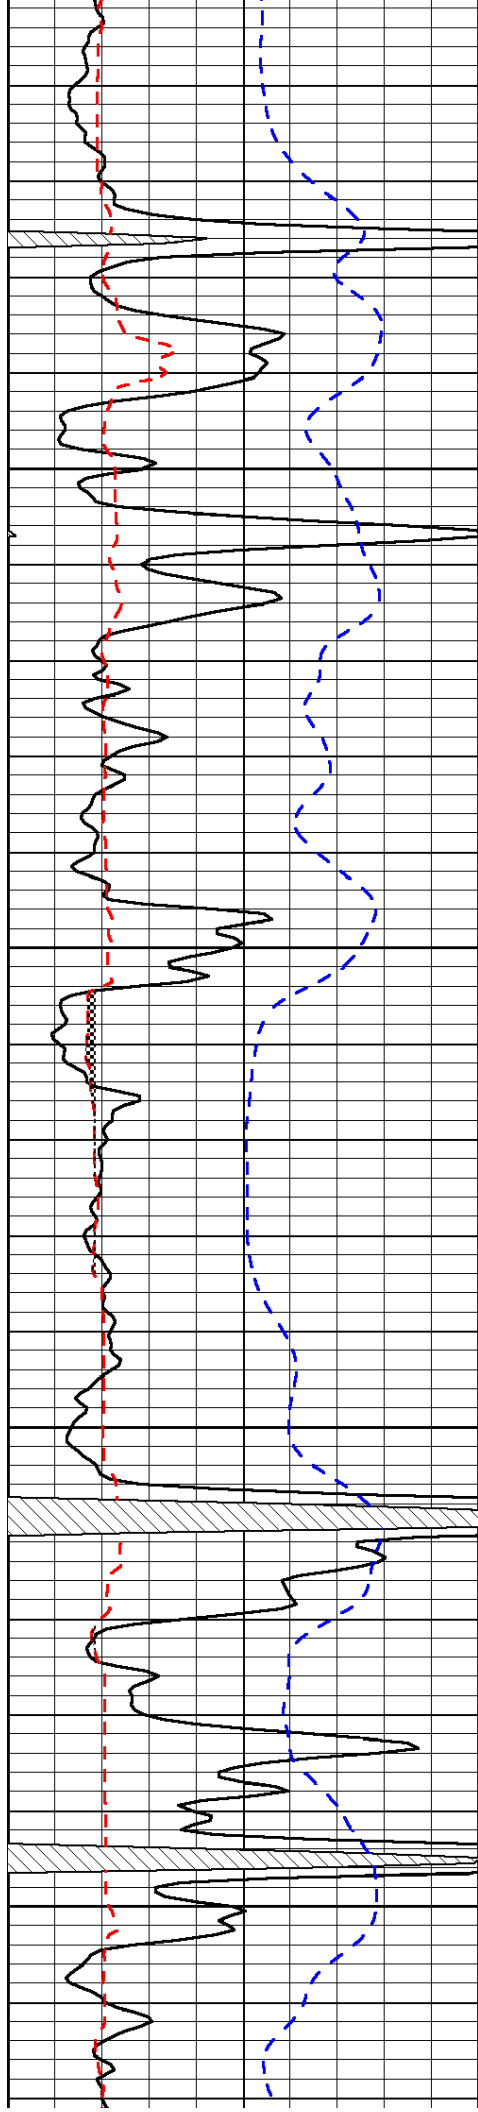



4500

4550

4600

4650

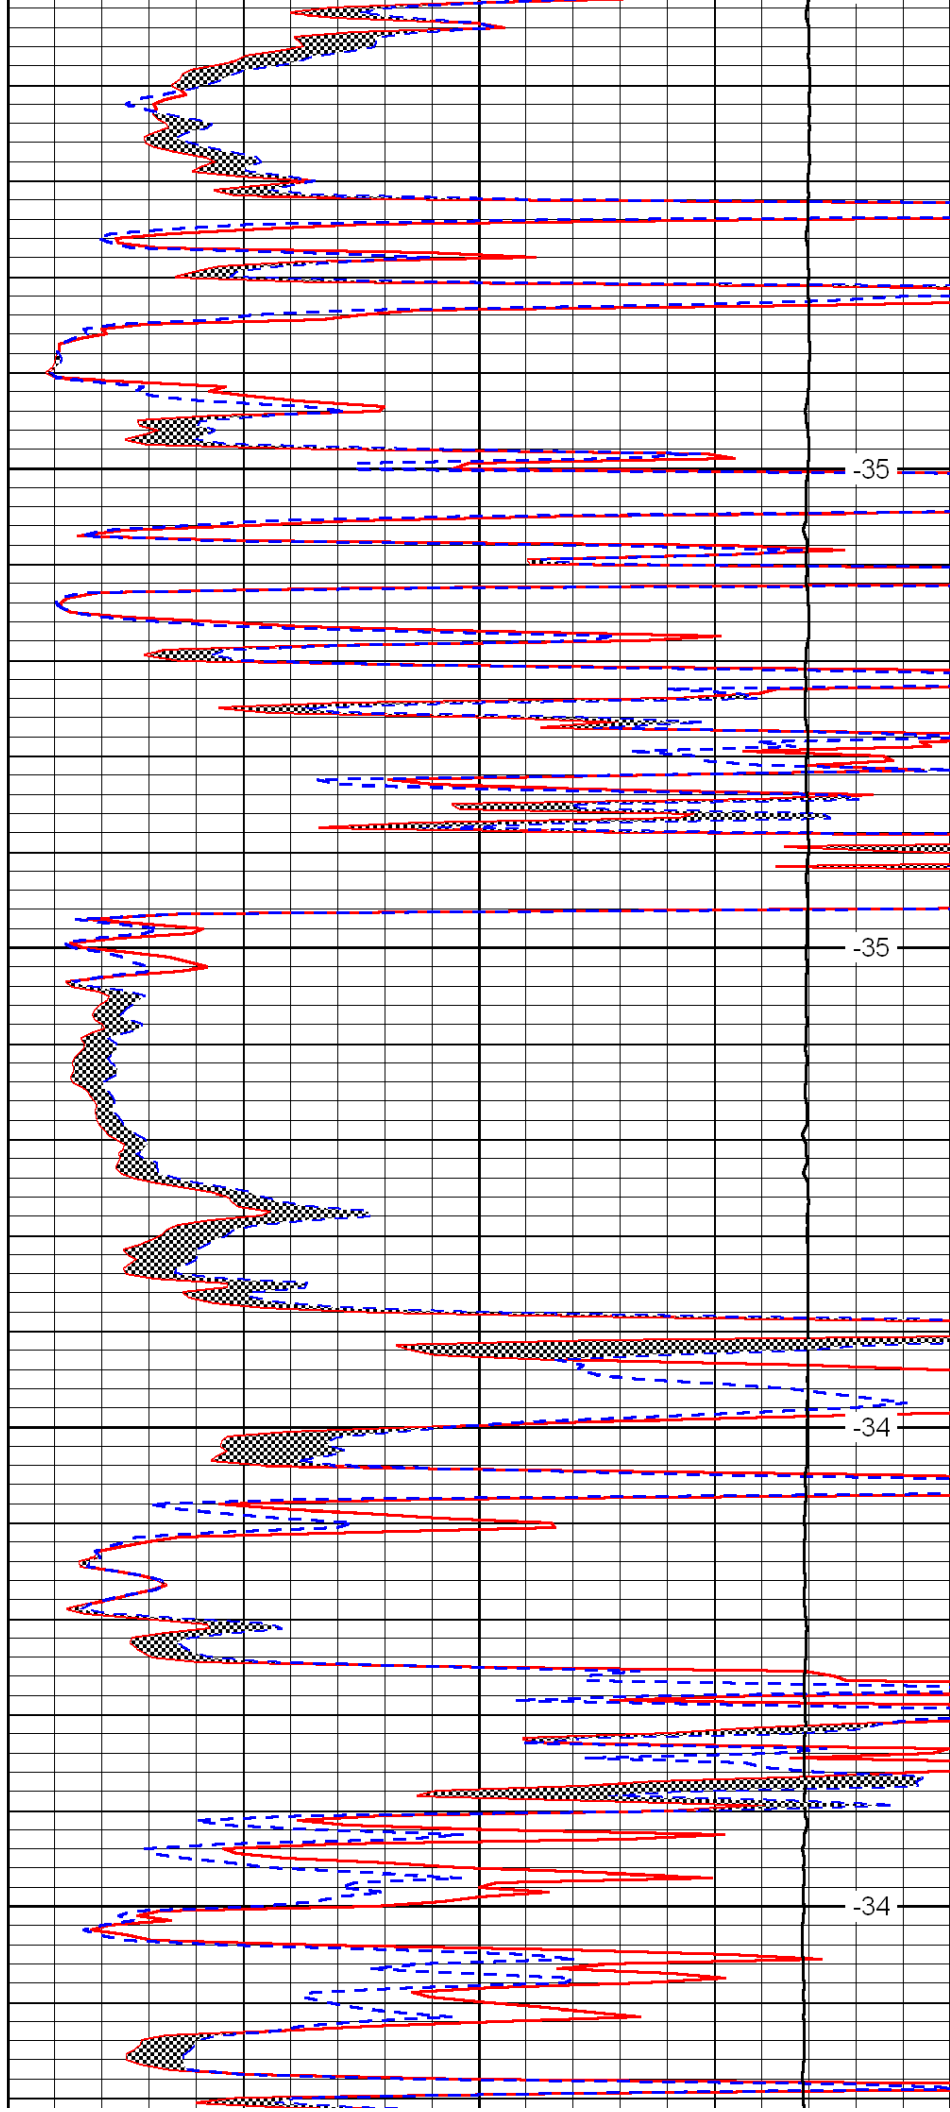

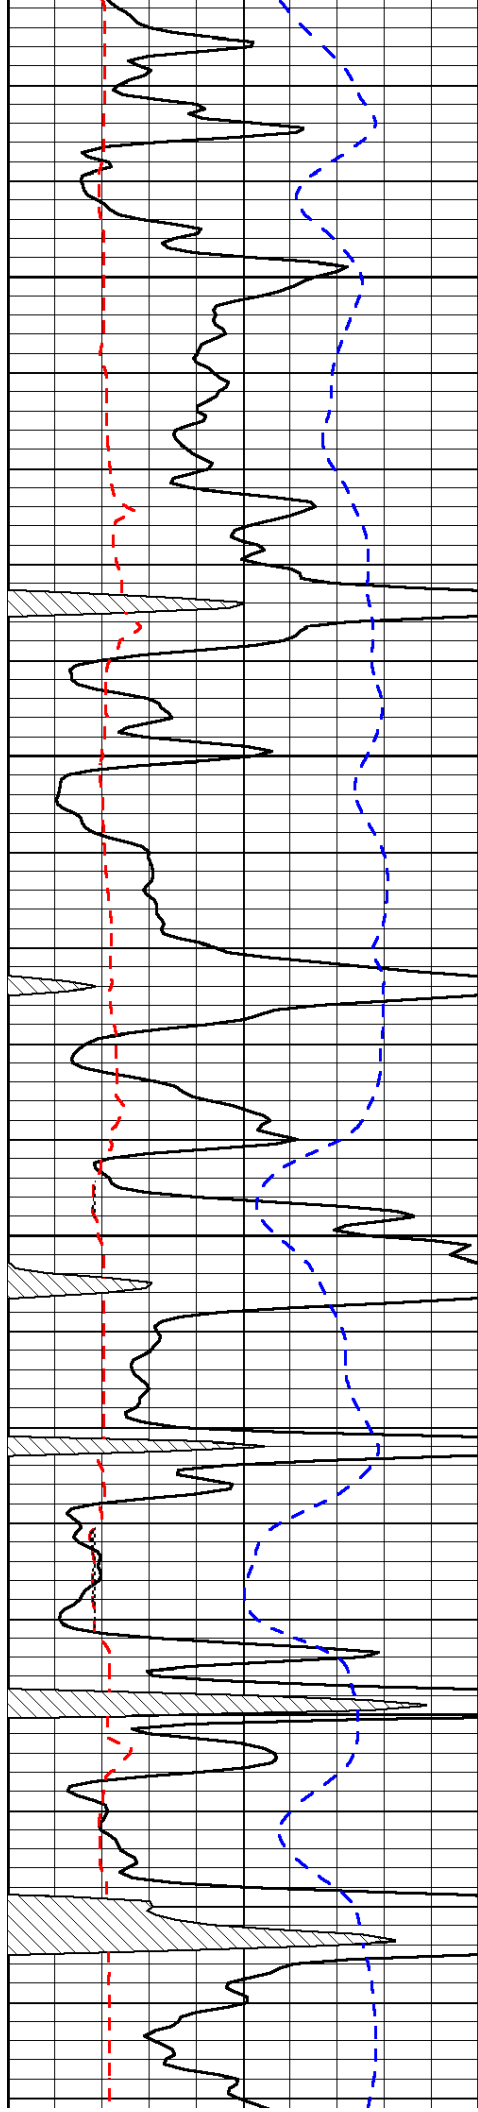



4700

4750

4800

4850

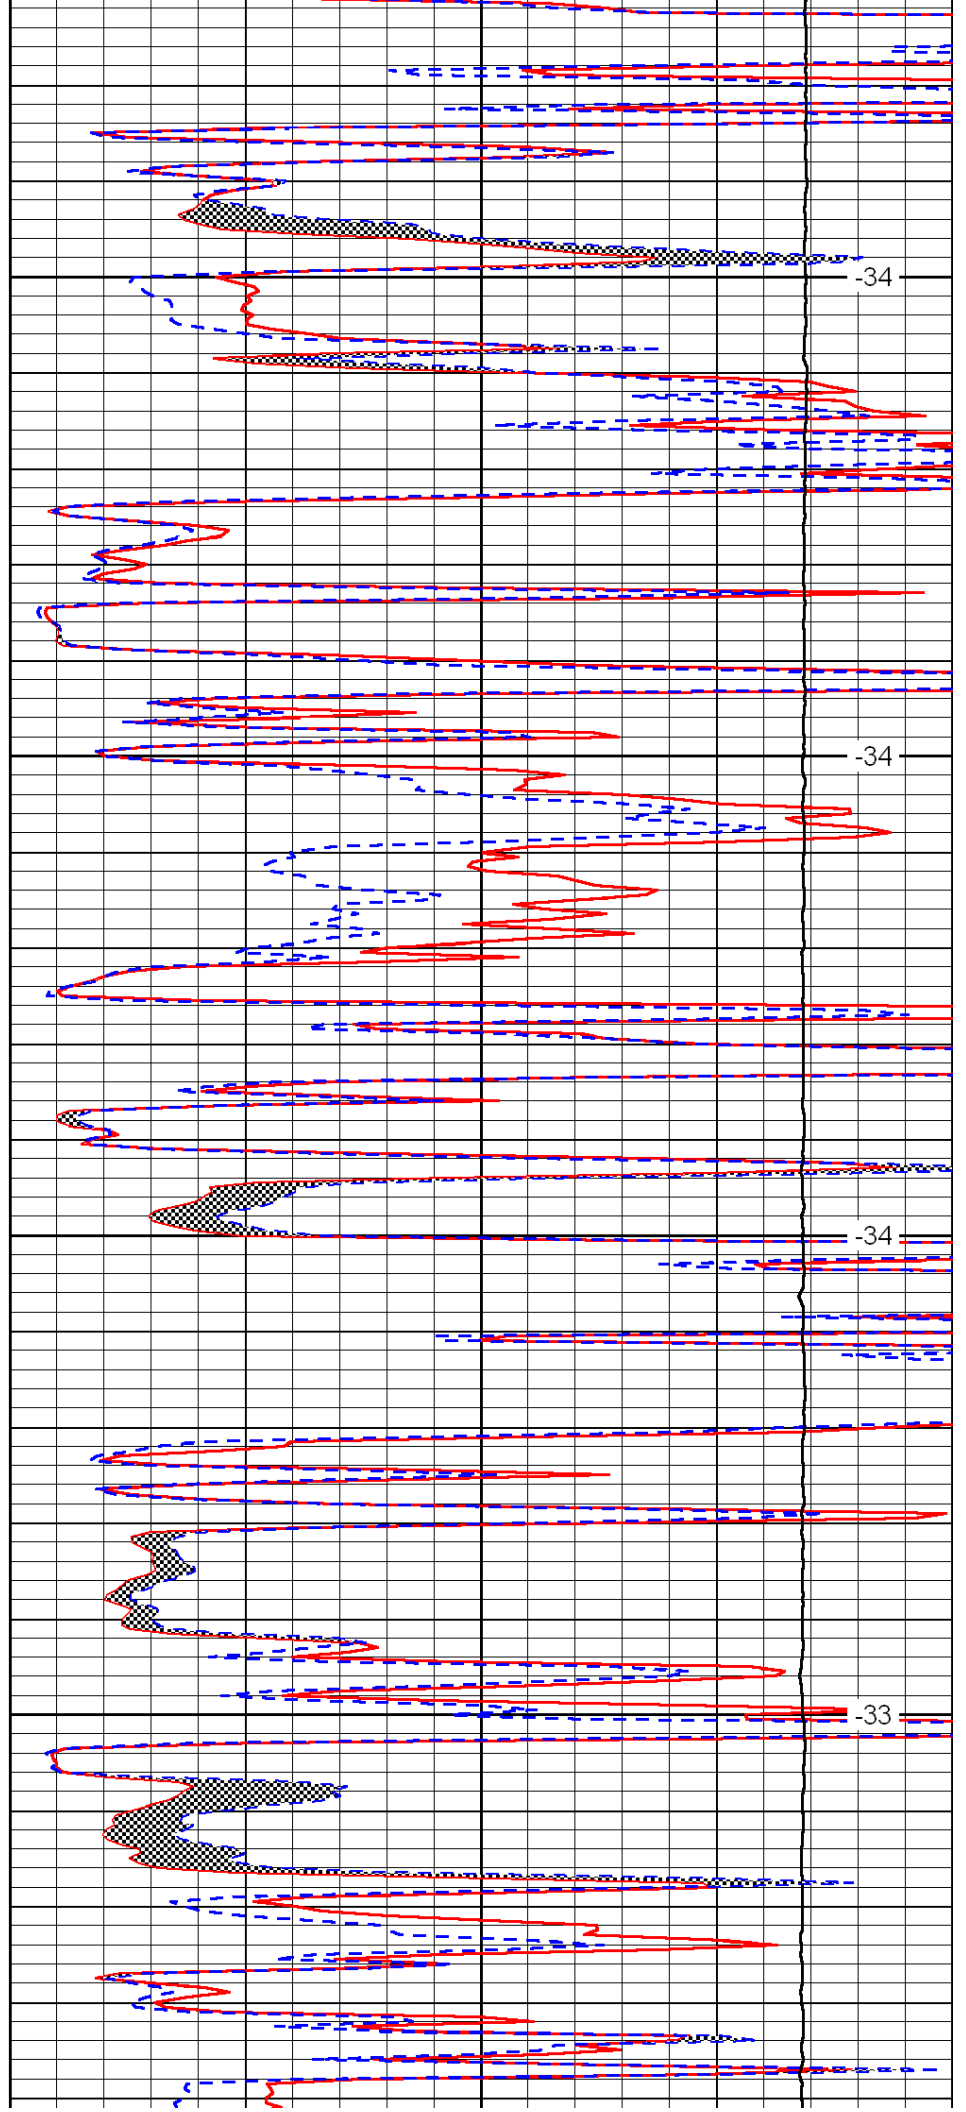

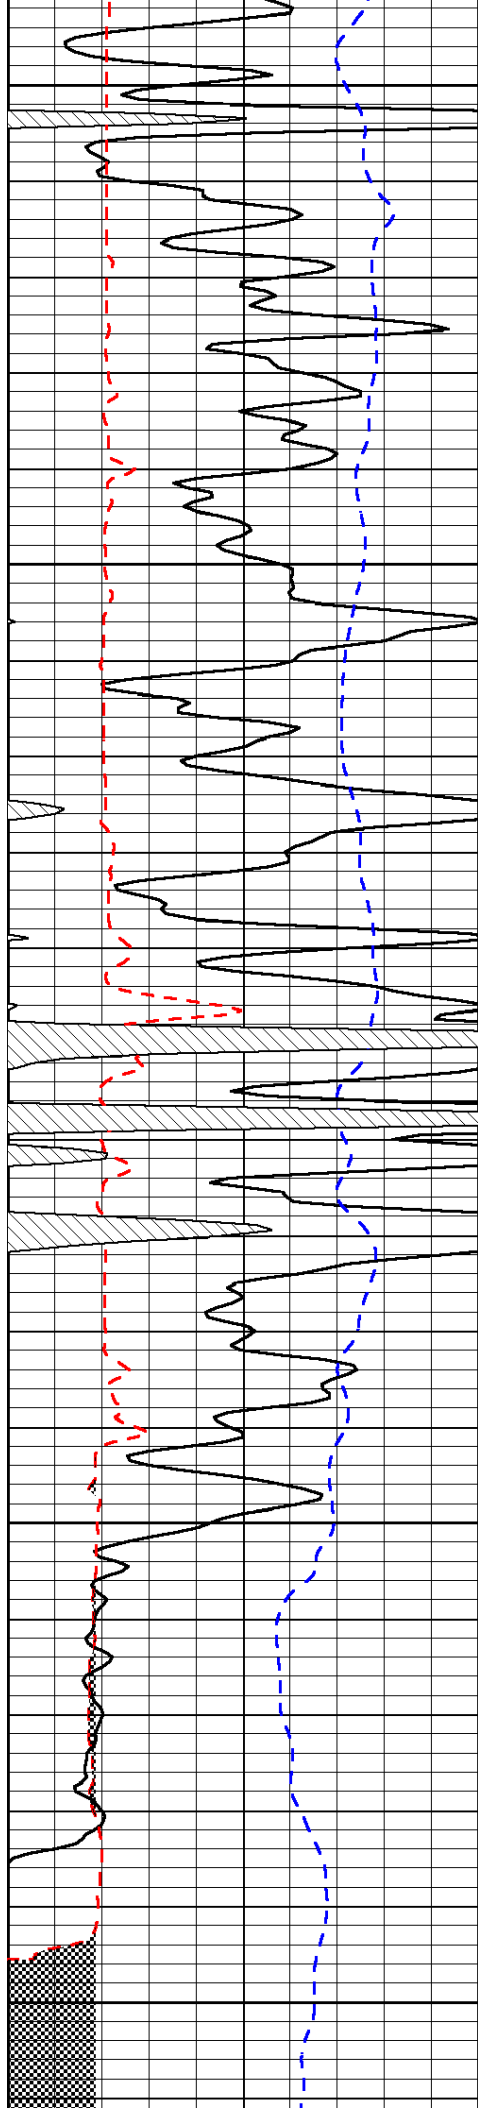


4900

4950

5000

5050

5100

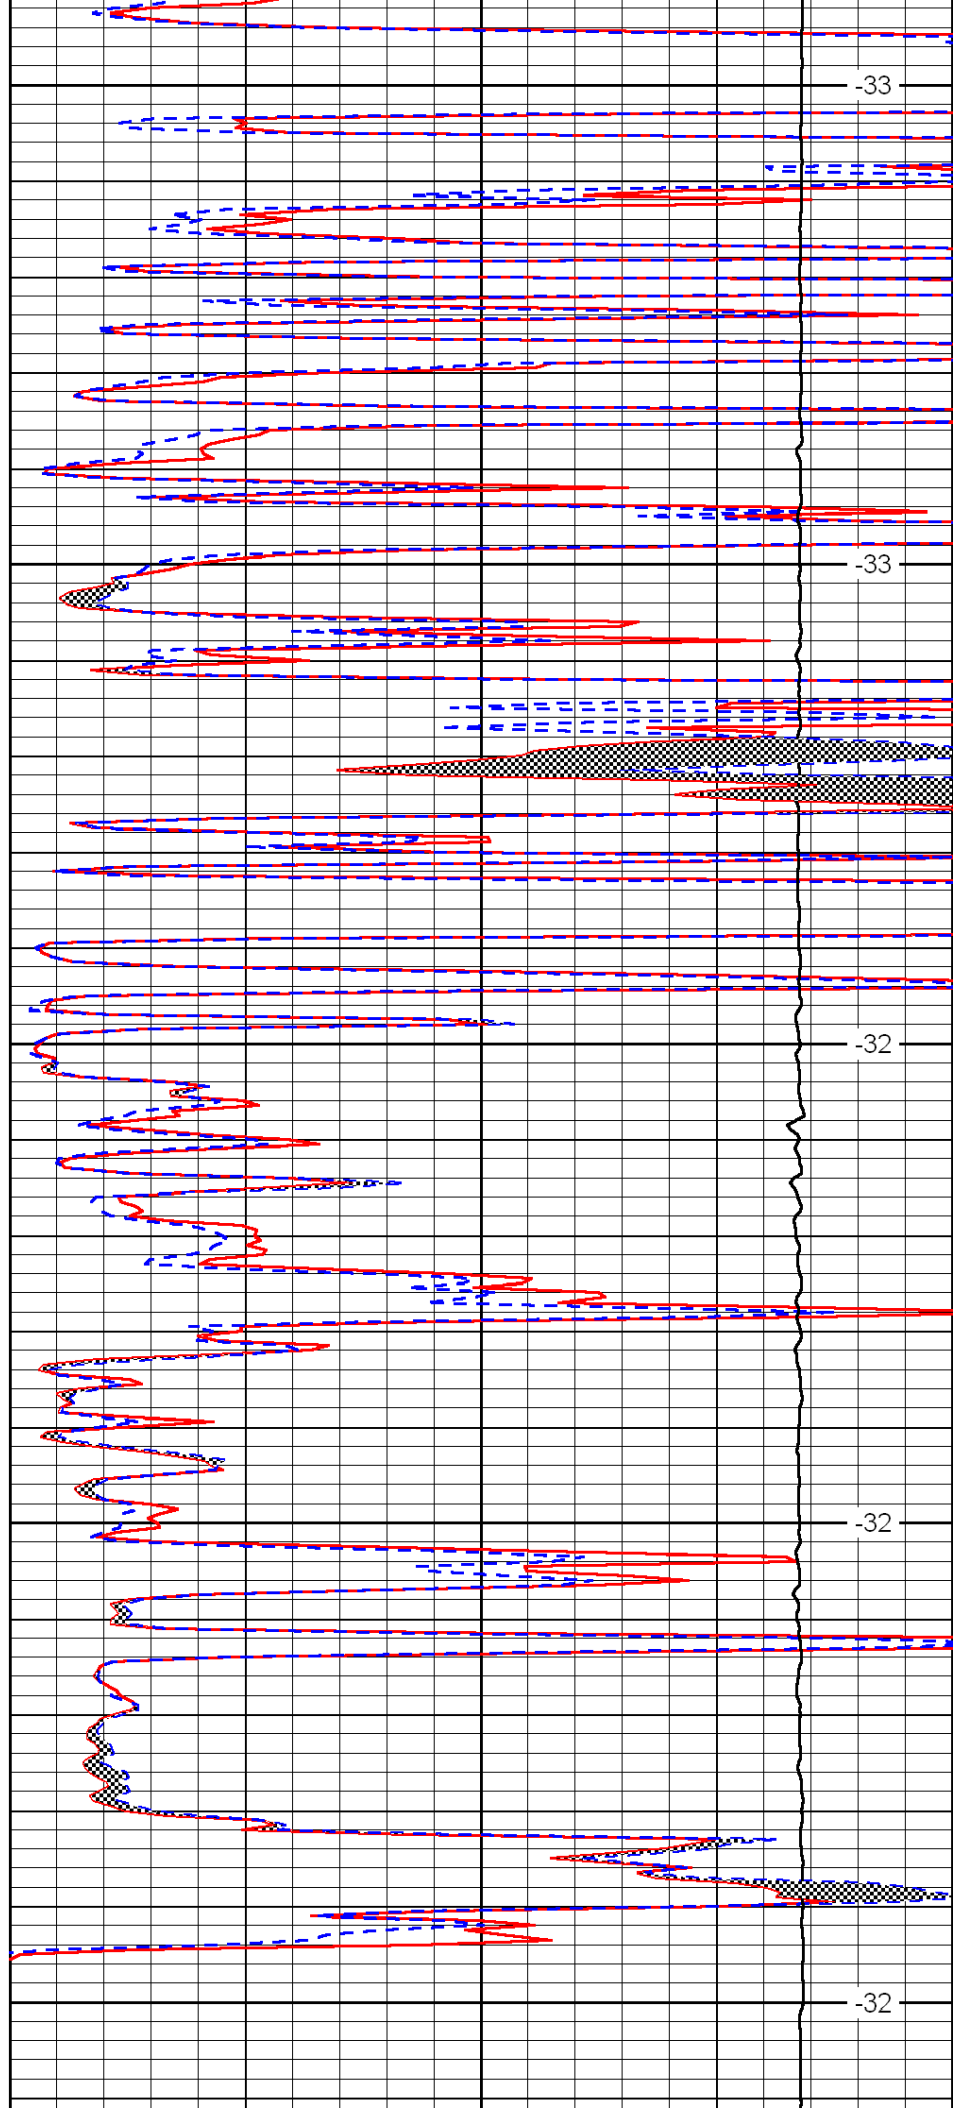



-33

-33

-32

-32

-32

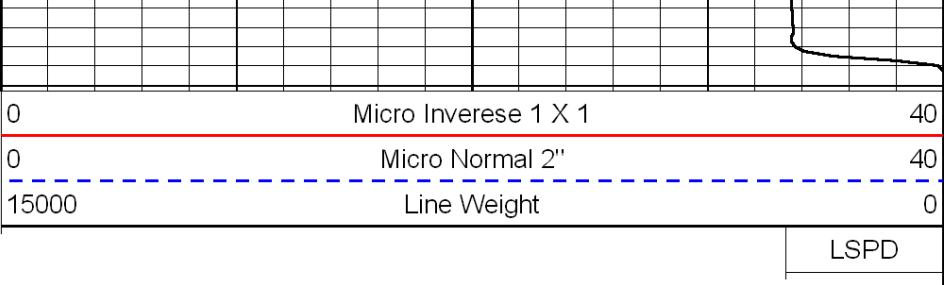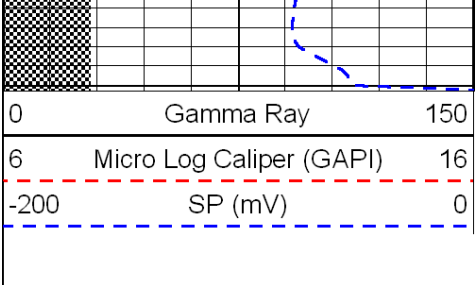

LSPD