

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 129-20124-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 11/04/1973

Well Operator: Colorado Interstate Gas Company KCC License #: 7117
(Owner / Company Name) (Operator's)

Address: P. O. Box 1087 City: Colorado Springs

State: CO Zip Code: 80944 Contact Phone: (719) 520 - 4557

Lease: Boehm Well #: 11 Sec. 15 Twp. 33 S. R. 42 East West

SE - NE - NE - SE Spot Location / QQQQ County: Morton

2,200' Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

100' Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well SD17.9
 SWD Docket # _____ ENHR Docket # KCC-1-19-05 Other: Gas Storage Well

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 13-3/8"-8-5/8" Set at: 1,415' GL Cemented with: 750 Sacks

Production Casing Size: 5-1/2" Set at: 4,824' Cemented with: 1,025 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs: 4,758'-70', 4,785'-93'. CIBP@4,730' GL.

Elevation: 3,484' (G.L. / K.B.) T.D.: 4,825' PBTD: 4,730' Anhydrite Depth: 1,368'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): (See Attachment)

RECEIVED

JAN 18 2005

KCC WICHITA

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? It was filed previously with original CP-1 that has since expired.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: David Veatch

Phone: (970) 376 - 1273

Address: P. O. Box 615 City / State: Fort Morgan, CO 80723

Plugging Contractor: Eagle Services, Inc. KCC License #: 7407
(Company Name) (Contractor's)

Address: 1661 West 7, Liberal, KS 67901 Phone: (620) 482 - 5637

Proposed Date and Hour of Plugging (if known?): Unknown

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 1/12/05 Authorized Operator / Agent: [Signature]
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202


Boehm 11

15-129-20124-00-00

Preliminary procedure confirmed w/ KCC, Steve Durrant 03/12/04

- Run tubing to CIBP
- Spot 10 to 20 sk cmt plug on CIBP
- Use water between plugs inside production casing
- Lay down tubing
- WOC then tag w/ wireline to verify
- Perforate casing at 1300'
- Circulate cement to surface from 1300', leave 50' cement in casing.
- Spot 10 sx cement plug at surface
- Cut off casing and weld cap

RECEIVED
JAN 18 2005
KCC WICHITA

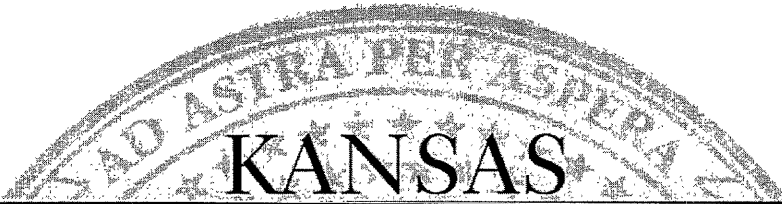

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Colorado Interstate Gas Company
PO Box 1087
Colorado Springs, CO 80944

January 19, 2005

Re: BOEHM #11
API 15-129-20124-00-00
SENESE 15-33S-42W, 2200 FSL 100 FEL
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor