



Dual Compensated Porosity Log

DIGITAL LOG (785) 625-3858

API No.

15-159-22,611-00-00

Company American Warrior, Inc.

Well Links No. 1-13

Field Chase-Silica

County Rice

State Kansas

Location

1546' FSL & 2296' FEL

Other Services
CNL/CDL
MEL/BHCS

Sec: 13 Twp: 19S Rge: 10W

Permanent Datum Ground Level Elevation 1749

Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum

K.B. 1757
D.F. 1749
G.L. 1749

Date 05/23/2010

Run Number One

Type Log CNL / CDL

Depth Driller 3375

Depth Logger 3370

Bottom Logged Interval 3350

Top Logged Interval 2500

Type Fluid In Hole Chemical

Salinity, PPM CL 5,400

Density 9.3

Level Full

Max. Rec. Temp. F 112

Operating Rig Time 4 Hours

Equipment -- Location 17 Hays

Recorded By Mike Garrison

Witnessed By Jim Musgrove

Borehole Record

Casing Record

Run No

Bit

From

To

Size

Wgt.

From

To

One 12.25

0

310

8.625

24#

0

310

Two 7.875

310

TD

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Chase, 2 North, 1 West, 1/2 North, West Into

Database File: awar_link-1-13hd.db
Dataset Pathname: dil/awarlgs
Presentation Format: cdl
Dataset Creation: Sun May 23 05:23:25 2010
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray	150
6	Caliper (GAPI)	16

30		Compensated Density (pu)		-10	
2		Bulk Density (g/cc)		3	
15000		Line Tension (lb)		0	
2.625	DGA (g/cc)	3.425	-0.25	Correction (g/cc)	0.25
					LSPD
					(ft/min)

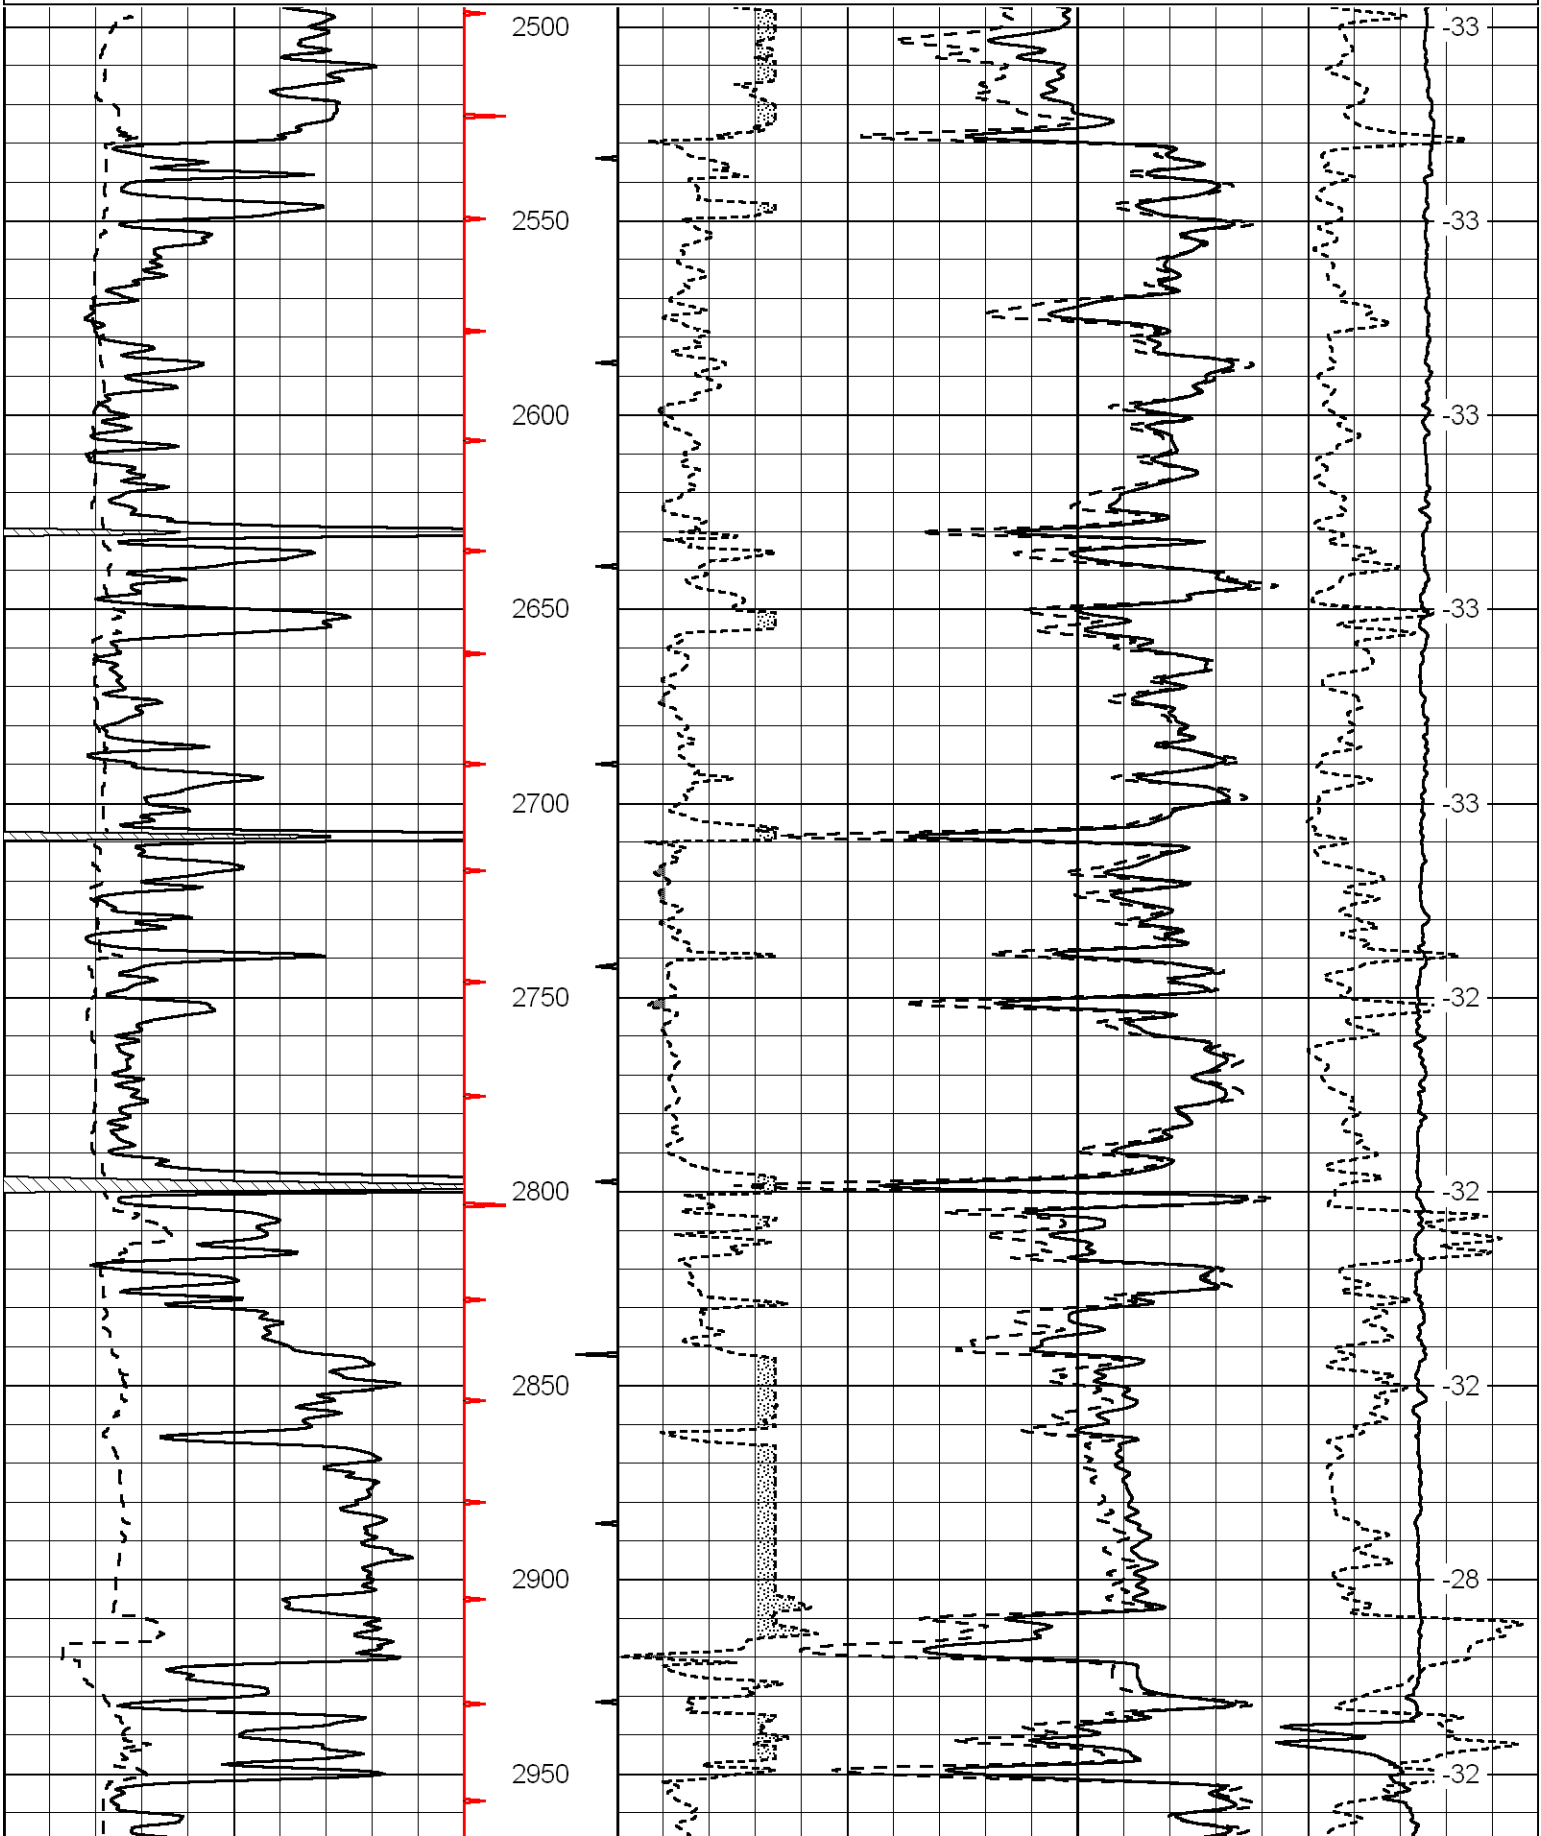

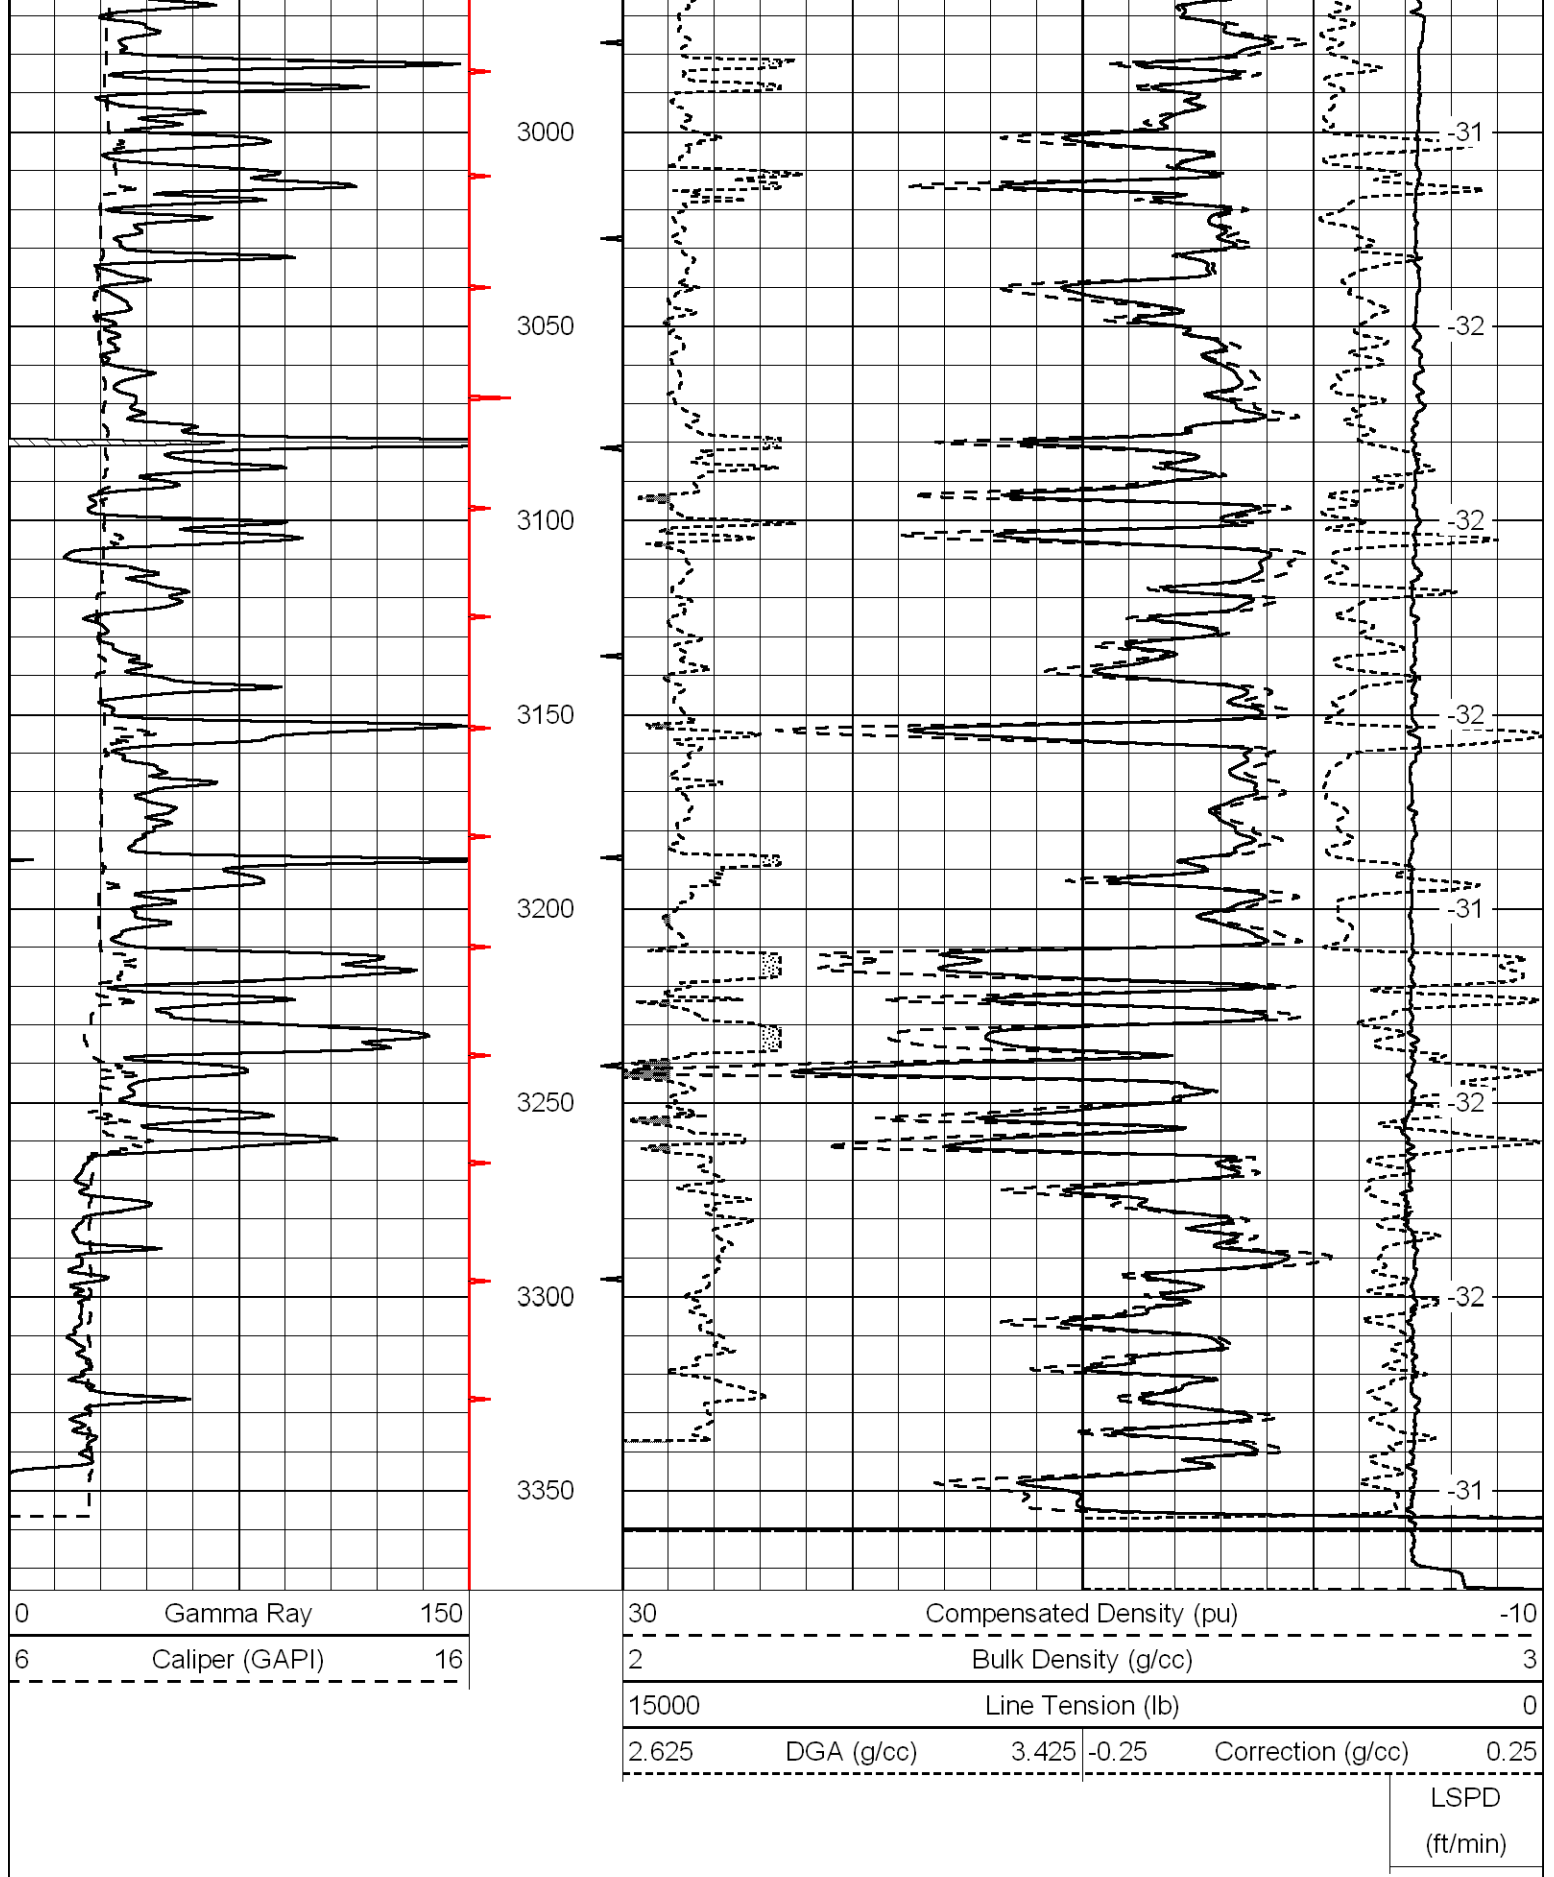



Database File: awar_link-1-13hd.db
Dataset Pathname: dil/awarlg
Presentation Format: cndlspec
Dataset Creation: Sun May 23 05:23:25 2010
Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Caliper (GAPI)	16


30	Compensated Neutron (pu)				-10
30	Compensated Density (2.71 ma) (pu)				-10
2.625	DGA (g/cc)	3.425	-0.25	Correction (g/cc)	0.25
10000	Line Tension (lb)				0


LSPD
(ft/min)

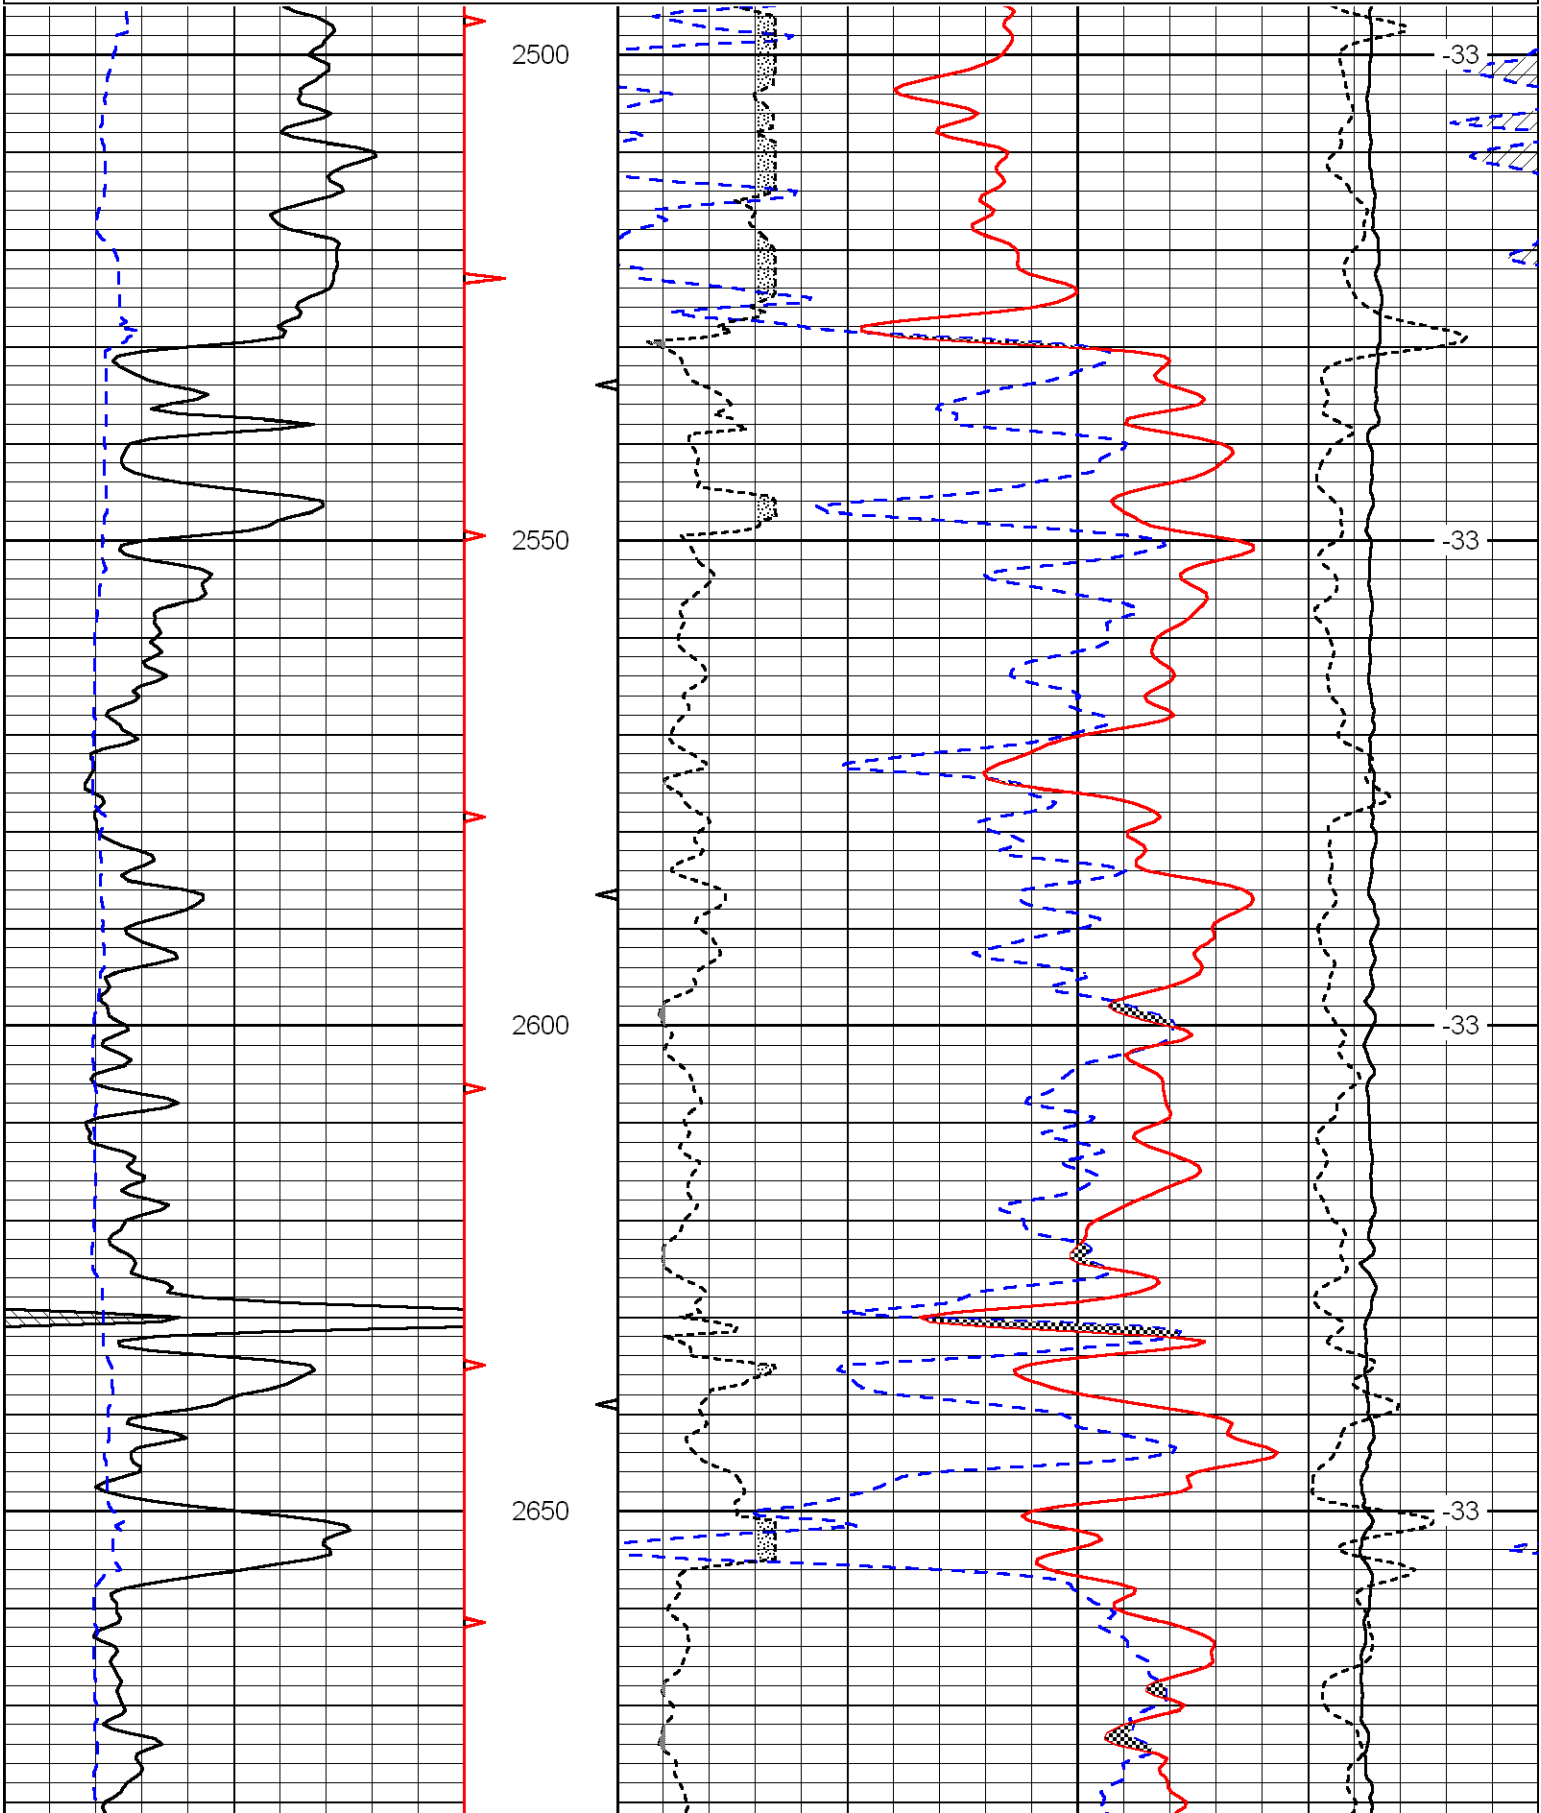

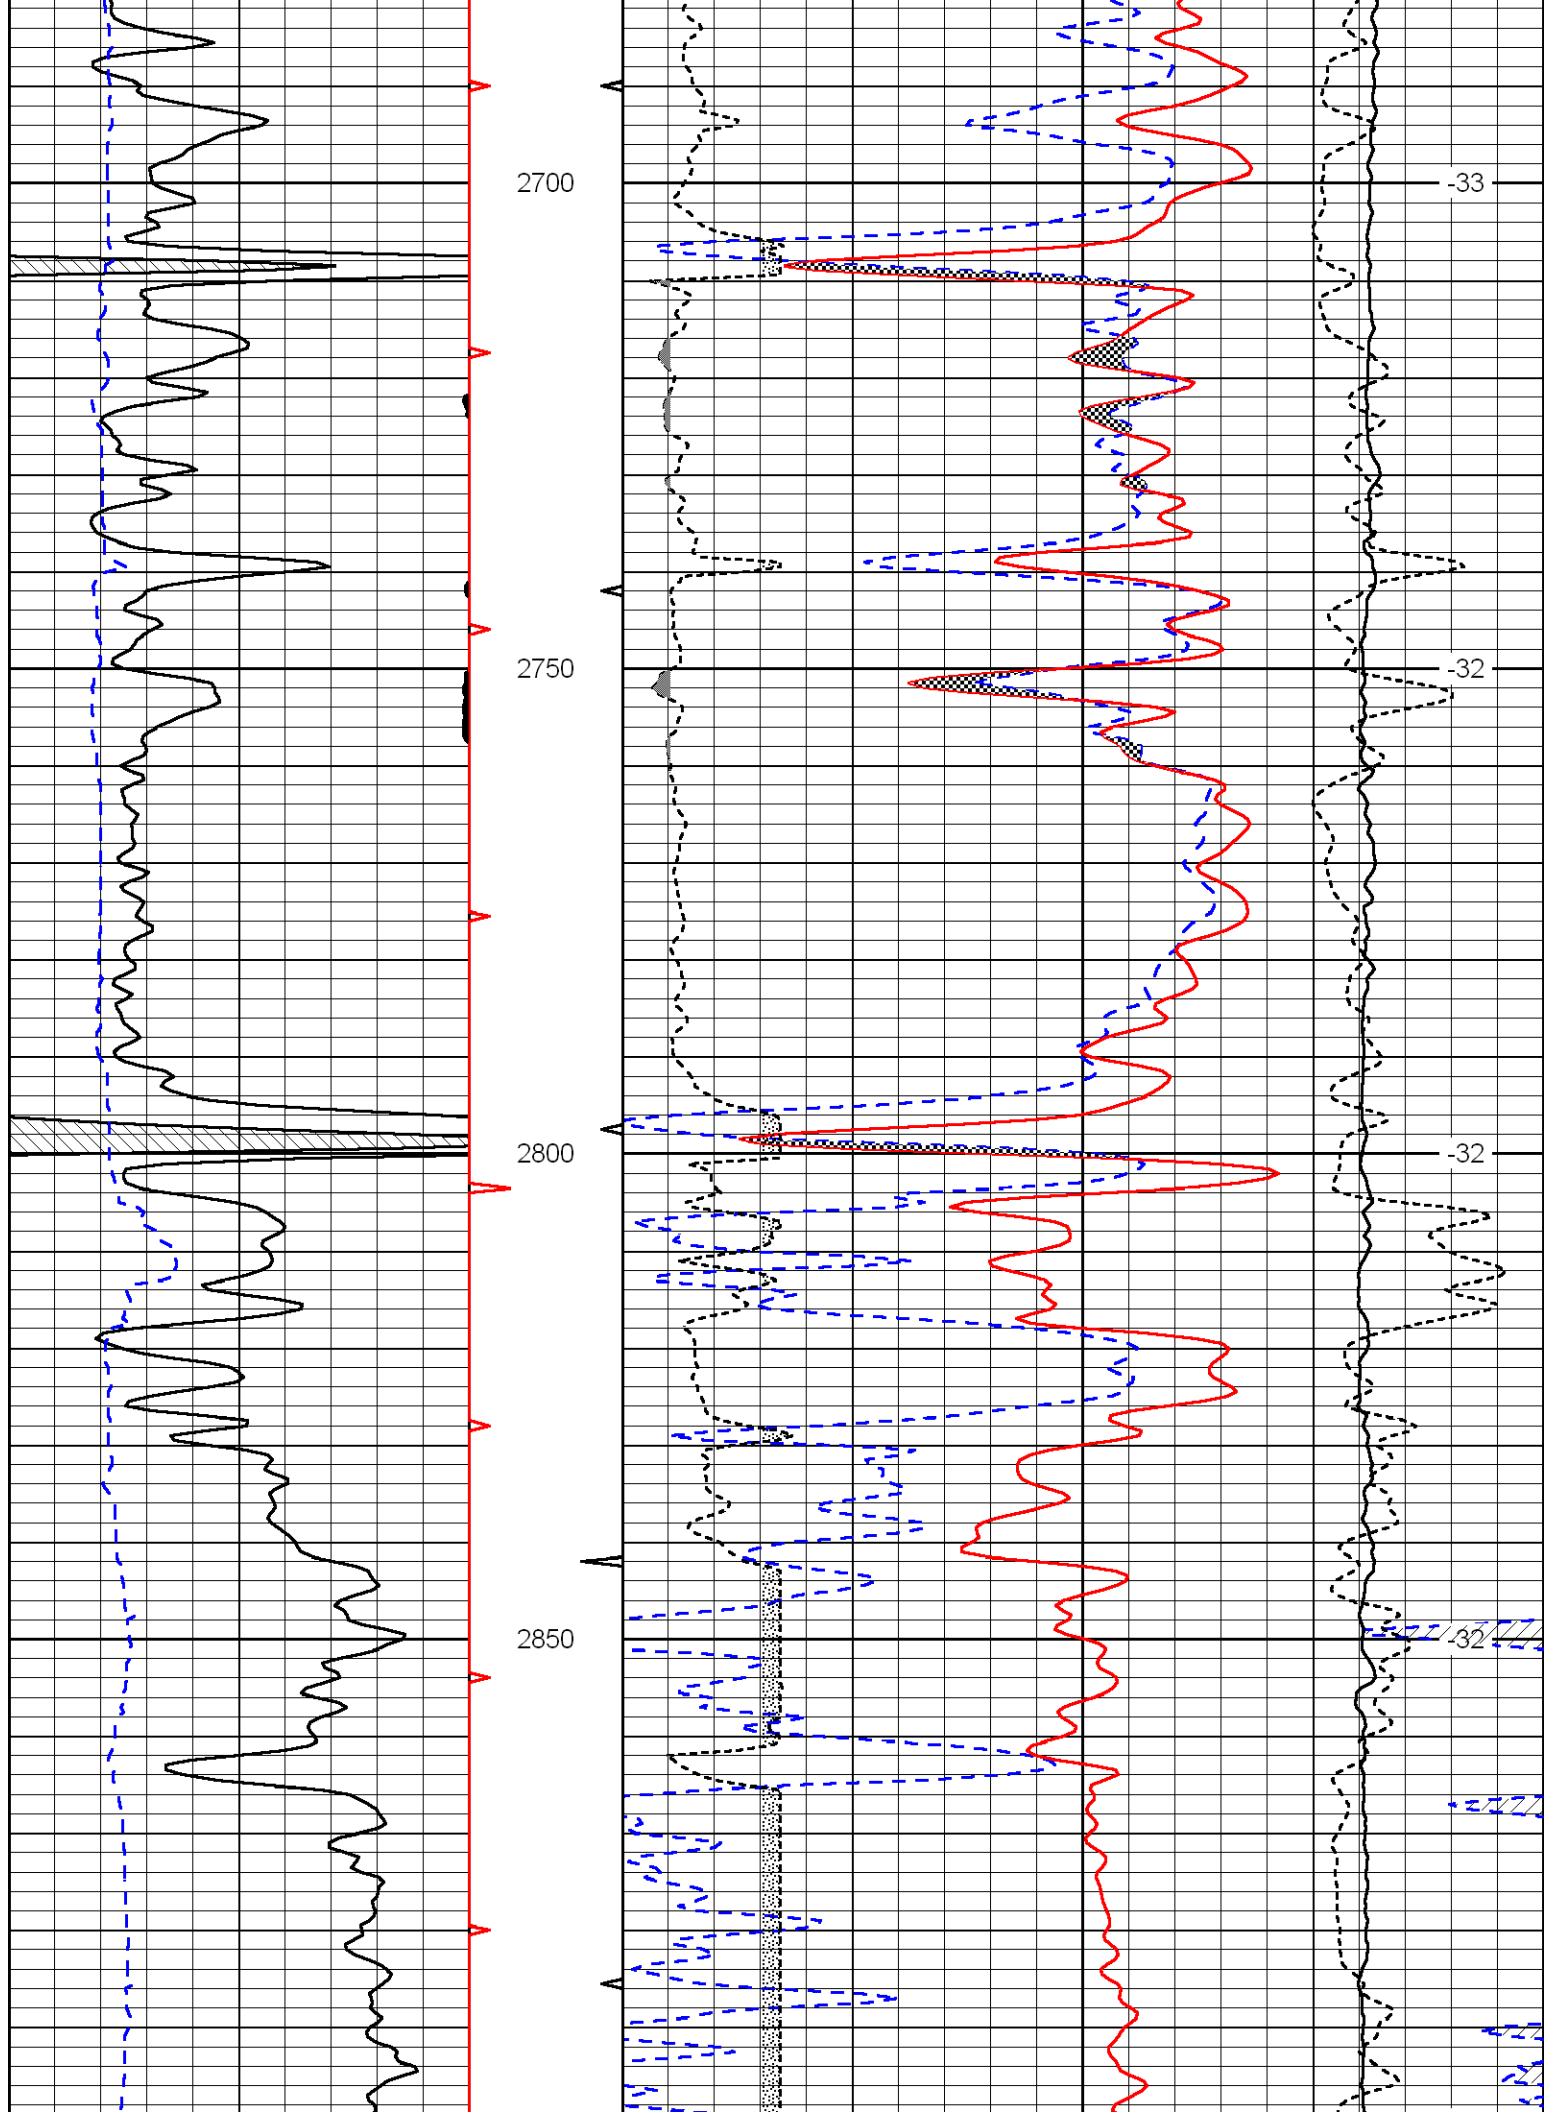


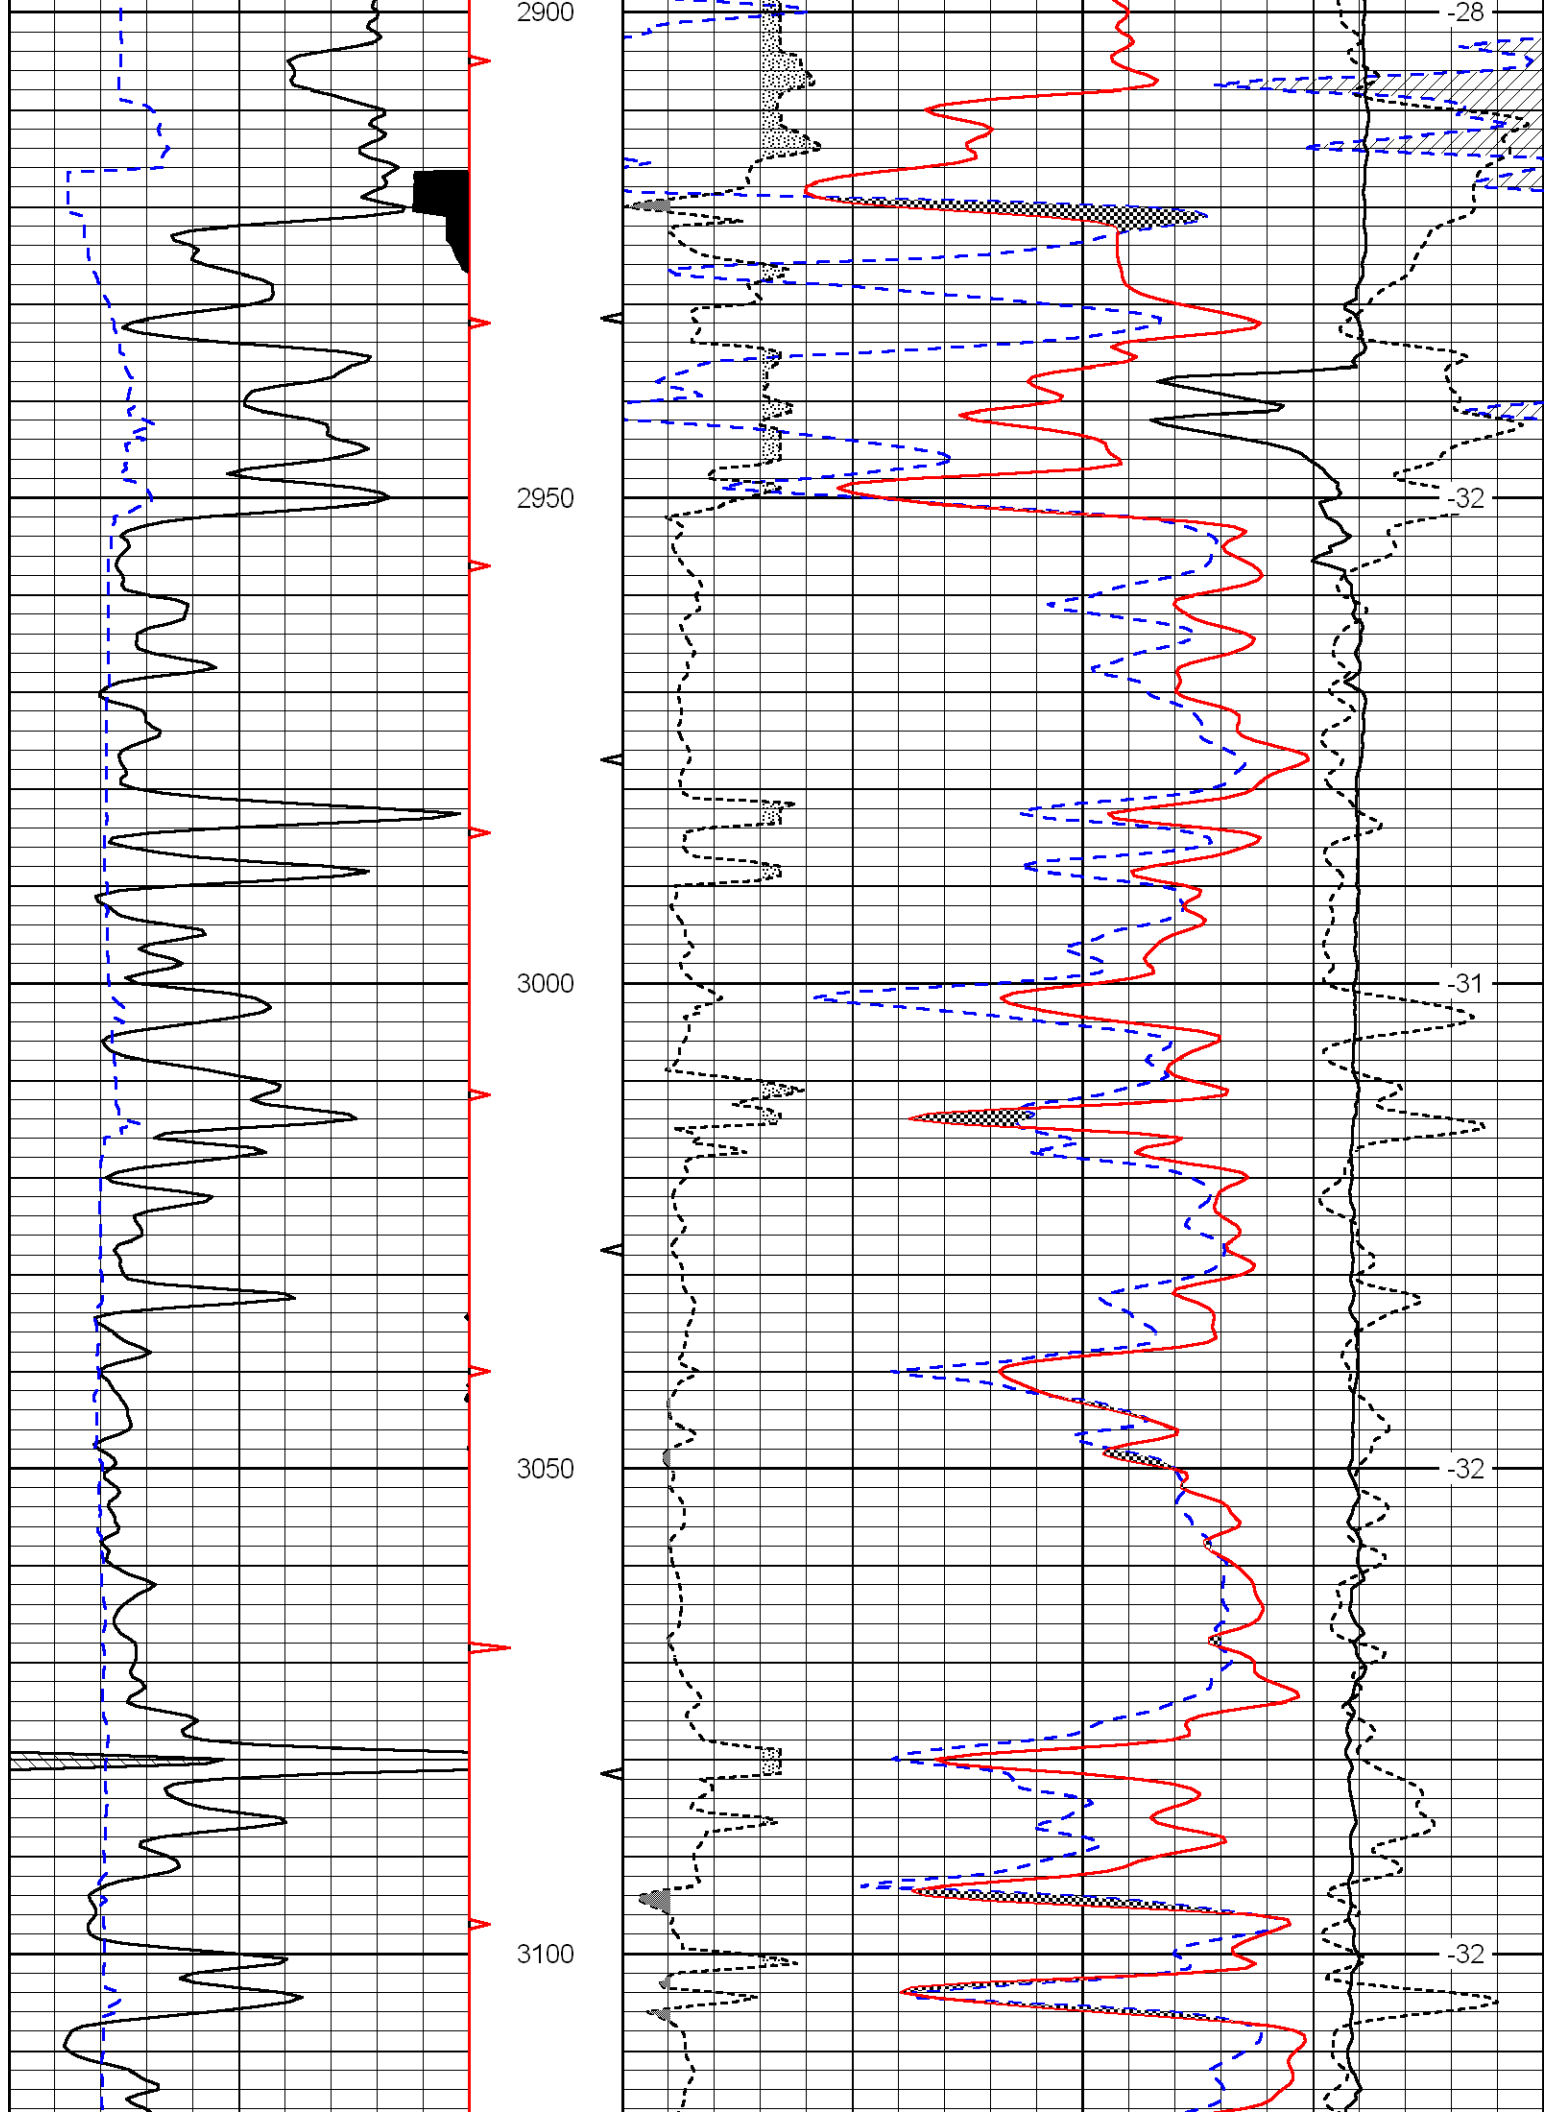

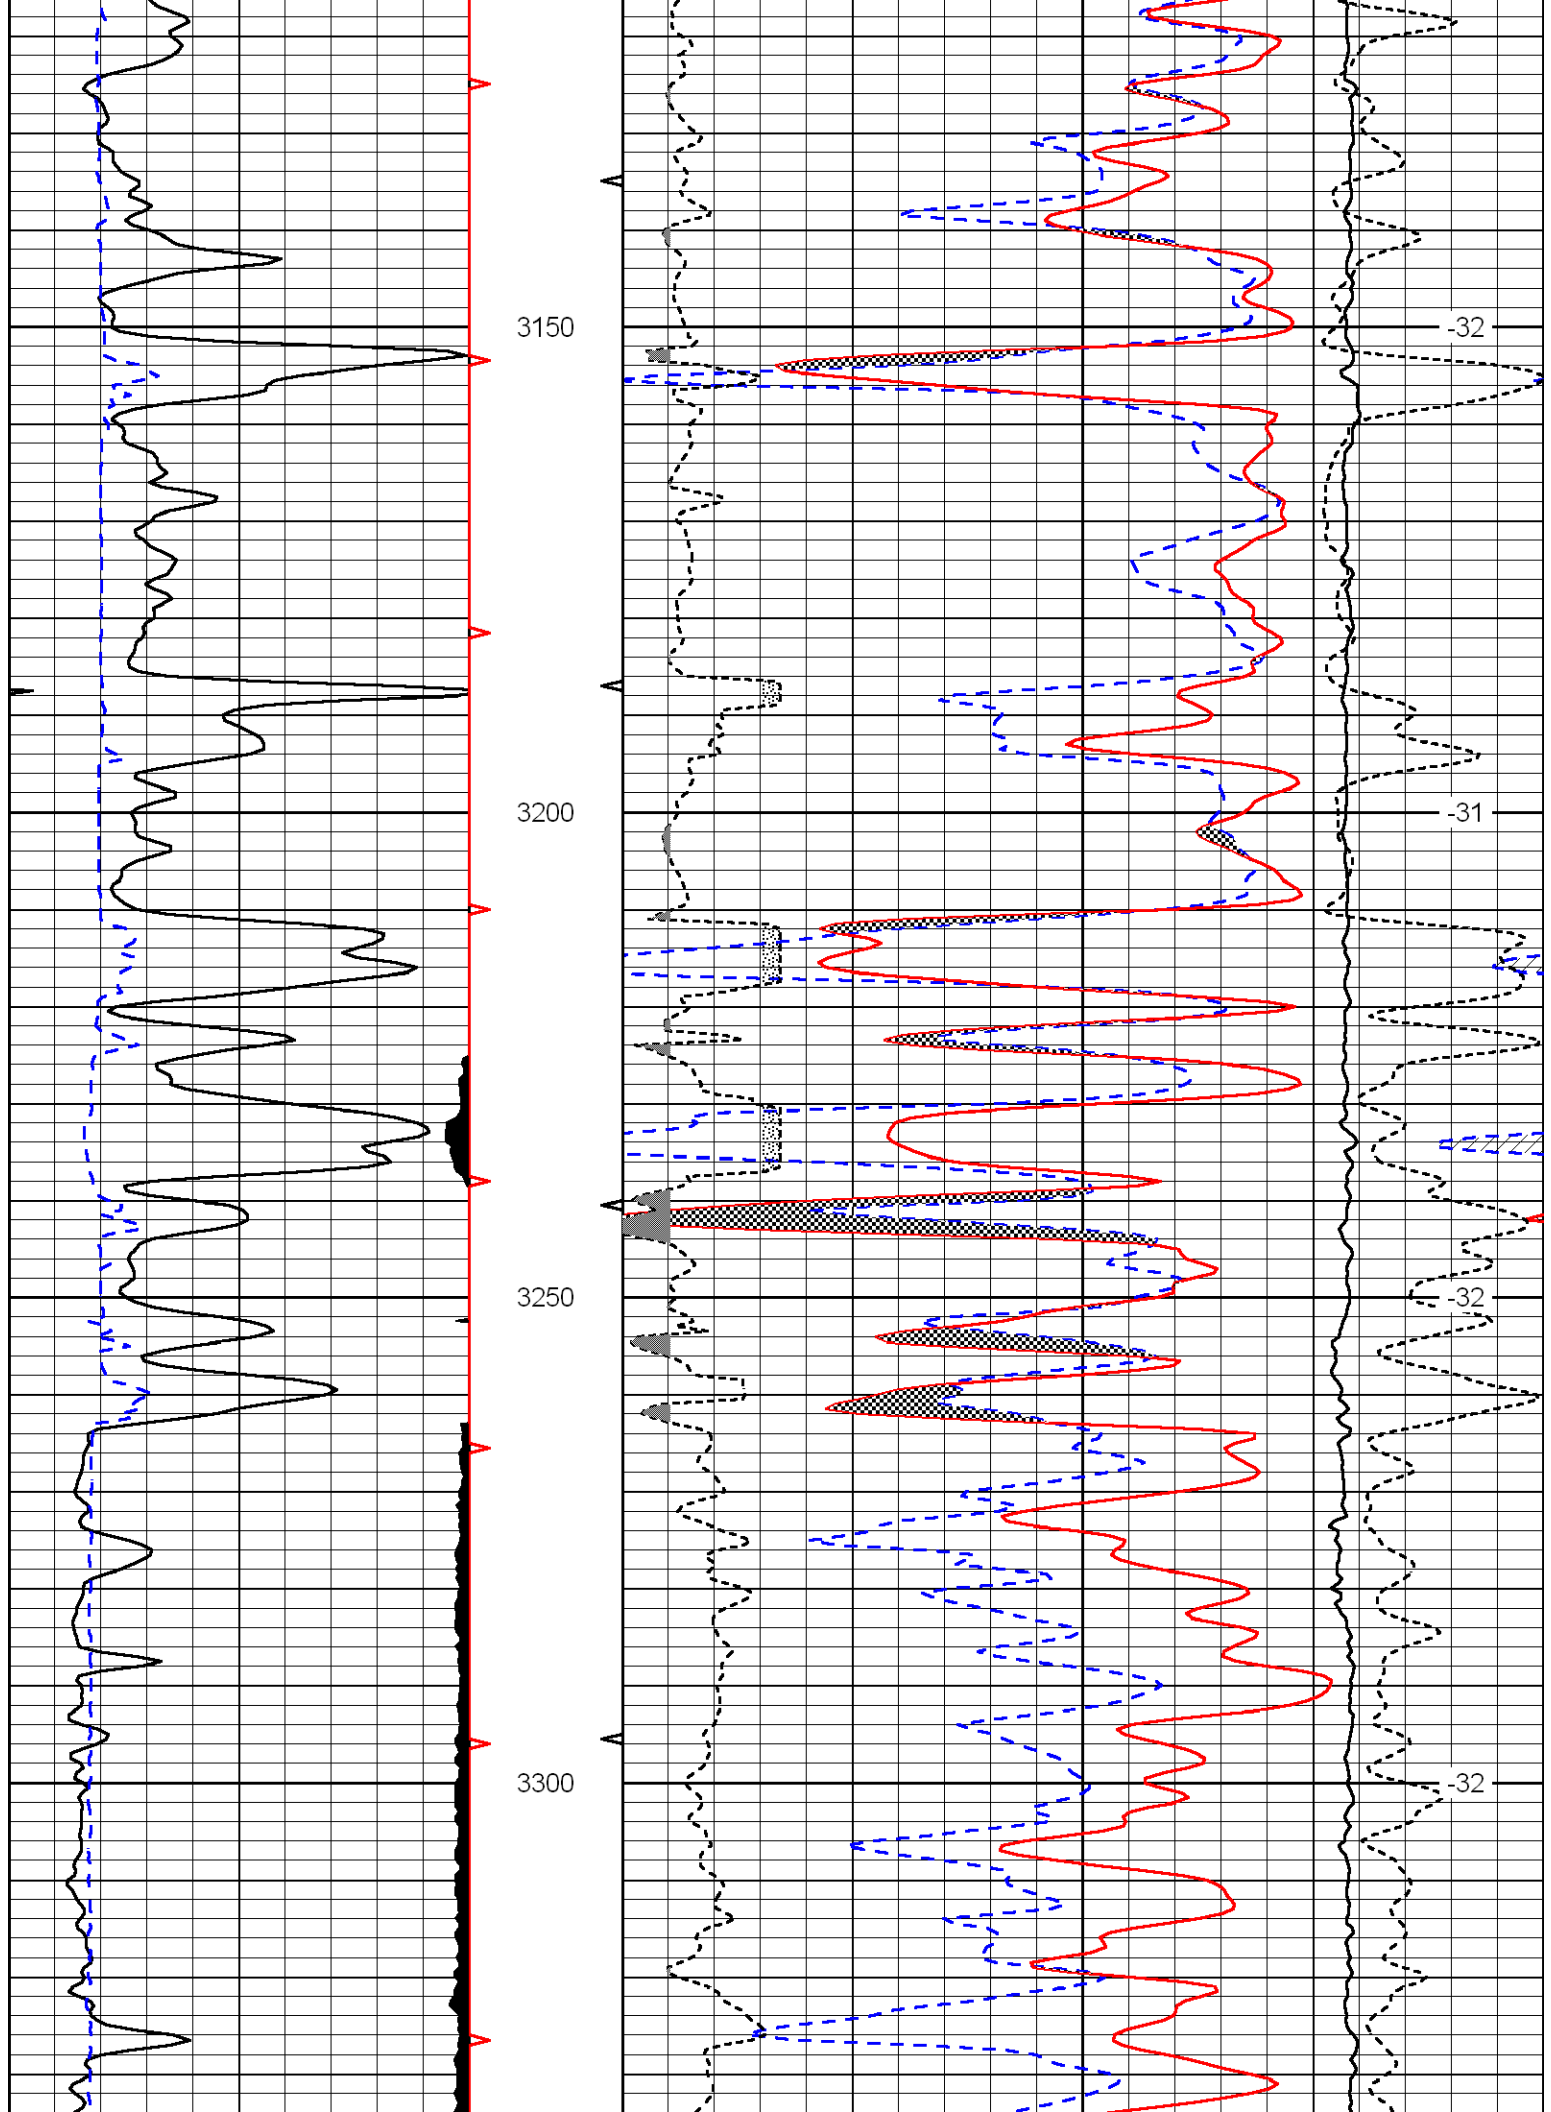

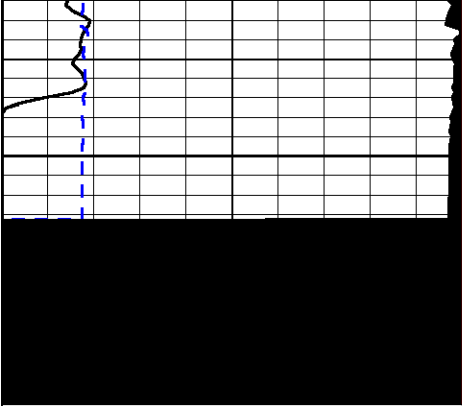

3350

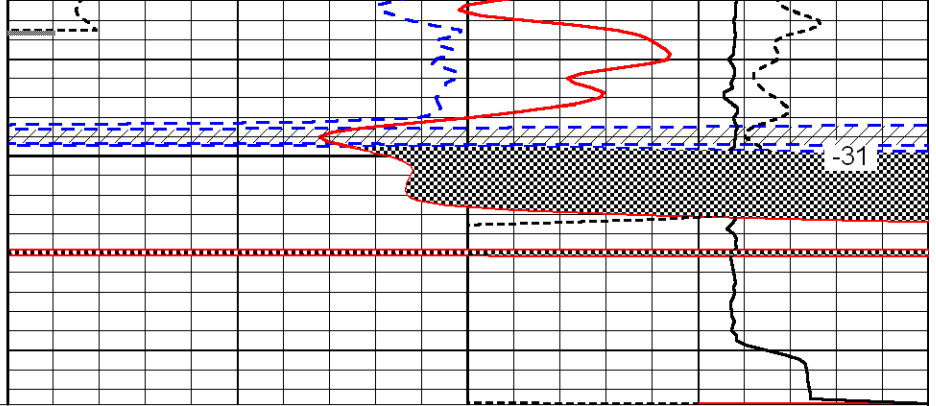

0	Gamma Ray	150
6	Caliper (GAPI)	16

30	Compensated Neutron (pu)				-10
30	Compensated Density (2.71 ma) (pu)				-10
2.625	DGA (g/cc)	3.425	-0.25	Correction (g/cc)	0.25
10000	Line Tension (lb)				0

LSPD
(ft/min)