


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Cheyenne County. Sec. 7 Twp. 5S Rge. 37W (E)____(W)
Location as "NE/CNW/SW" or footage from lines SE SW
Lease Owner Arvel C. Smith & Ben J. Taylor
Lease Name Nelson Well No. 1
Office Address 534 N. Tallyrand, Wichita 6, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Lost Hole
Date well completed August 29, 19 65
Application for plugging filed August 29, 19 65
Application for plugging approved " " 19 "
Plugging commenced " " 19 "
Plugging completed " " 19 "
Reason for abandonment of well or producing formation Lost Hole.

NORTH

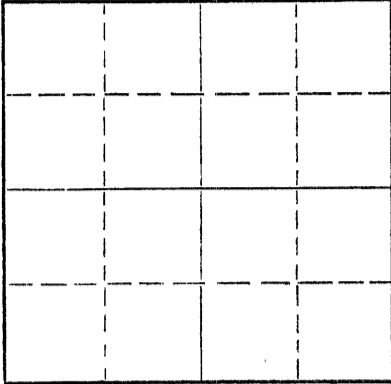

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3846 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface pipe	0'	327'	8 5/8"		

RECEIVED
STATE CORPORATION COMMISSION
SEP 17 1965
9-17-65
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

0' - 35' Ten sack Cement plug (inside surface pipe)
35' - 2200' Heavy Mud
2200' - 2366' 150 sack Cement Plug
2366' - 3846' 4 1/2" drill pipe & collars lost in hole.

On August 29, 1965 rig skidded 25 feet west of abandoned hole covered by this Plugging Record, and Nelson #1-A was commenced. See Intent to Drill, & subsequent forms relative to Nelson #1-A.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stoepelwerth Drilling, Inc.
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Arvel C. Smith (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Arvel C. Smith
534 N. Tallyrand, Wichita 6, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of September, 1965.

My commission expires 12-29-68
Pelly Lee Hallmark
Notary Public.

