

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-025-21506-00-00

Company Falcon Exploration, Inc.

Well Barnhardt No. 1-27

Field Wildcat

County Clark

State

Kansas

Location

100' FSL & 170' FWL

Other Services
CNL/CDL
MEL/BHCS

Sec: 27

Twp: 30 S

Rge: 22 W

Elevation

Permanent Datum Ground Level Elevation 2353
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2363
D.F.
G.L. 2353

Date 5/22/2010

Run Number One

Depth Driller 6022

Depth Logger 6016

Bottom Logged Interval 6015

Top Log Interval 650

Casing Driller 8.625 @ 680

Casing Logger 674

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 15,600

Density / Viscosity 9.1 52

pH / Fluid Loss 9.5 14.0

Source of Sample Flowline

Rm @ Meas. Temp 0.65 @ 65

Rmf @ Meas. Temp 0.49 @ 65

Rmc @ Meas. Temp 0.49 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT 0.31 @ 136

Operating Rig Time 7 Hours

Max Rec. Temp. F 136

Equipment Number 15

Location Hays

Recorded By B. Becker

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Kingsdown, Ks;
7-1/2 South; 1-1/2 East;
South Into at Cattle Guard



Database File: falconhd.db
Dataset Pathname: DIL/falcstk
Presentation Format: dil2in
Dataset Creation: Sun May 23 07:57:20 2010
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP	0




0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500




LSPD

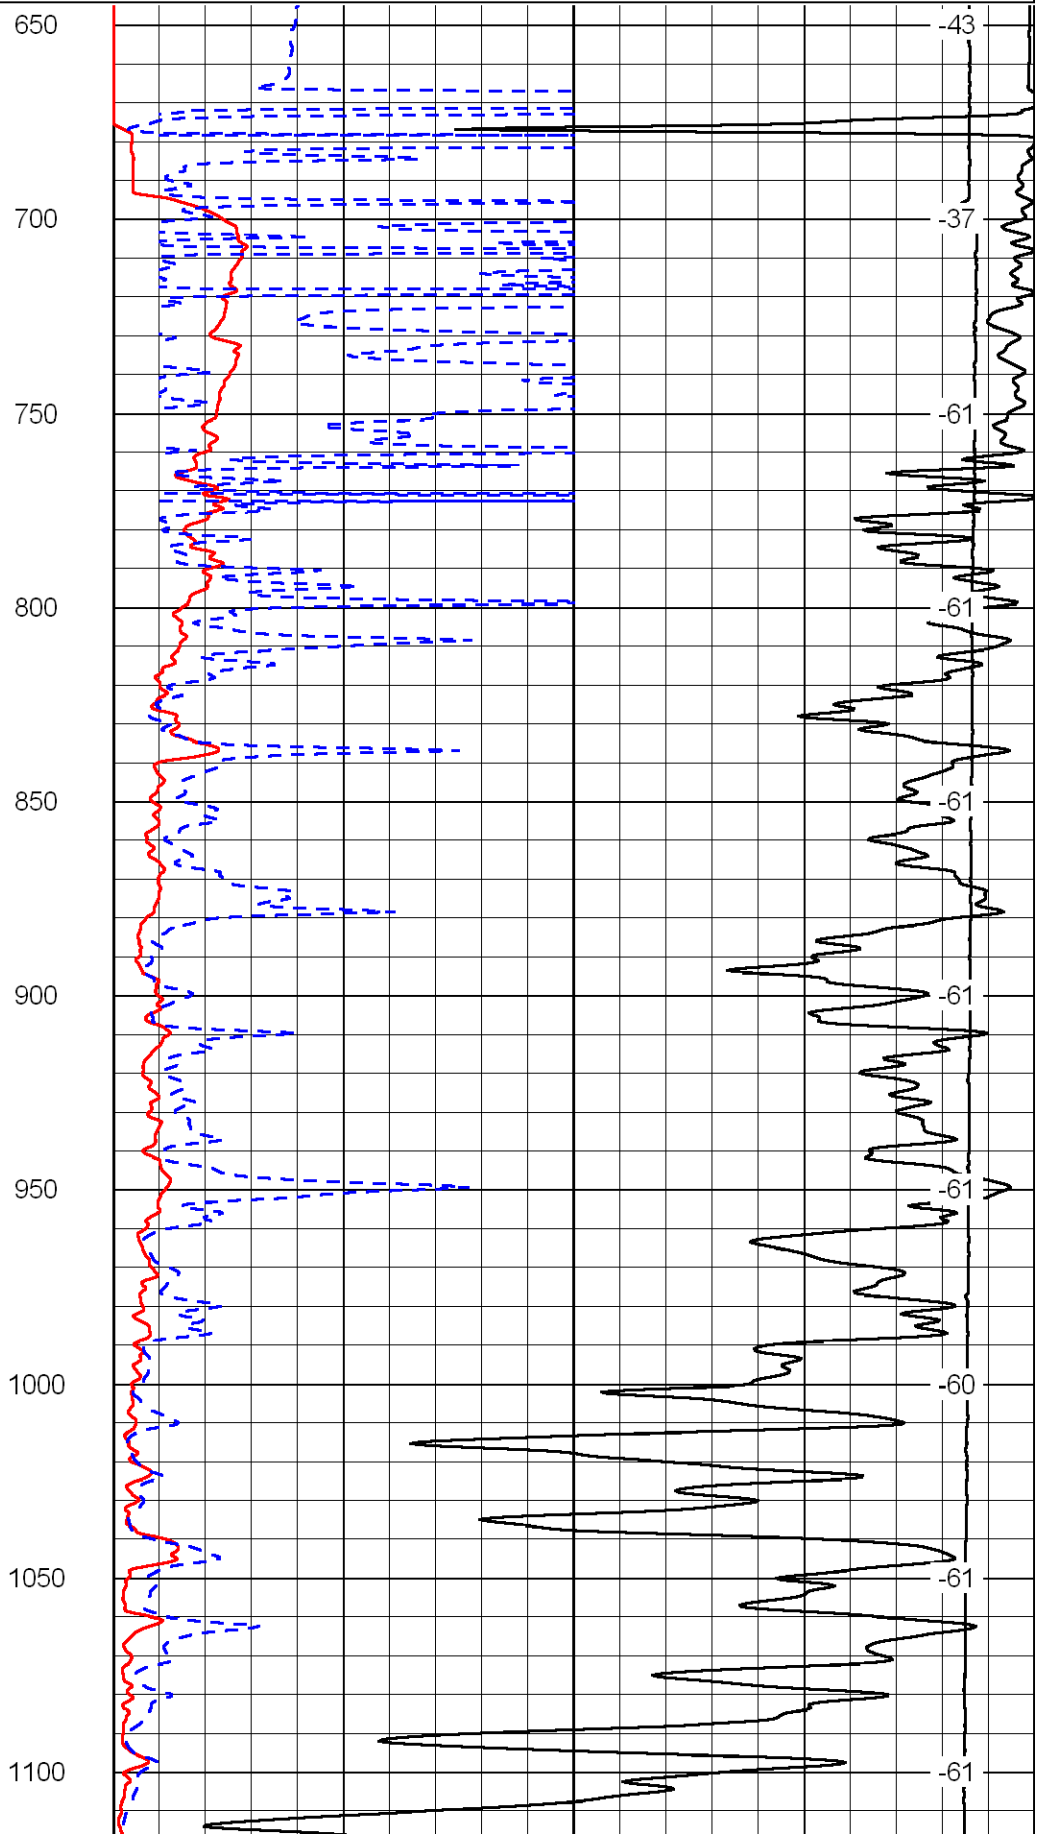
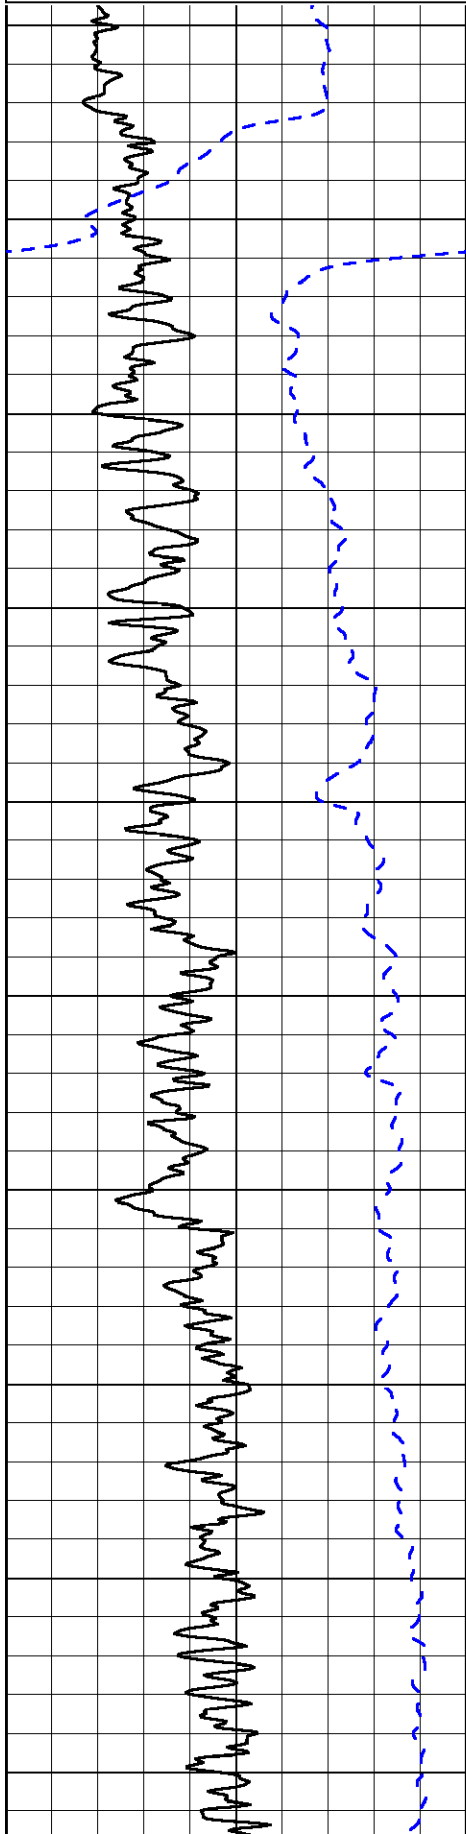



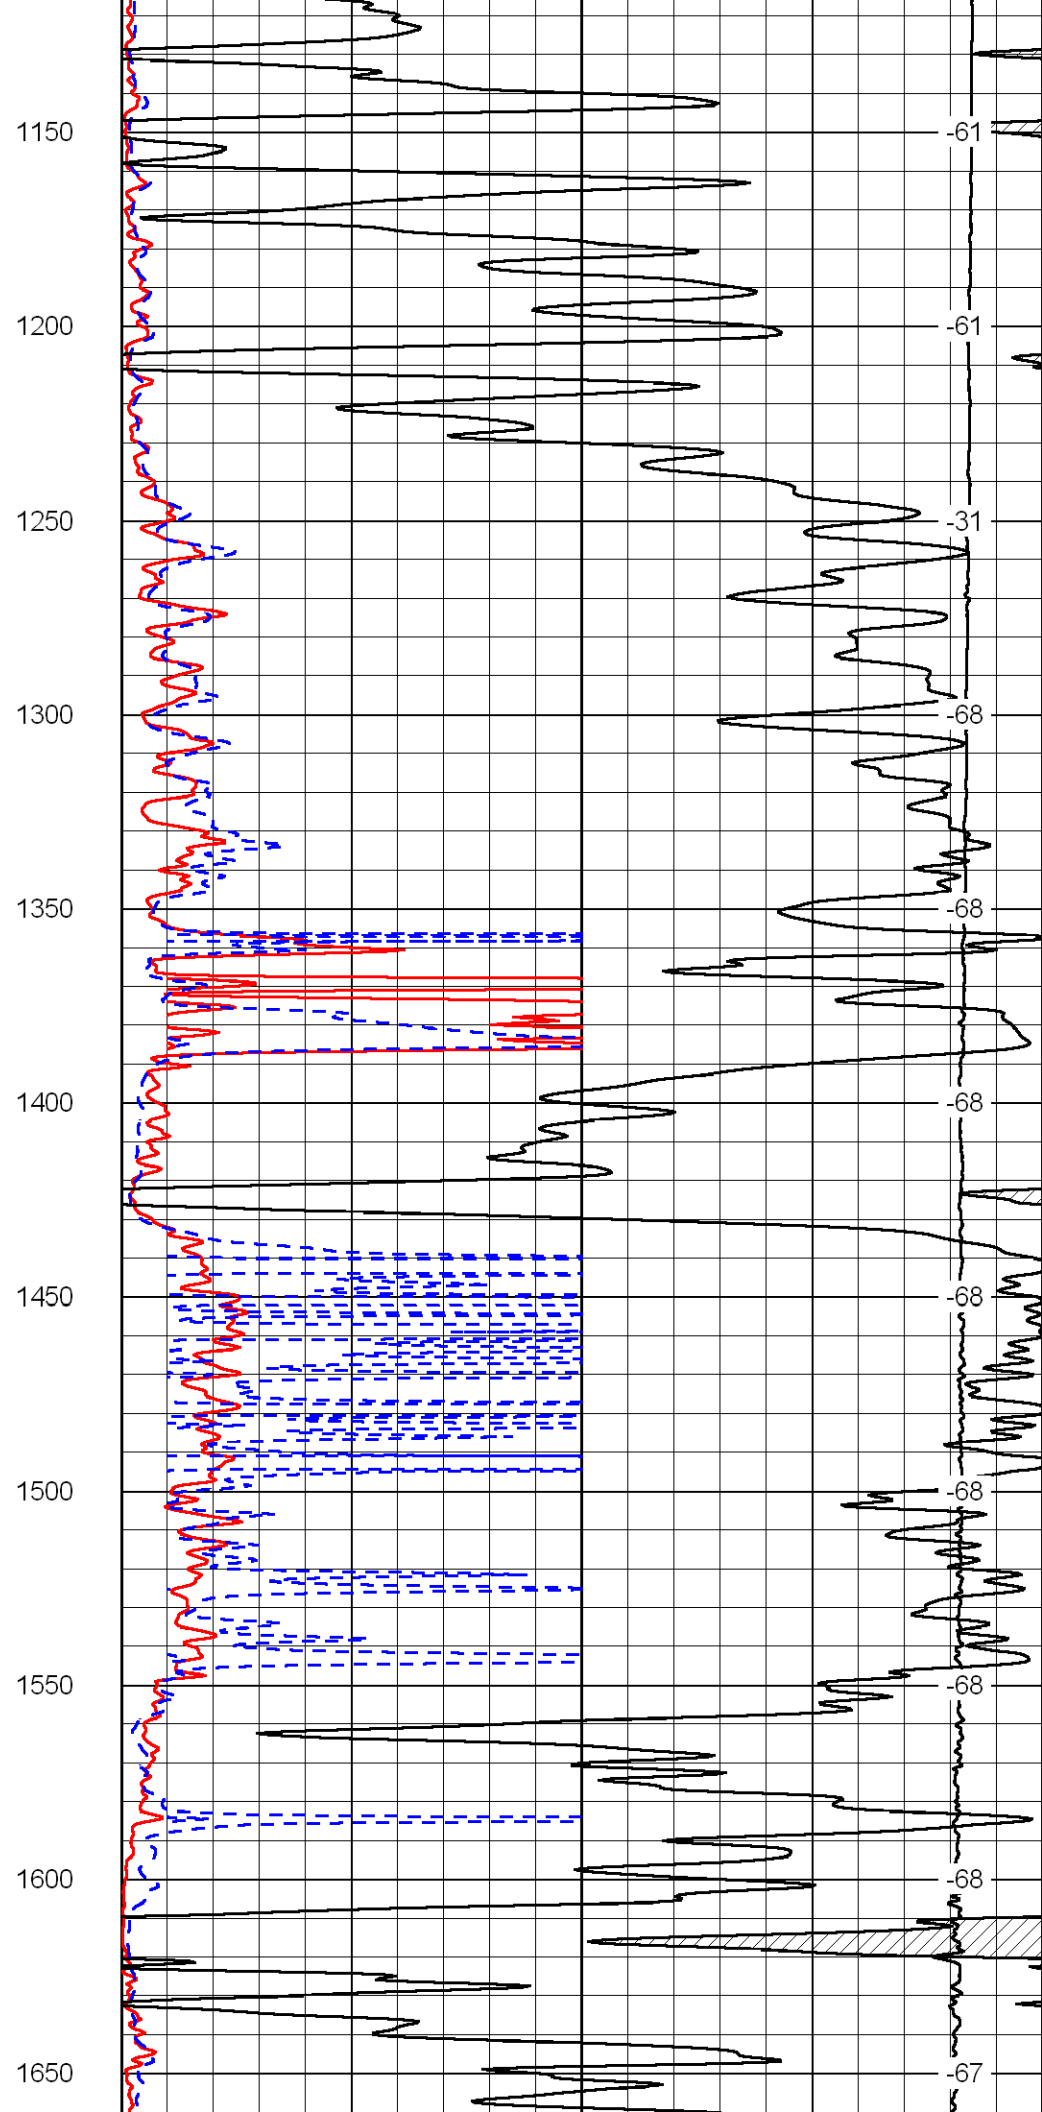
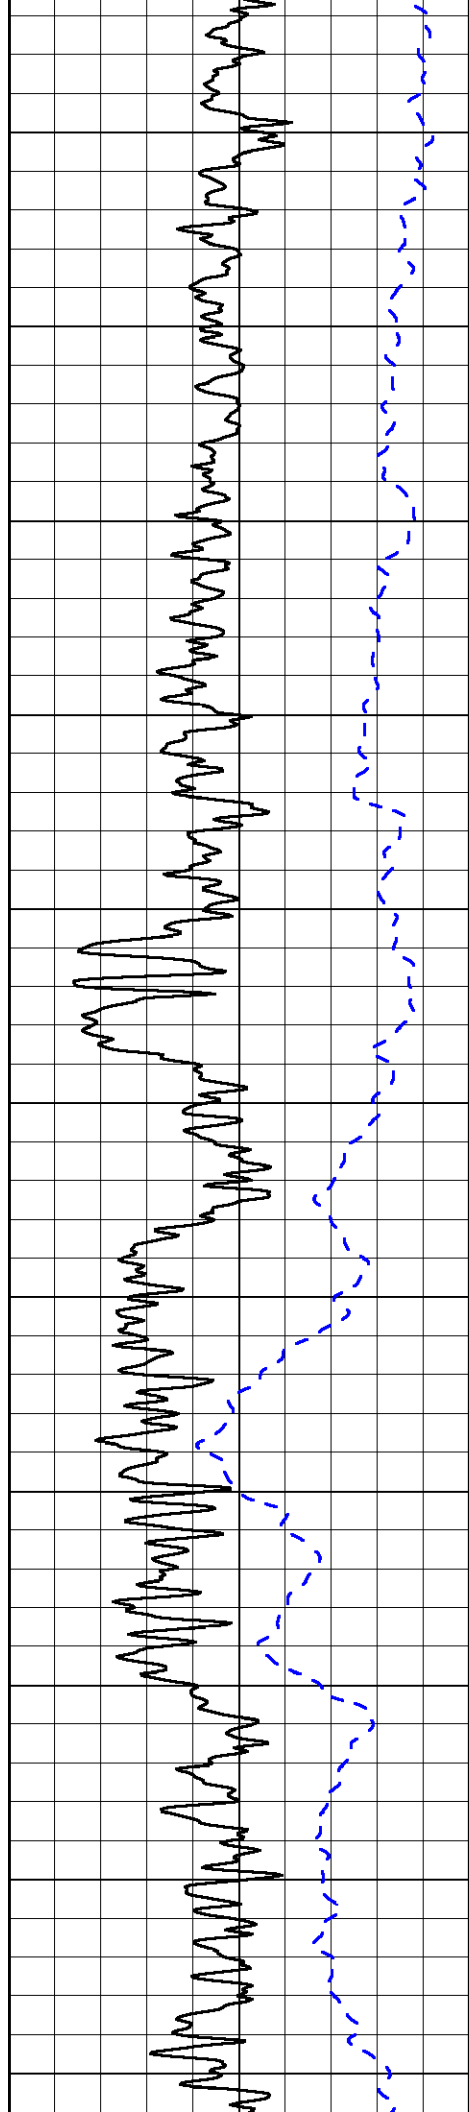



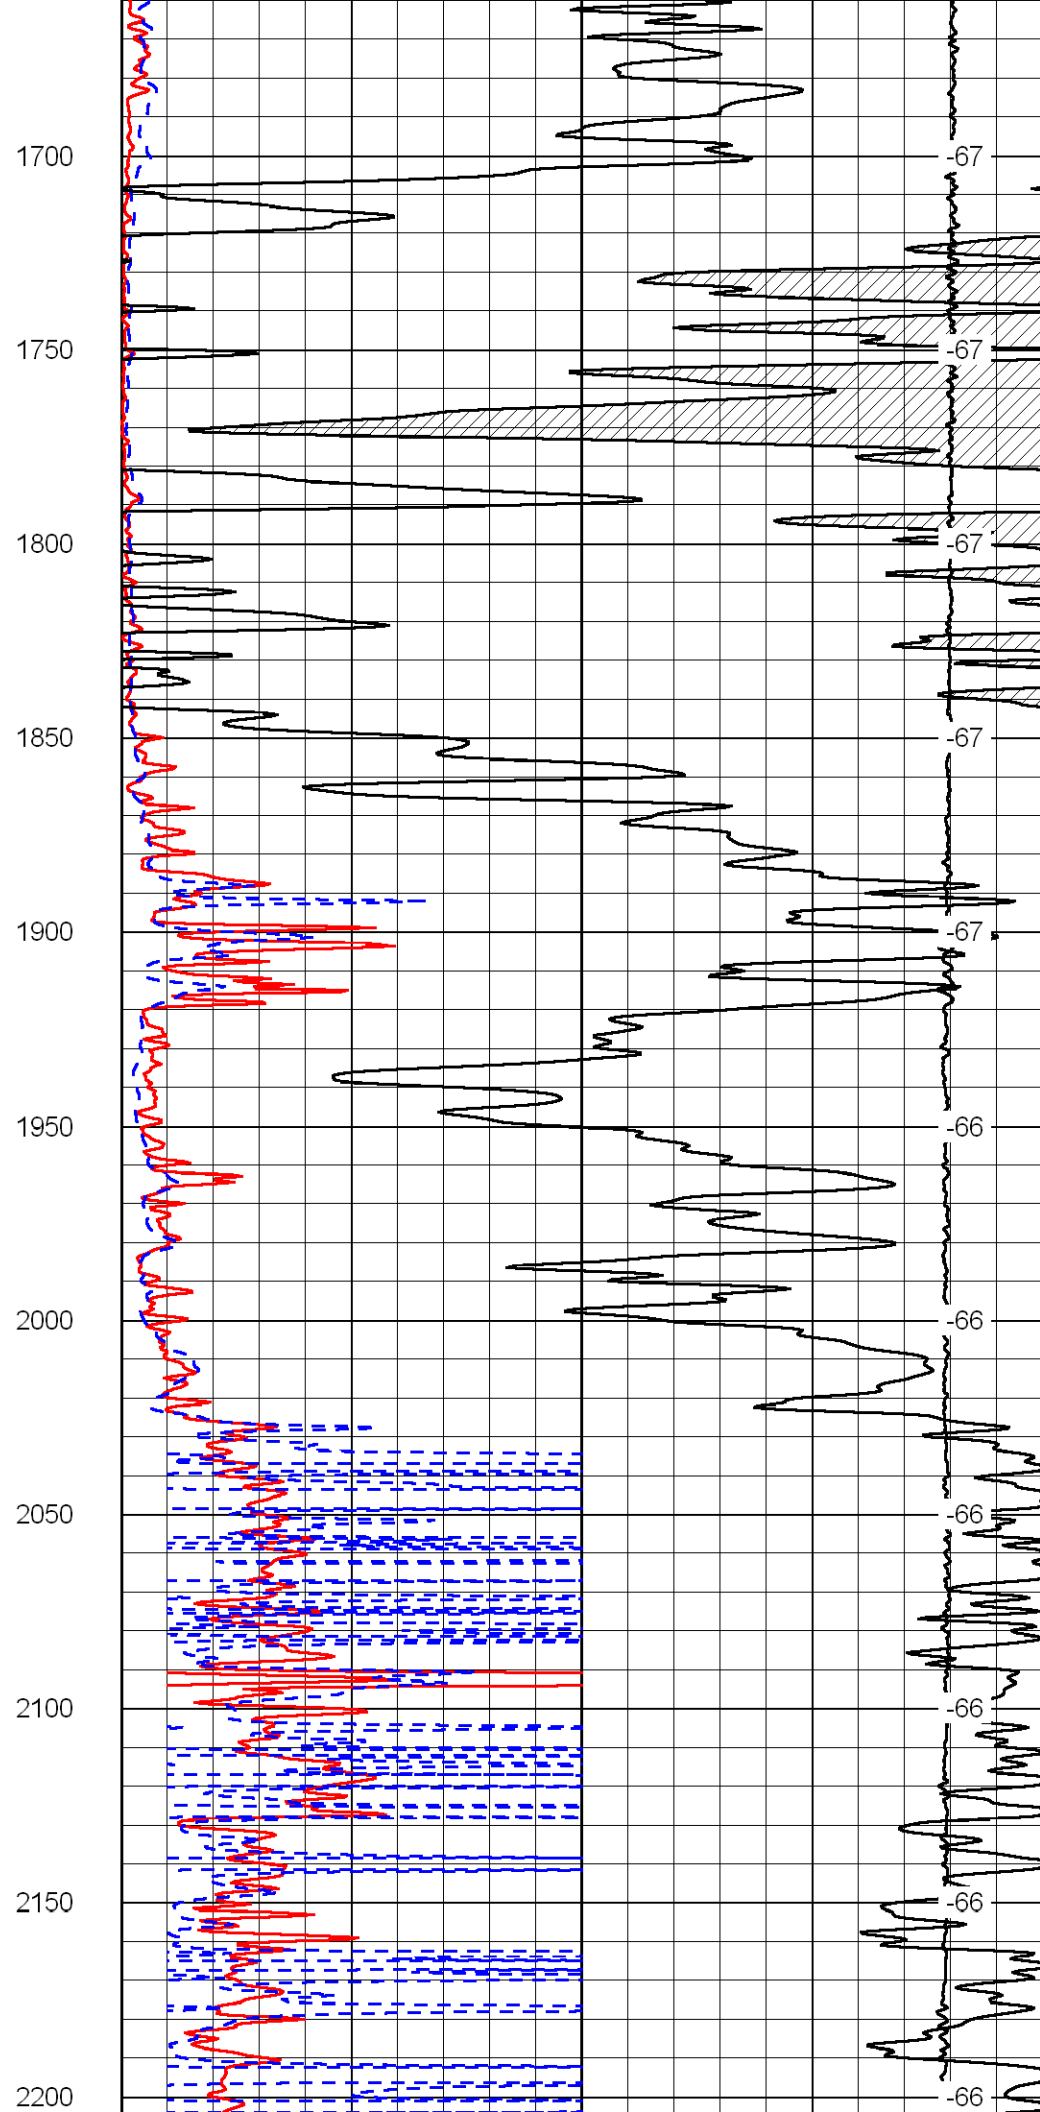
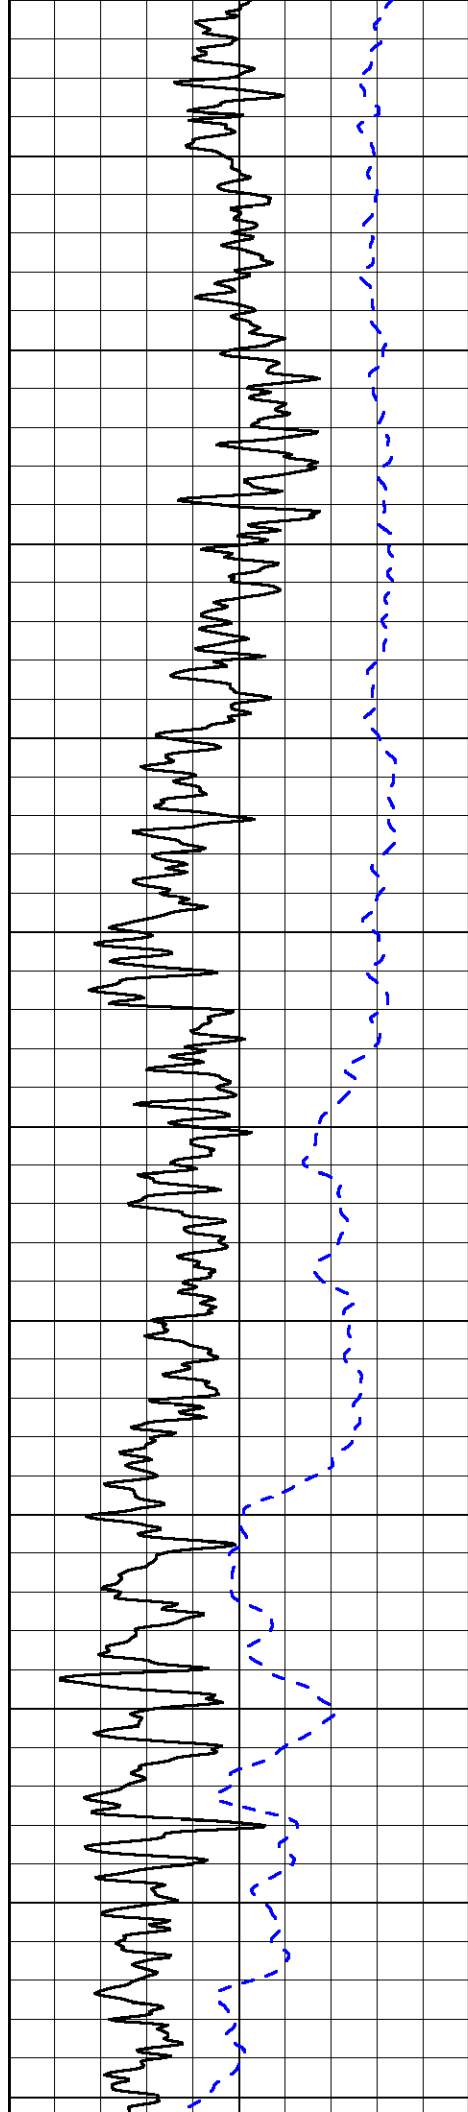


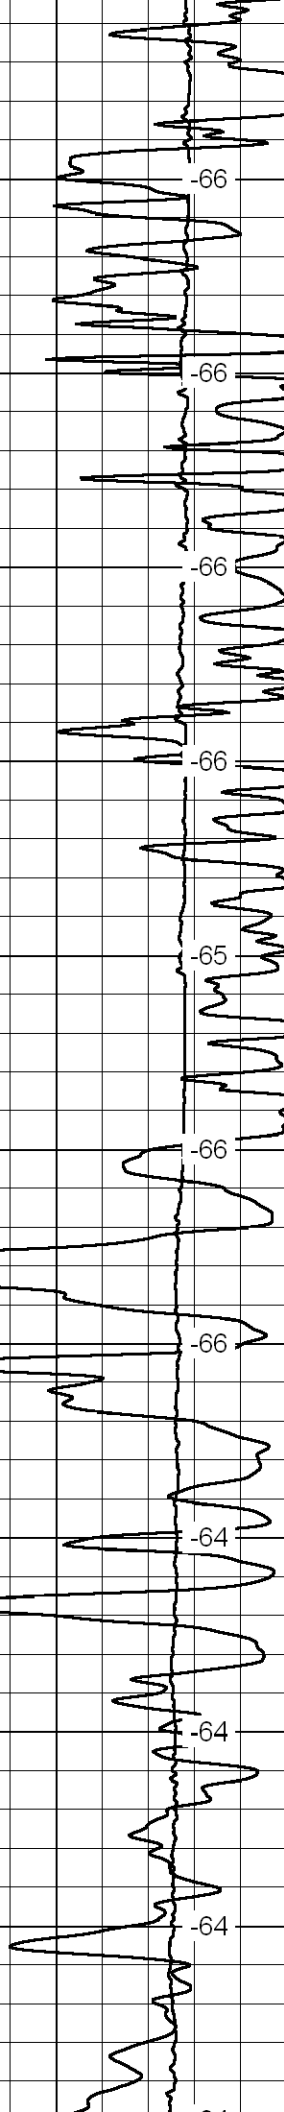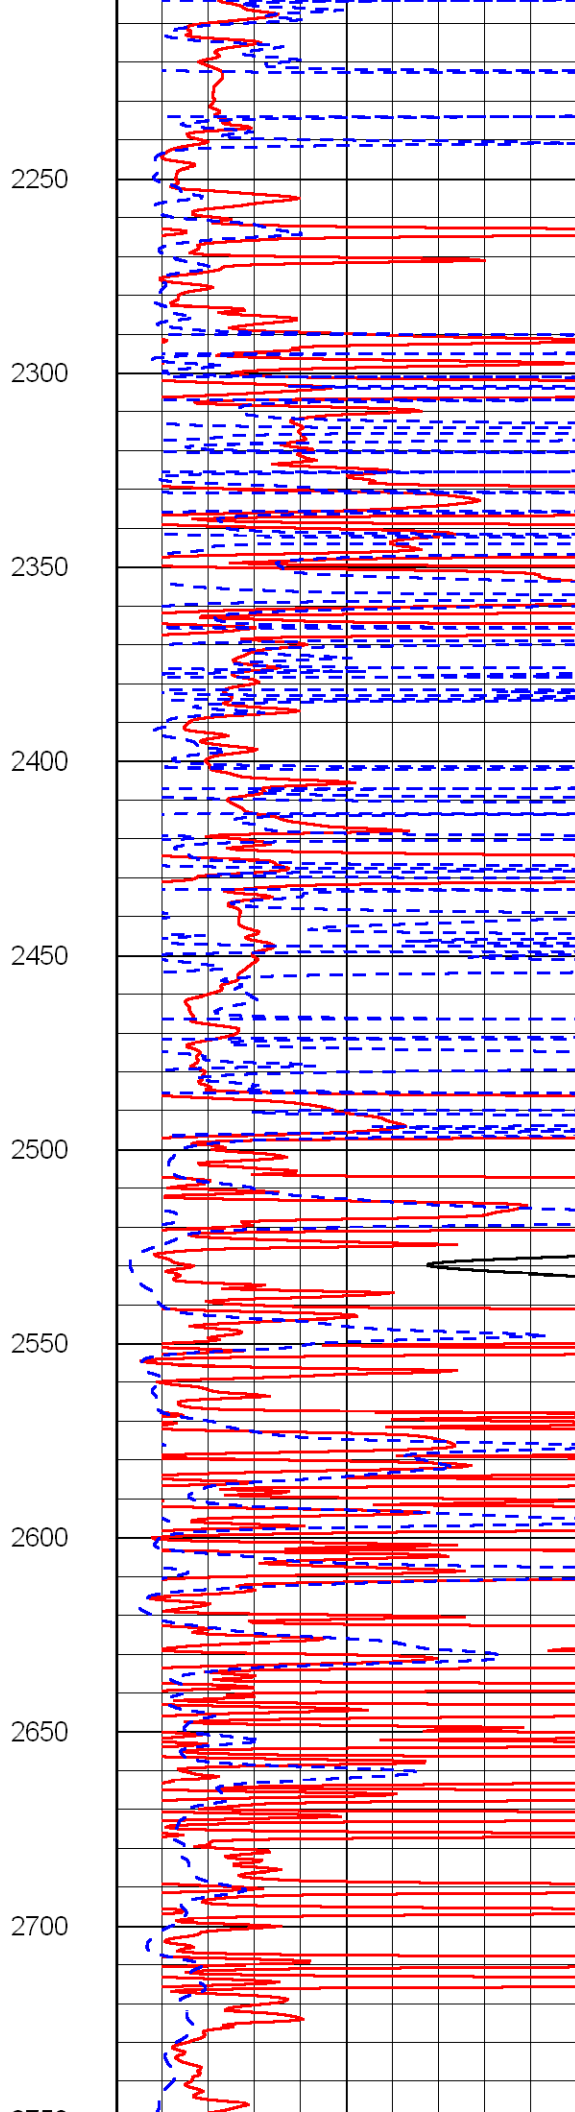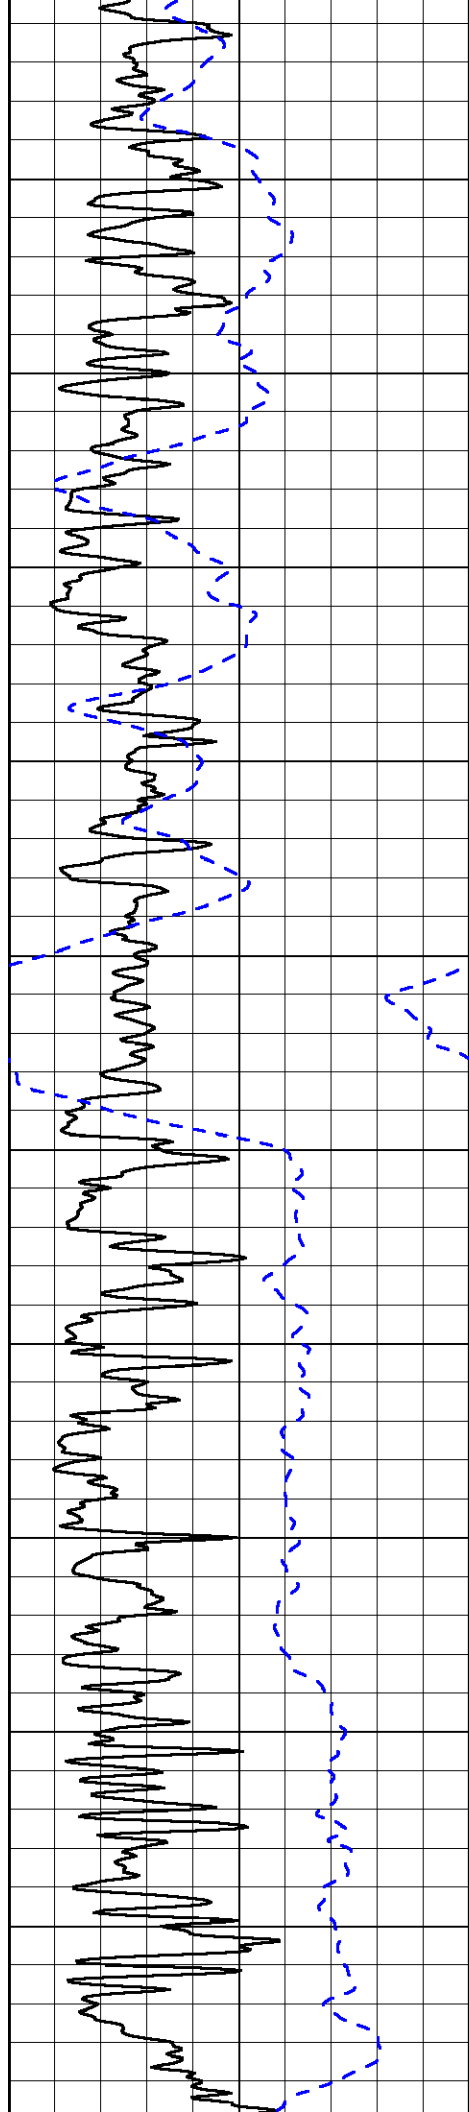


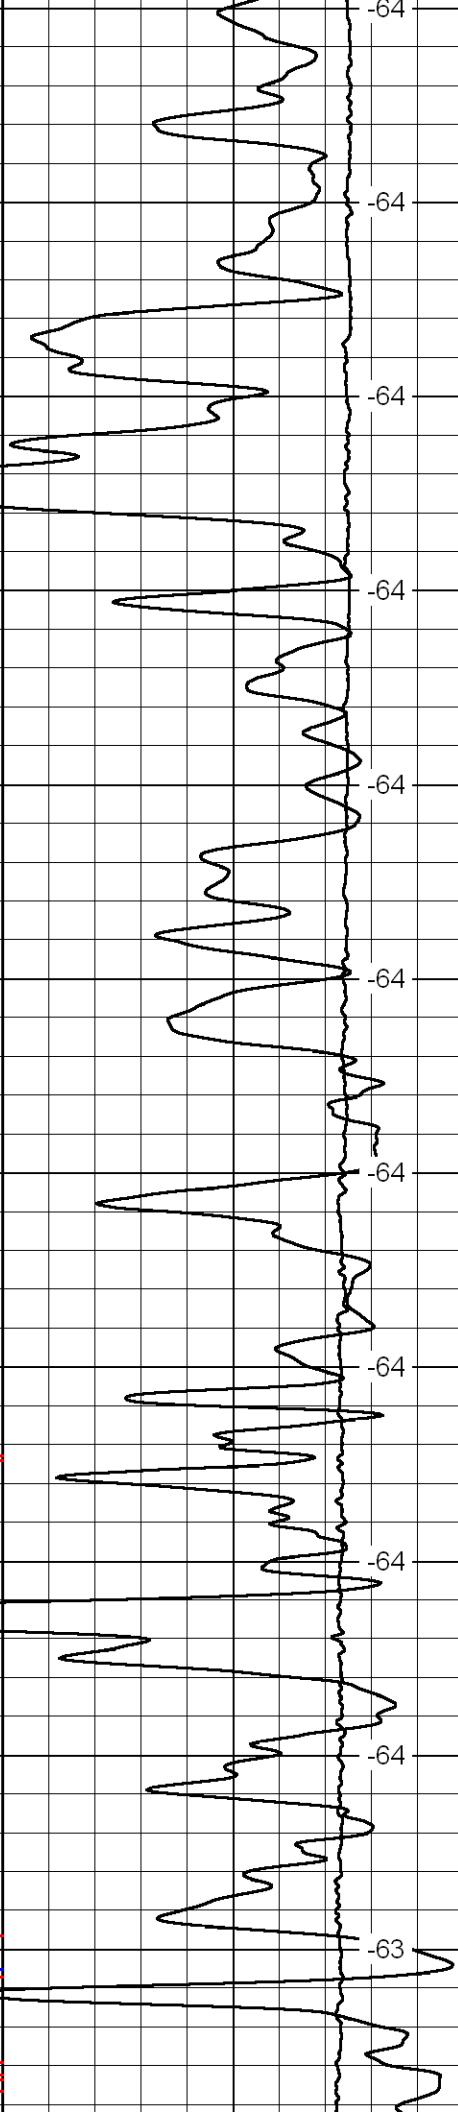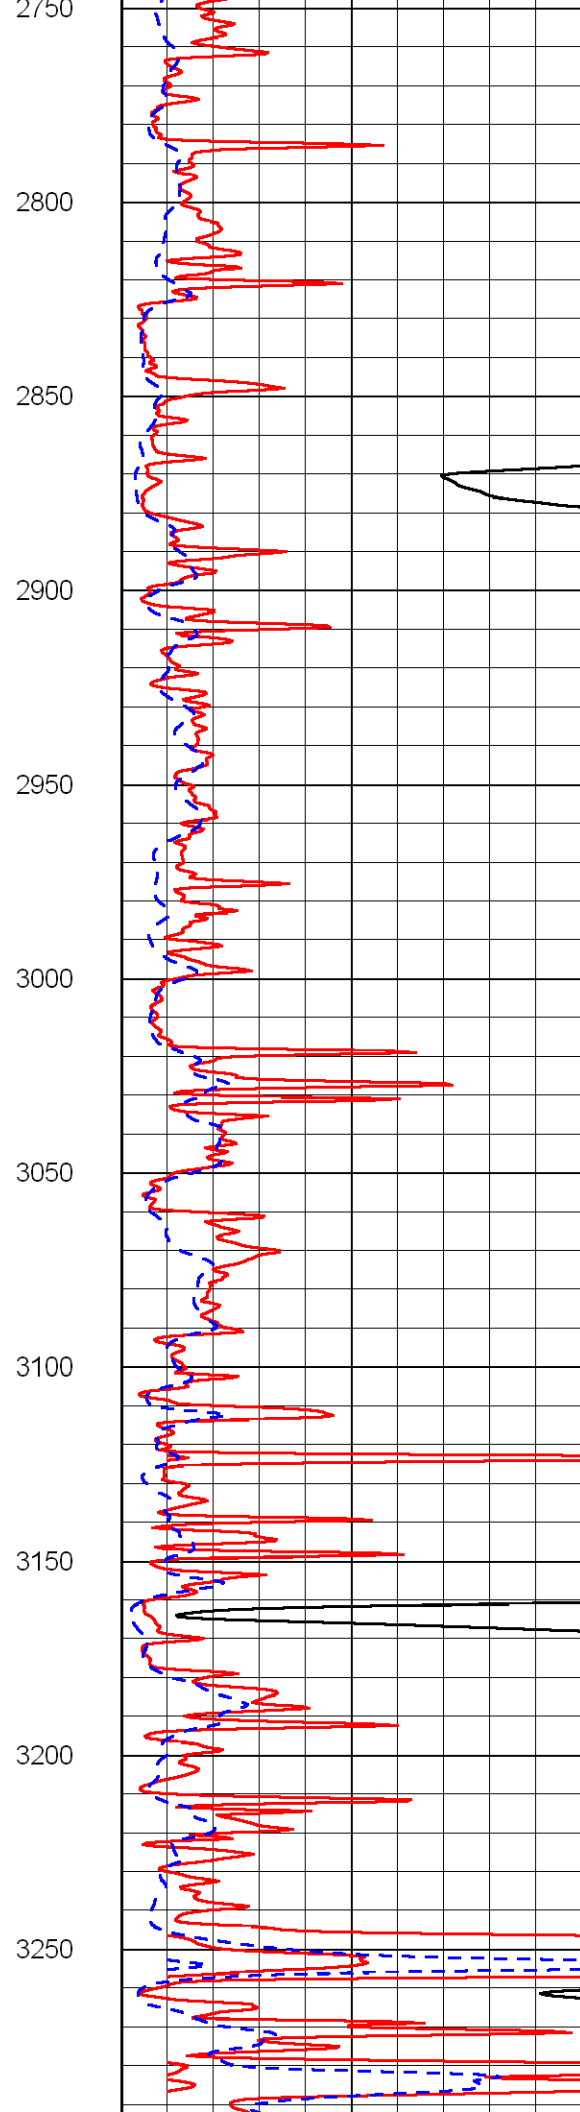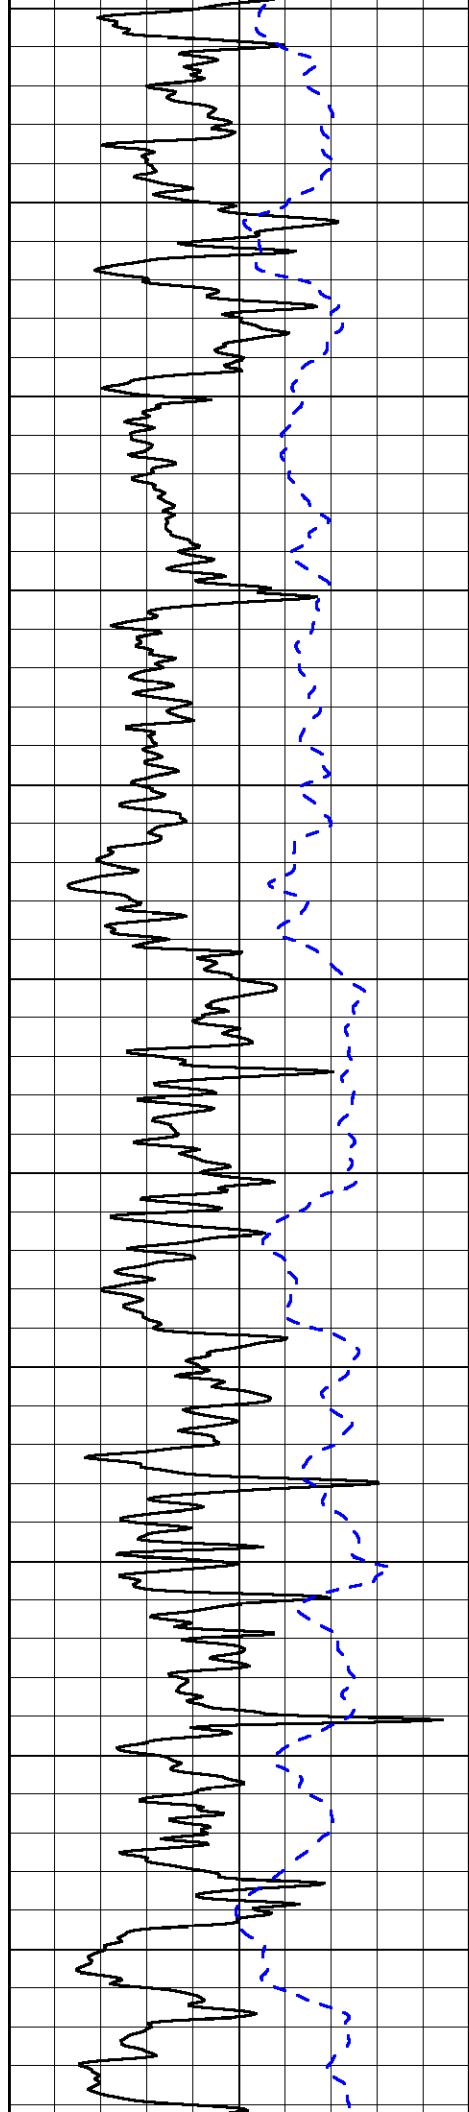

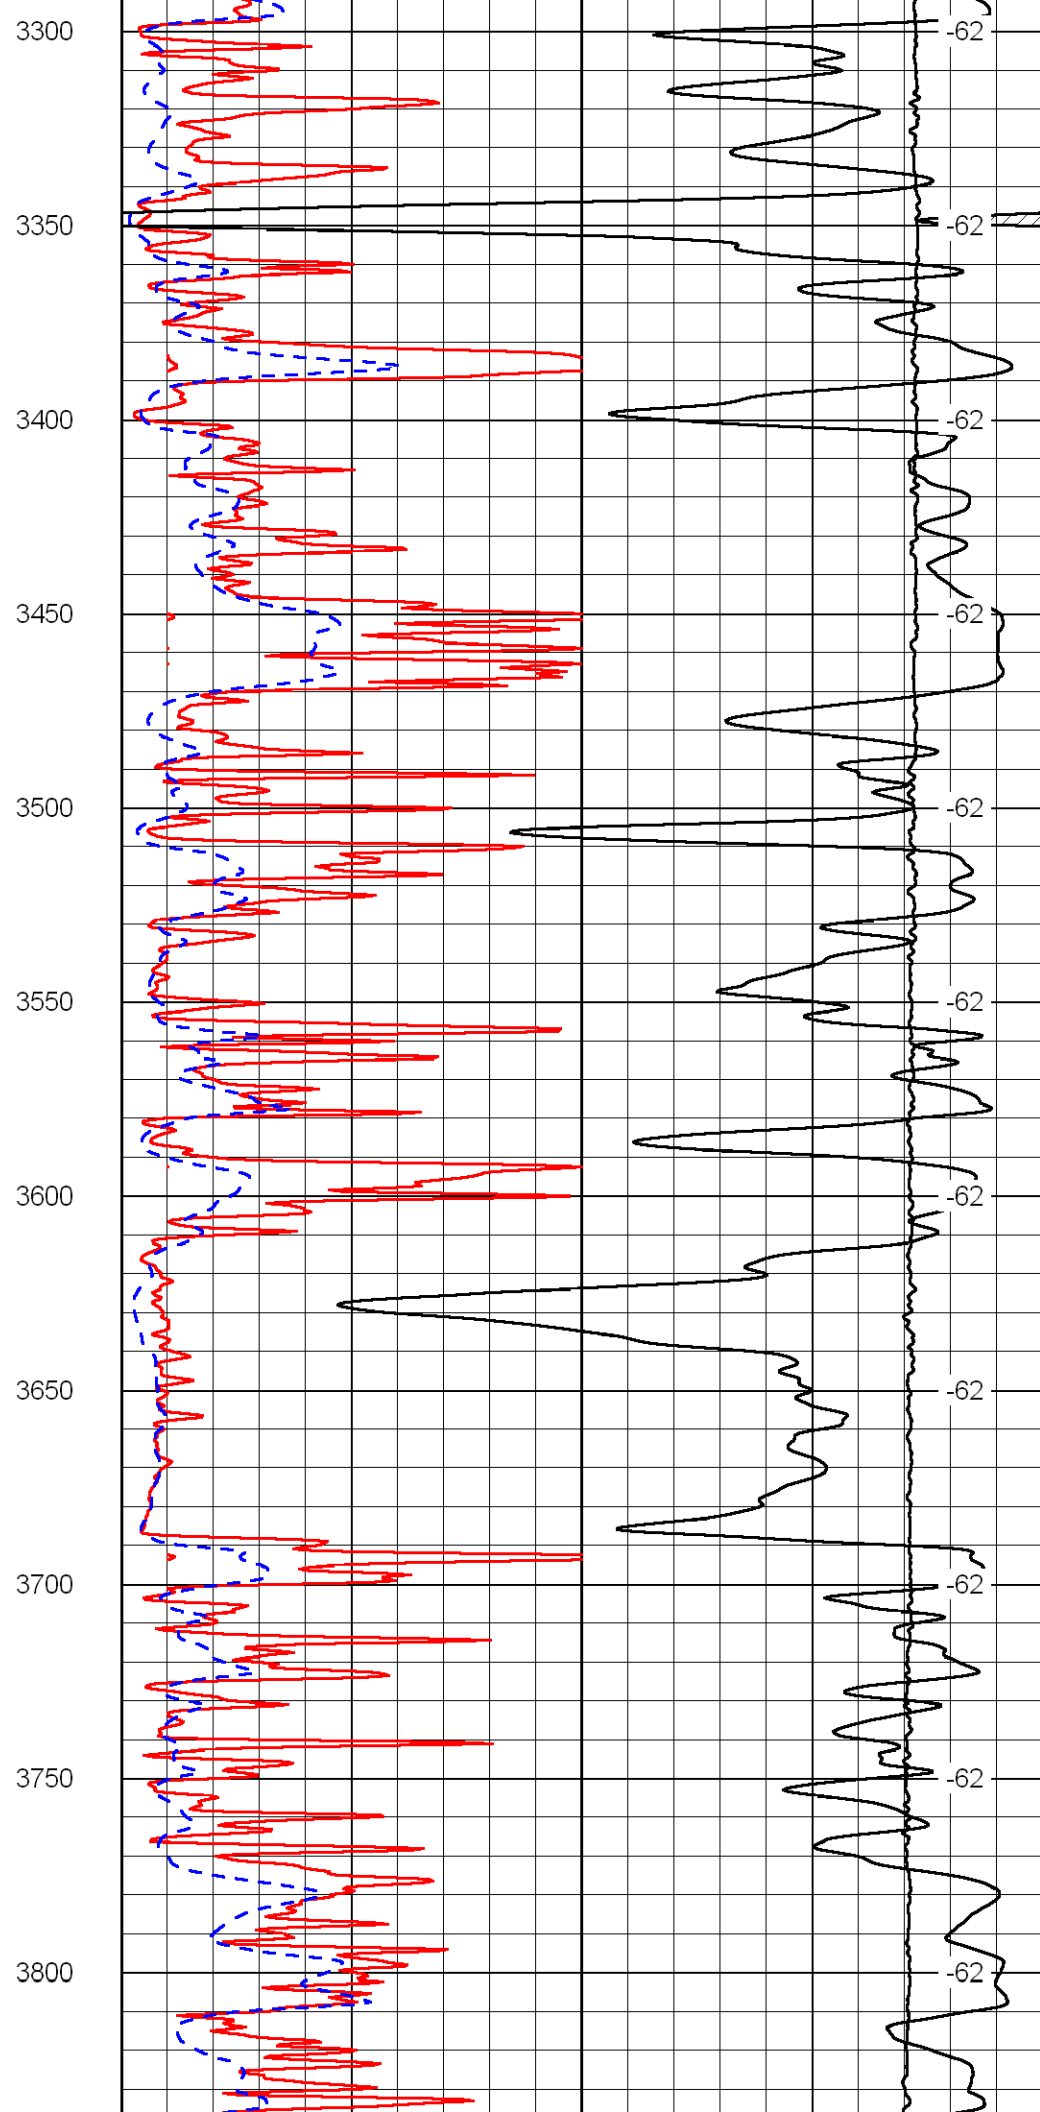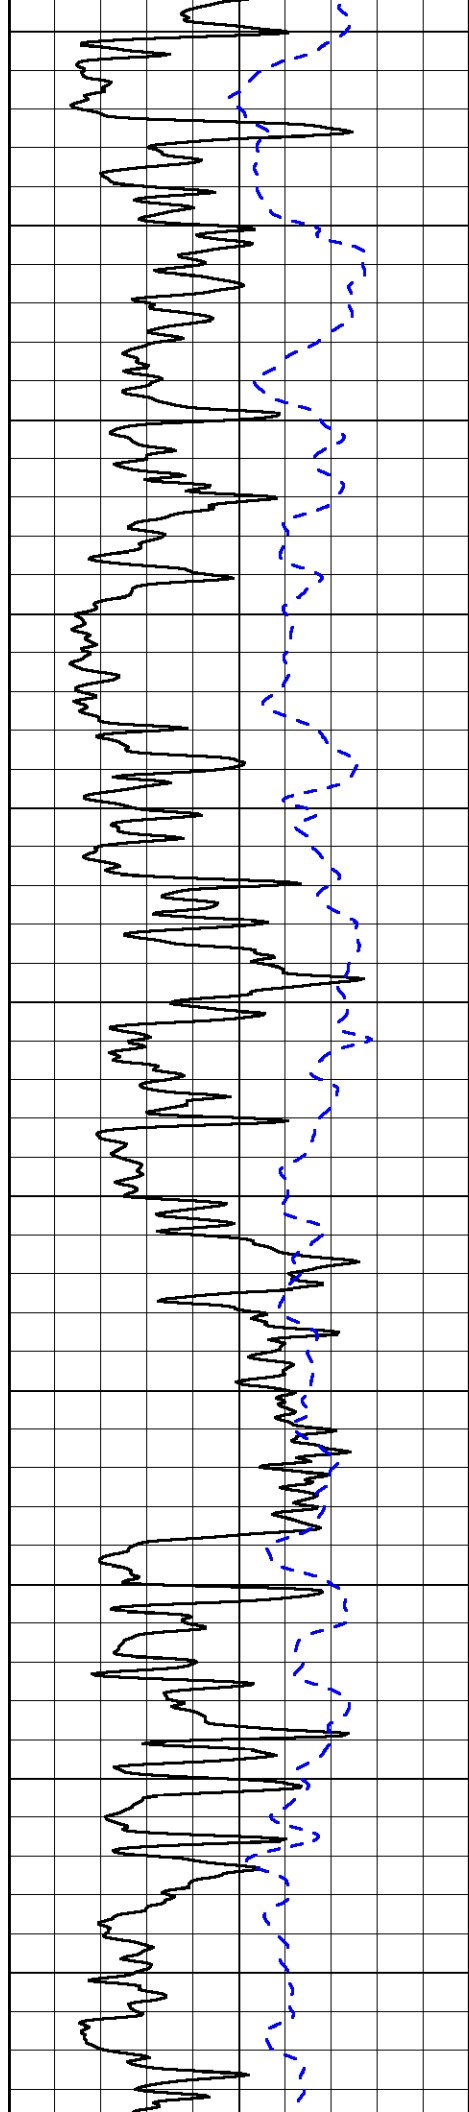

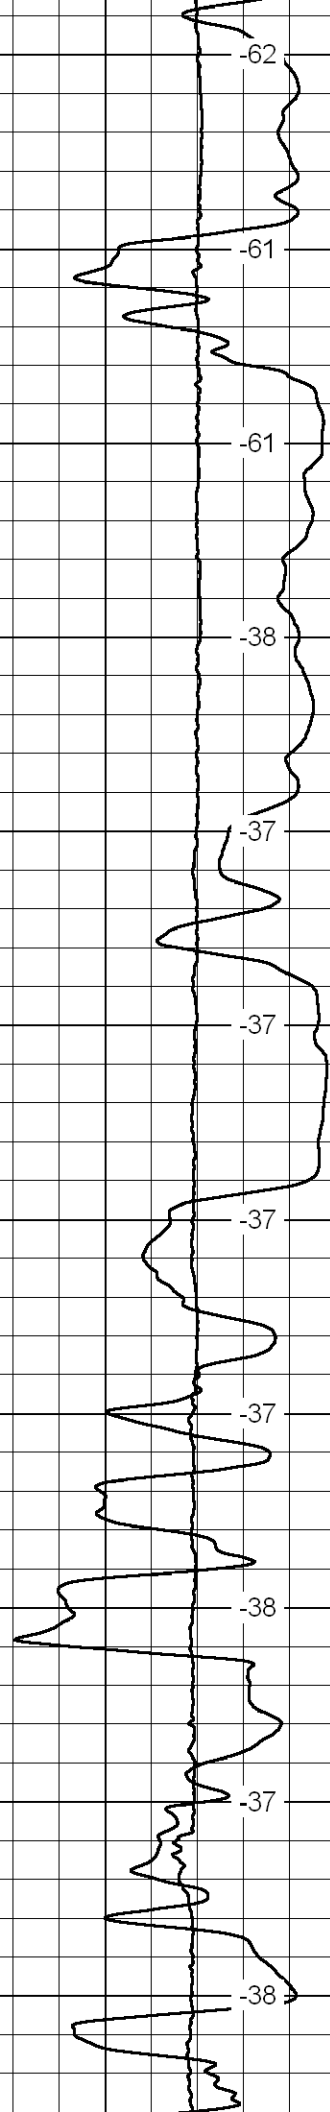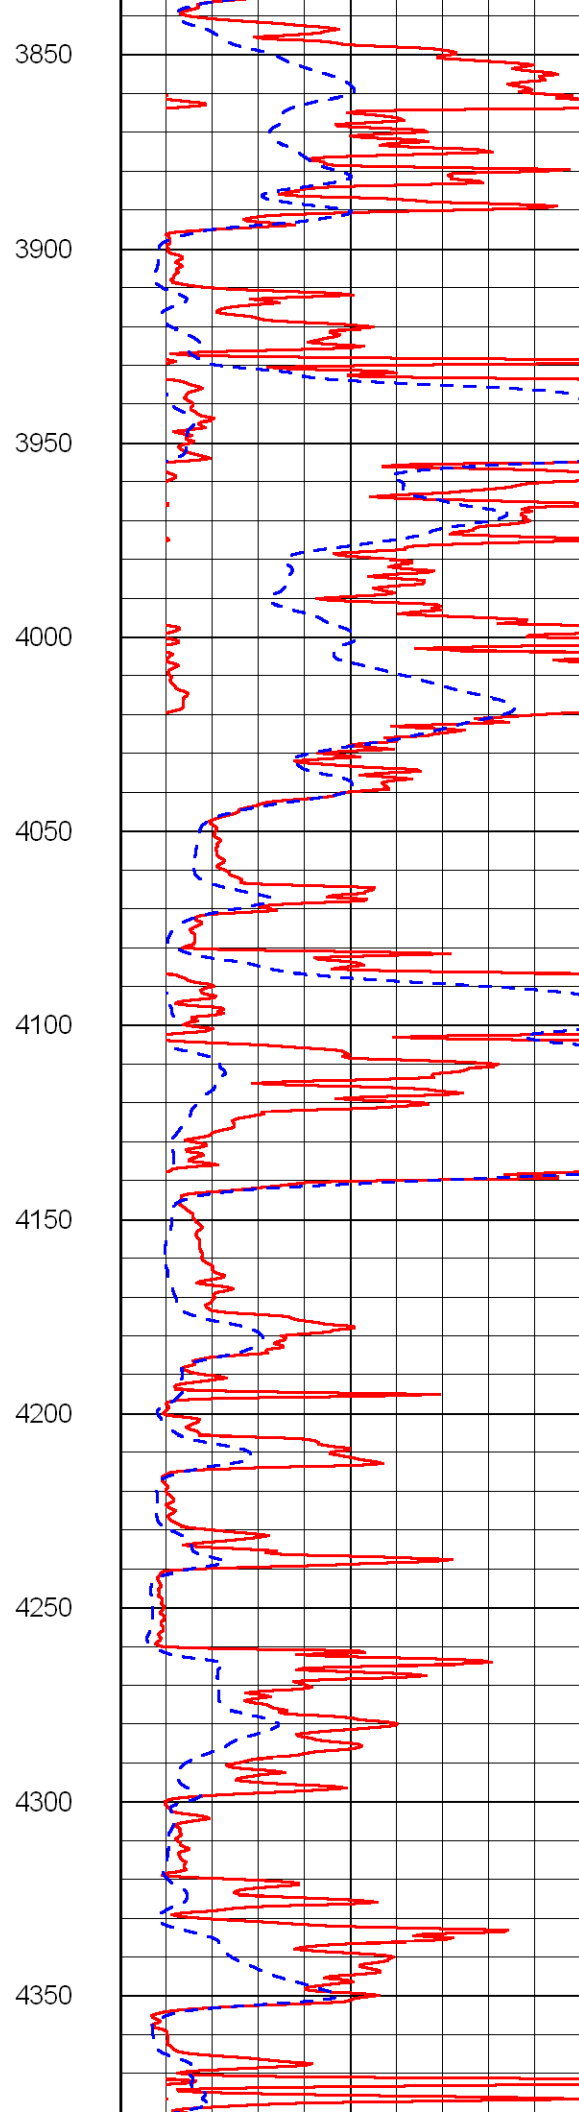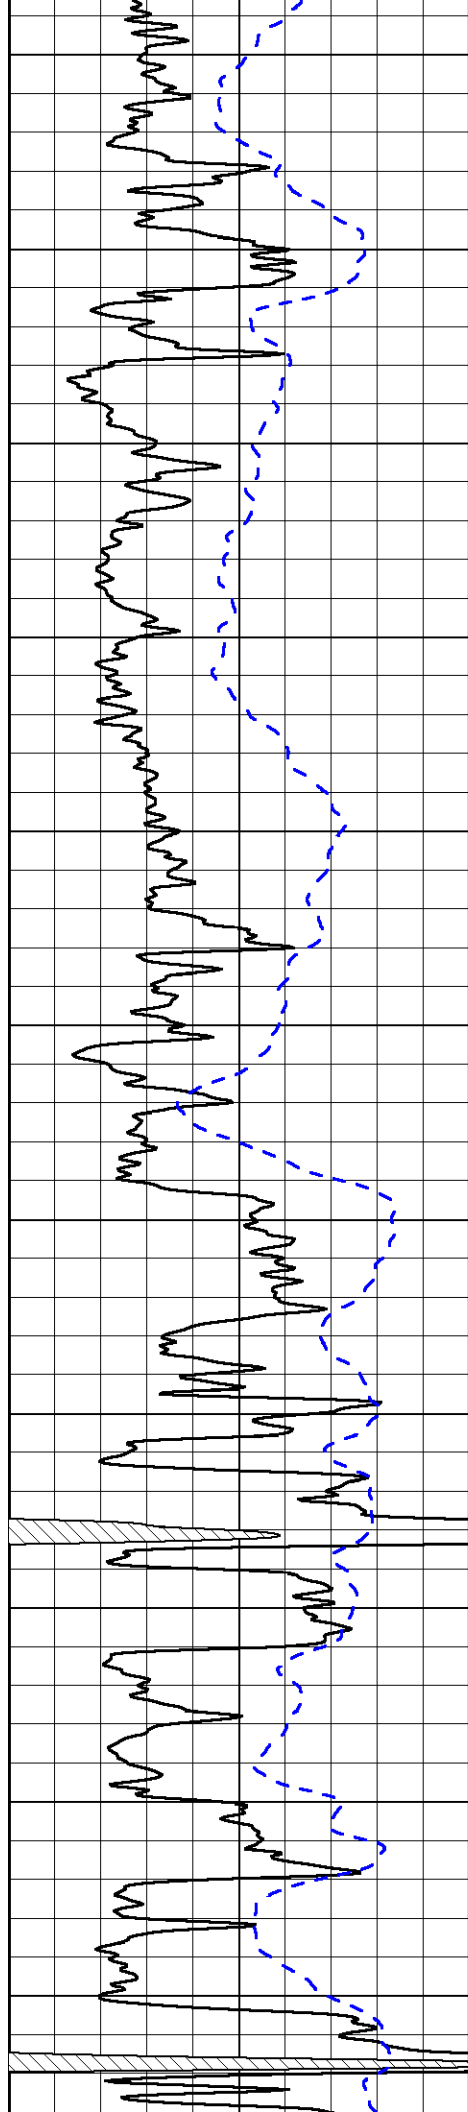

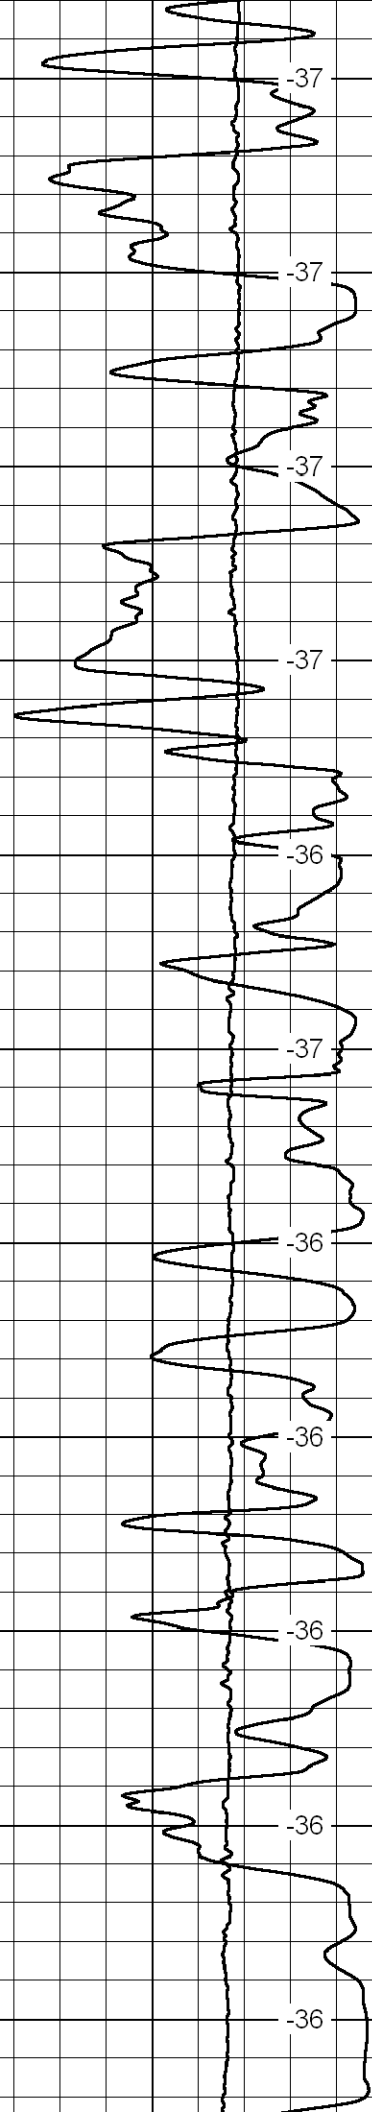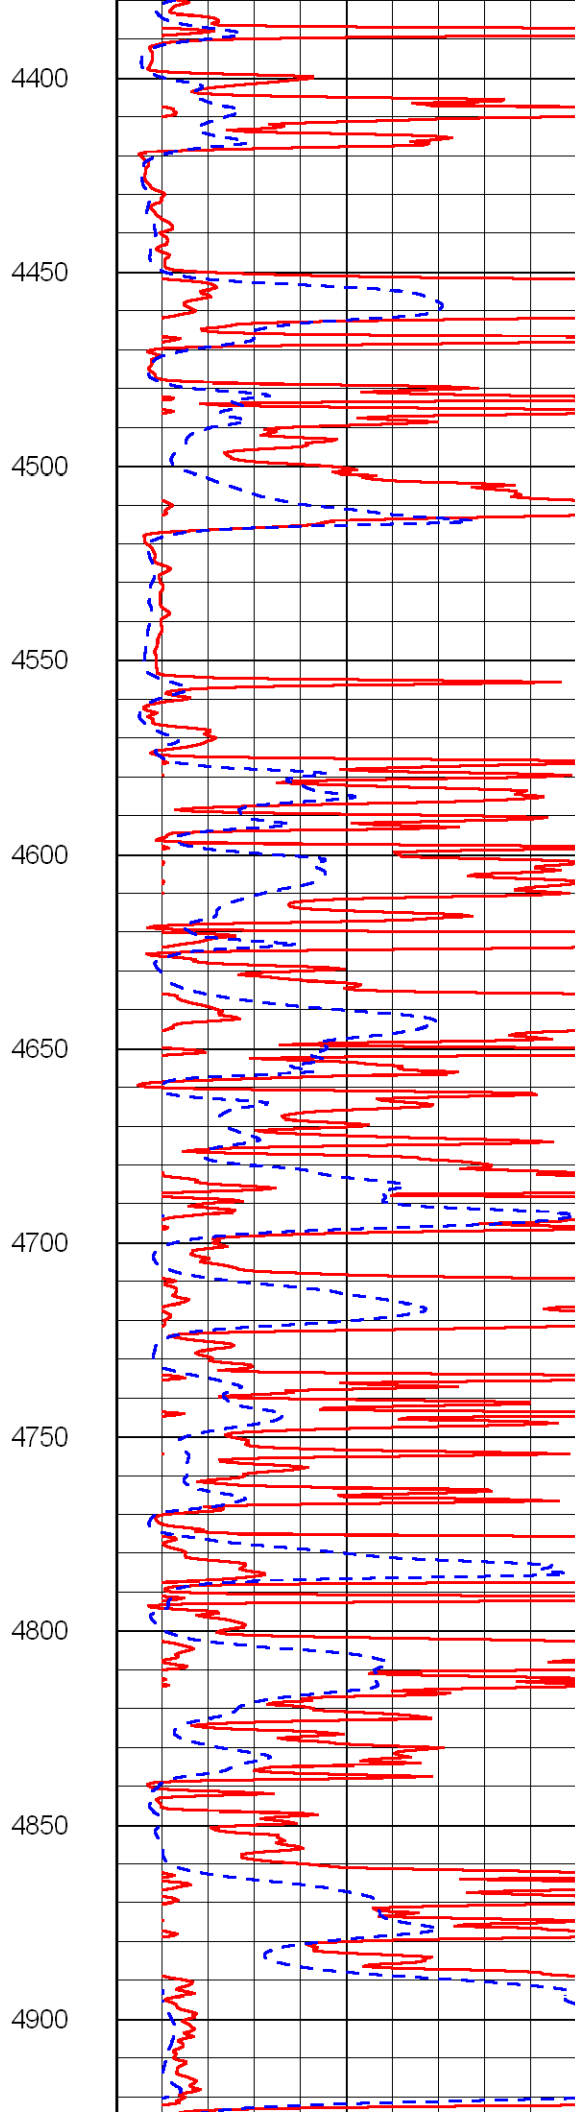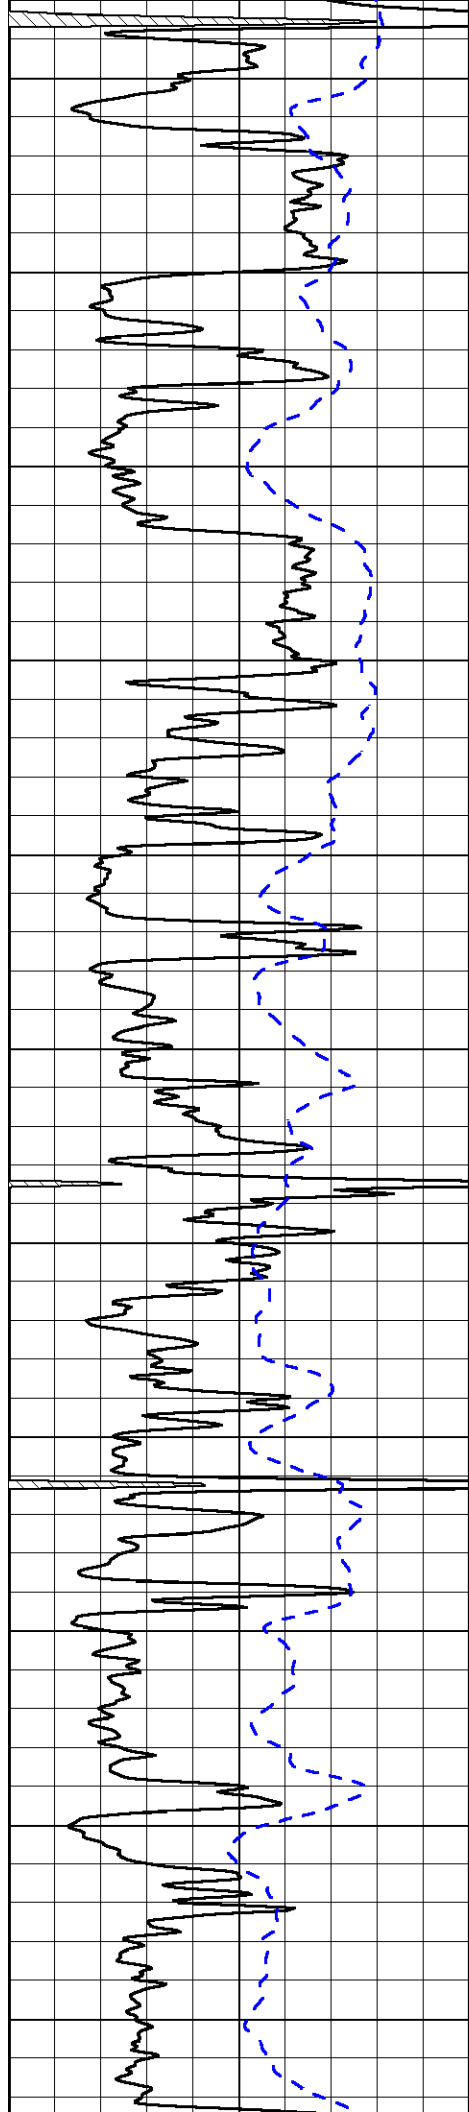

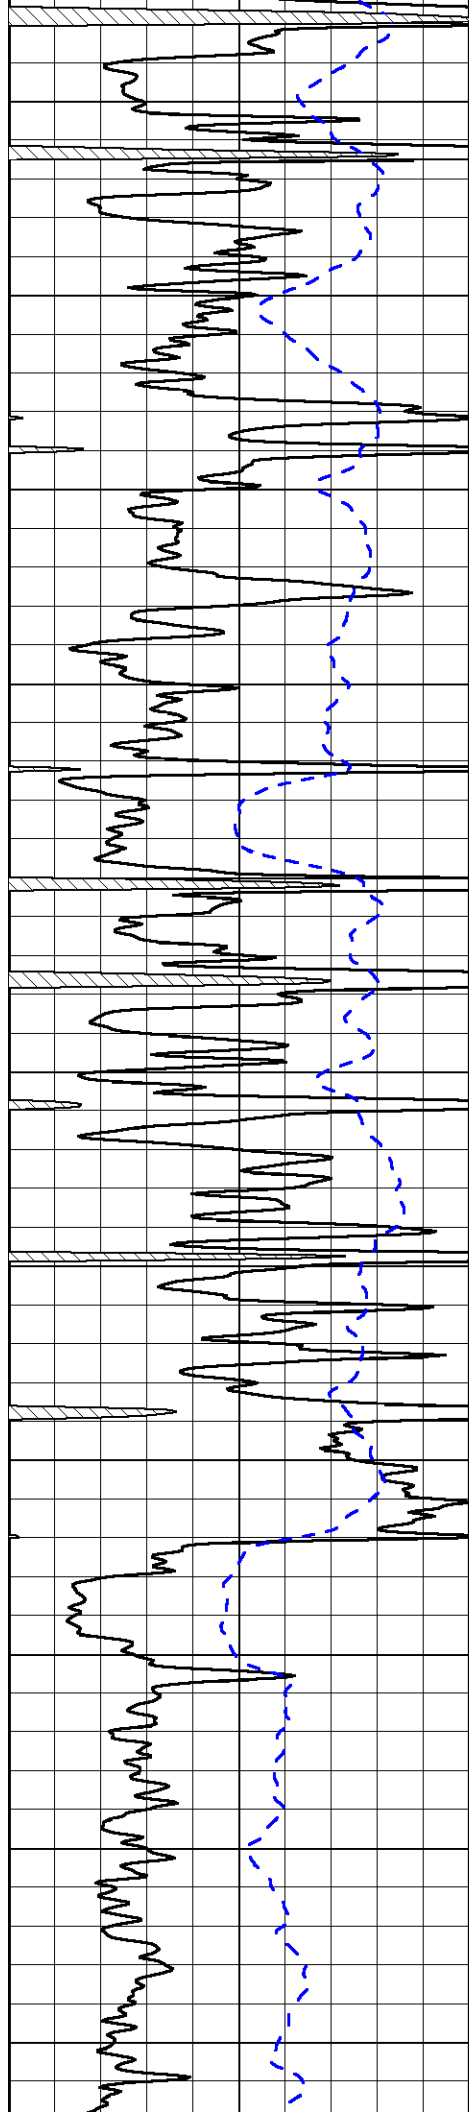

4950

5000

5050

5100

5150

5200


5250

5300

5350

5400

5450

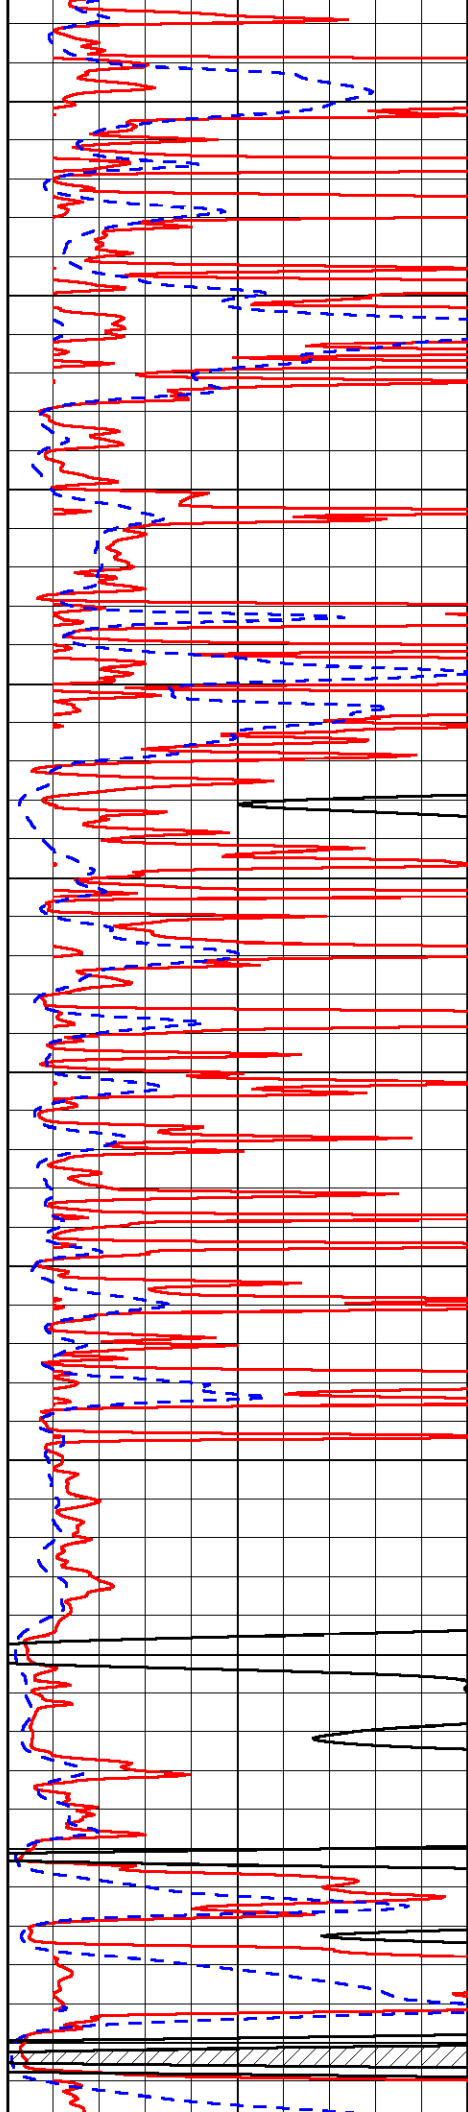

-36

-36

-36

-36

-36

-35


-35



-35




-35


-35

-35

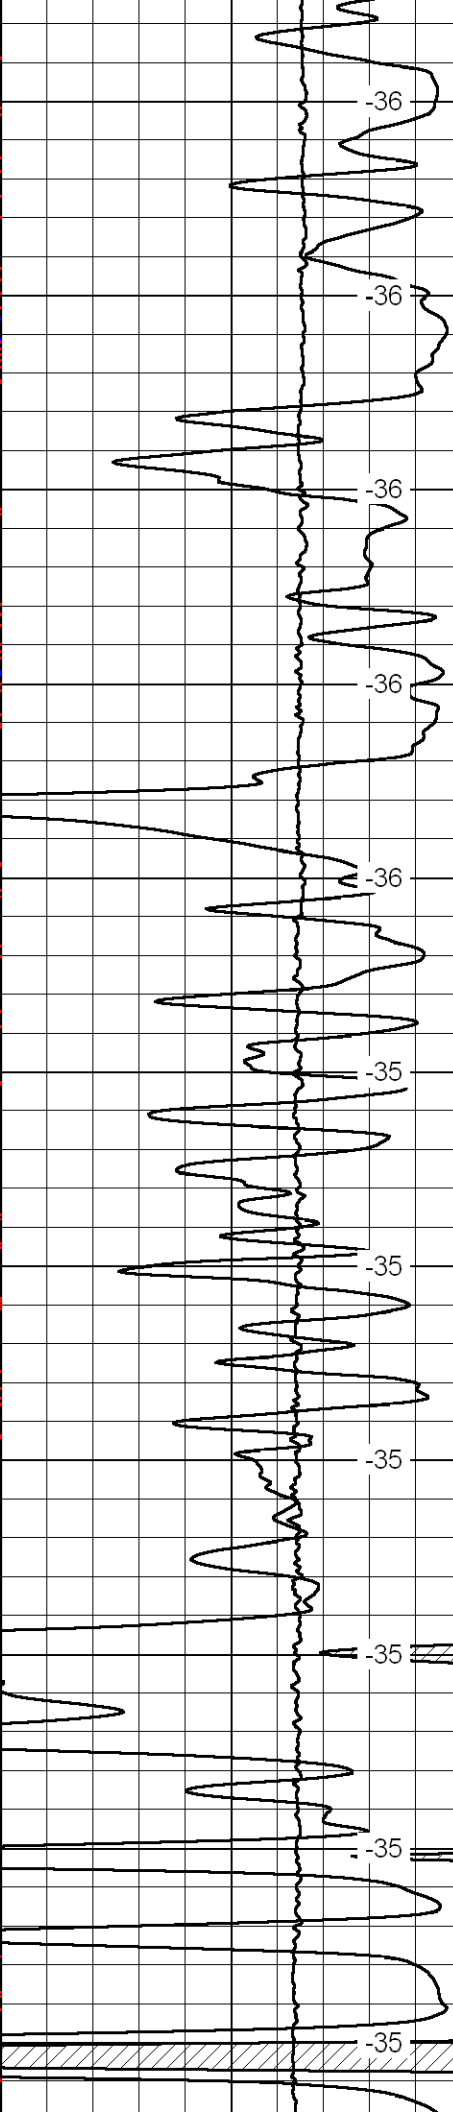

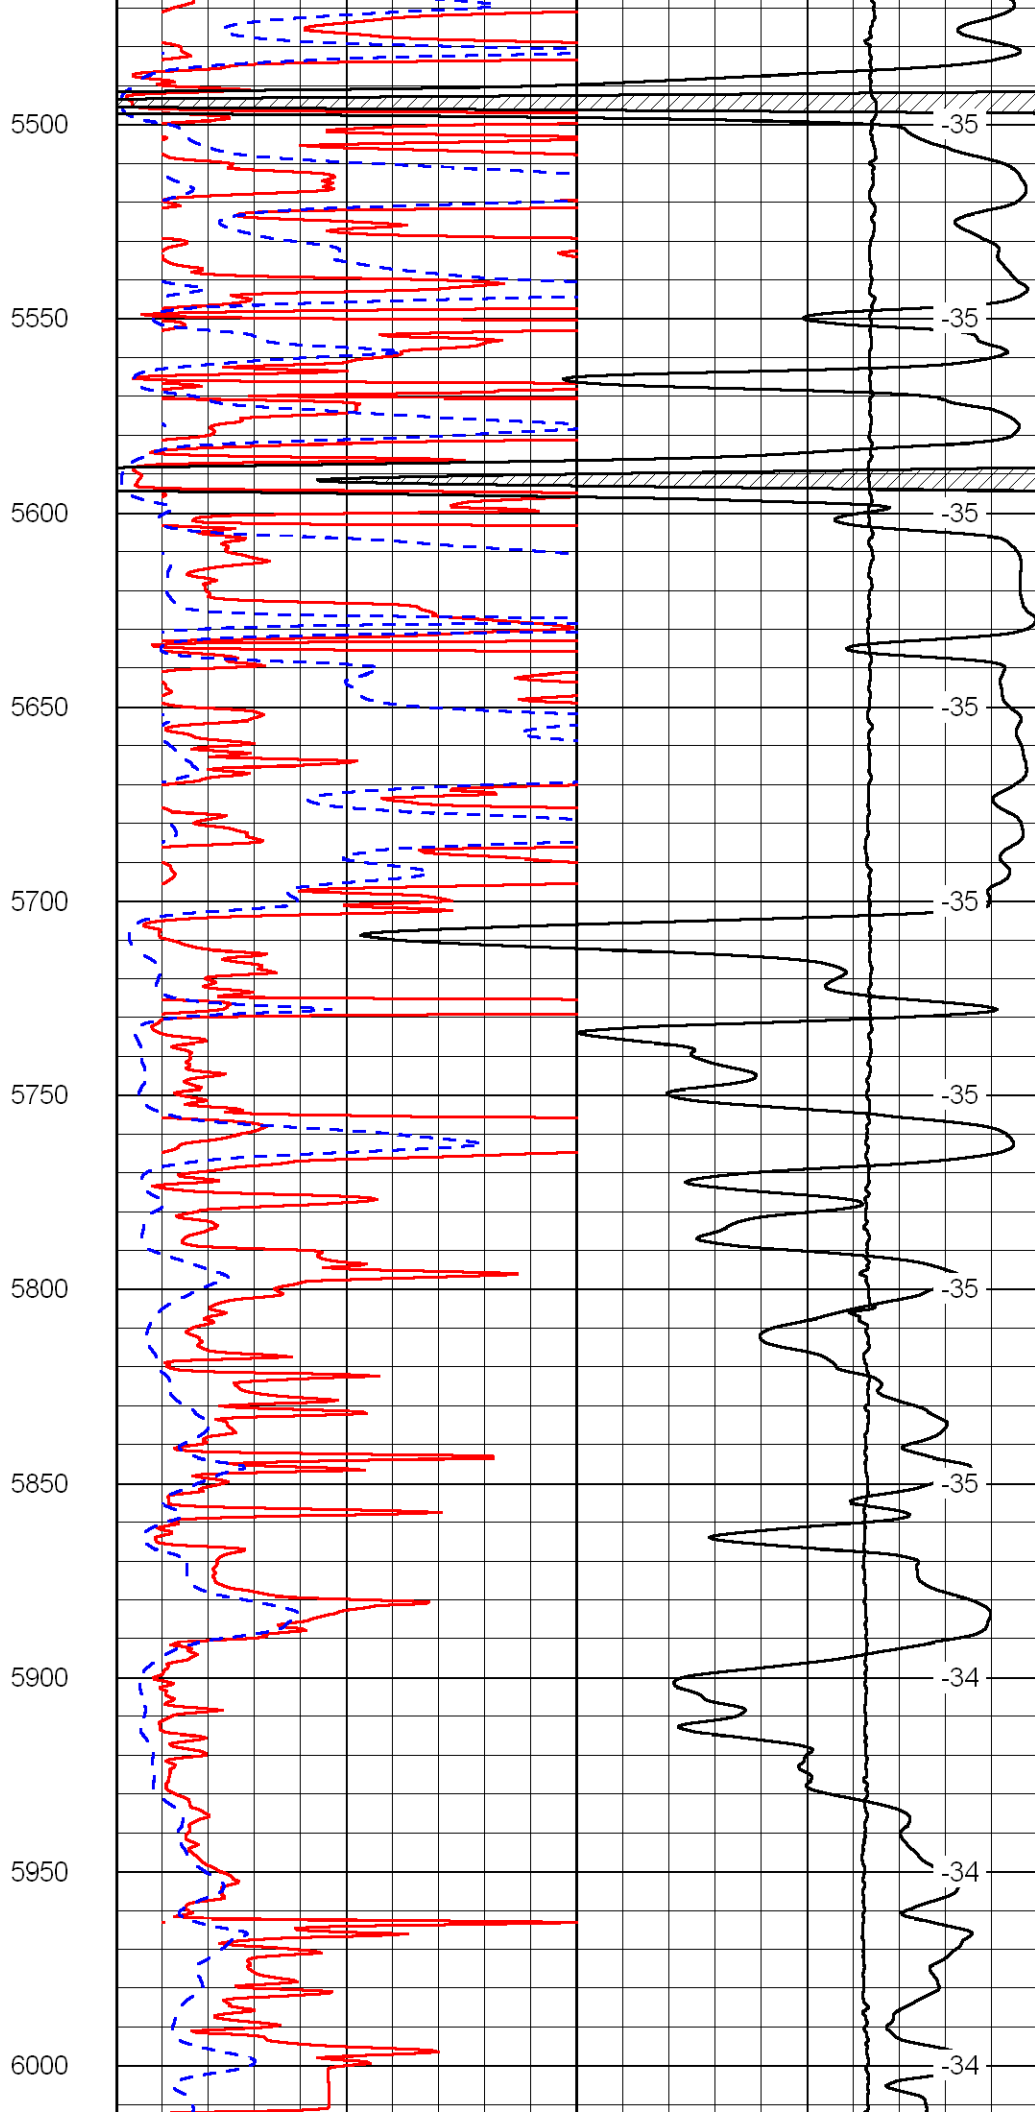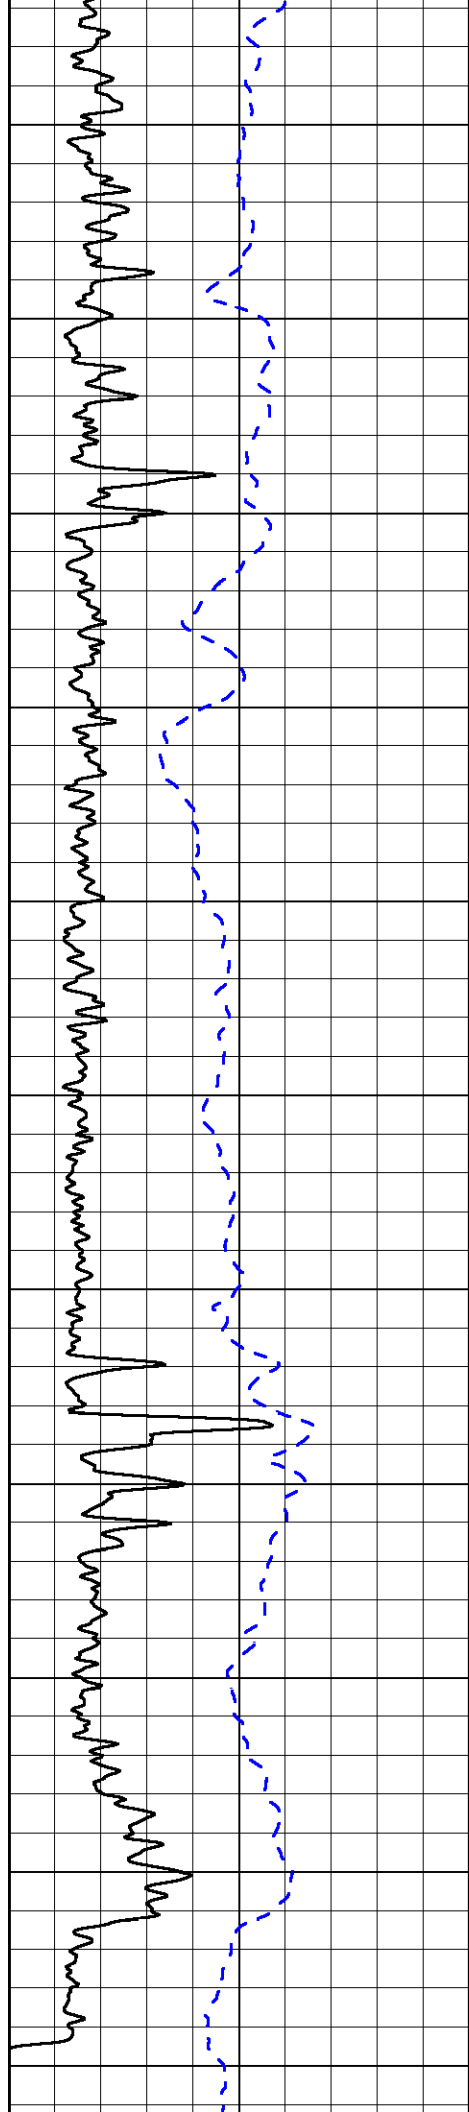

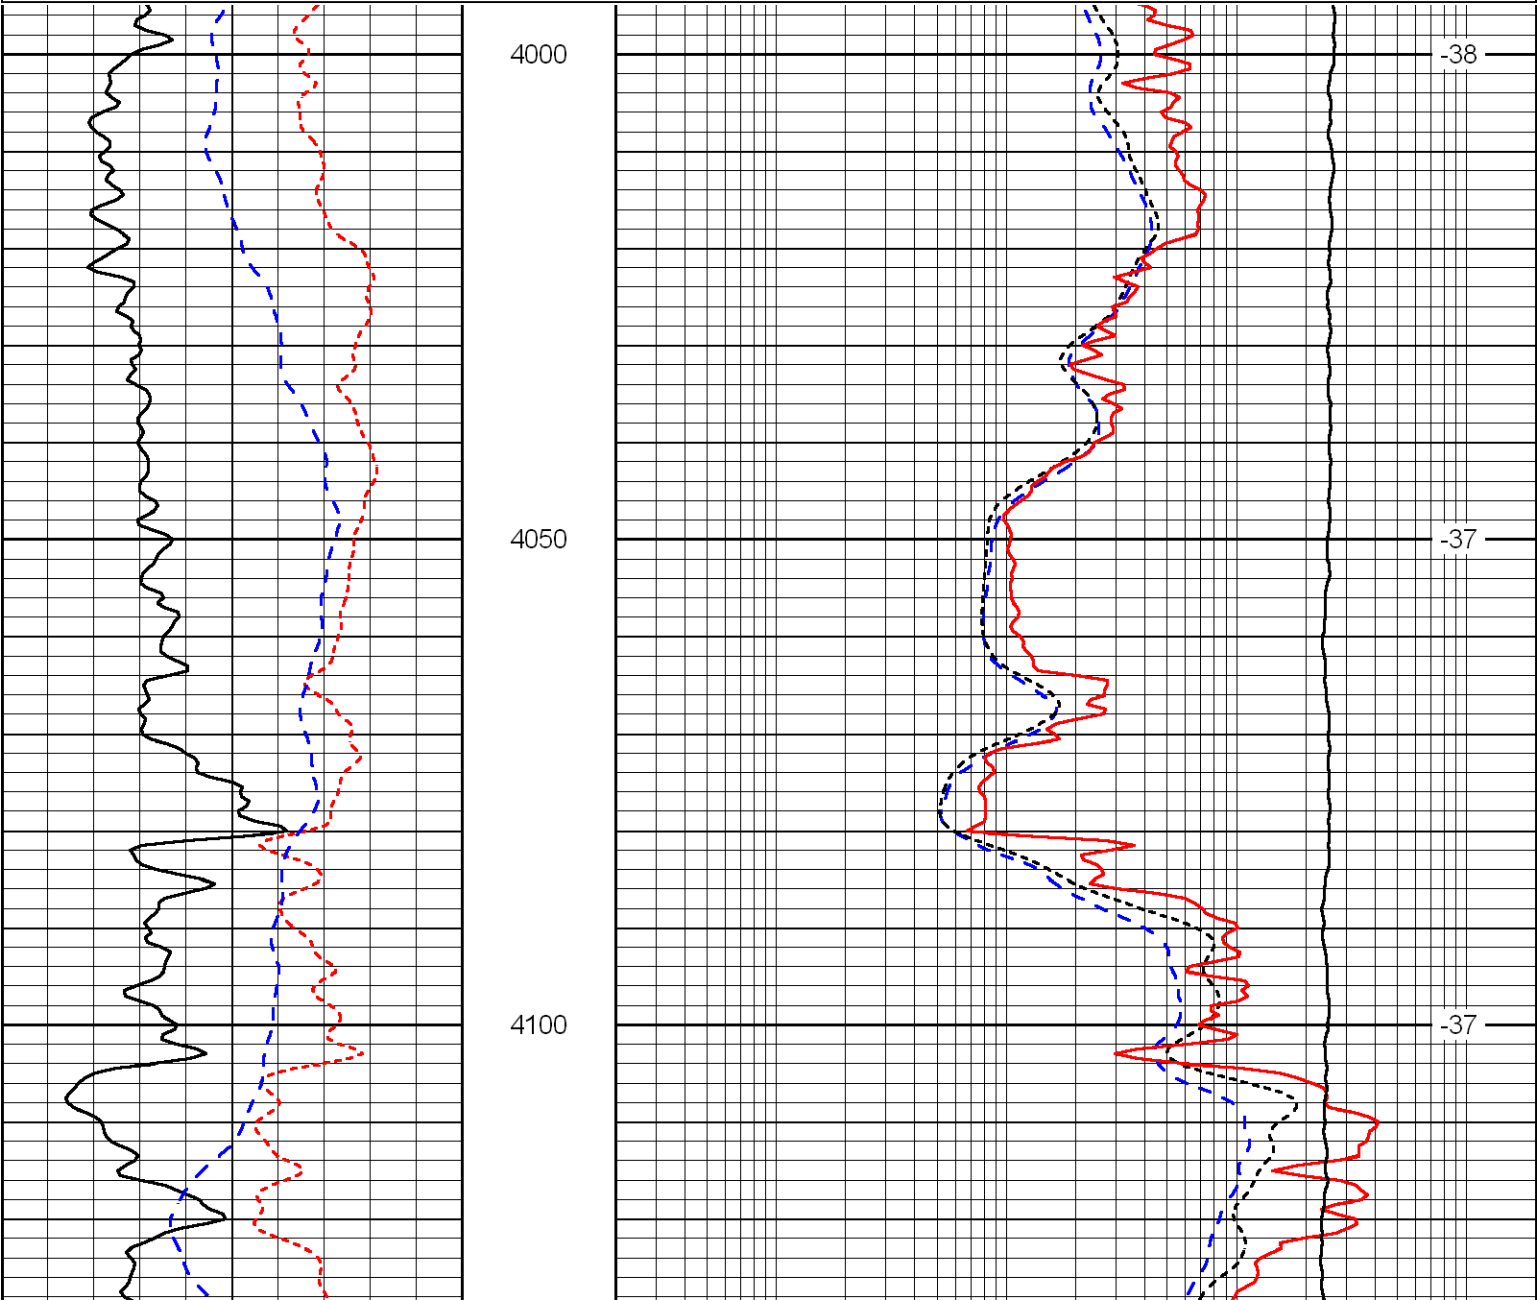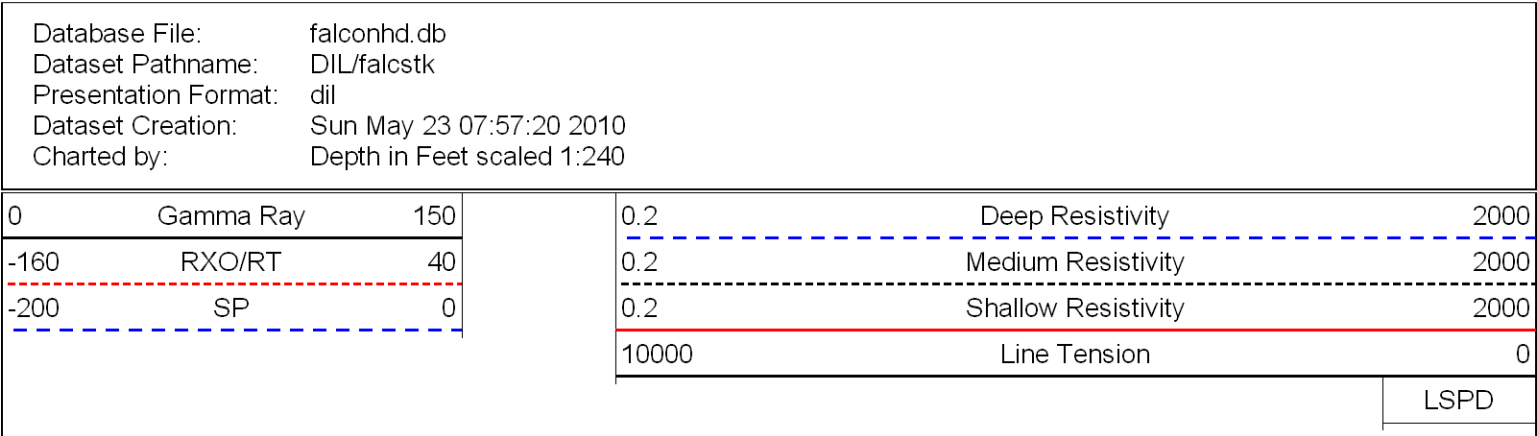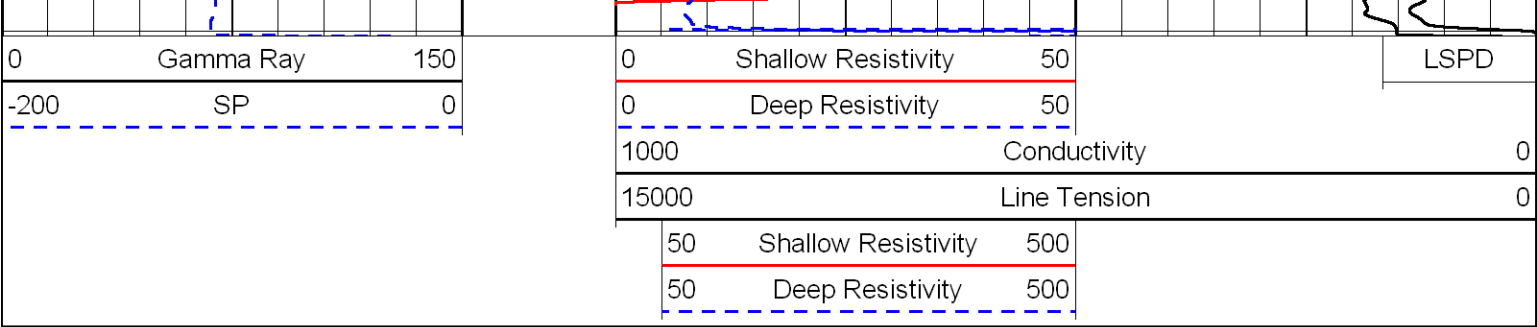

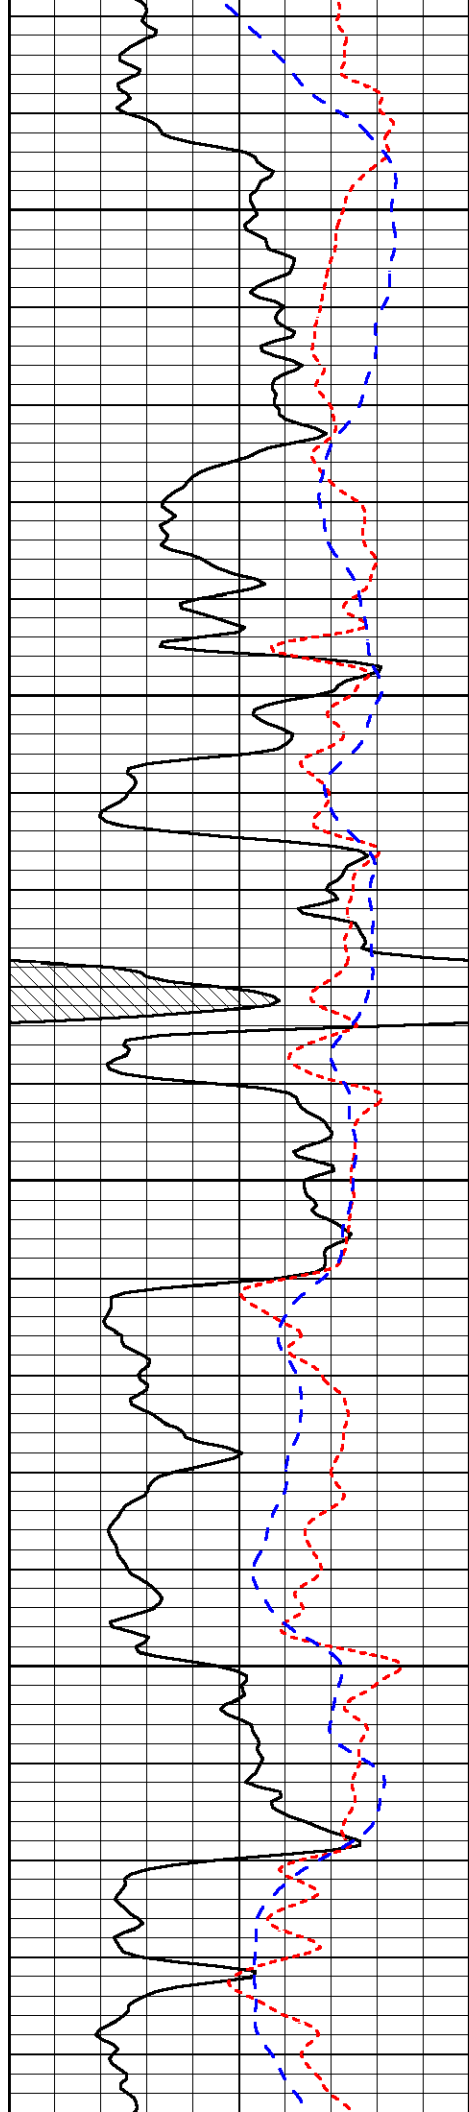


4150

4200

4250

4300

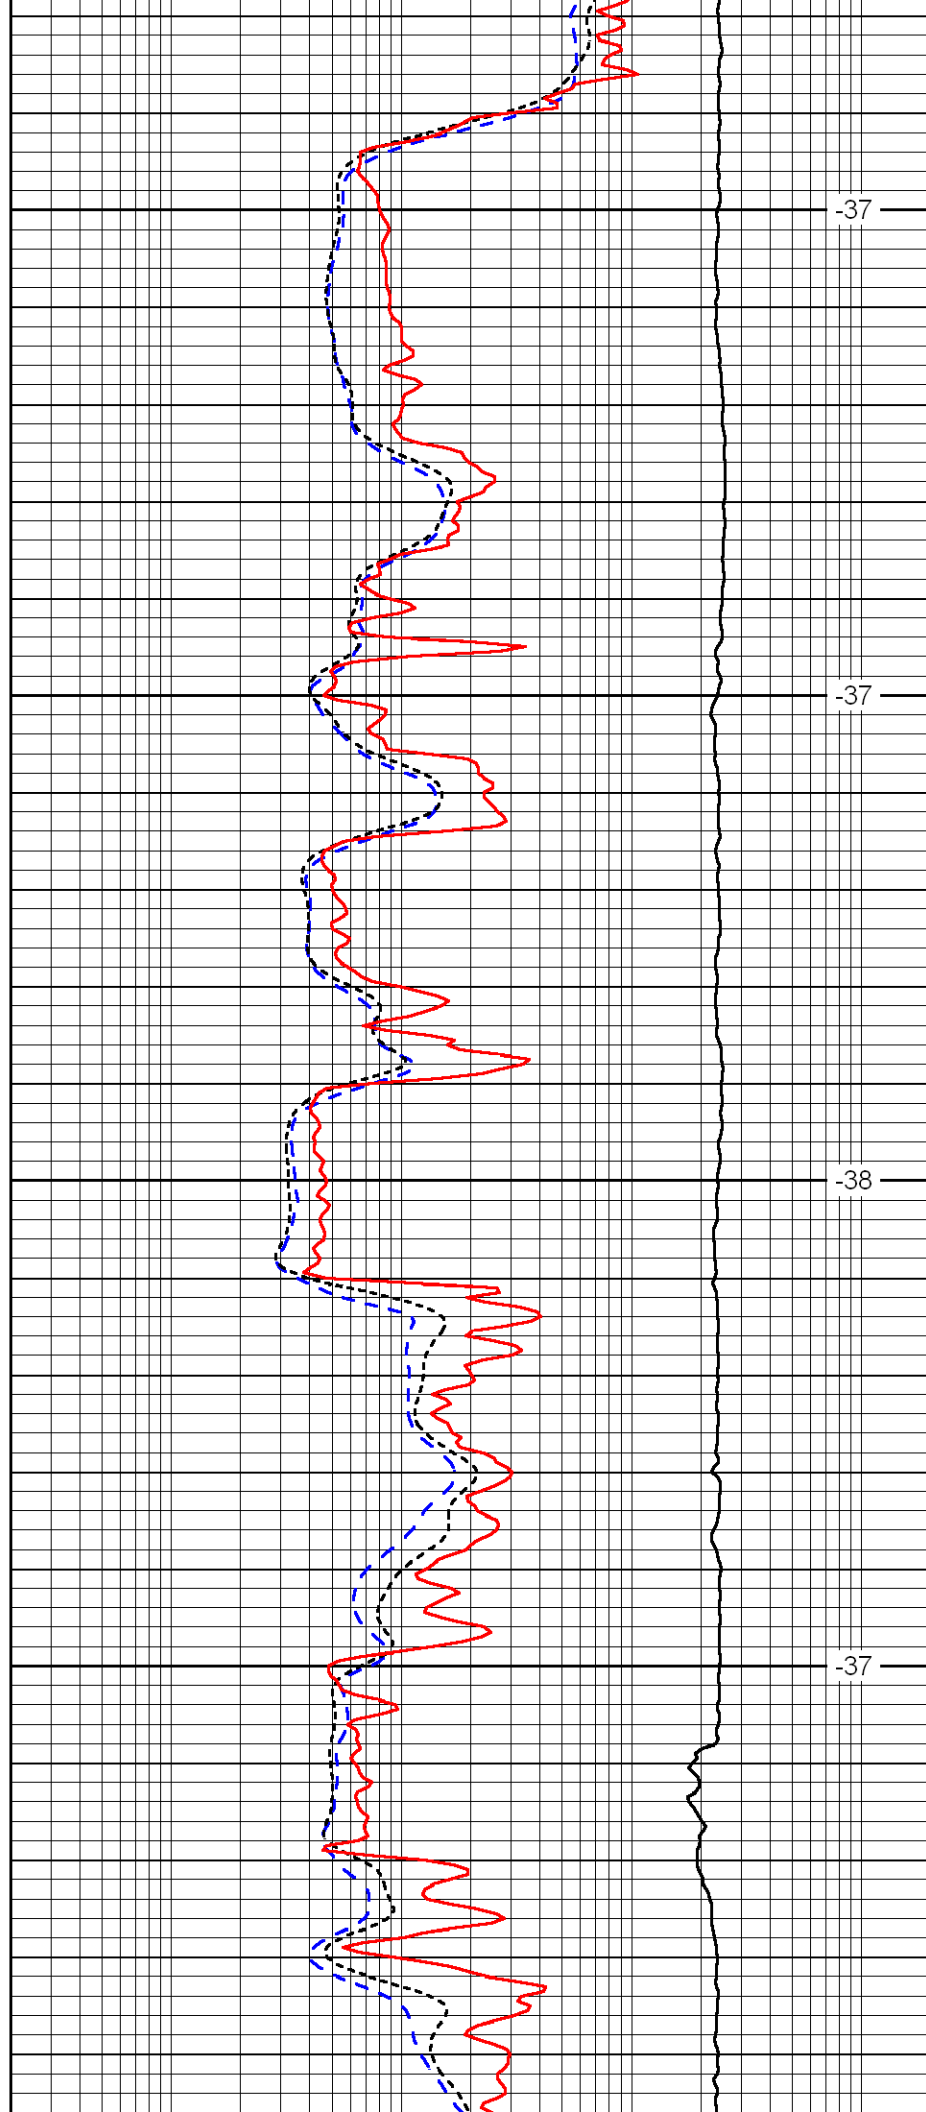


-37

-37

-38

-37

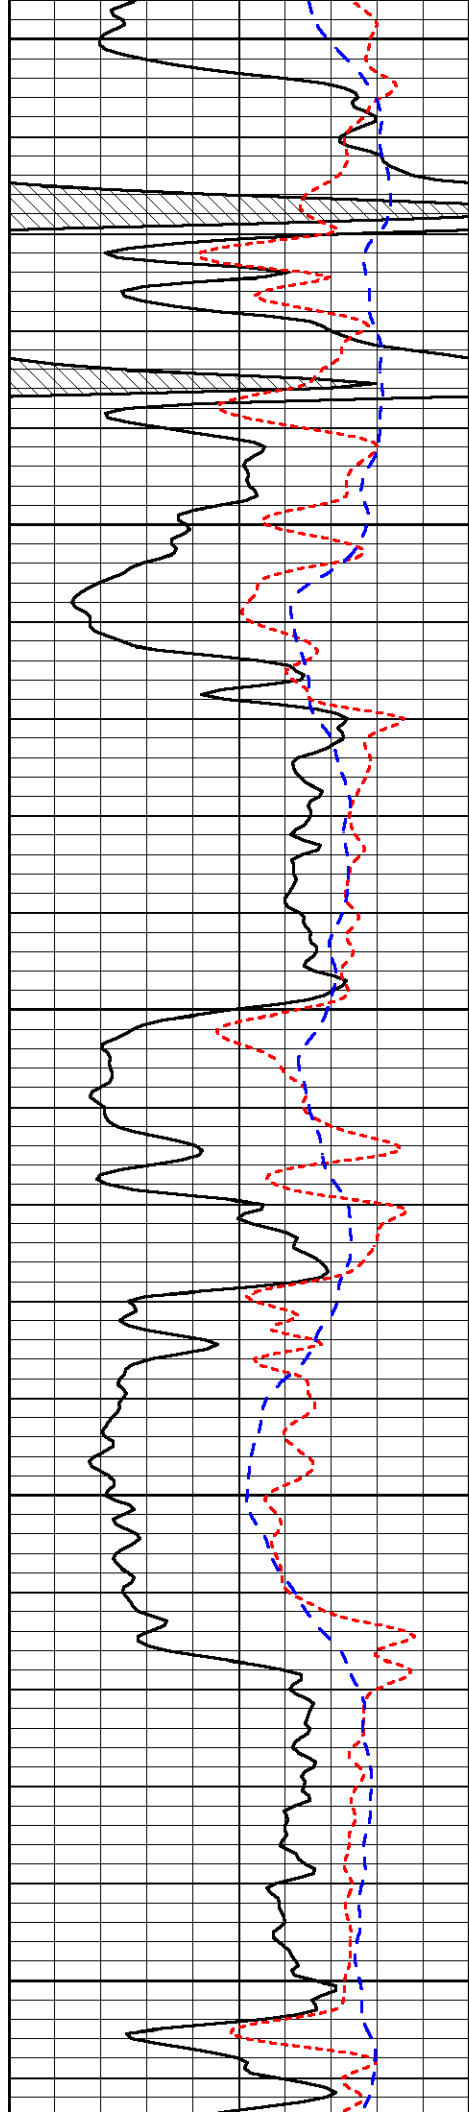


4350

4400

4450

4500

4550

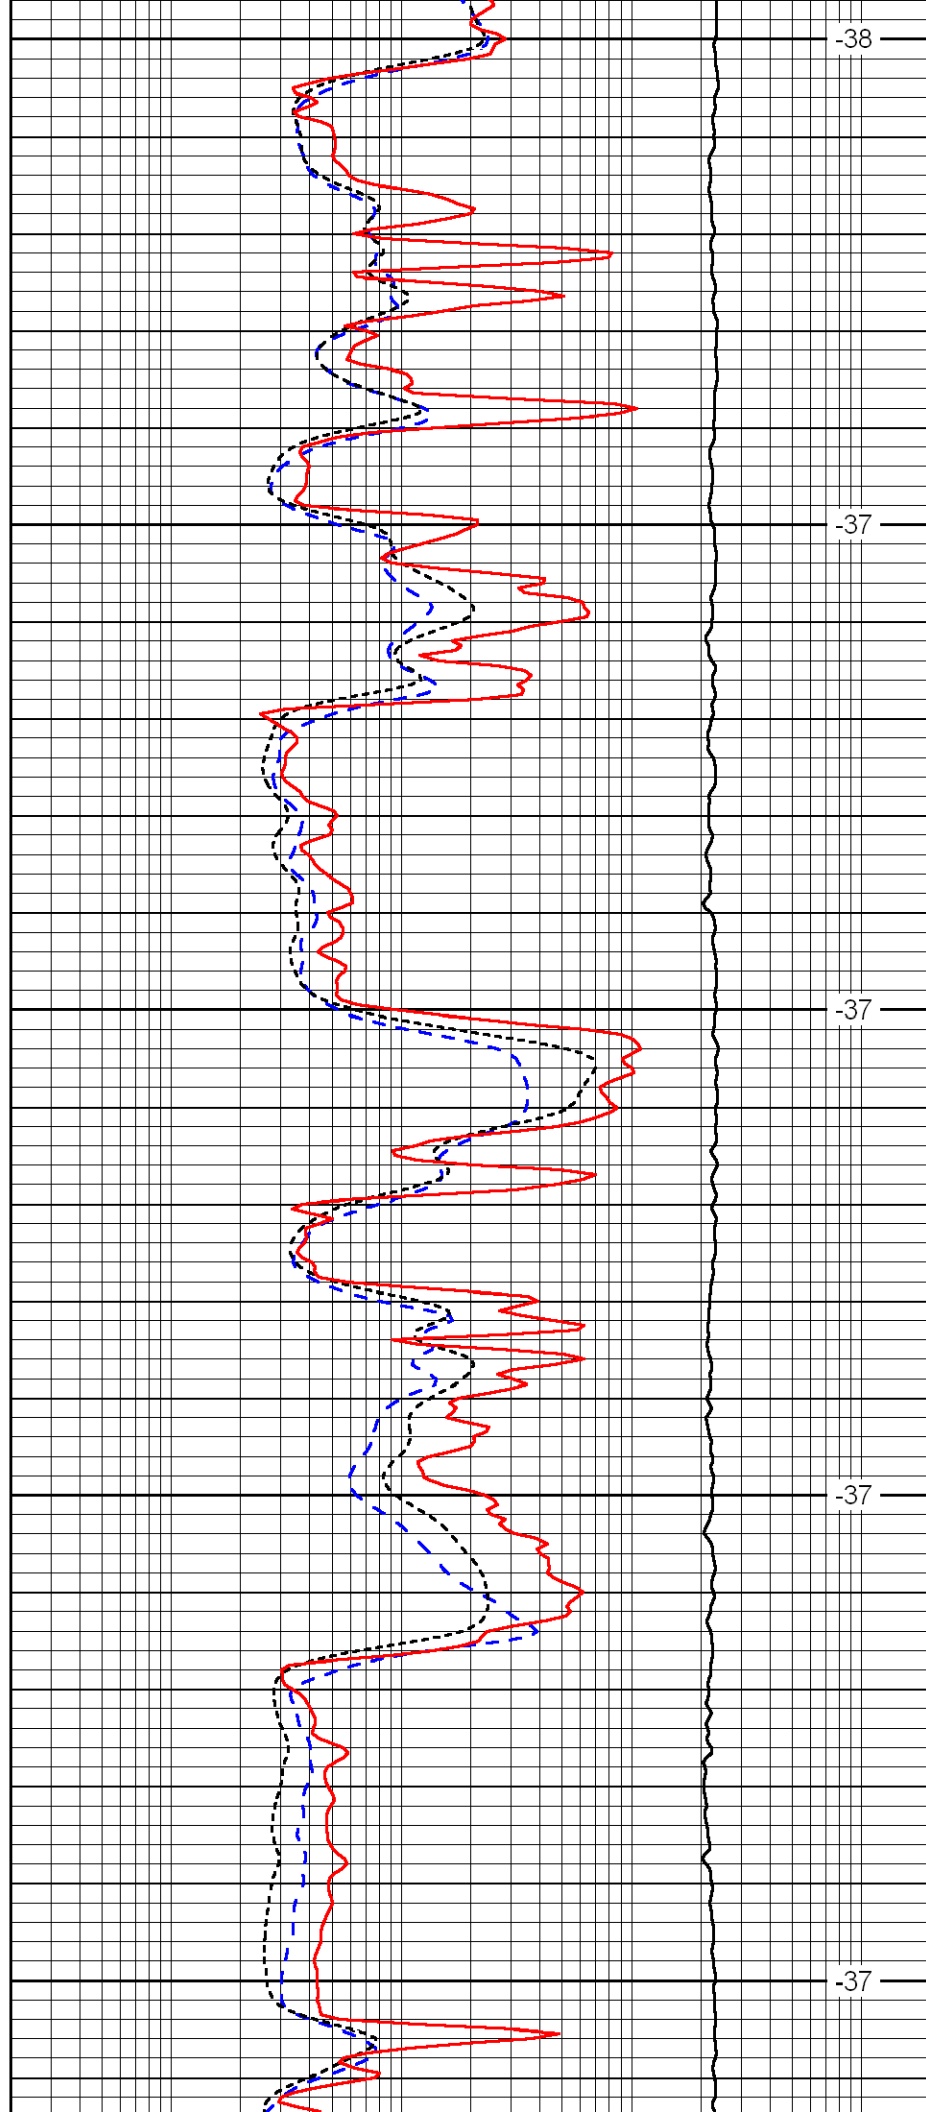


-38

-37

-37

-37

-37

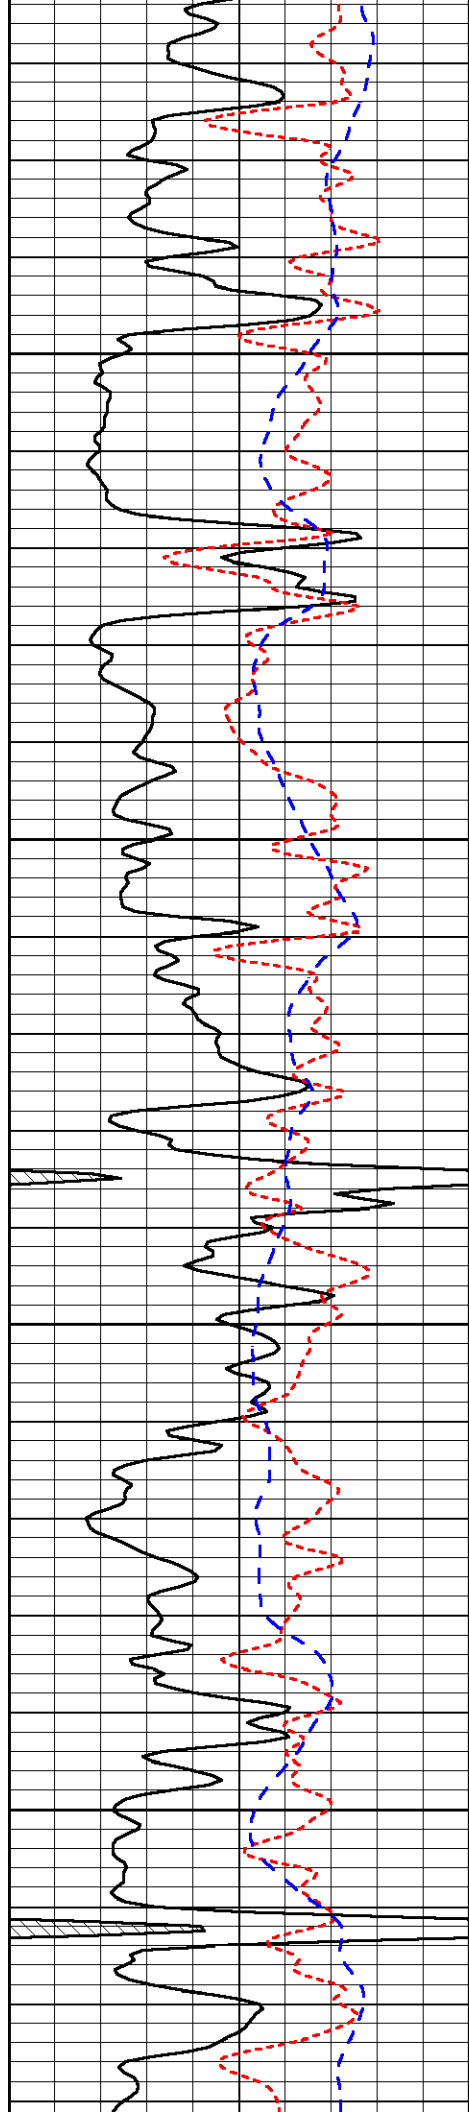


4600

4650

4700

4750

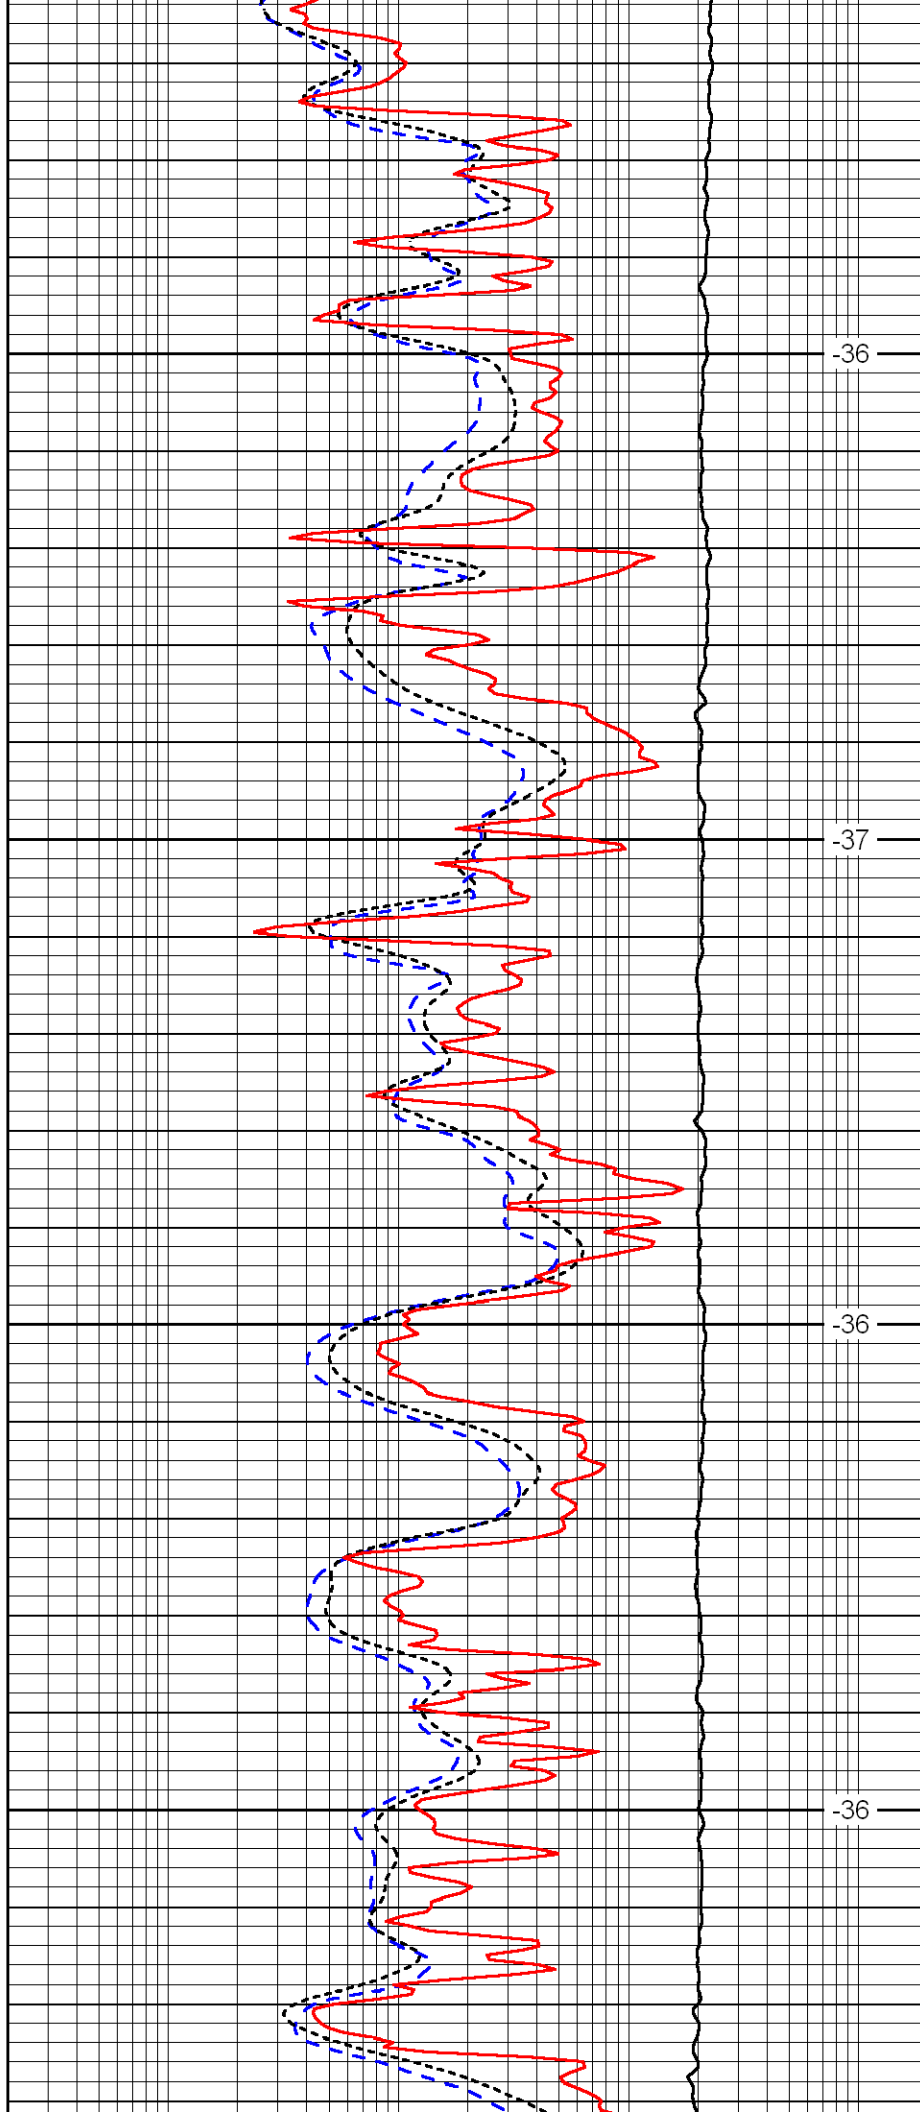


-36

-37

-36

-36

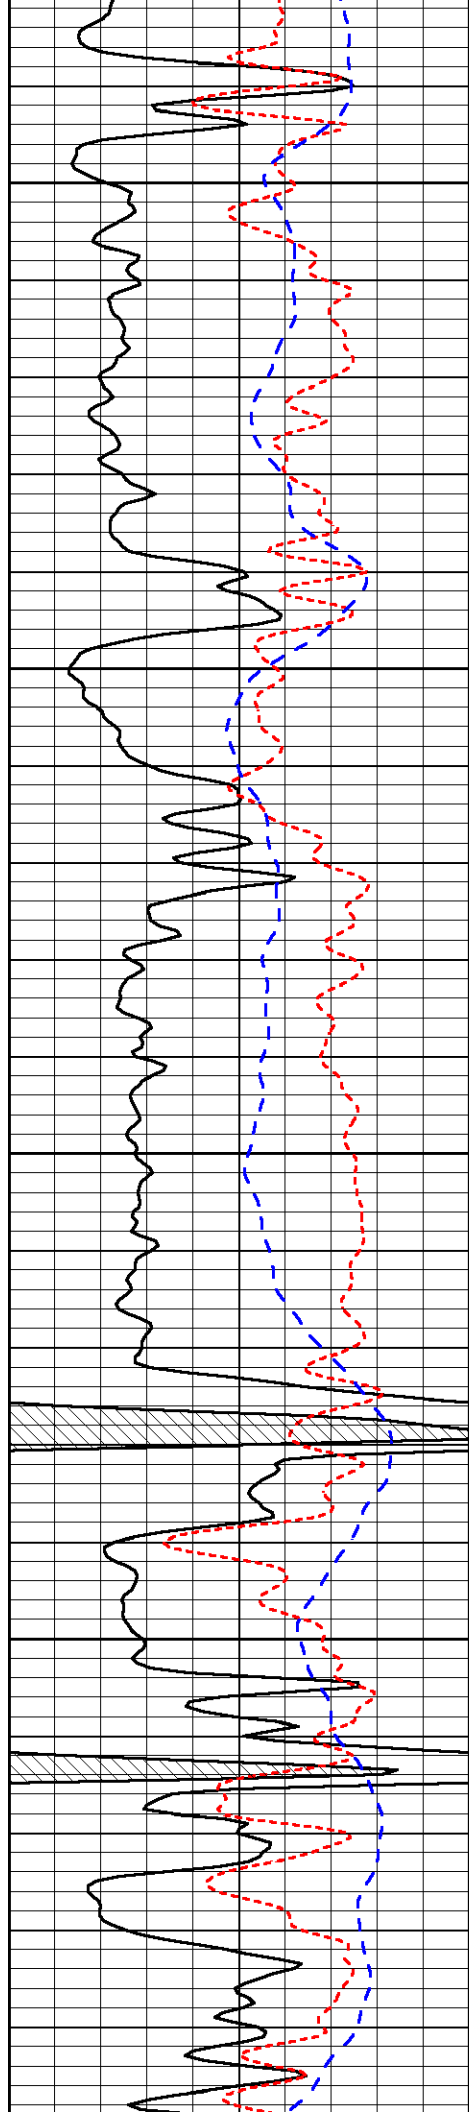


4800

4850

4900

4950

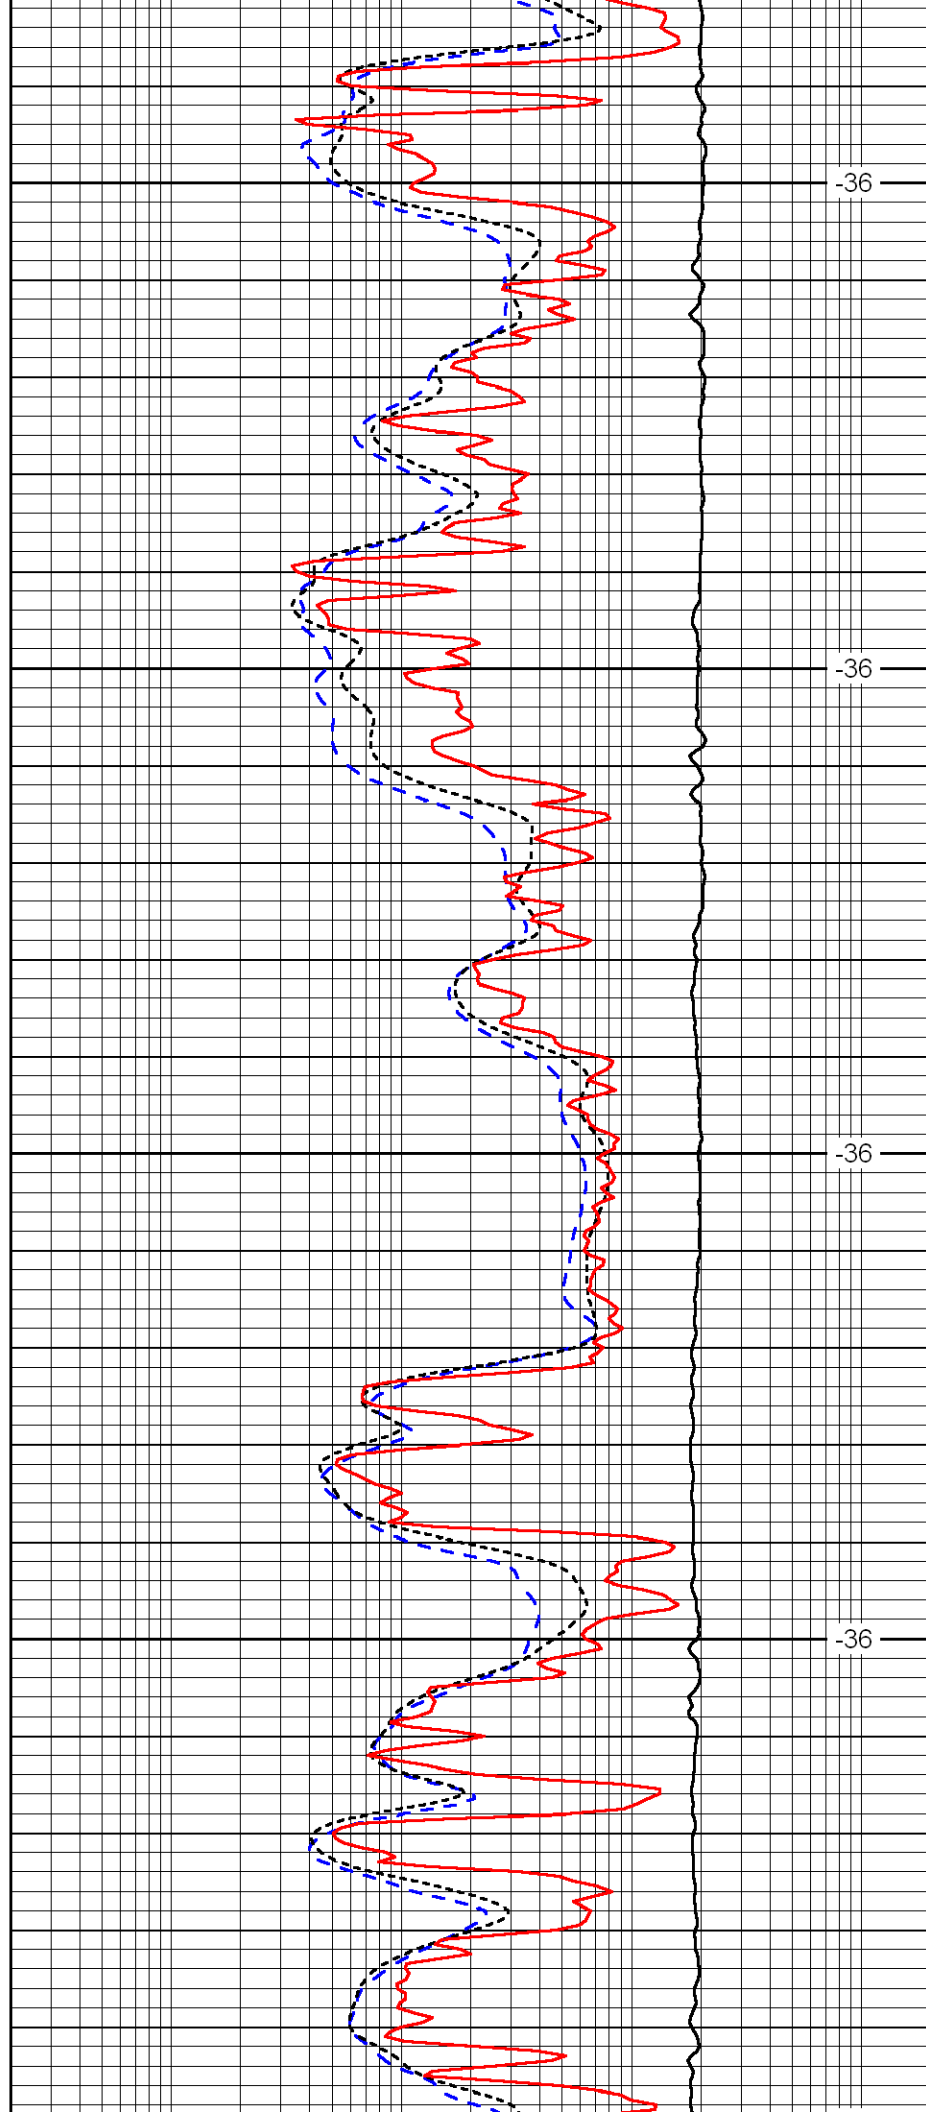


-36

-36

-36

-36

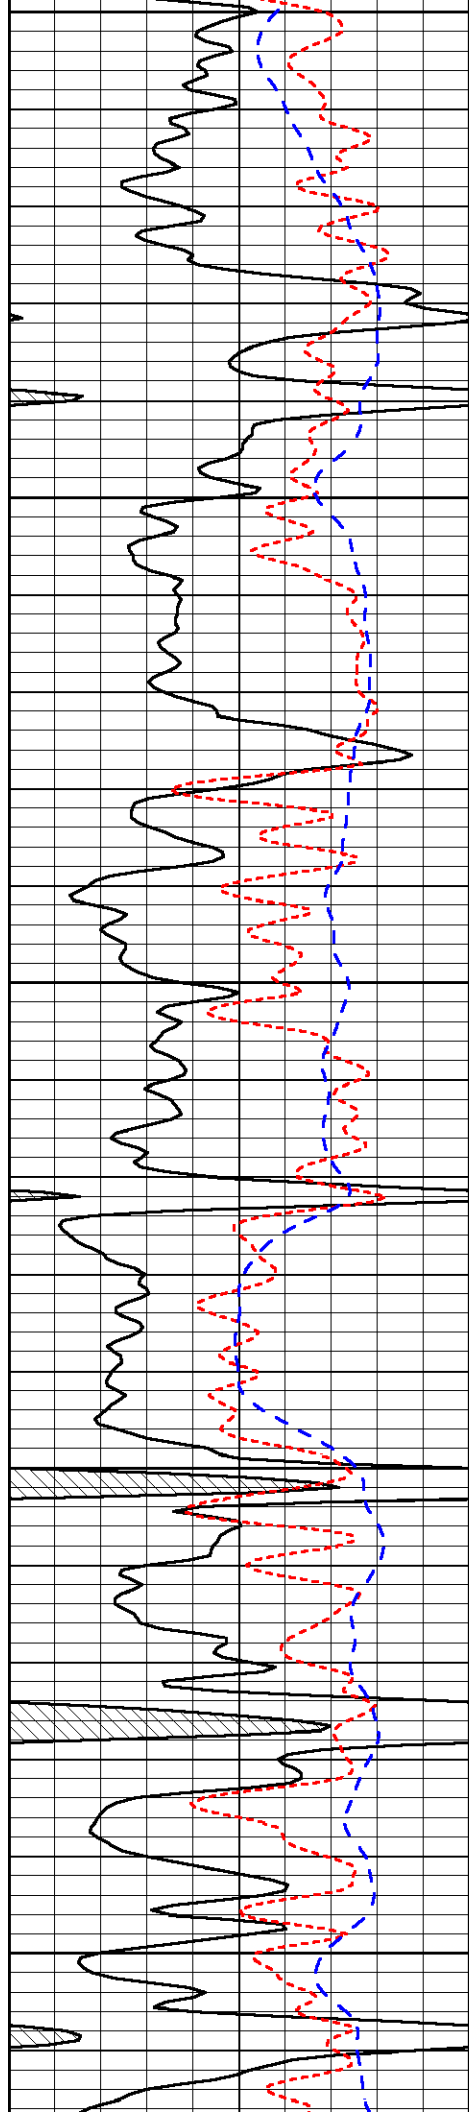


5000

5050

5100

5150

5200

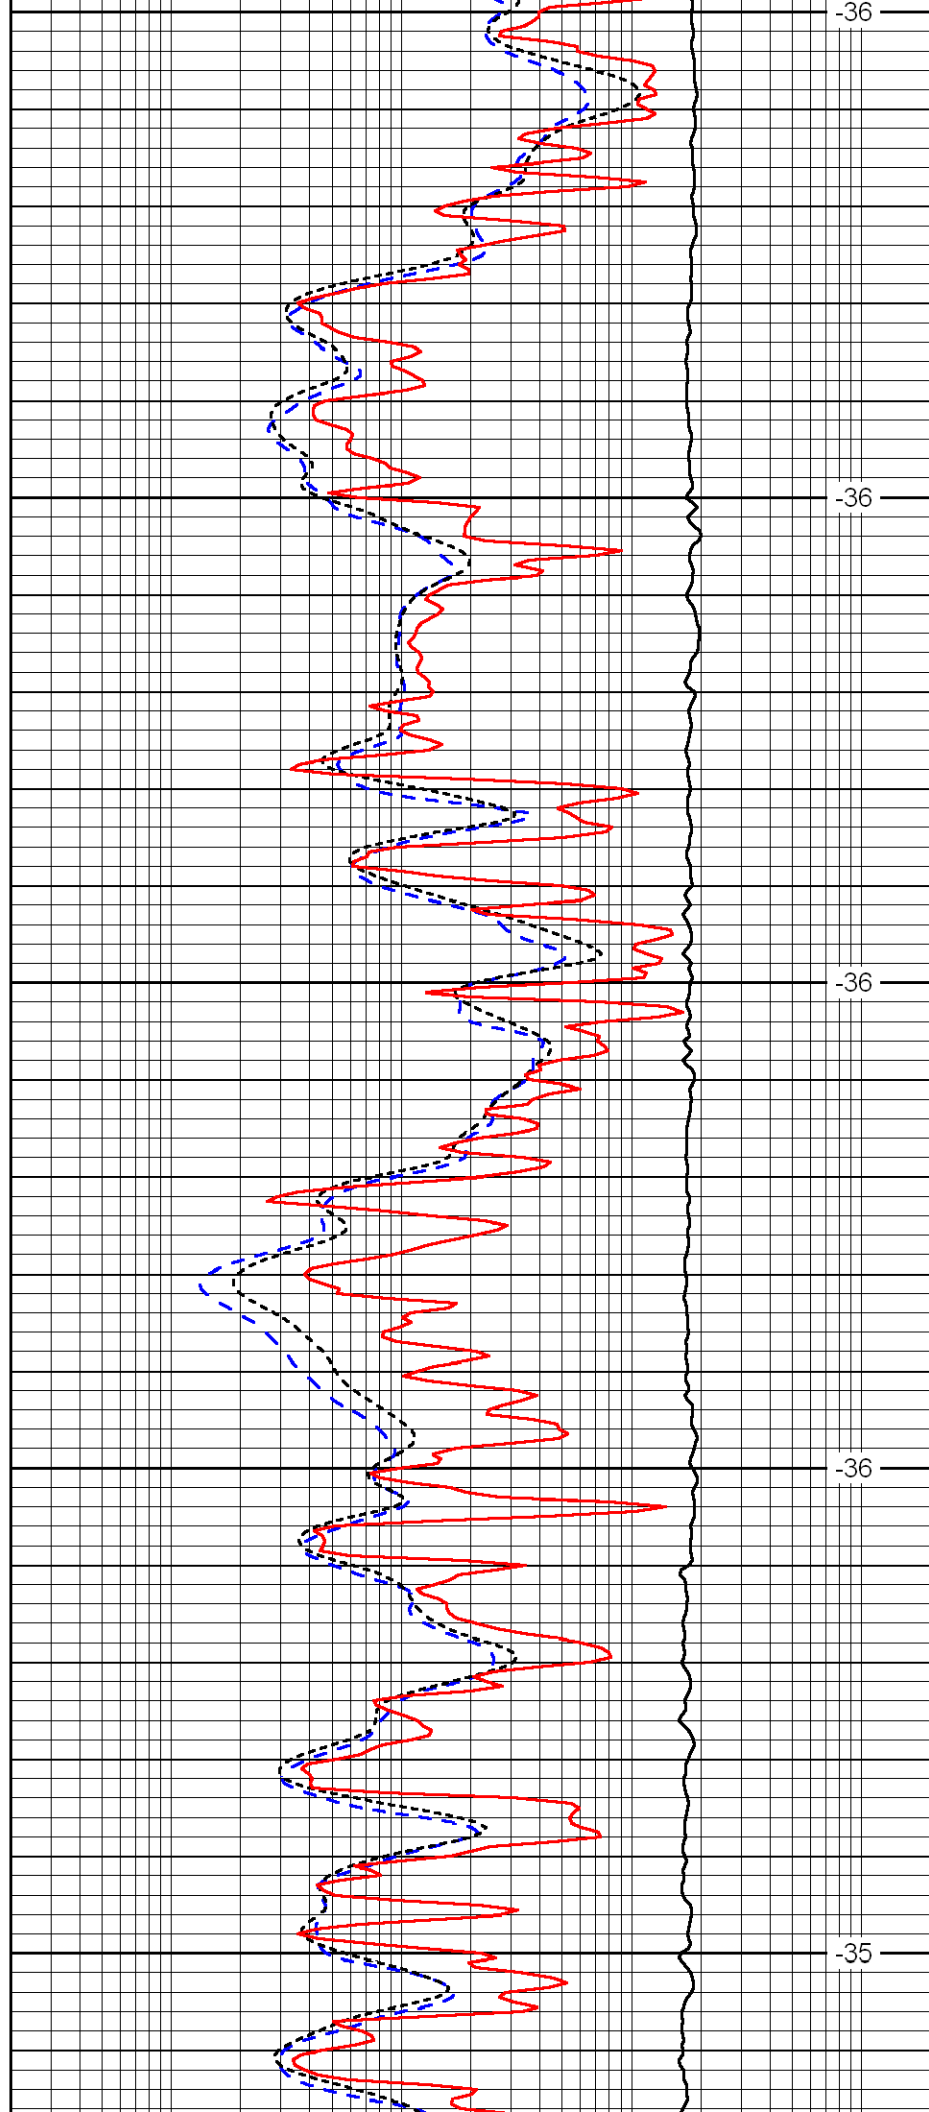


-36

-36

-36

-36

-35

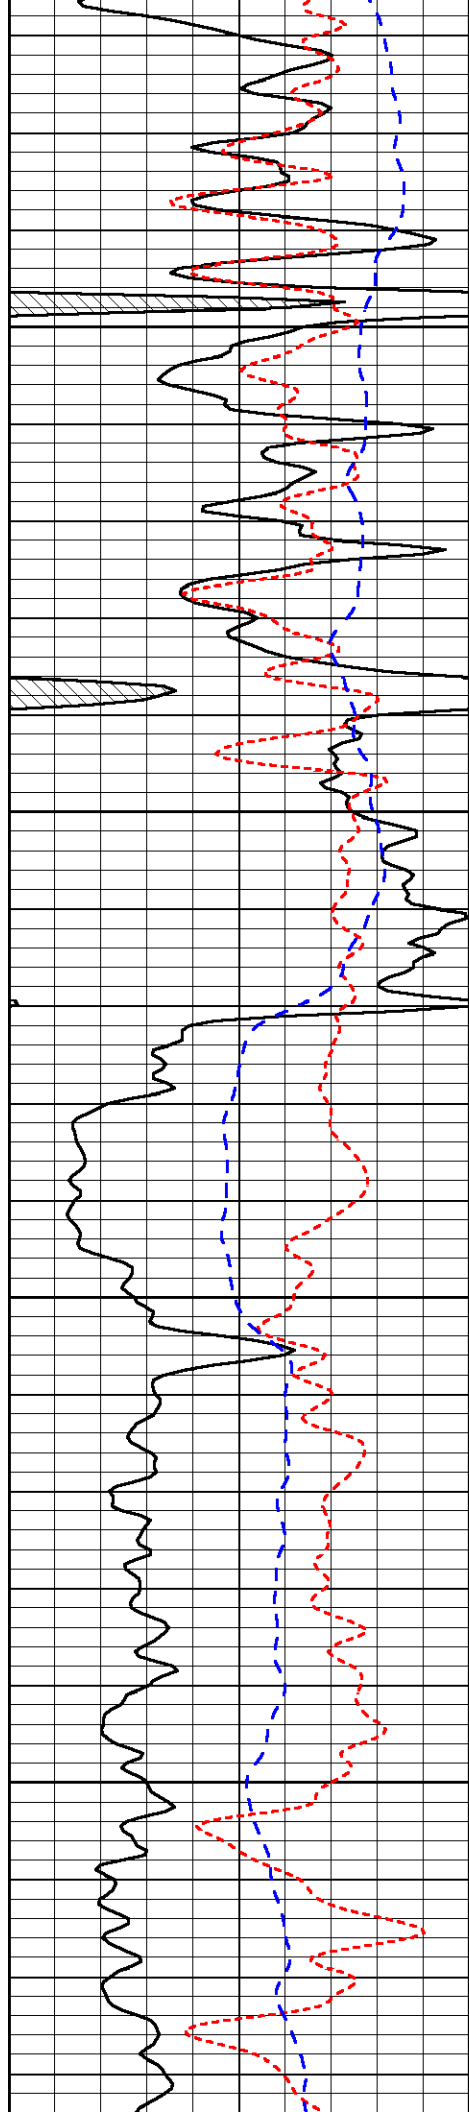


5250

5300

5350

5400

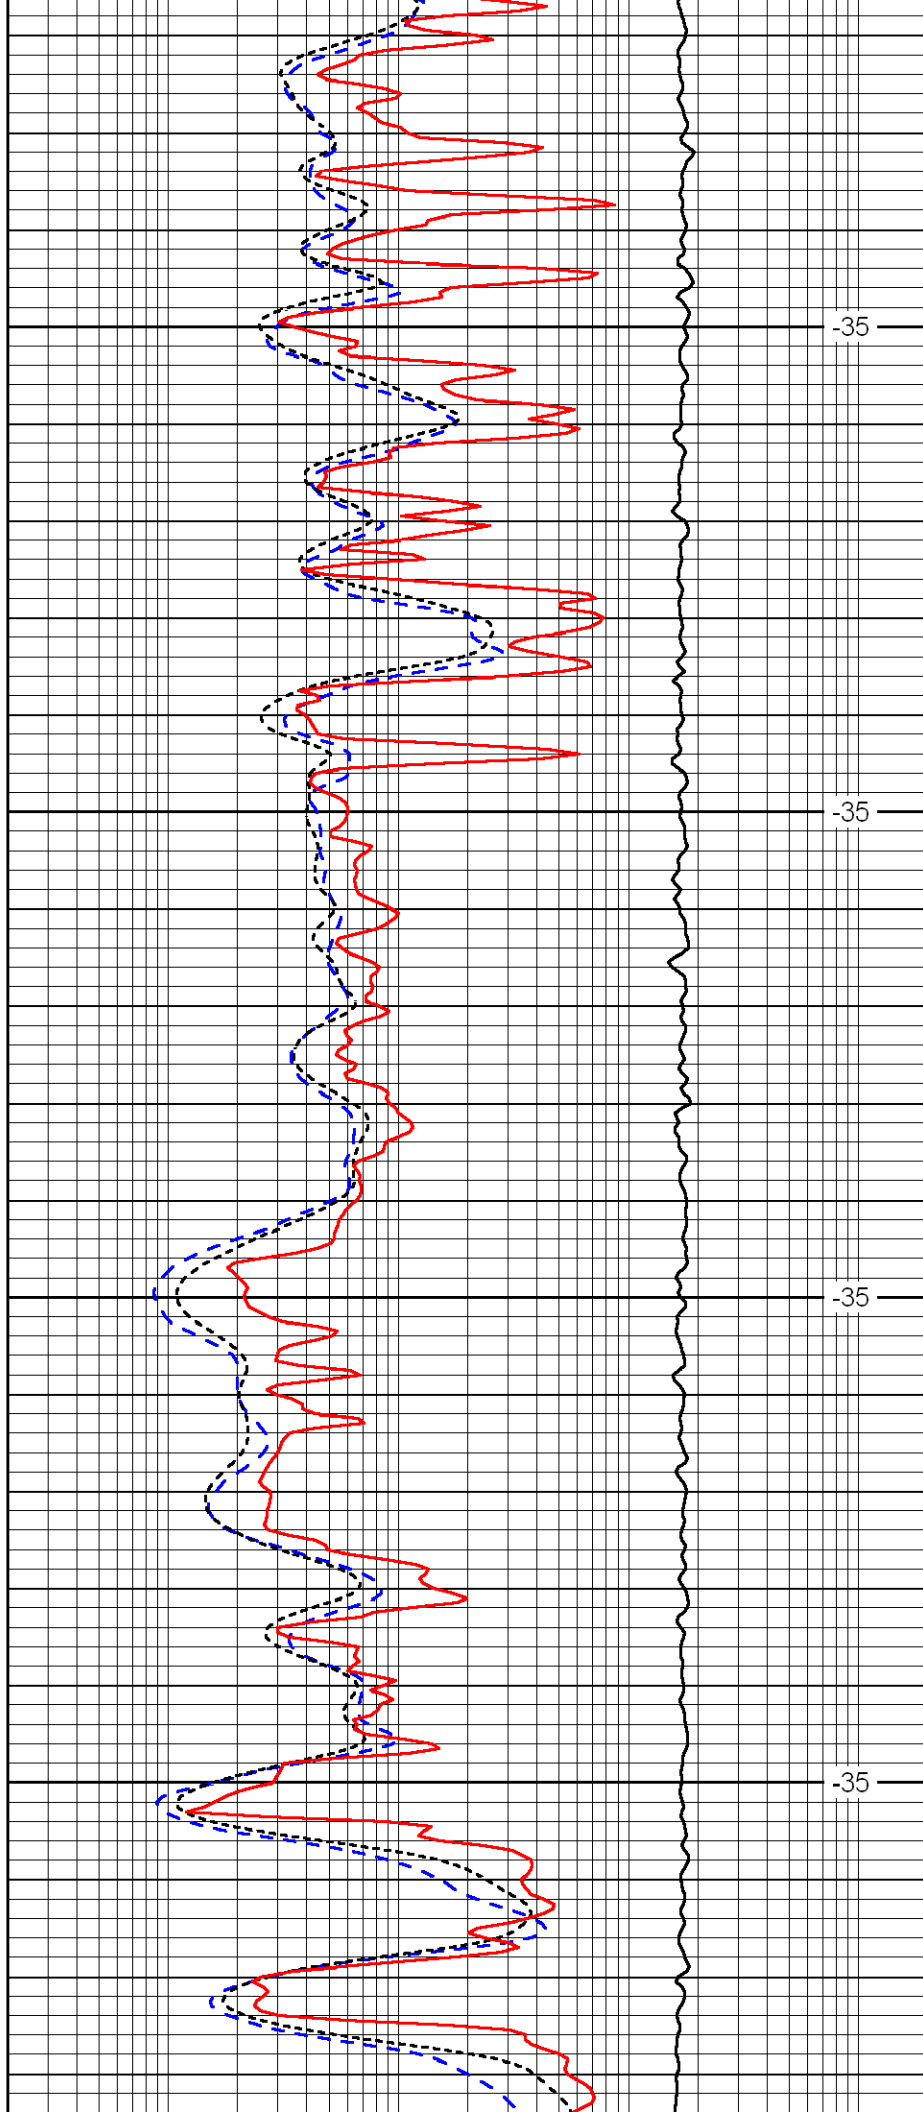


-35

-35

-35

-35

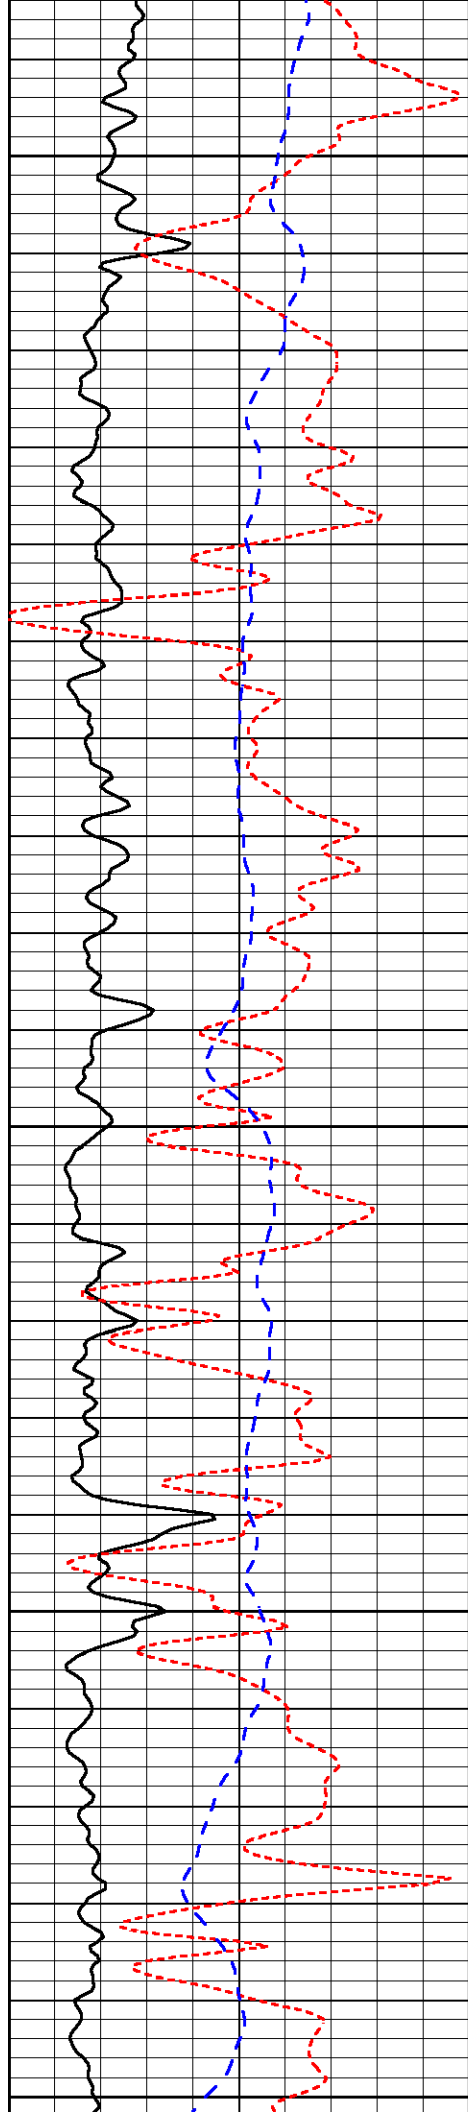


5450

5500

5550

5600

5650

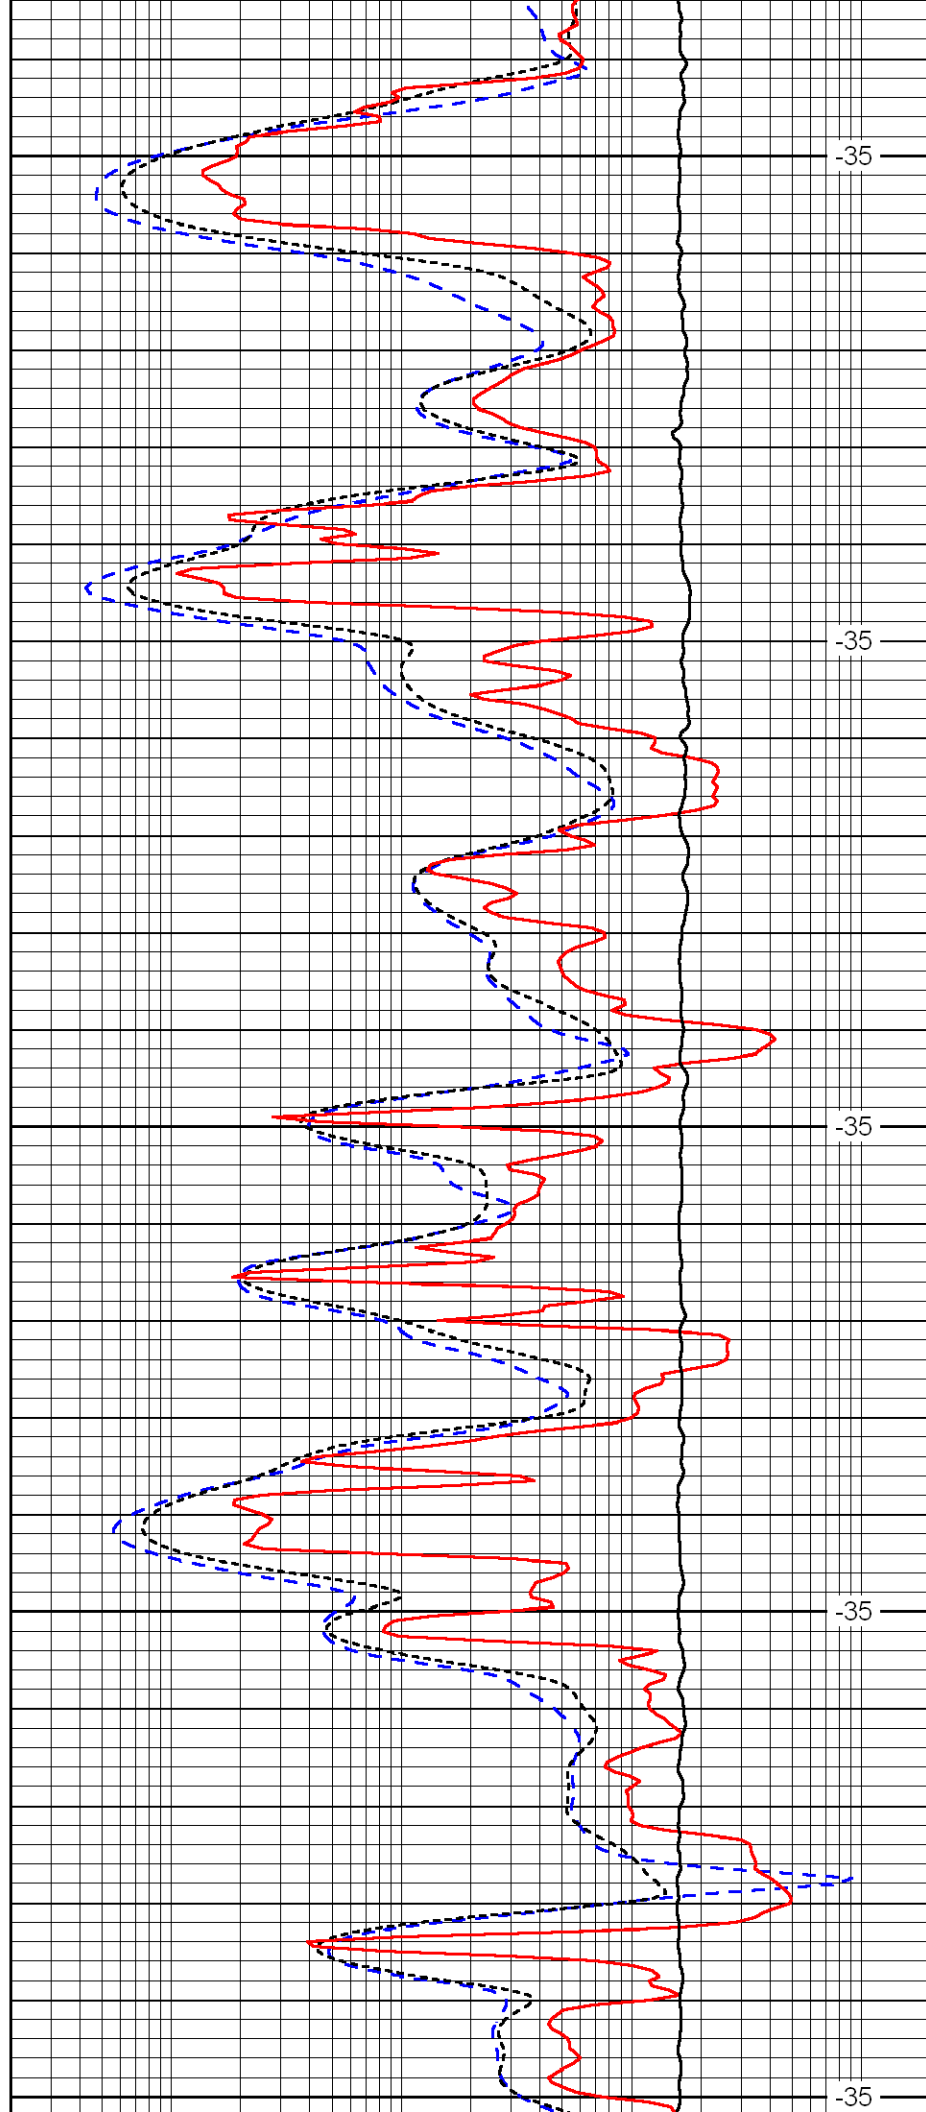


-35

-35

-35

-35

-35

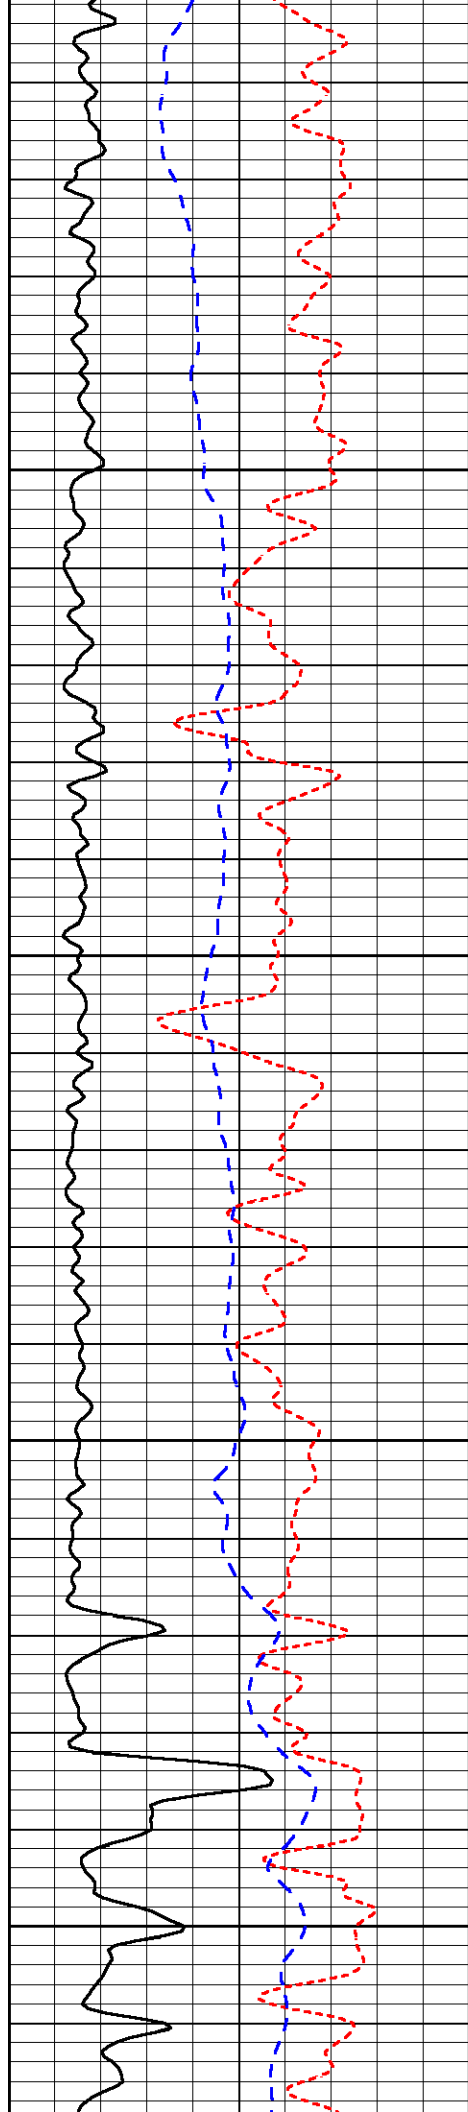


5700

5750

5800

5850


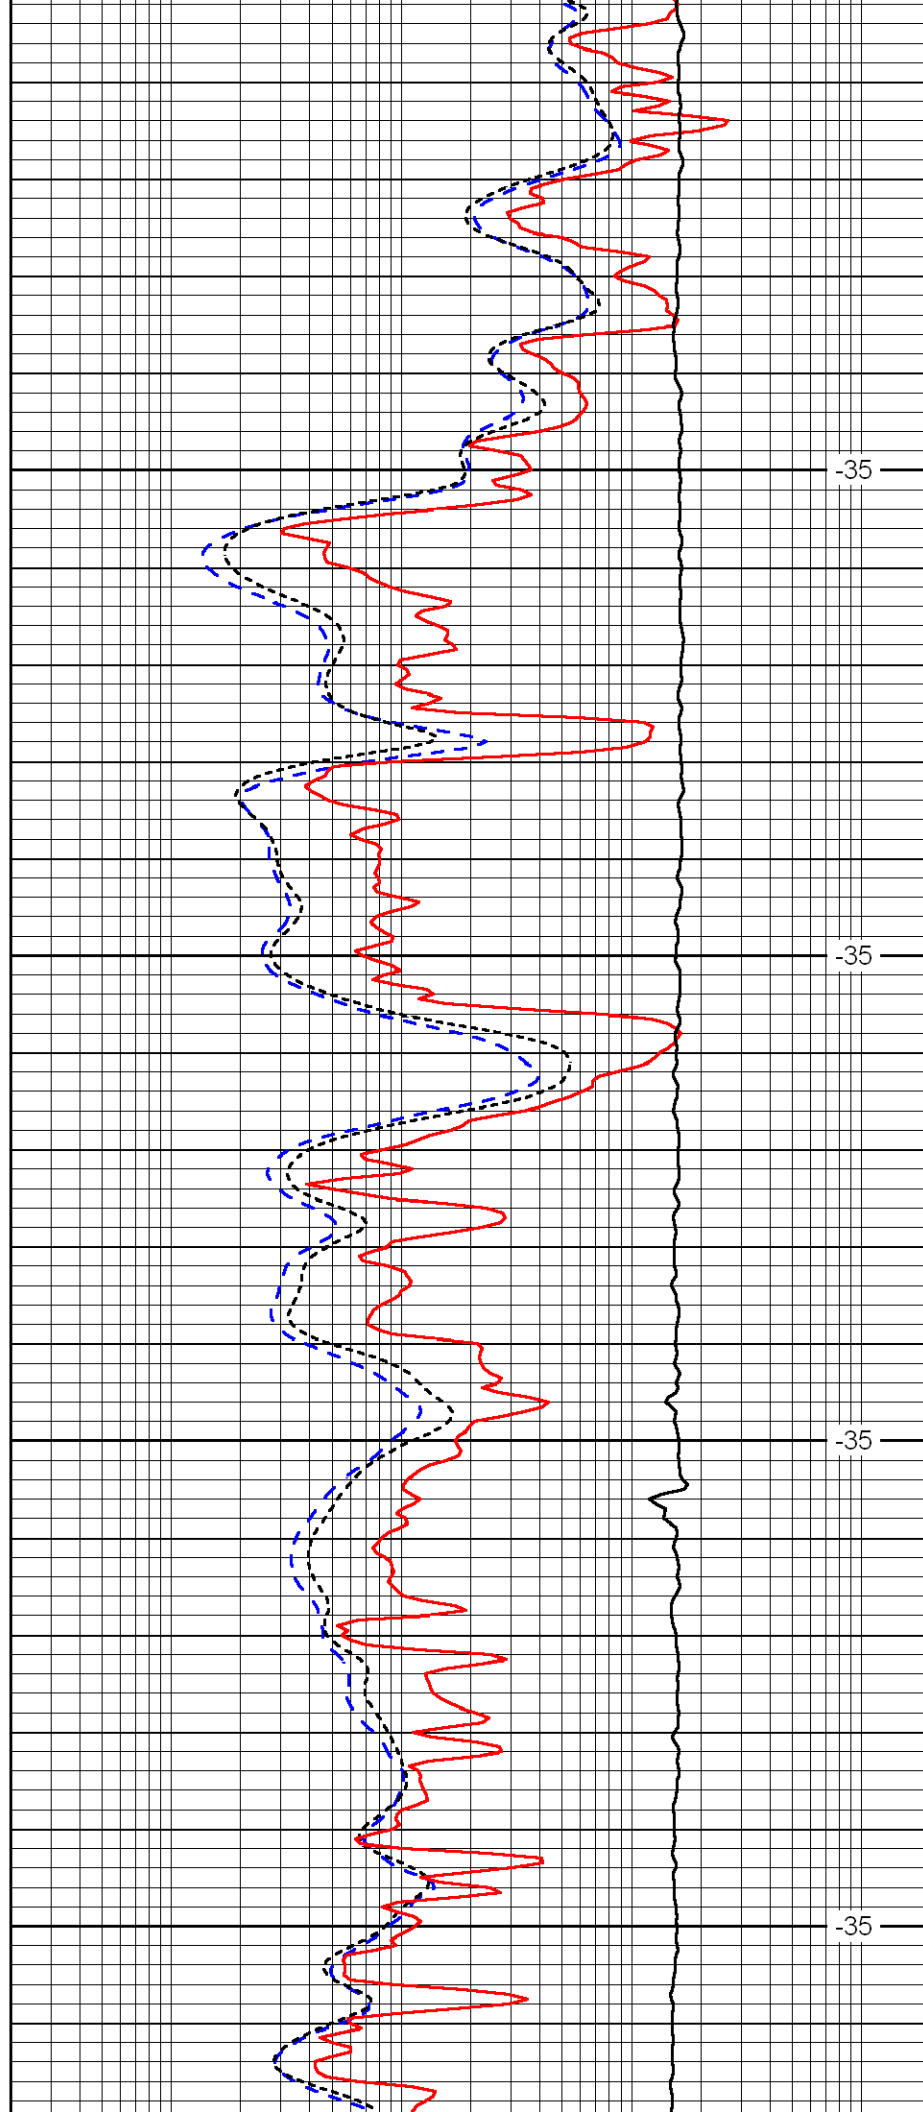


-35

-35

-35

-35

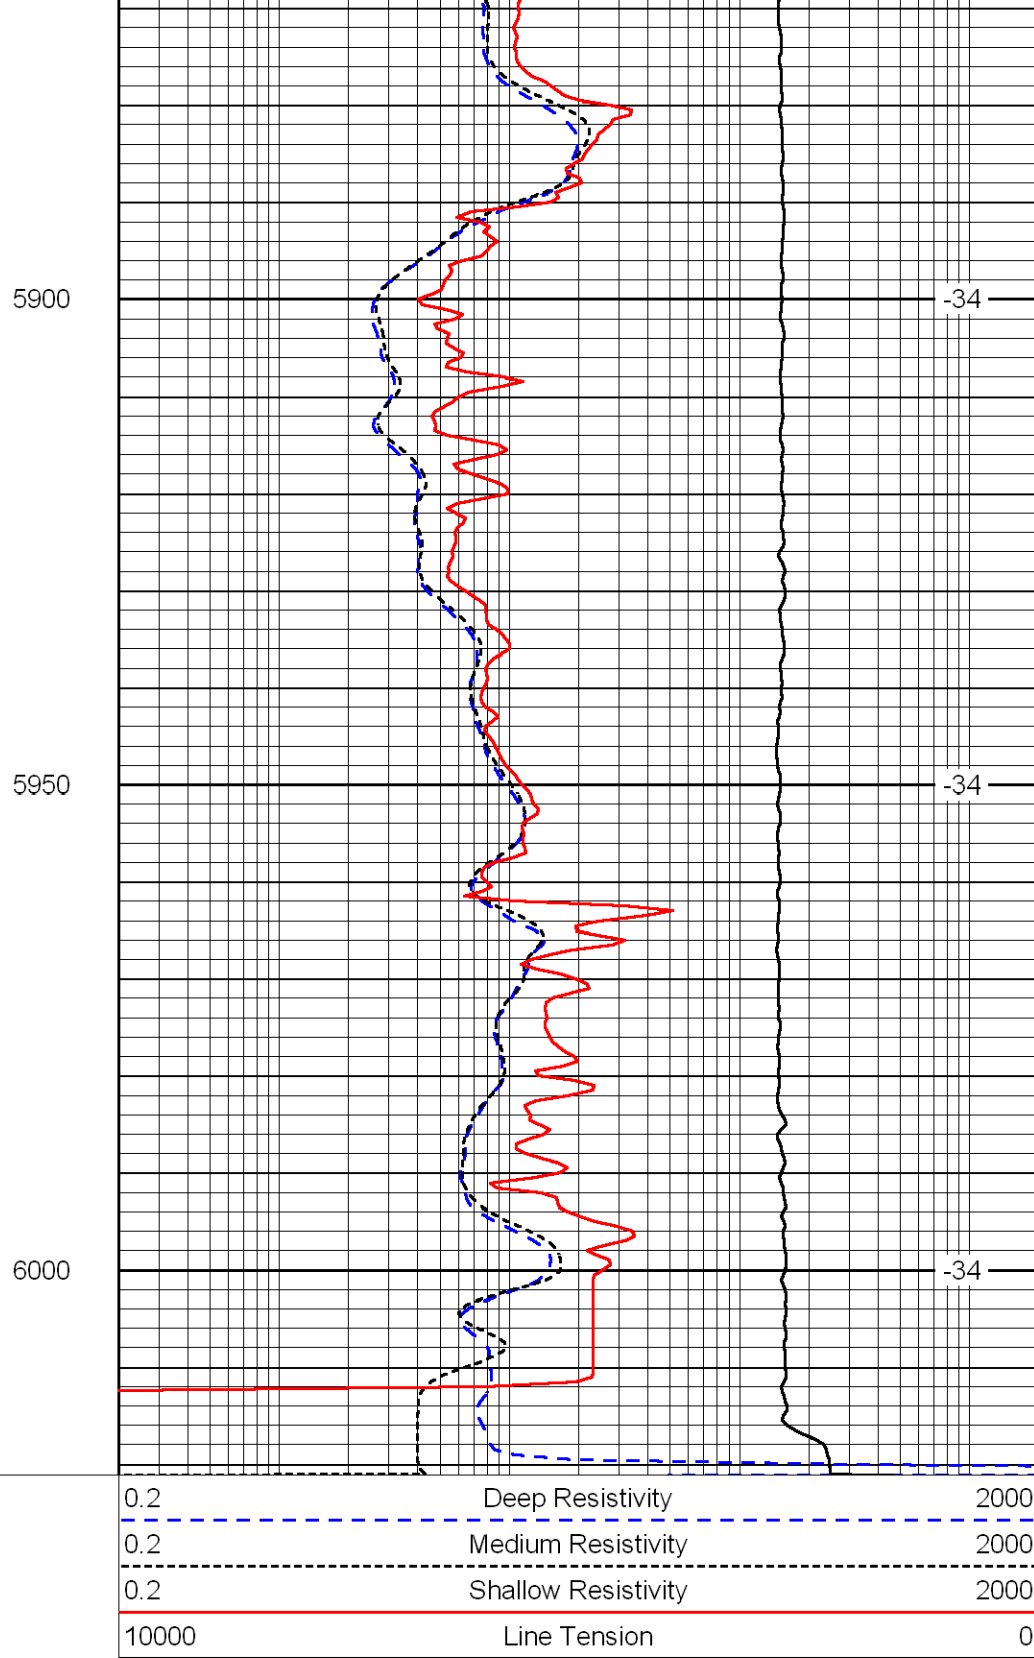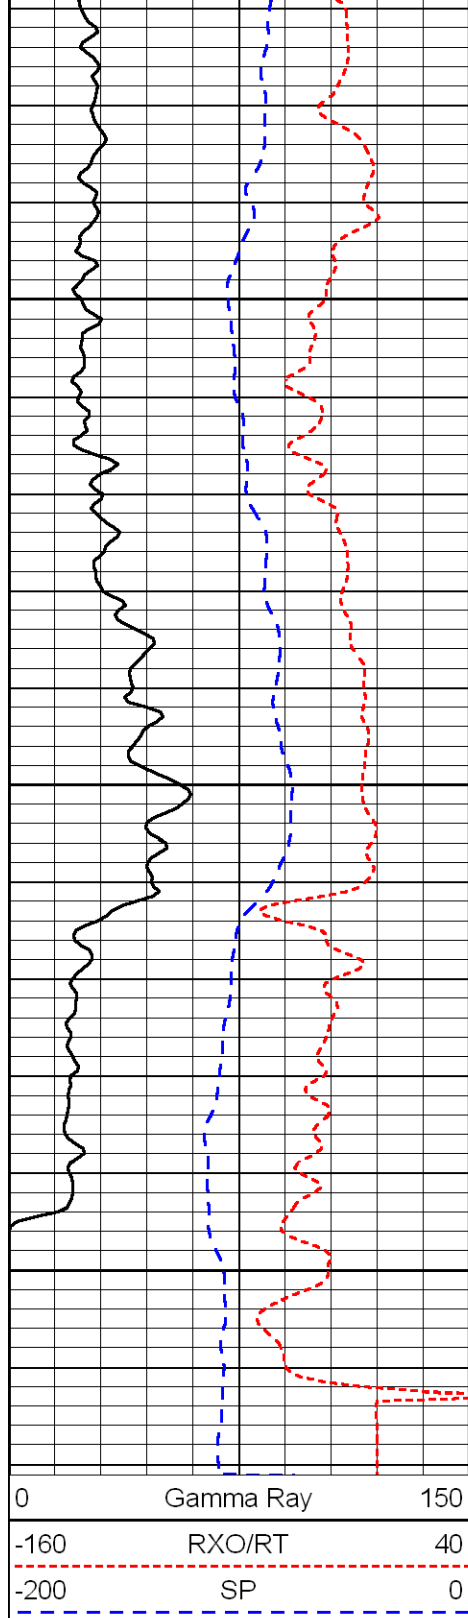

LSPD