



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-101-22222-00-00		
Company	Larson Engineering, Inc.		
Well	Splitter No. 2-35		
Field	Dighton SW		
County	Lane	State	Kansas
Location	NW - SW - SW - SE 602' FSL & 2386' FEL		
Sec: 35	Twp: 18 S	Rge: 29 W	Elevation K.B. 2813 D.F. 2803 G.L. 2803
Permanent Datum	Ground Level	Elevation 2803	
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		

Date	4/14/2010	
Run Number	Two	
Depth Driller	4630	
Depth Logger	4631	
Bottom Logged Interval	4630	
Top Log Interval	3600	
Casing Driller	8.625 @ 267	
Casing Logger	260	
Bit Size	7.875	
Type Fluid in Hole	Chemical	
Salinity, ppm CL	3.000	
Density / Viscosity	9.3	52
pH / Fluid Loss	10.0	7.2
Source of Sample	Flowline	
Rm @ Meas. Temp	1.80 @	65
Rmf @ Meas. Temp	1.35 @	65
Rmc @ Meas. Temp	2.43 @	65
Source of Rmf / Rmc	Charts	
Rm @ BHT	0.96 @	122
Operating Rig Time	3-1/2 Hours	
Max Rec. Temp. F	122	
Equipment Number	15	
Location	Hays	
Recorded By	B. Becker	
Witnessed By	Steve Davis	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton, Ks;
2 South; 2 West;
1/2 South; East Into

Database File: larsonhd.db
 Dataset Pathname: DIL/larstk
 Presentation Format: micro
 Dataset Creation: Wed Apr 14 19:35:41 2010
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD

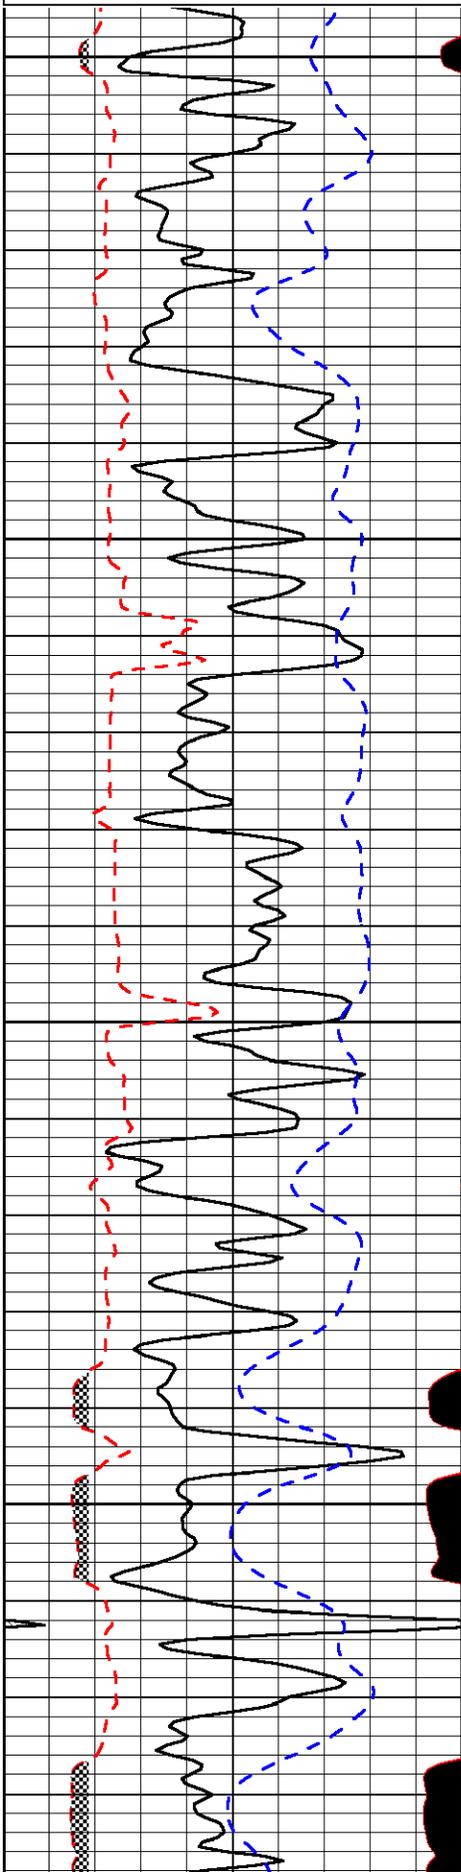


3600

3650

3700

3750

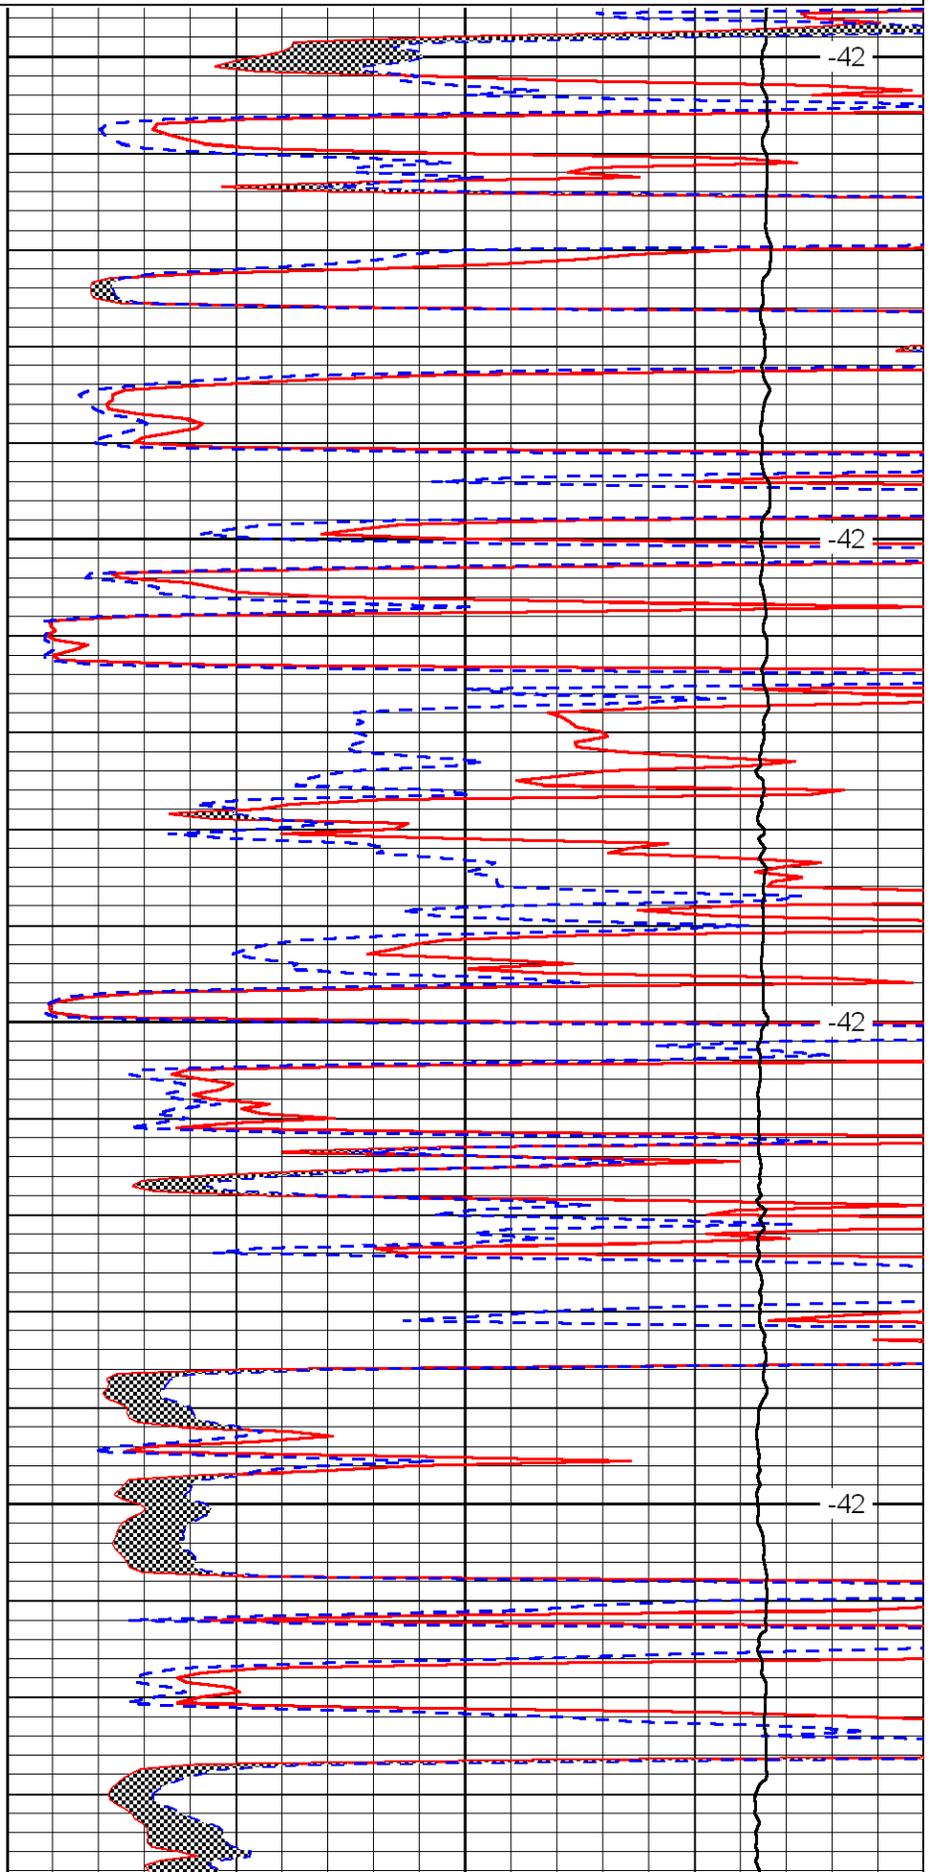


-42

-42

-42

-42

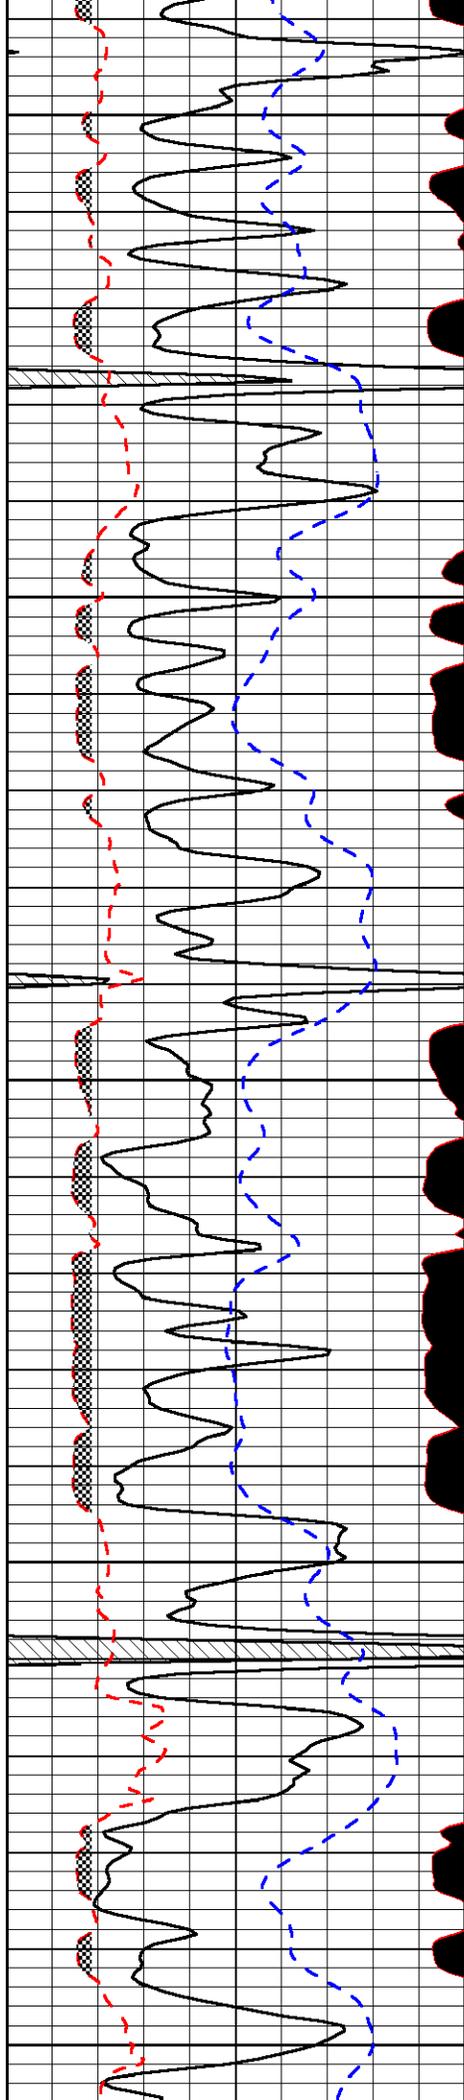


3800

3850

3900

3950

4000

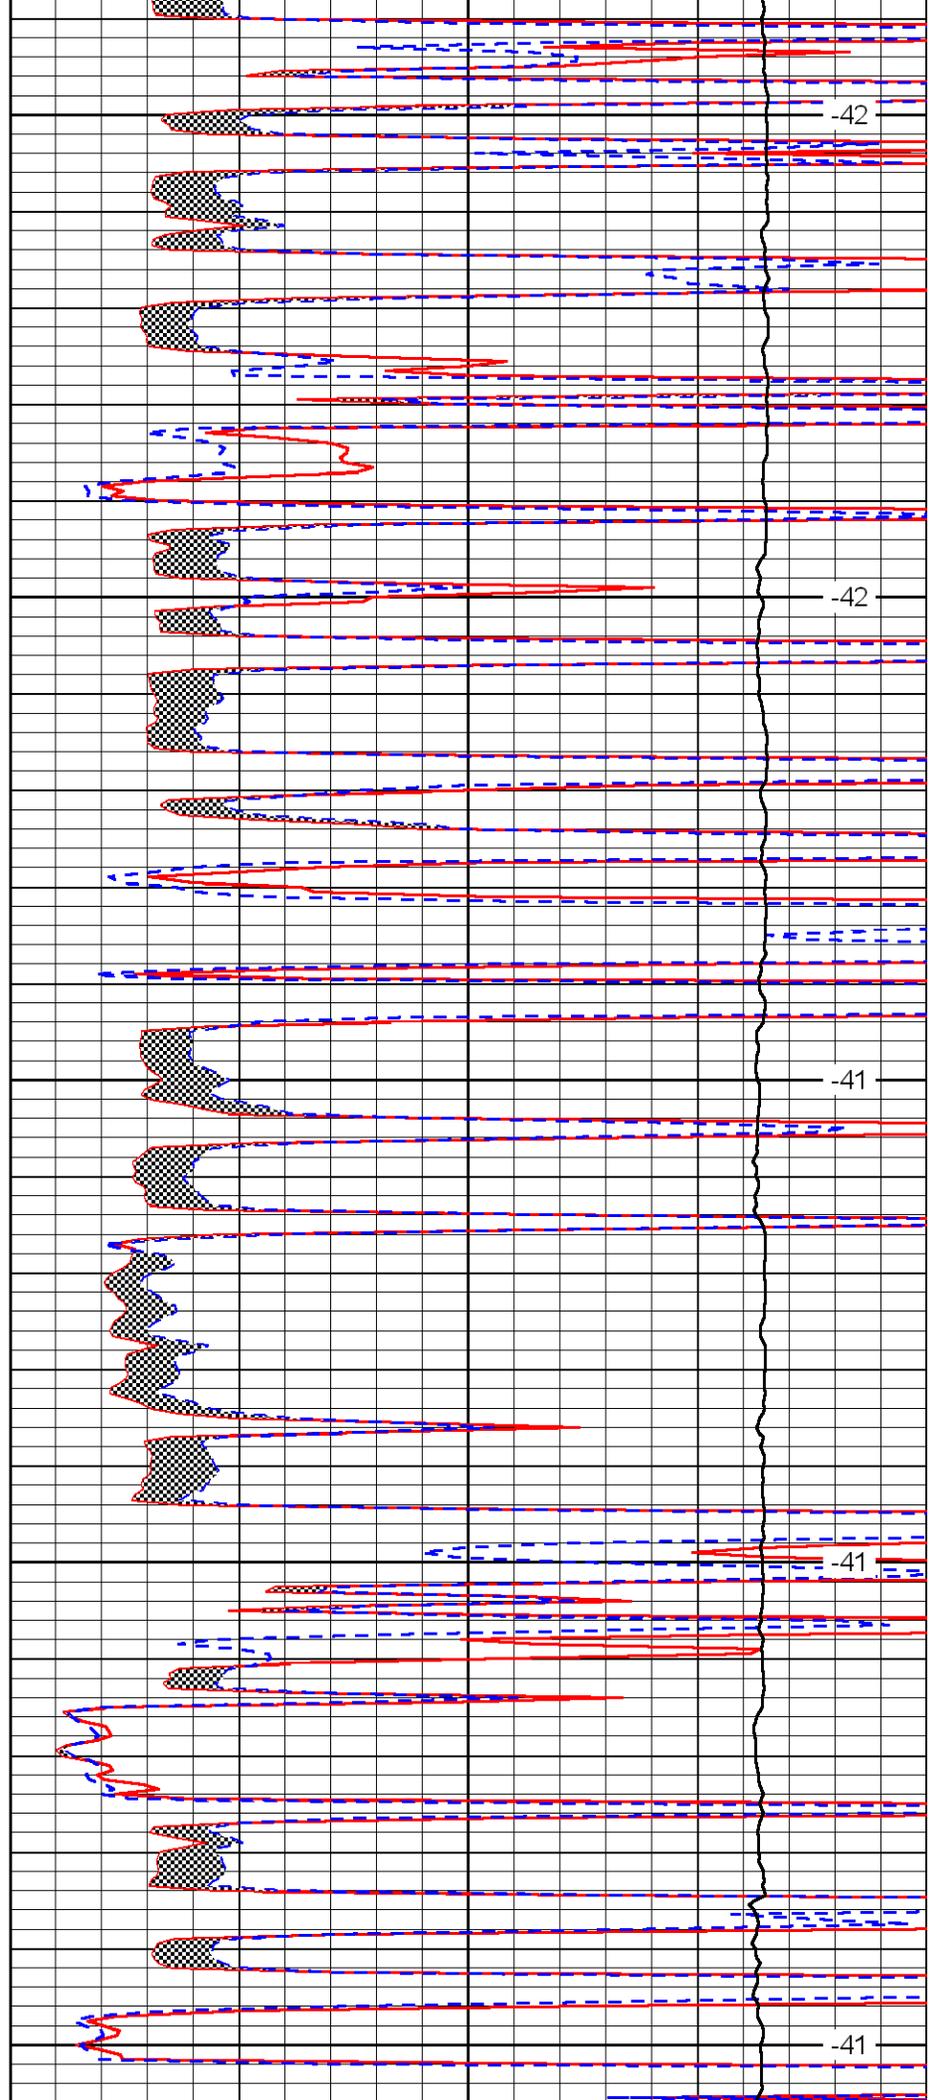


-42

-42

-41

-41

-41

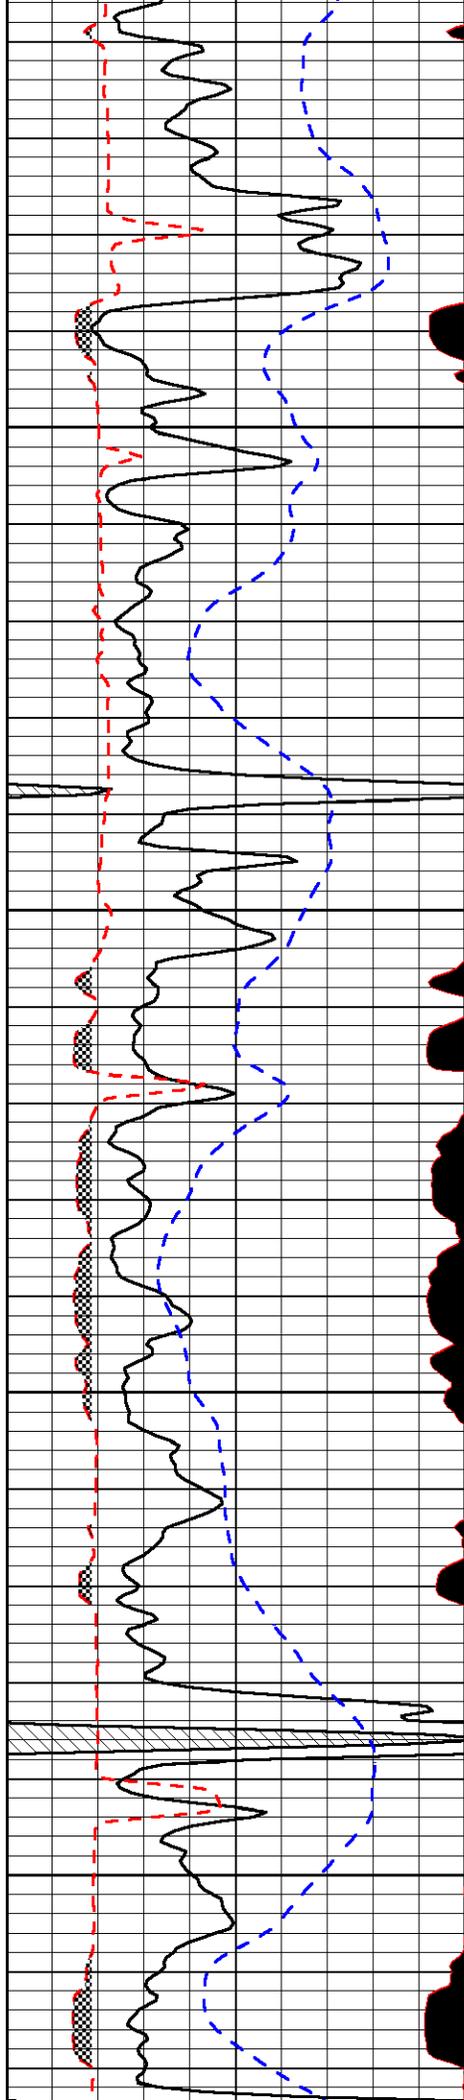


4050

4100

4150

4200

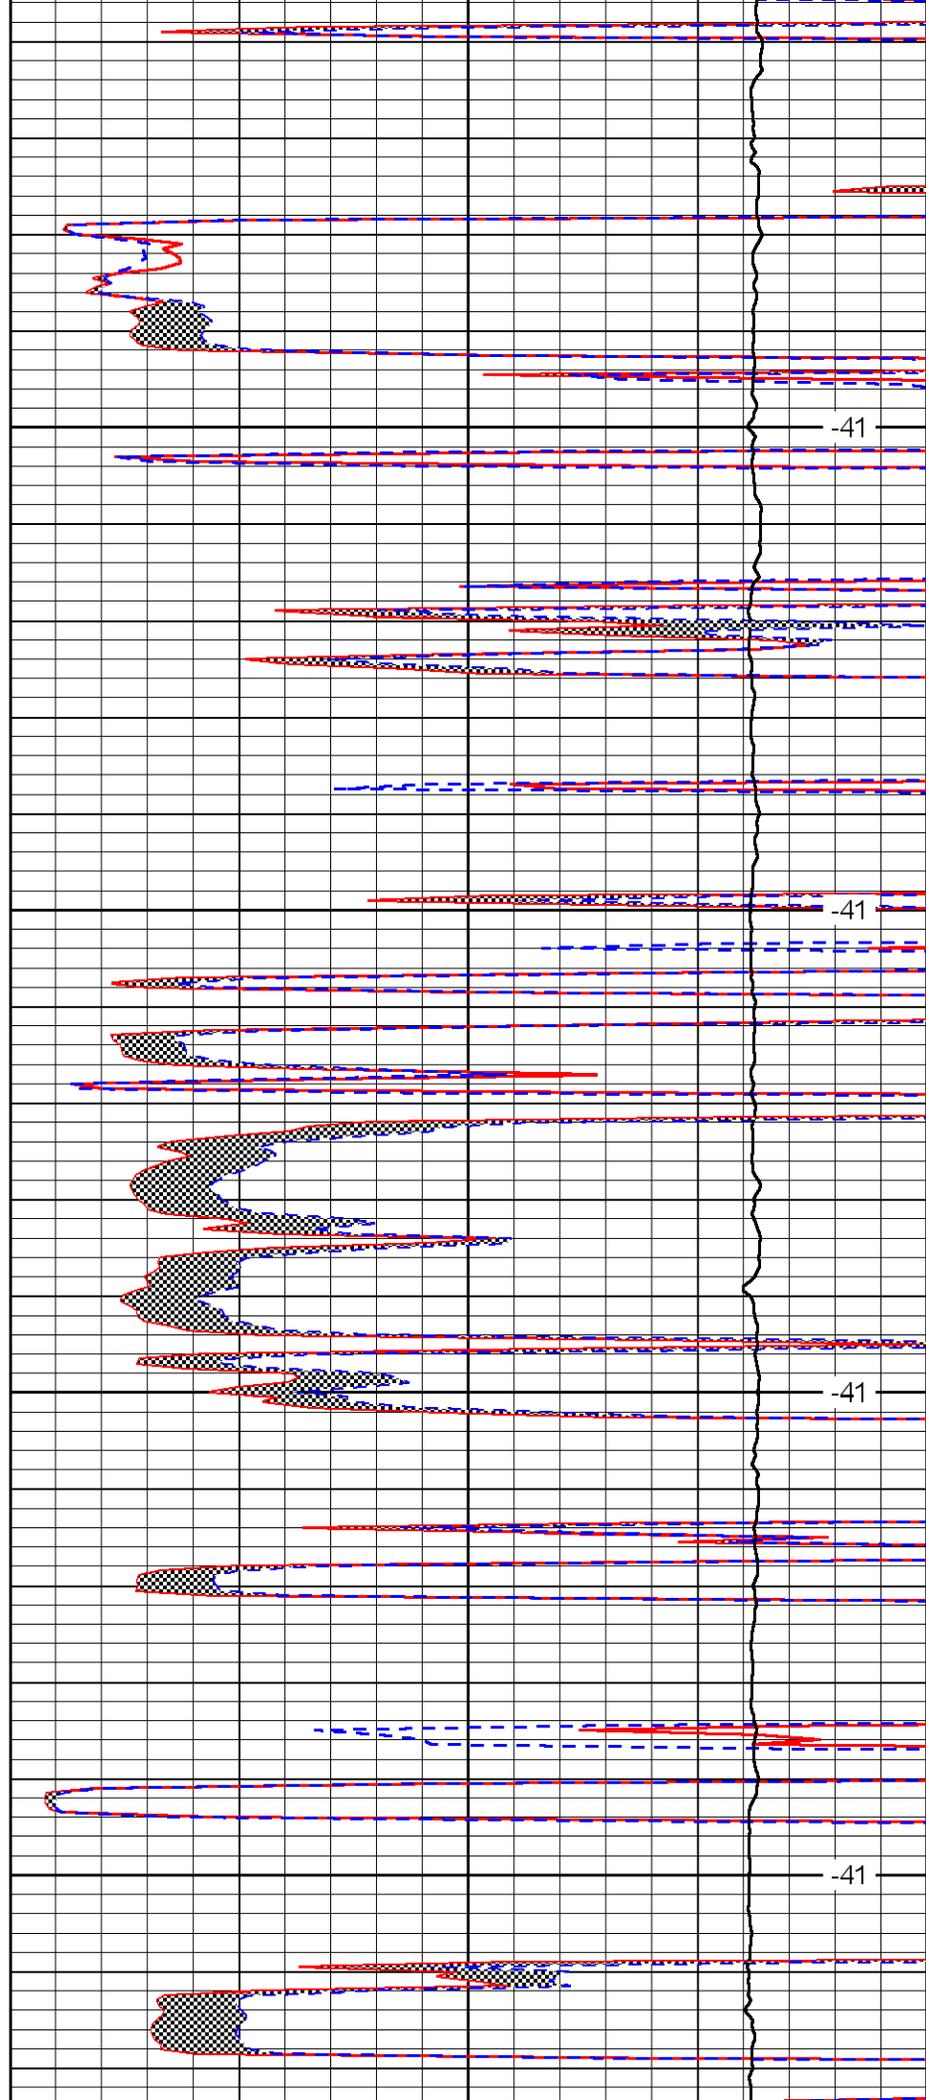


-41

-41

-41

-41

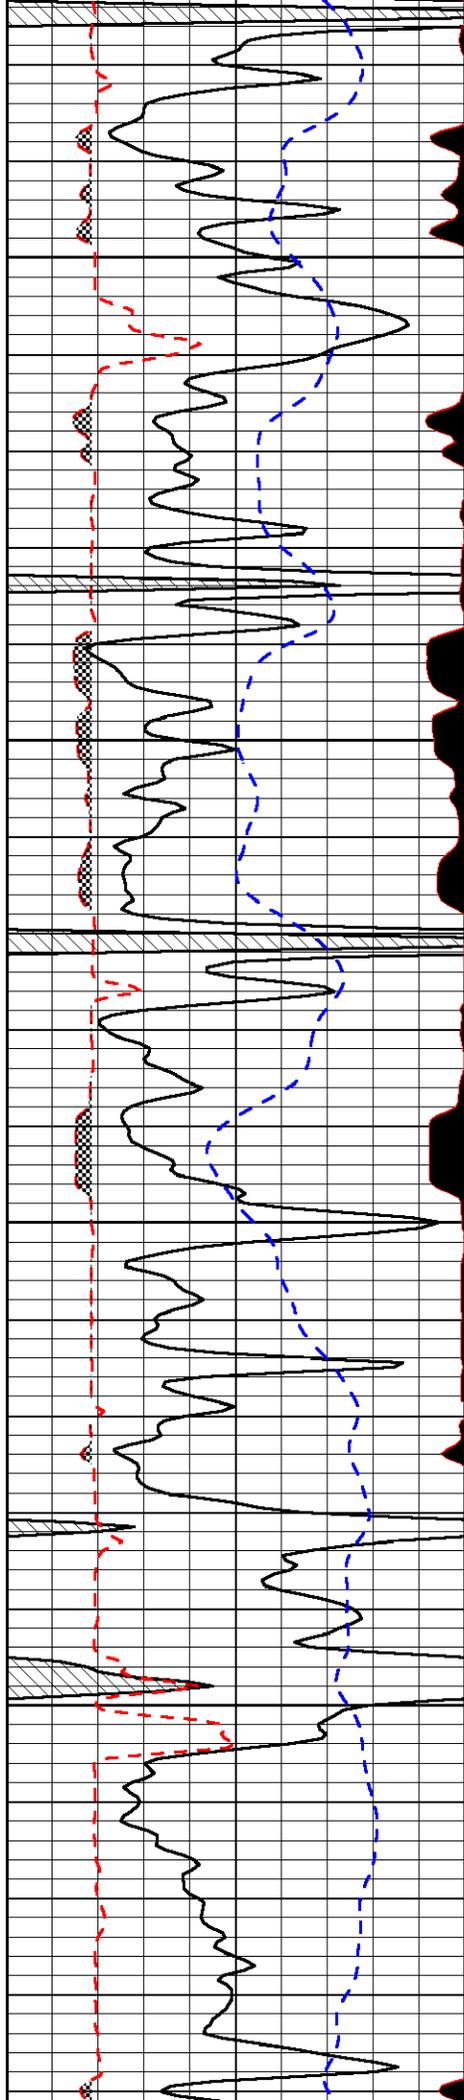


4250

4300

4350

4400

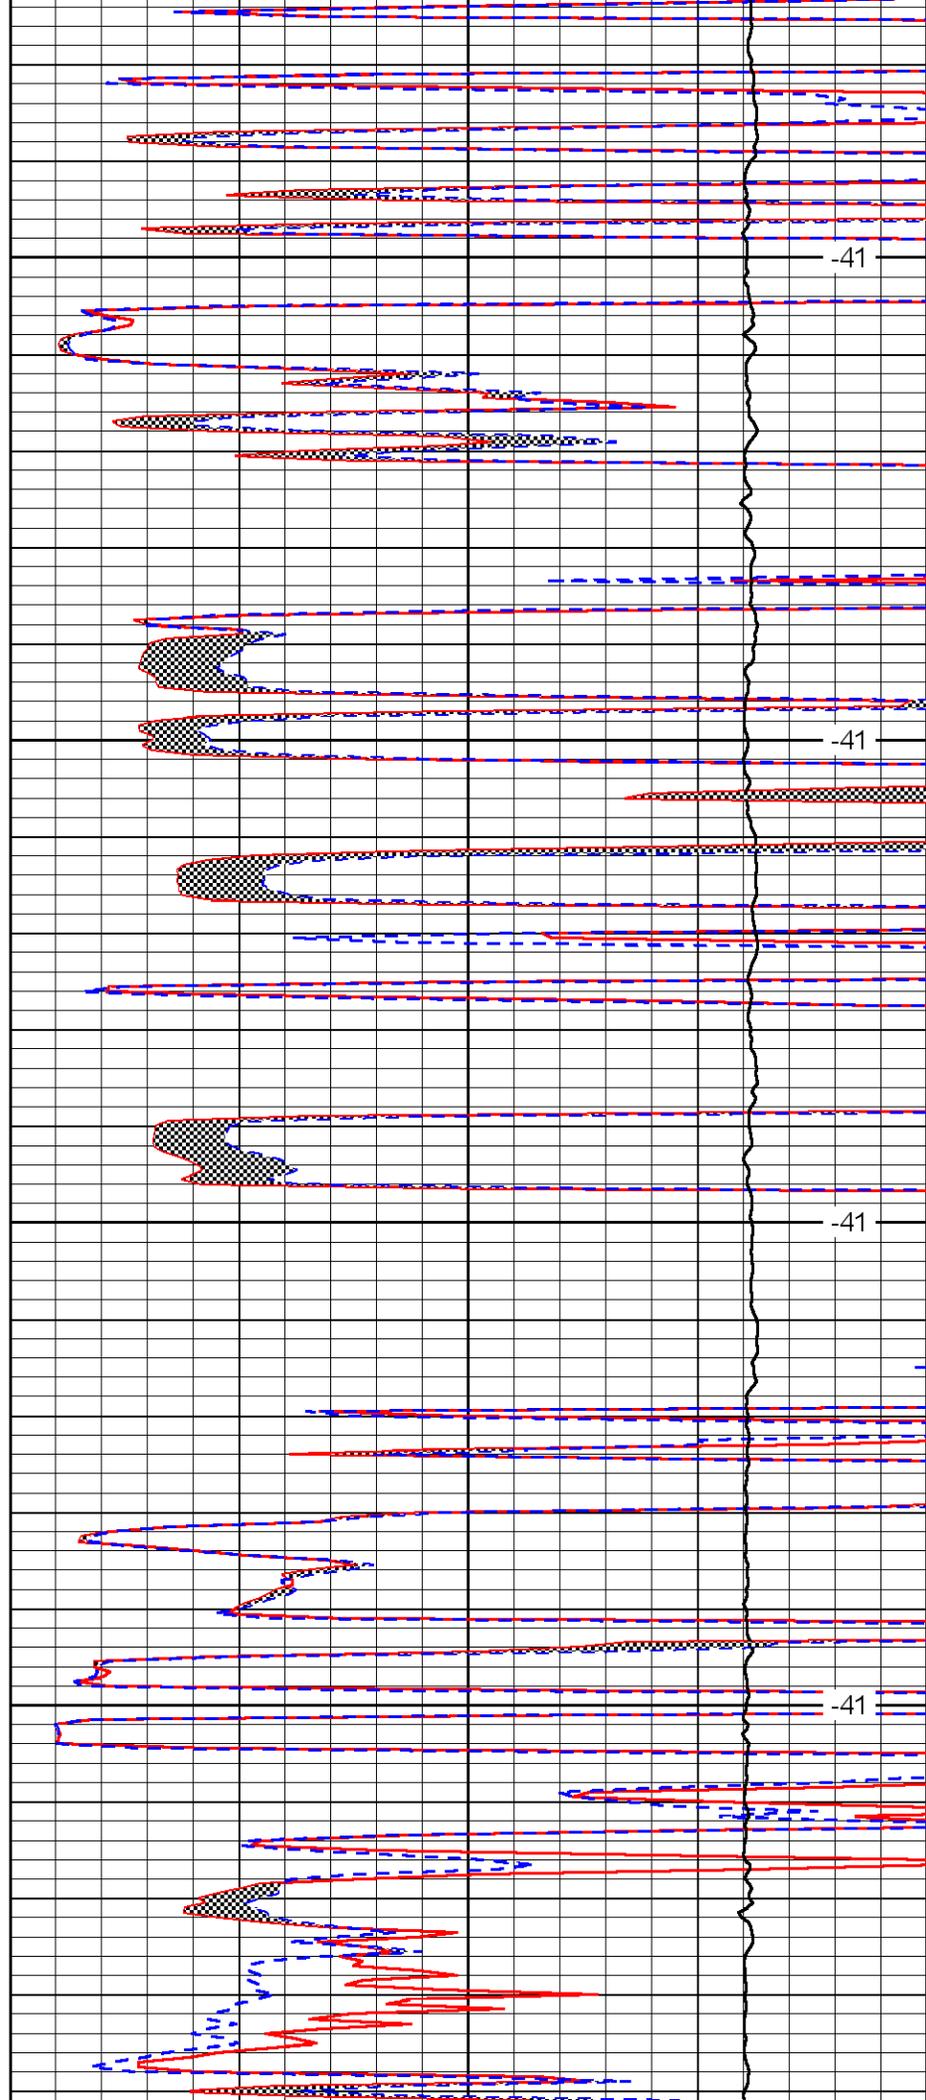


-41

-41

-41

-41

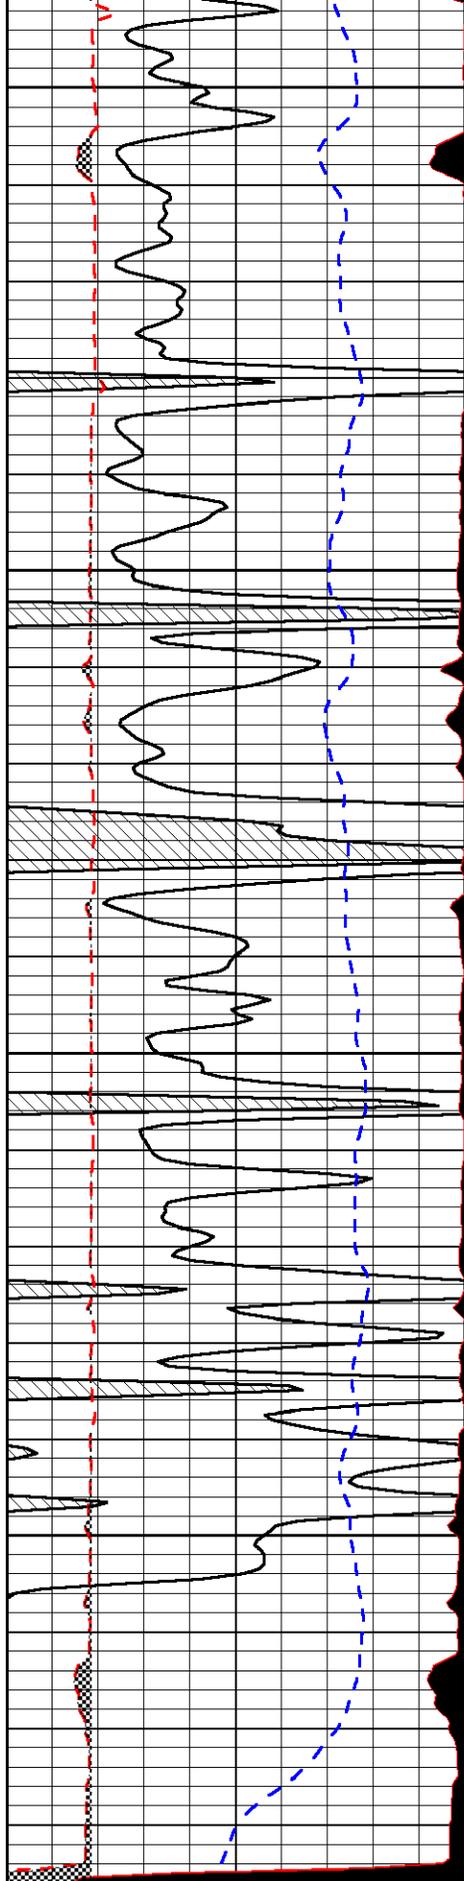


4450

4500

4550

4600

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

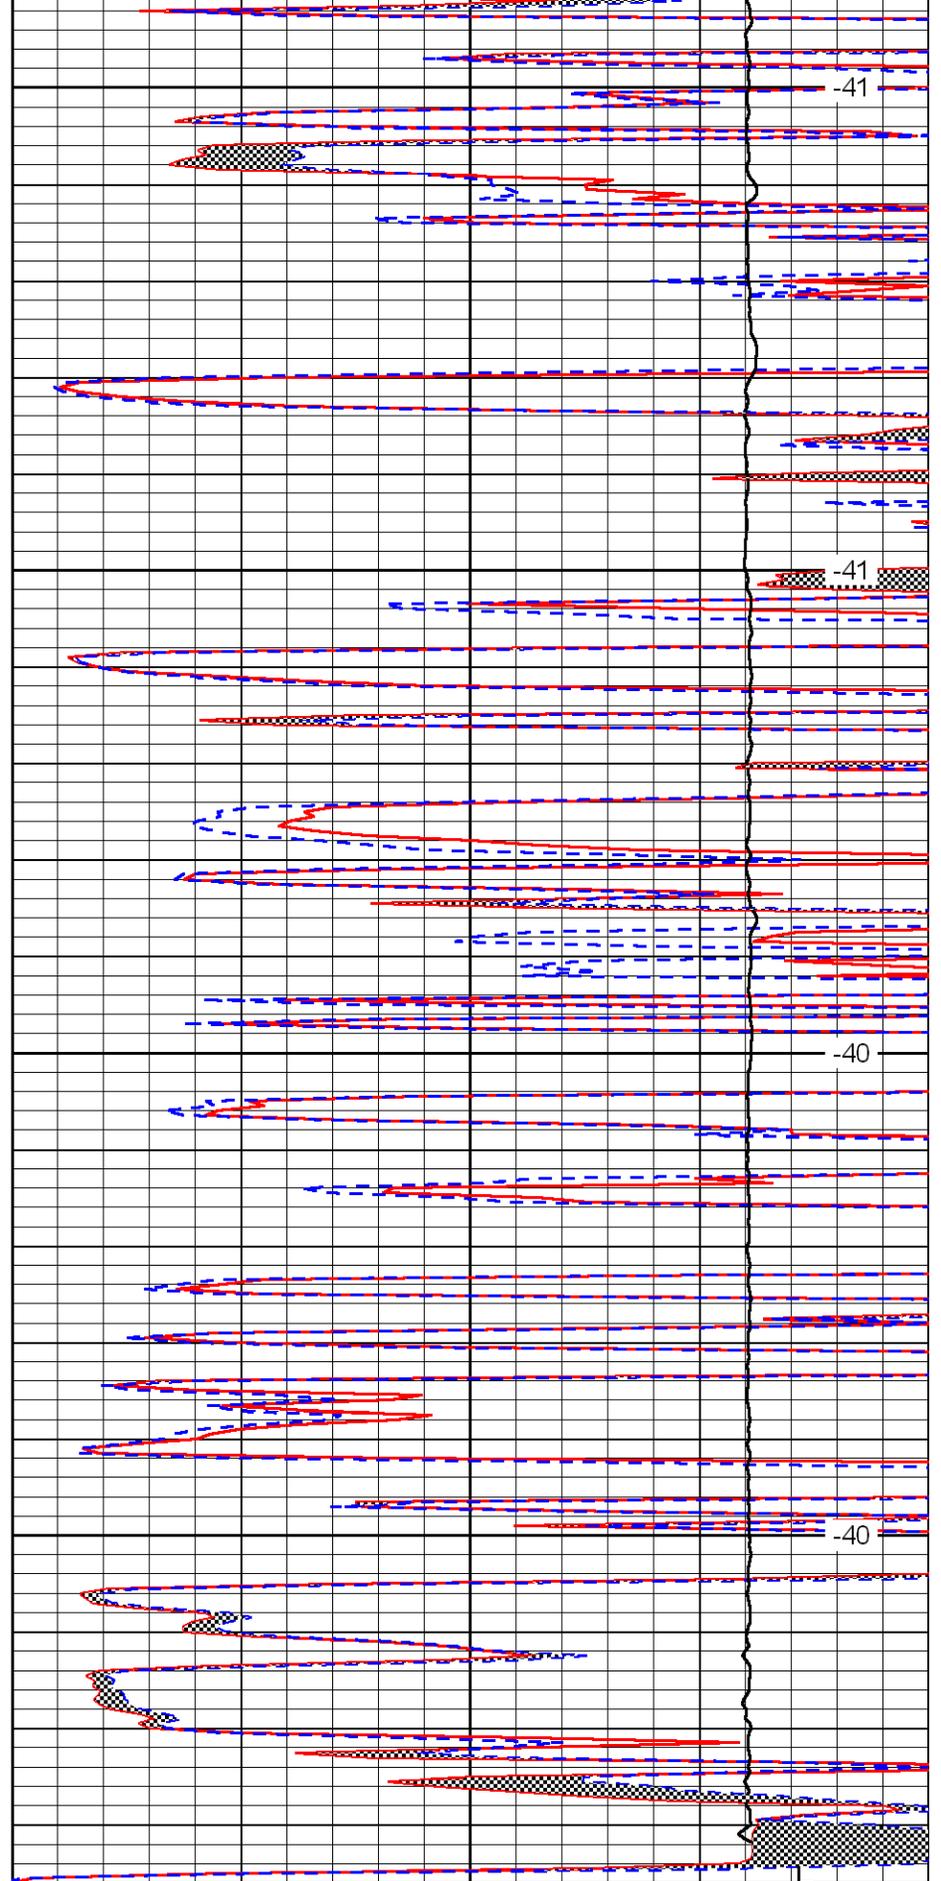

-41

-41

-40

-40

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD

