



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.				
		Well Ohmart No.1-15				
		Field Wildcat				
		County	Scott	State	Kansas	
15-171-20,753-00-00		Location		330' FSL & 330' FEL		Other Services CNL/CDL DIL
		Sec: 15	Twp: 17S	Rge: 31W		
Permanent Datum		Ground Level	Elevation 2919		Elevation	
Log Measured From		Kelly Bushing	5 Ft. Above Perm. Datum		K.B. 2924	
Drilling Measured From		Kelly Bushing			D.F. 2919	
Date		03/30/2010		G.L. 2919		
Run Number	Two					
Depth Driller	4628					
Depth Logger	4624					
Bottom Logged Interval	4623					
Top Log Interval	3600					
Casing Driller	8.625 @ 257					
Casing Logger	262					
Bit Size	7.875					
Type Fluid in Hole	Chemical					
Salinity,ppm CL	4.000					
Density / Viscosity	9.2 51					
pH / Fluid Loss	10.5 6.4					
Source of Sample	Flowline					
Rm @ Meas. Temp	.9 @ 61					
Rmf @ Meas. Temp	.68 @ 61					
Rmc @ Meas. Temp	1.22 @ 61					
Source of Rmf / Rmc	Charts					
Rm @ BHT	.44 @ 124					
Operating Rig Time	4 Hours					
Max Rec. Temp. F	124					
Equipment Number	17					
Location	Hays					
Recorded By	Mike Garrison					
Witnessed By	Bob Lewellyn					

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Healy, 6 West to Venison Rd, 2 1/2 South, West Into

Database File: c:\warrior\data\larson_ohmart no.1-15\larson_ohmart-1-15hd.db
Dataset Pathname: dil\Irsnstck
Presentation Format: micro
Dataset Creation: Tue Mar 30 10:02:13 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

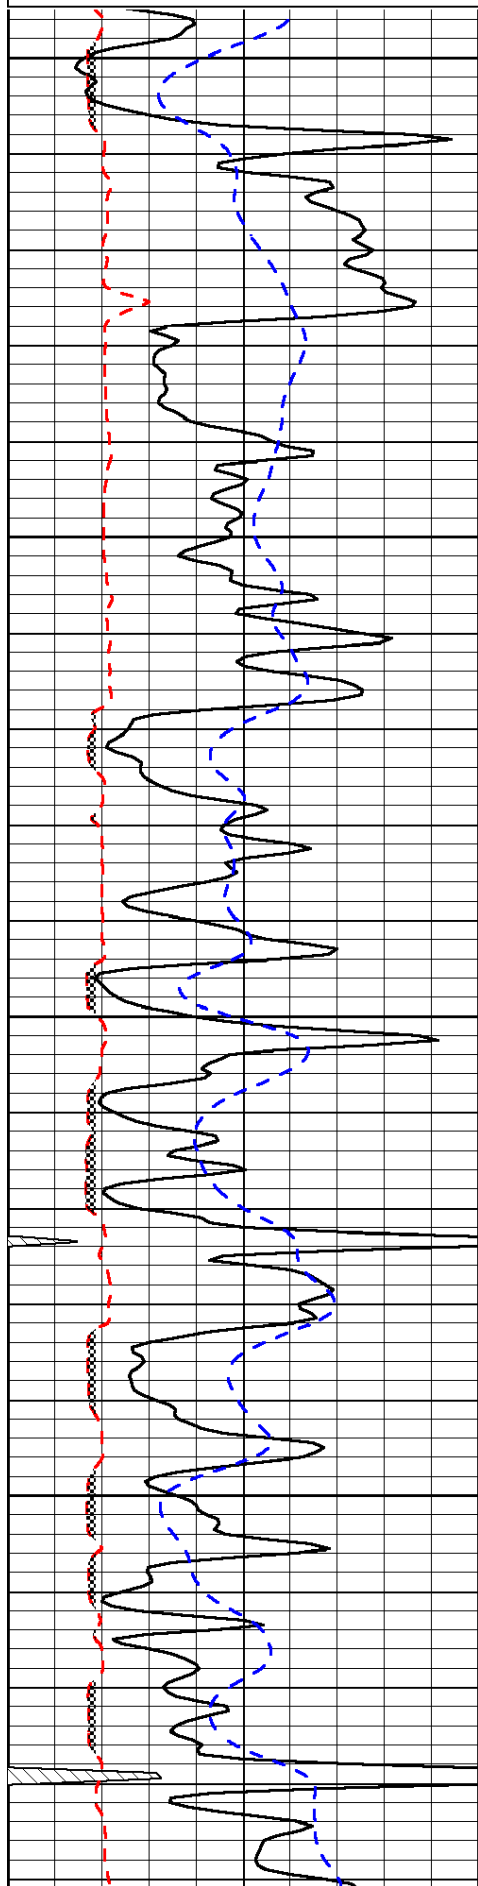

3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

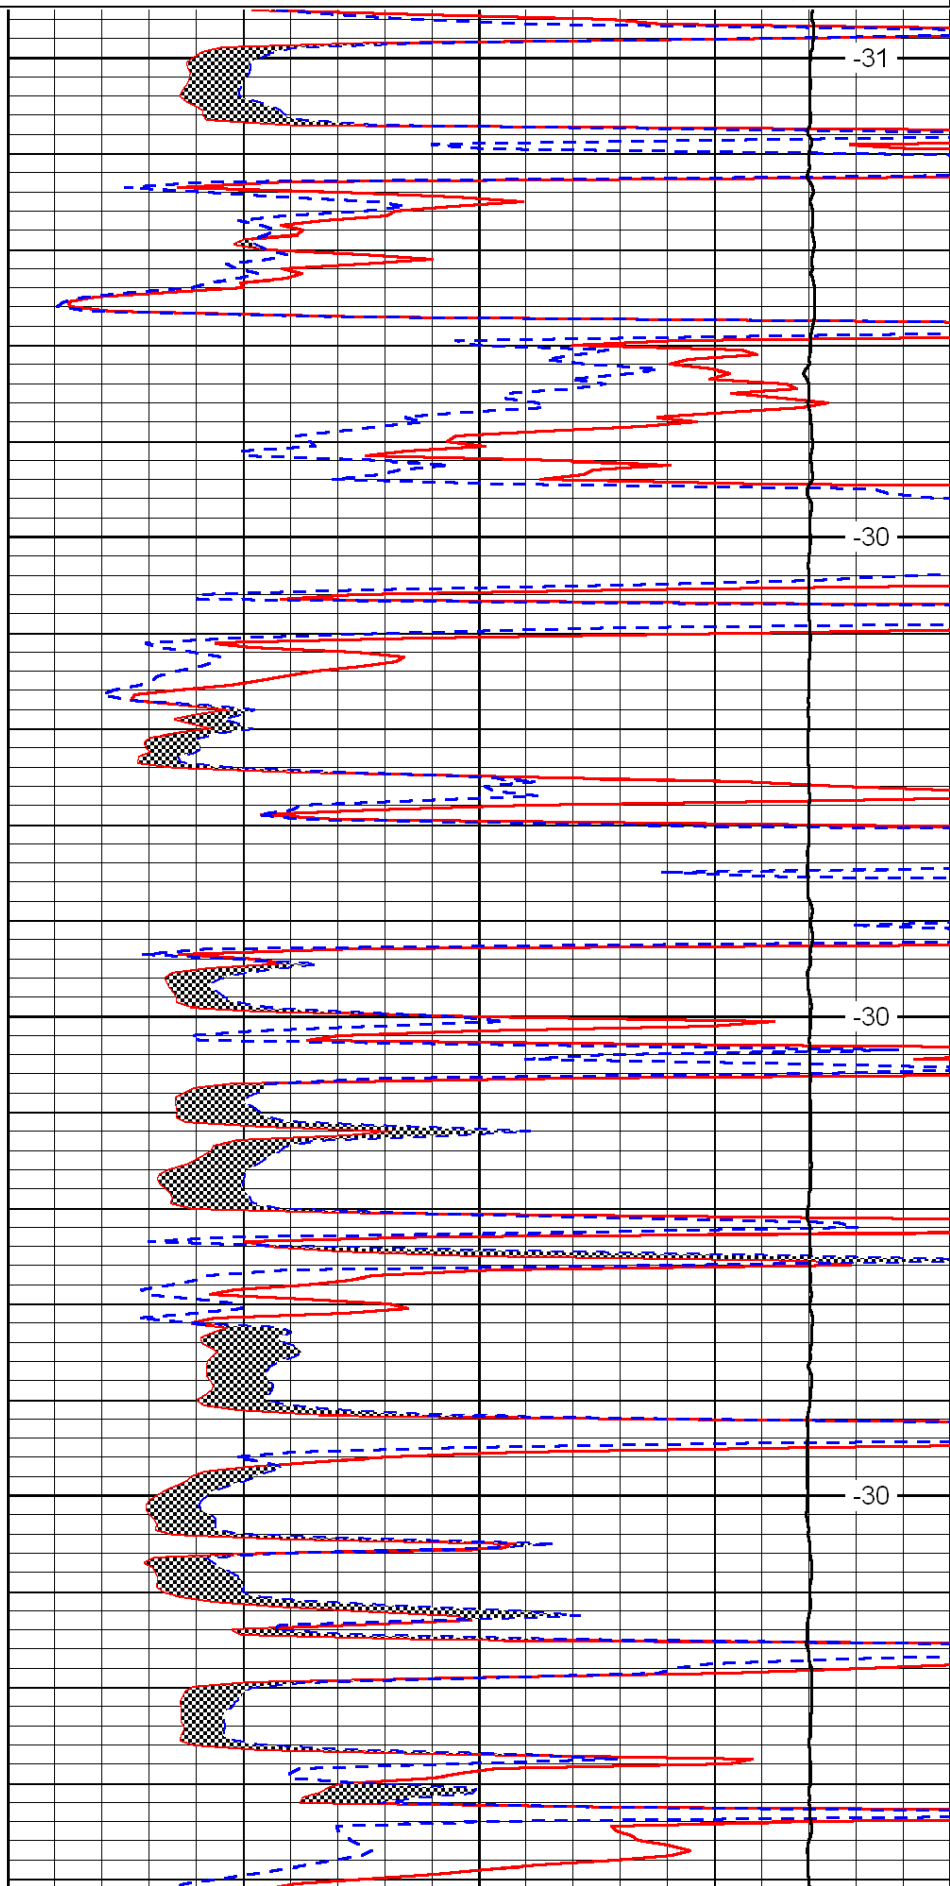


-31

-30

-30

-30

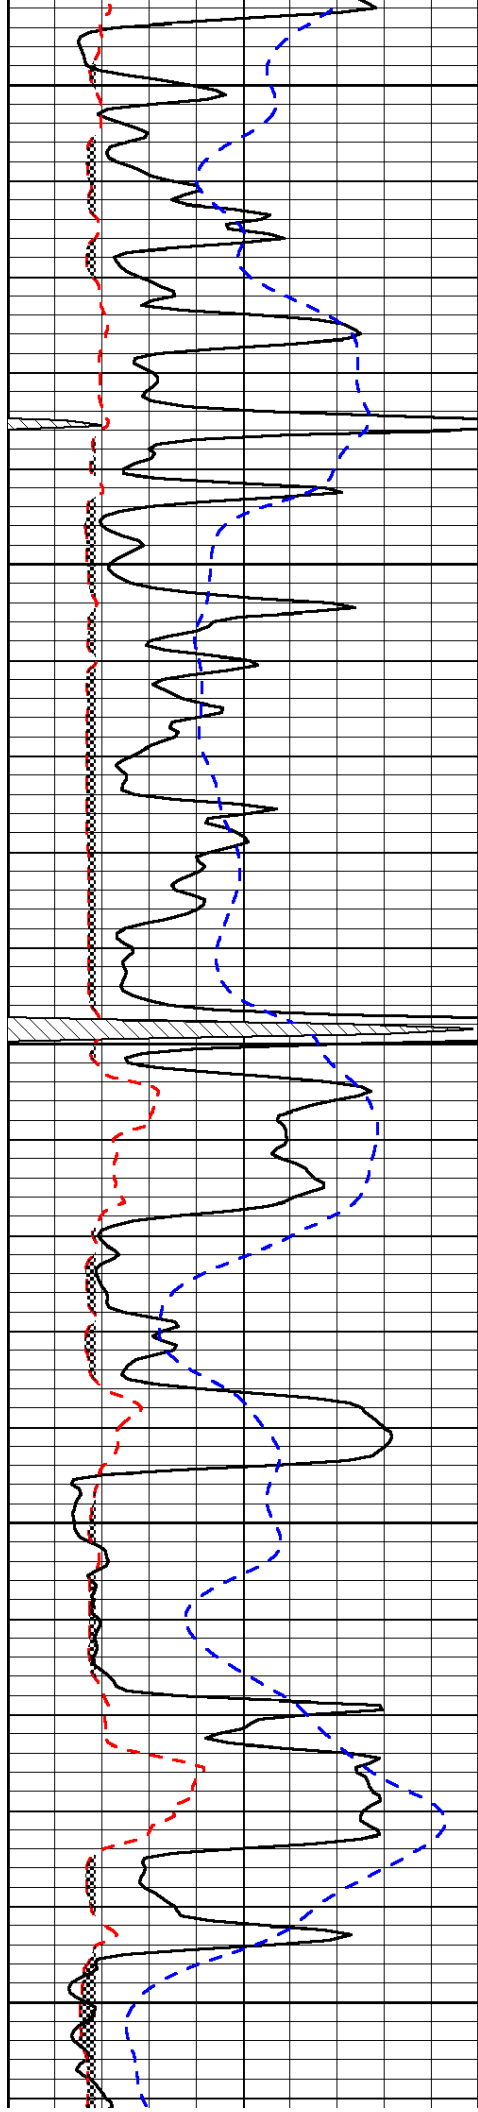


3800

3850

3900

3950

4000

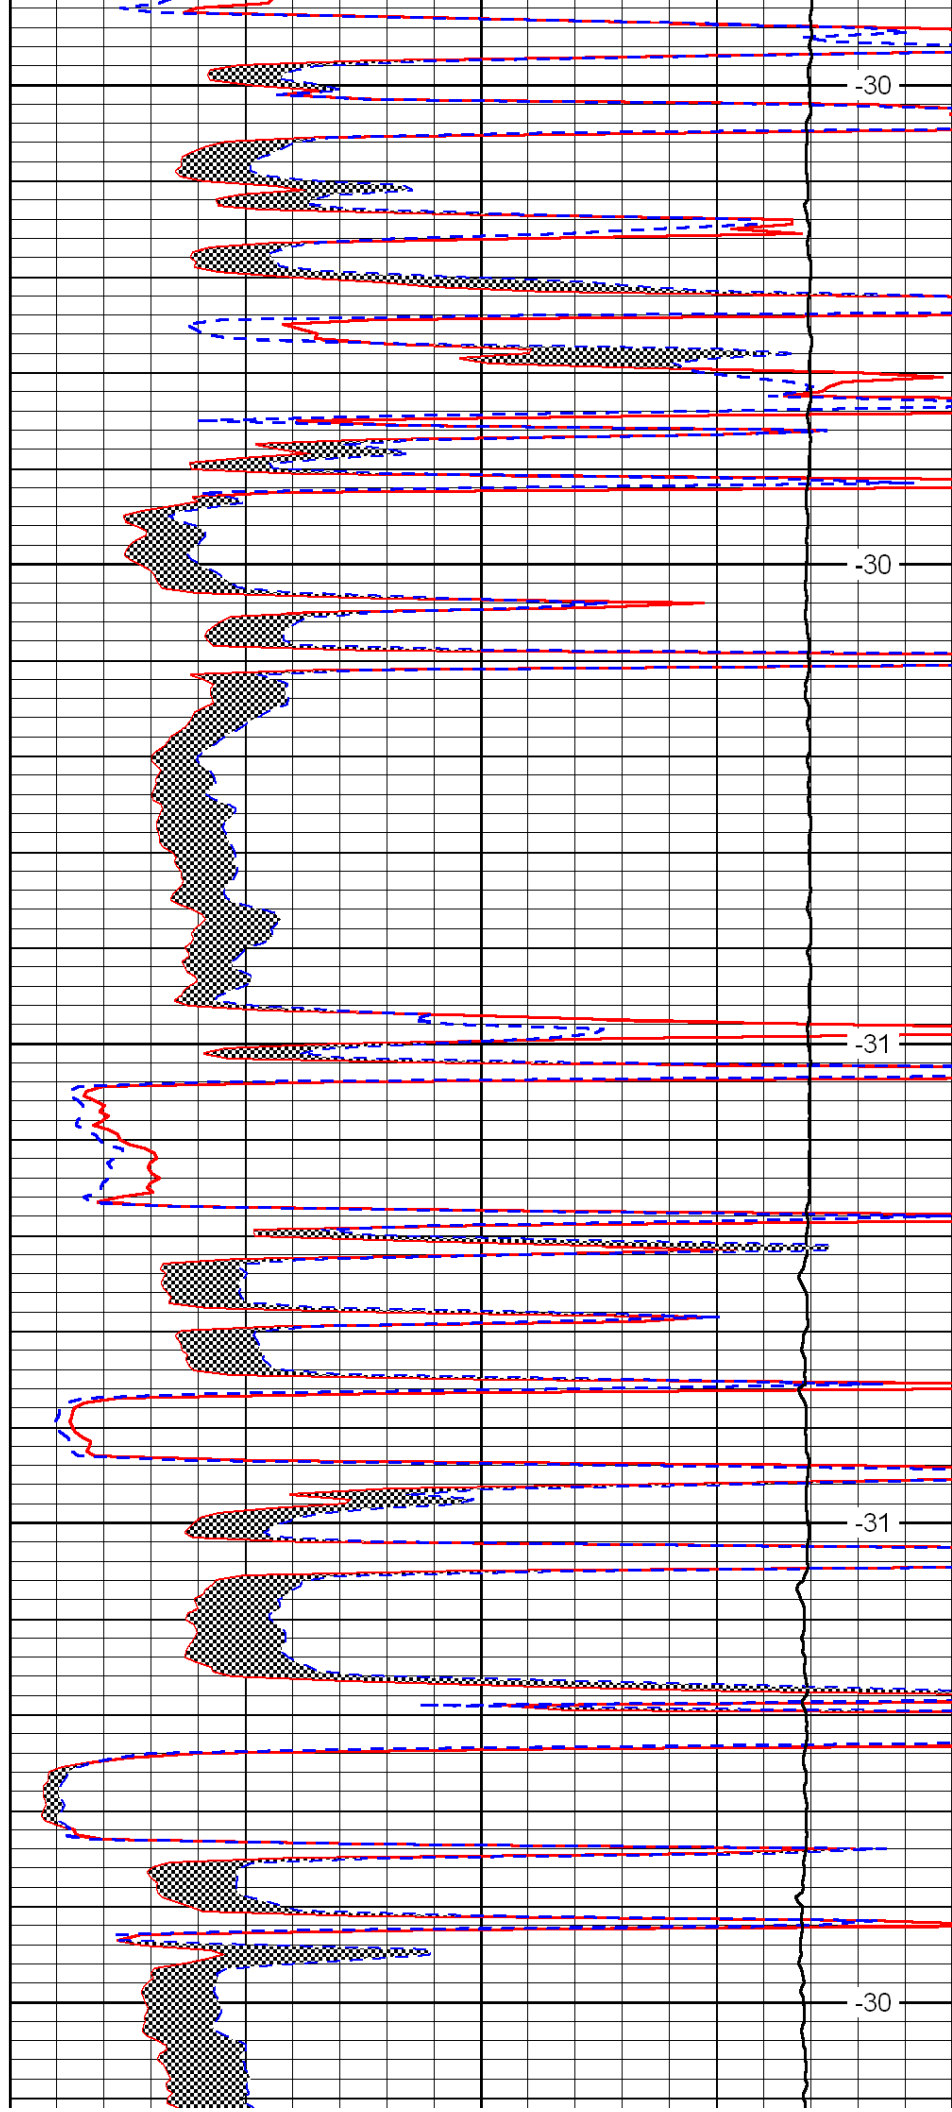


-30

-30

-31

-31

-30

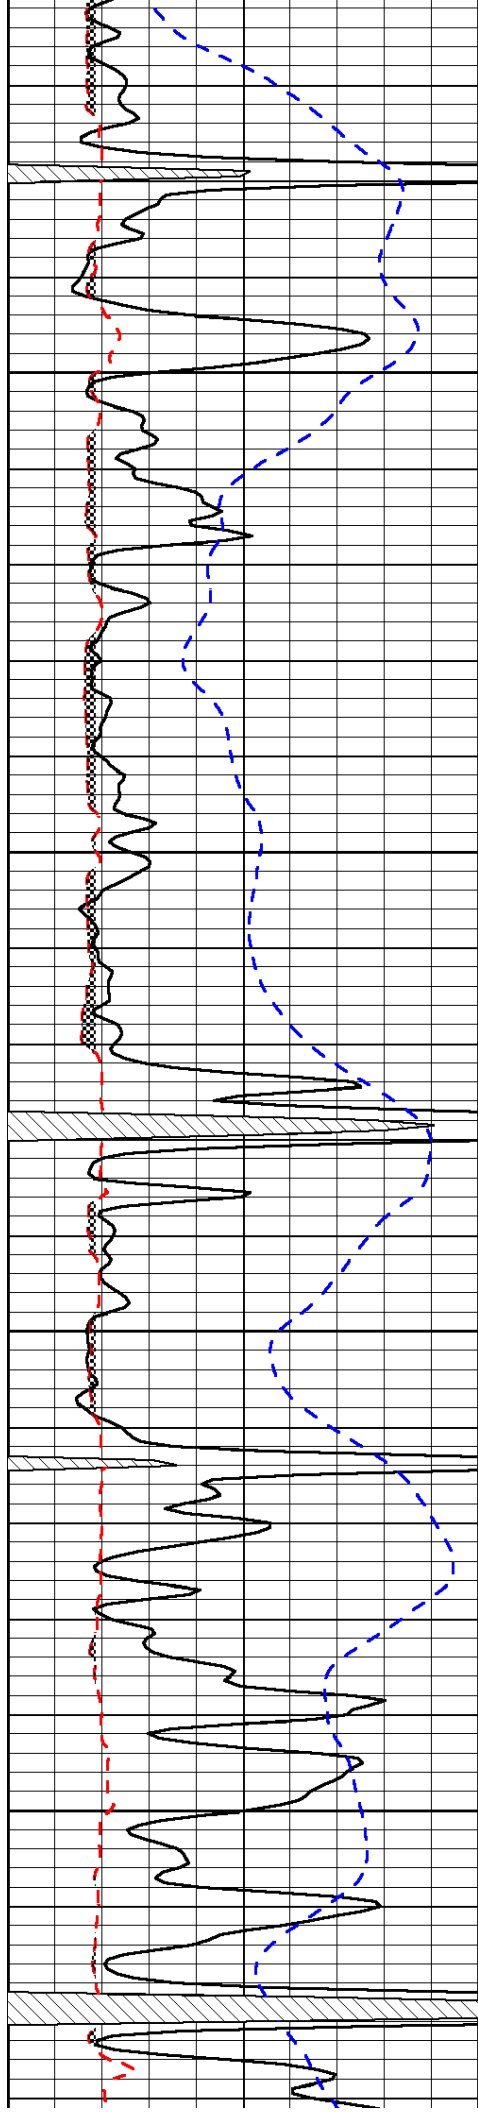



4050

4100

4150

4200

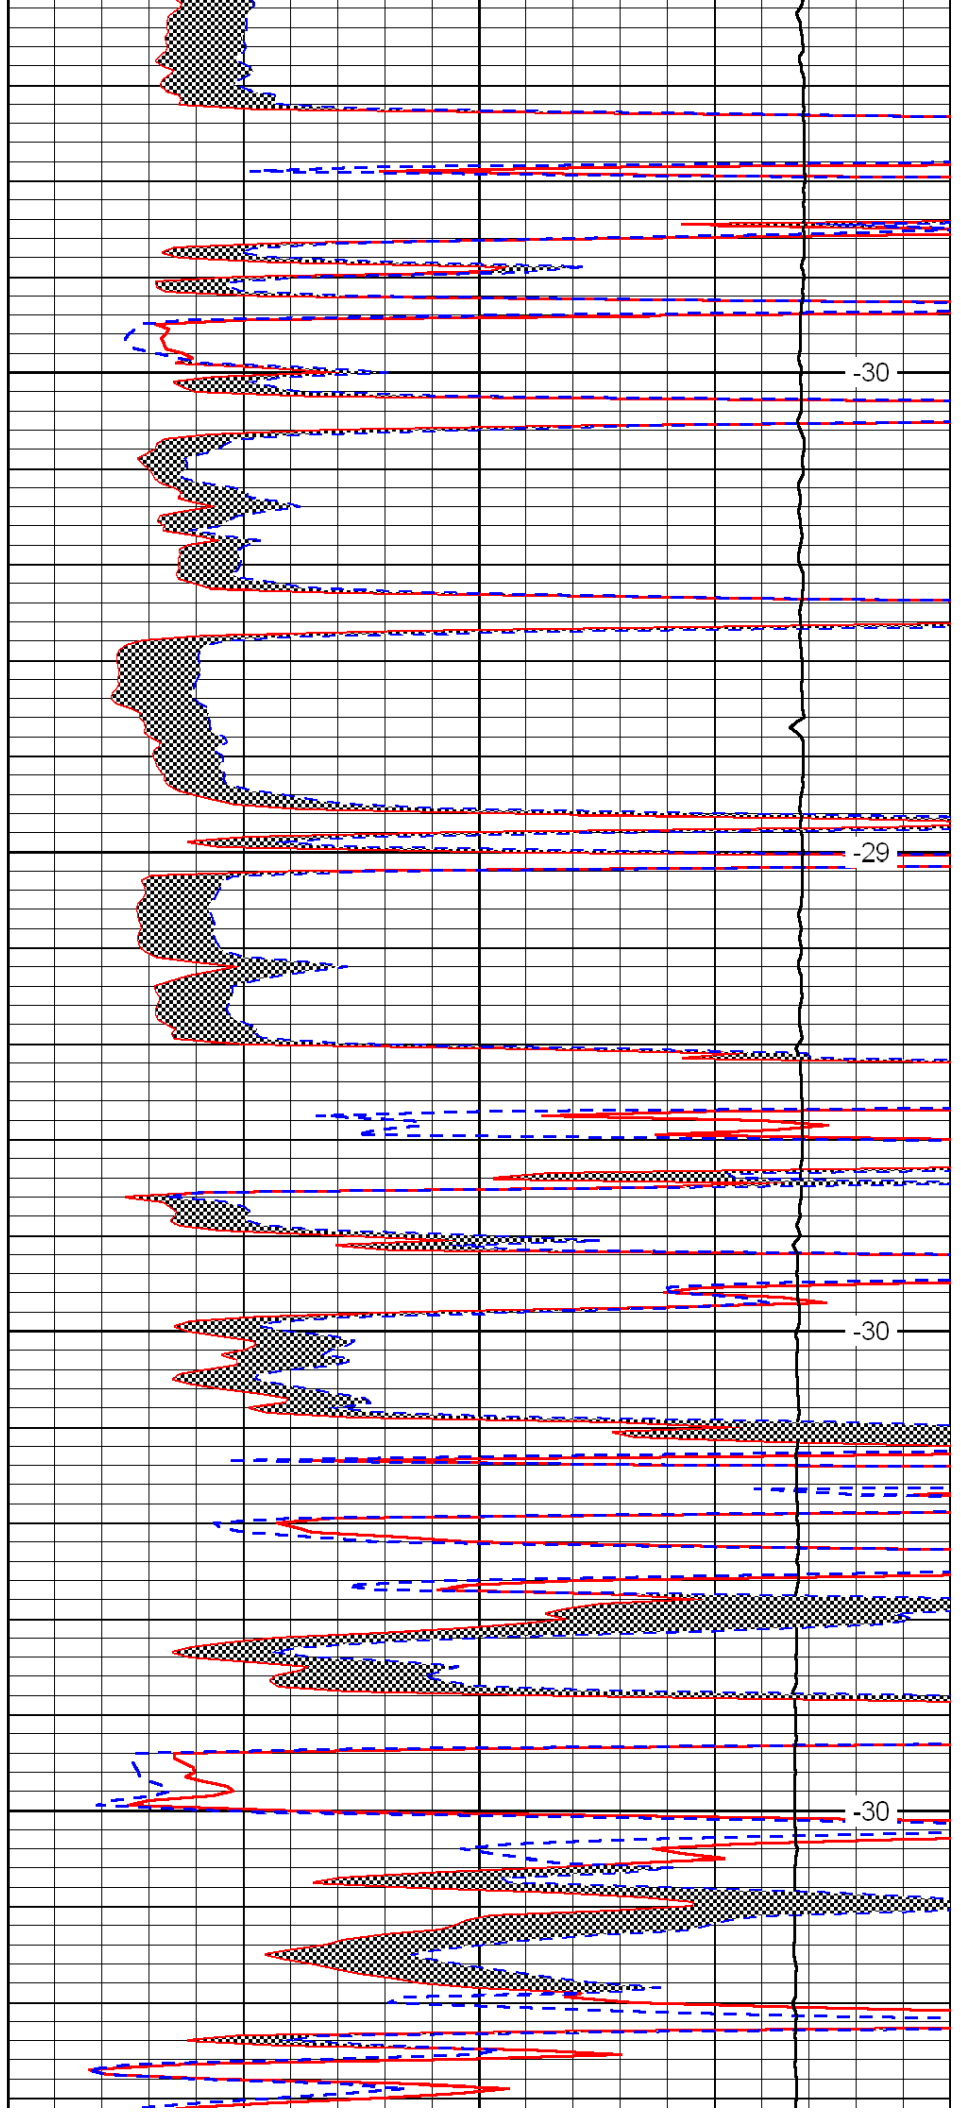

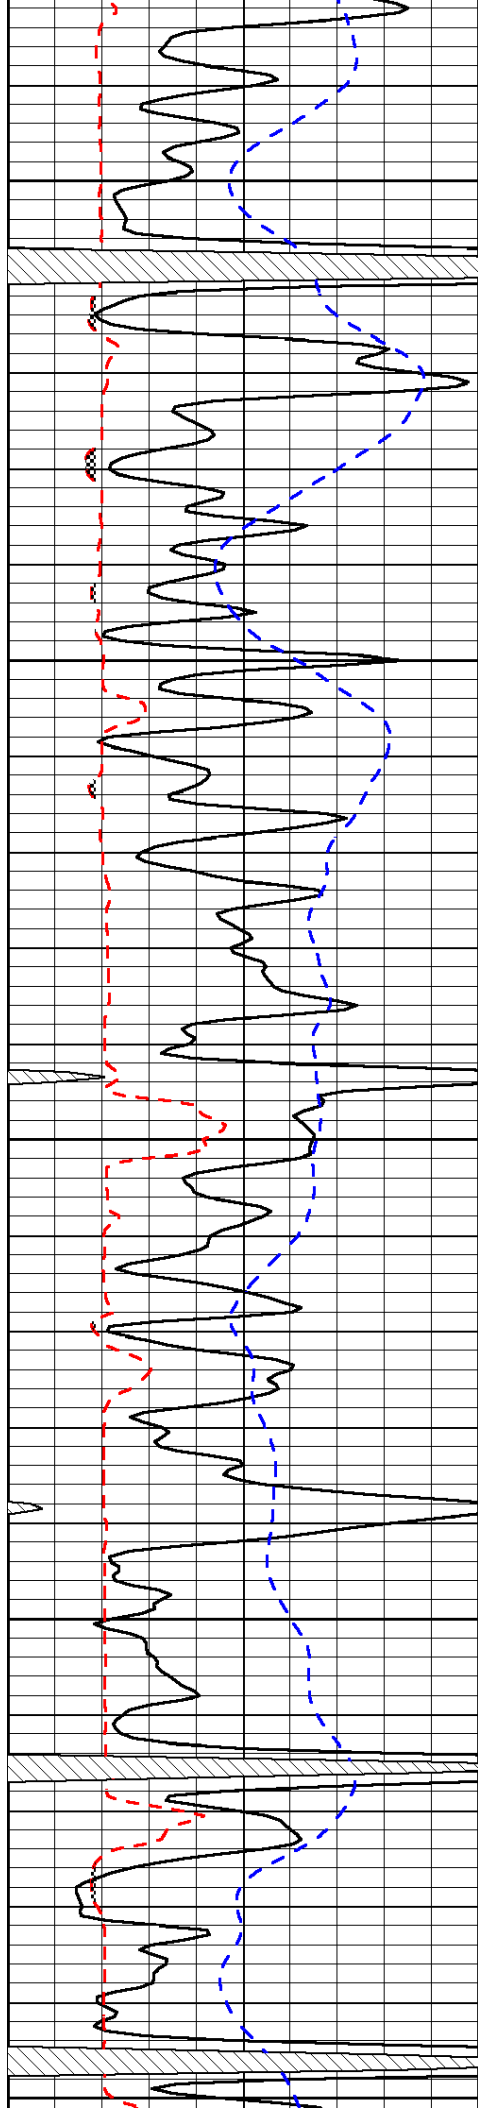


4250



4300

4350

4400

4450

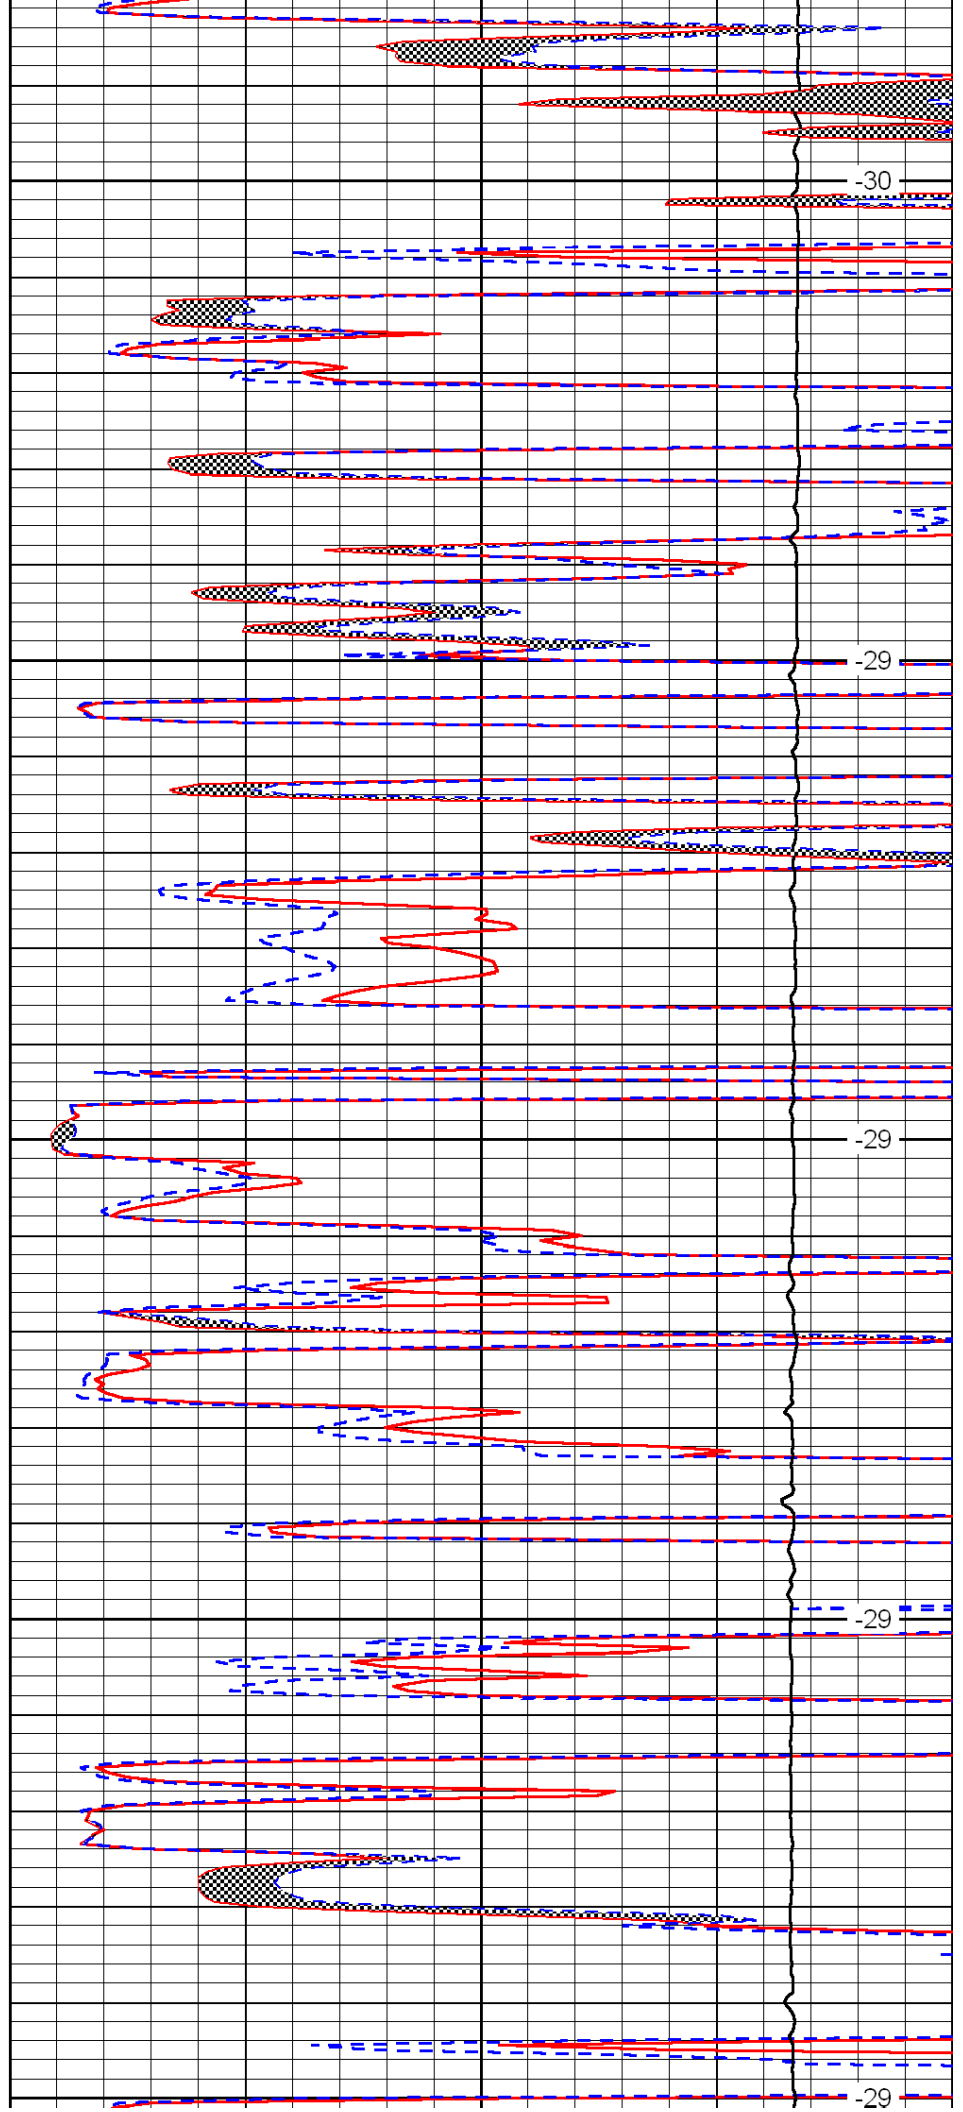

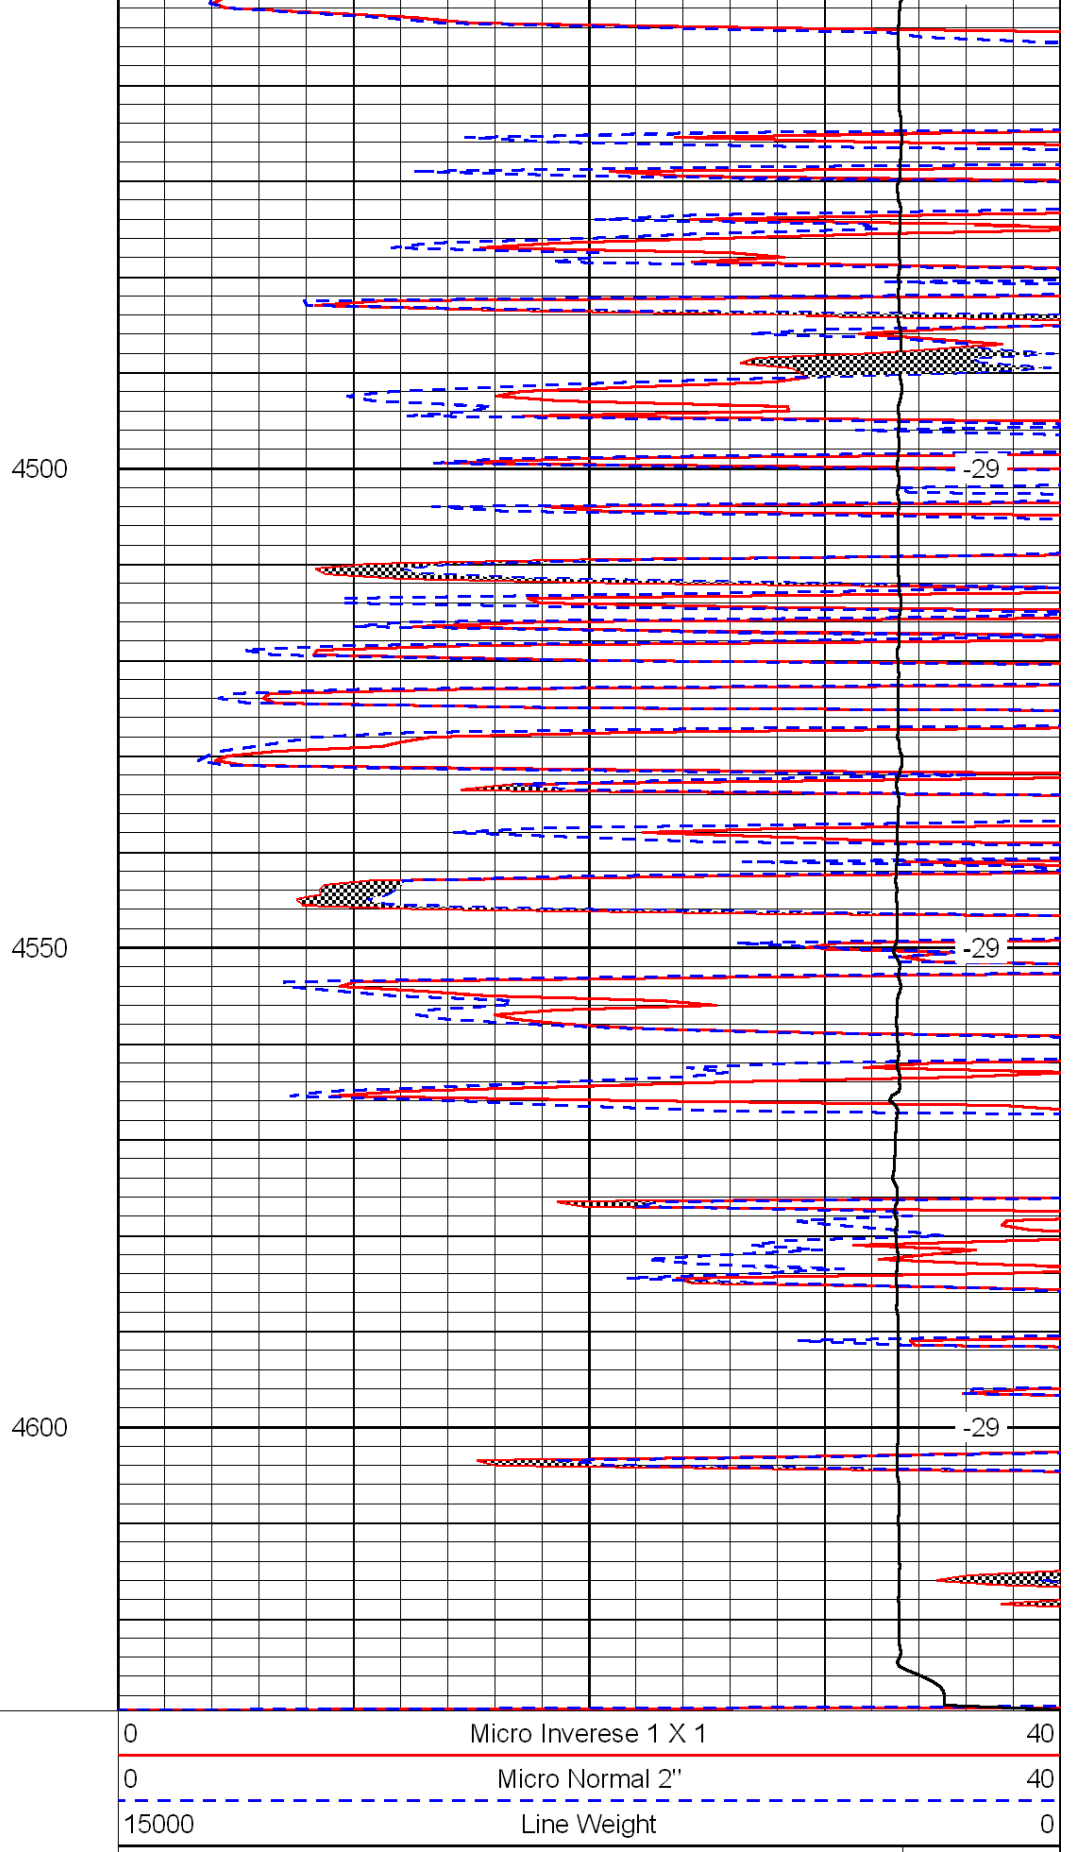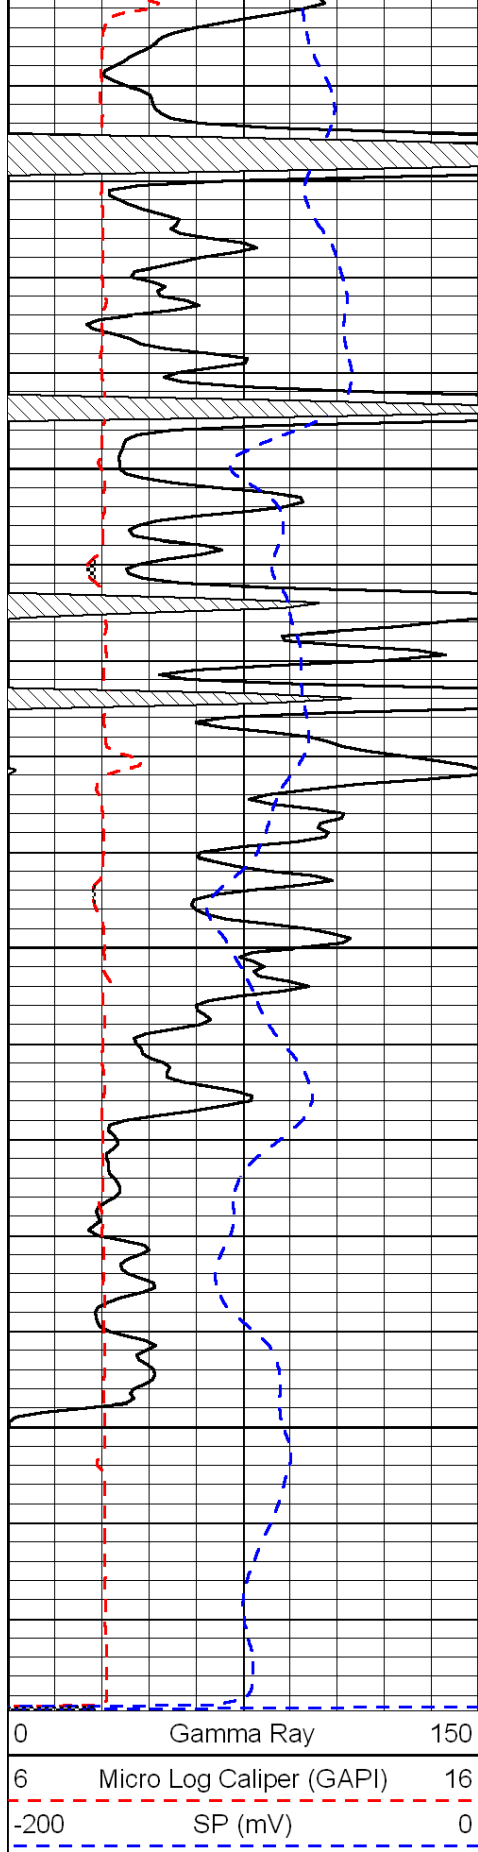

LSPD