



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-195-22,647-00-00	Company Murfin Drilling Company, Inc.	Well Hendricks No. 2-16	Field Wildcat
	County Trego	State Kansas	
	Location 100' FNL & 2310' FWL		
	Sec: 16	Twp: 12S	Rge: 24W
Permanent Datum Log Measured From Drilling Measured From	Ground Level Kelly Bushing Kelly Bushing	Elevation 2473 5 Ft. Above Perm. Datum	Other Services CNL/CDL DIL/BHCS
Date	03/18/2010		

Run Number	Two
Depth Driller	4145
Depth Logger	4146
Bottom Logged Interval	4145
Top Log Interval	3400
Casing Driller	8.625 @ 218
Casing Logger	216
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	3.000
Density / Viscosity	9.2 54
pH / Fluid Loss	11.5 7.2
Source of Sample	Flowline
Rm @ Meas. Temp	.46 @ 58
Rmf @ Meas. Temp	.35 @ 58
Rmc @ Meas. Temp	.62 @ 58
Source of Rmf / Rmc	Charts
Rm @ BHT	.22 @ 119
Operating Rig Time	4 1/2 Hours
Max Rec. Temp. F	119
Equipment Number	17
Location	Hays
Recorded By	Mike Garrison
Witnessed By	Paul Gunzelman

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
 (785) 625-3858



 Voda Exit, 1/2 South, 1 1/2 East, North Into


Database File: c:\warrior\data\murfin_hendricks no. 2-16\murf.db
 Dataset Pathname: dil/mrfnstck
 Presentation Format: micro
 Dataset Creation: Thu Mar 18 21:23:21 2010
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

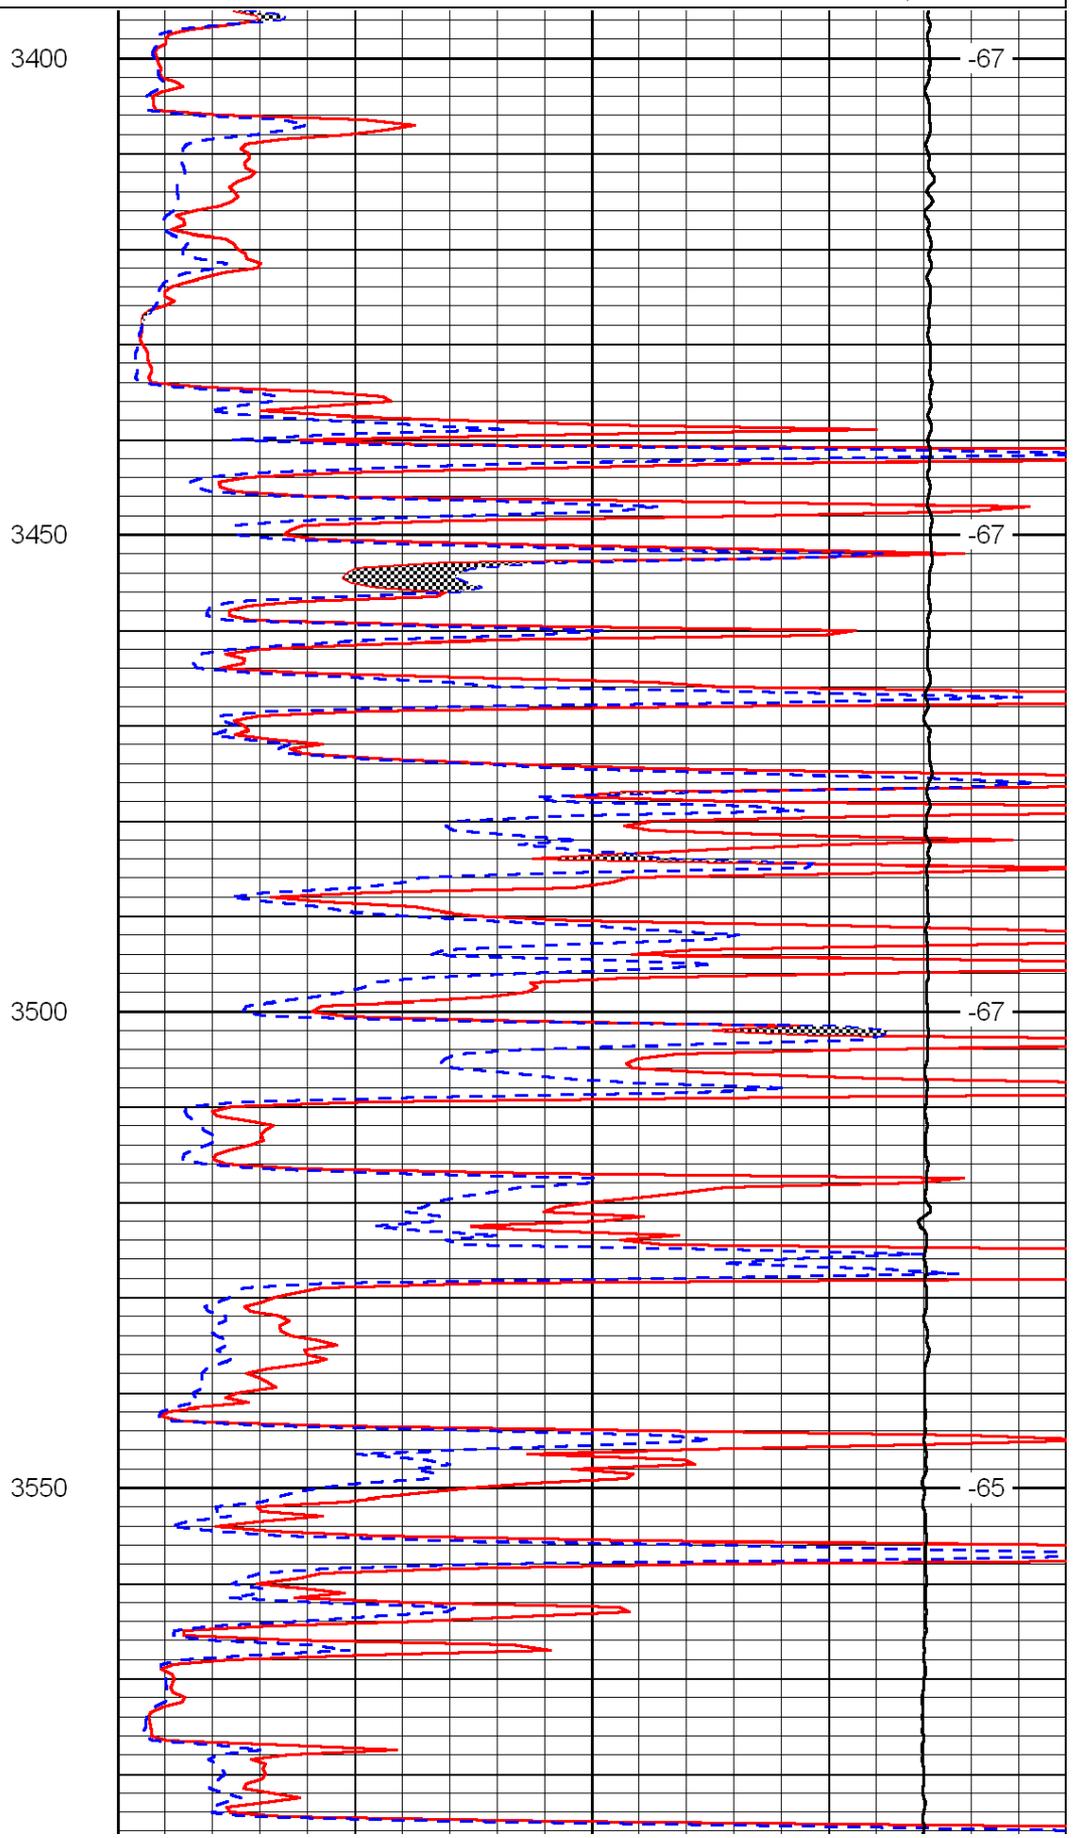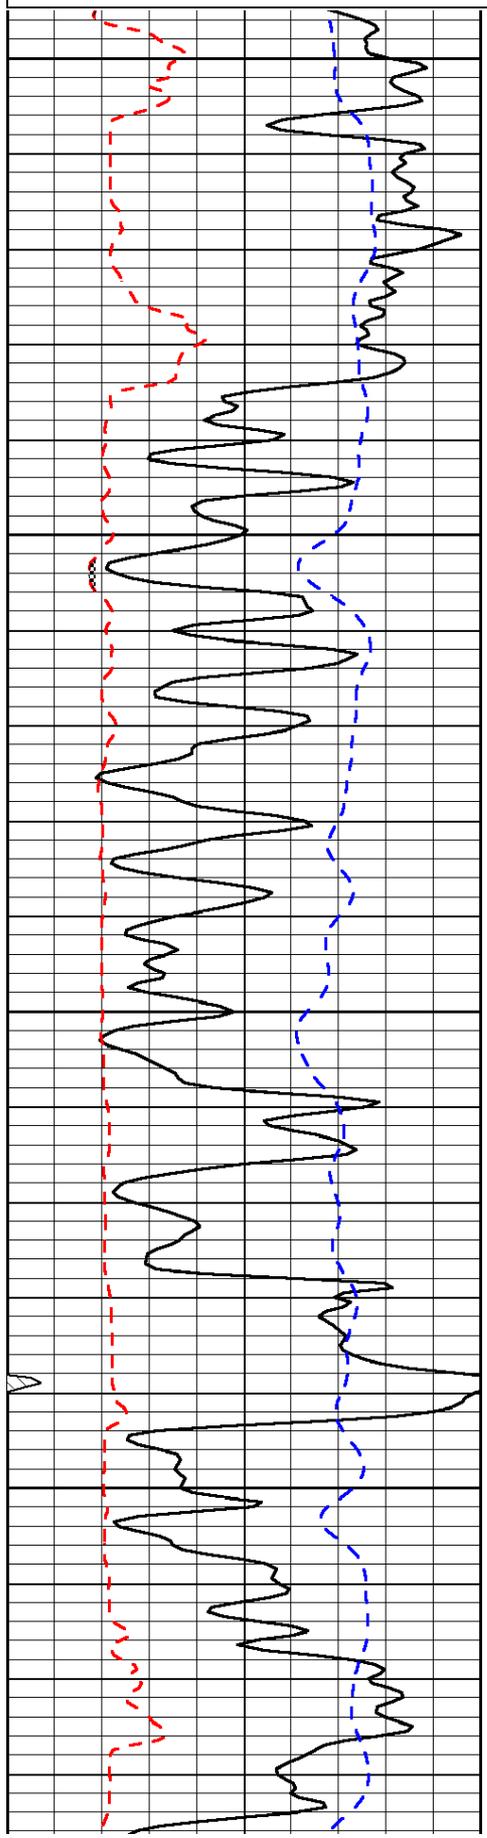

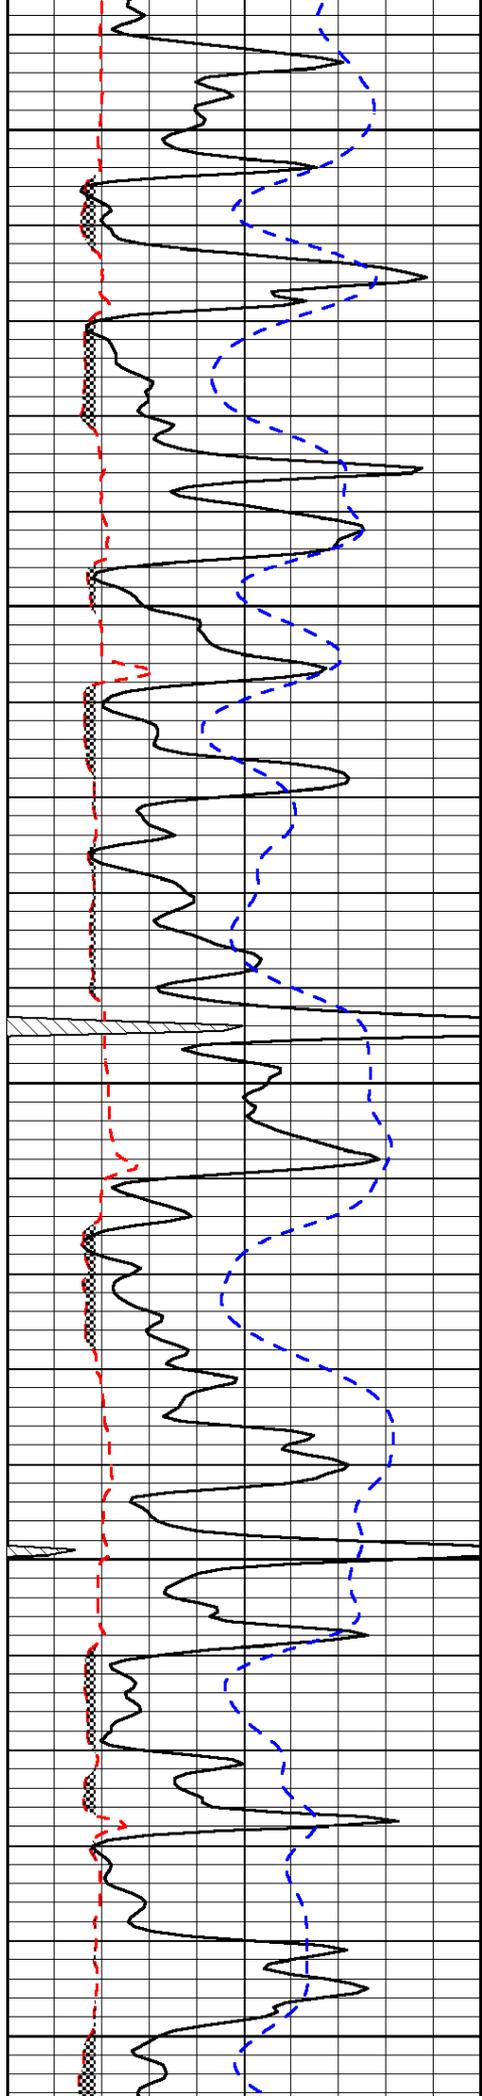


3600

3650

3700

3750

3800

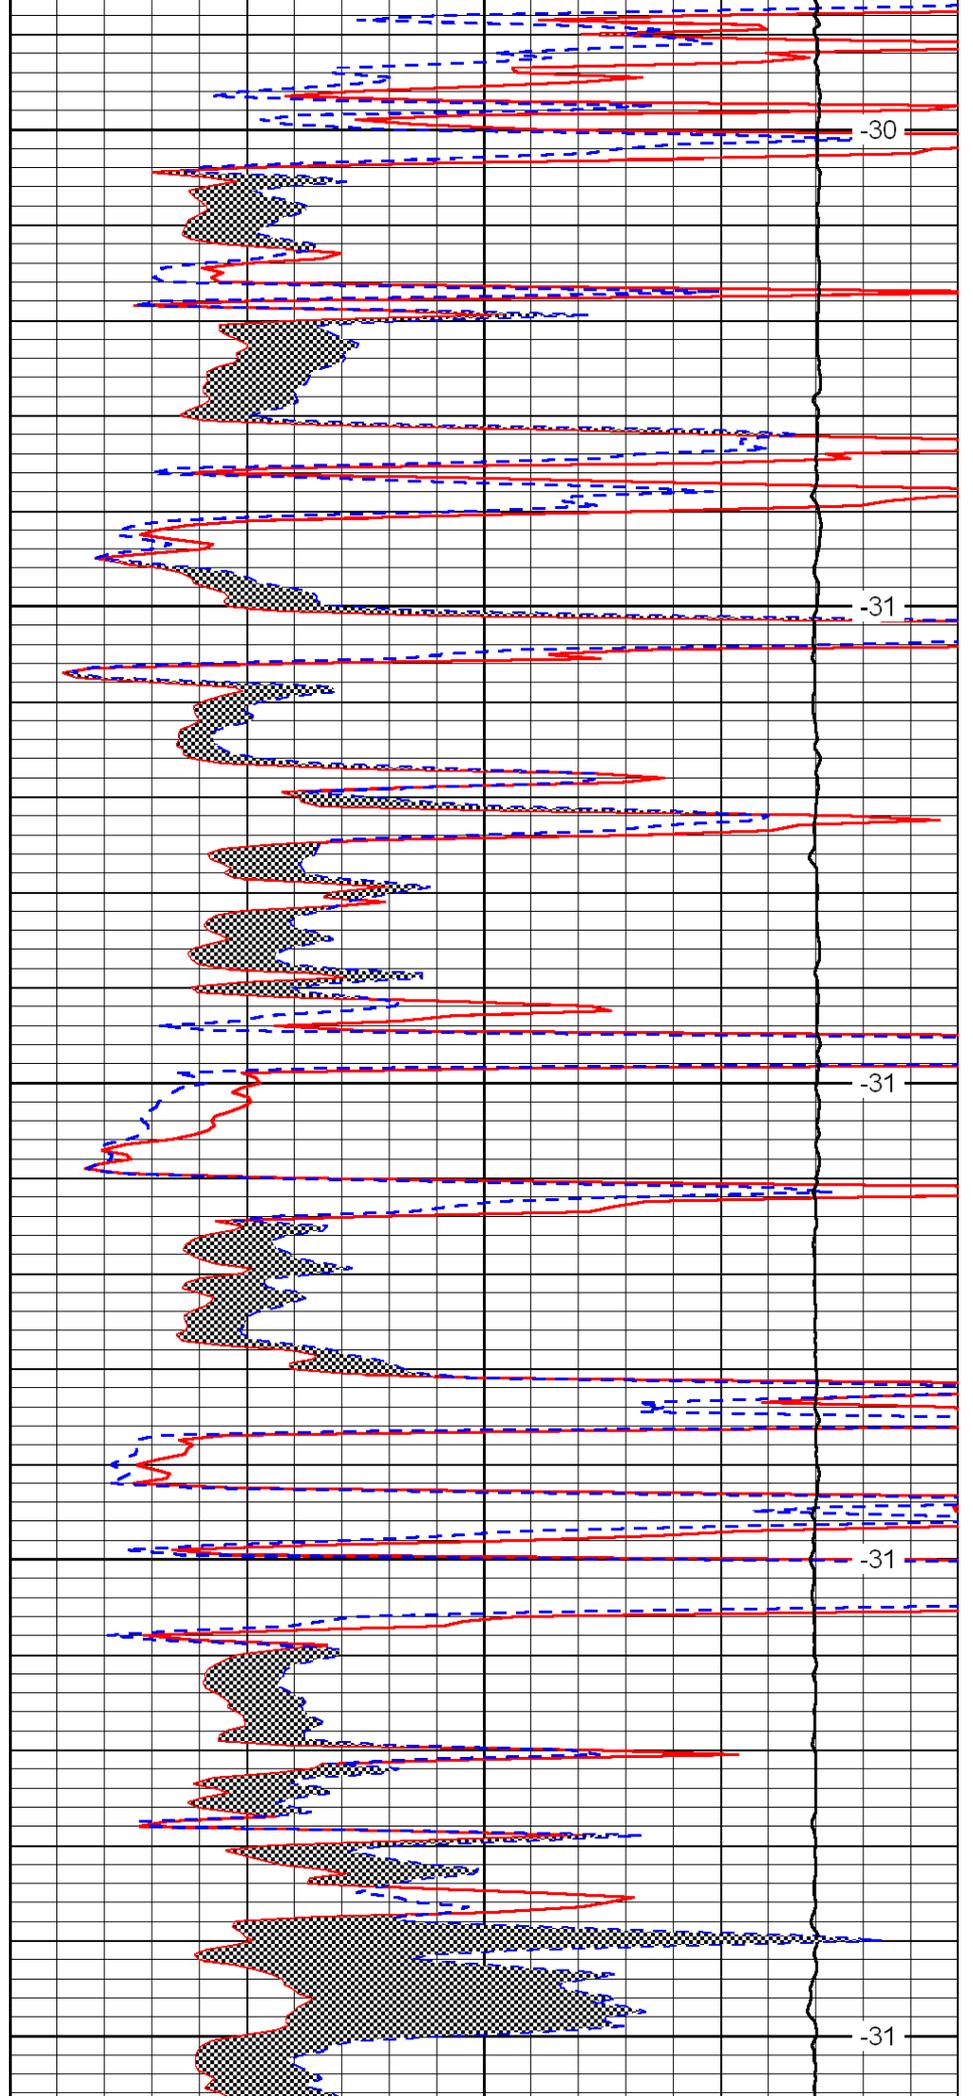


-30

-31

-31

-31

-31

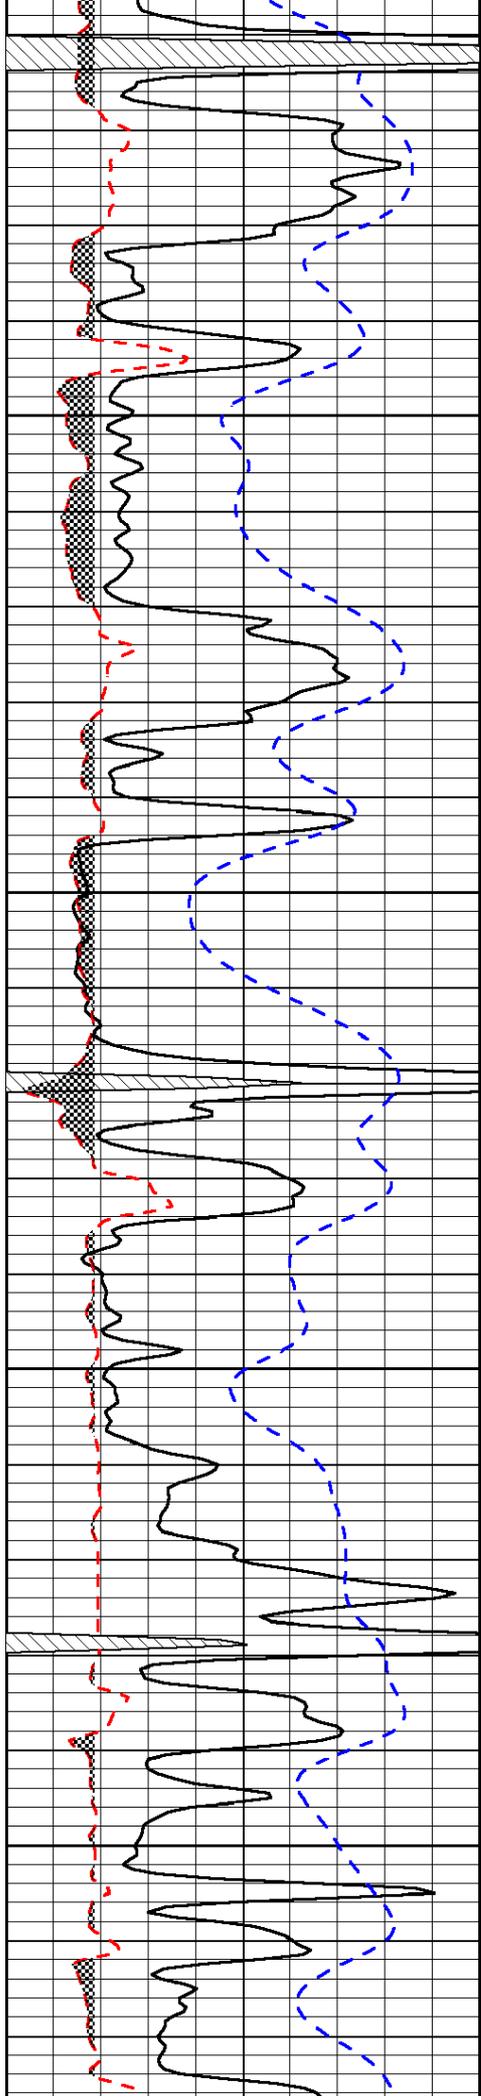


3850

3900

3950

4000

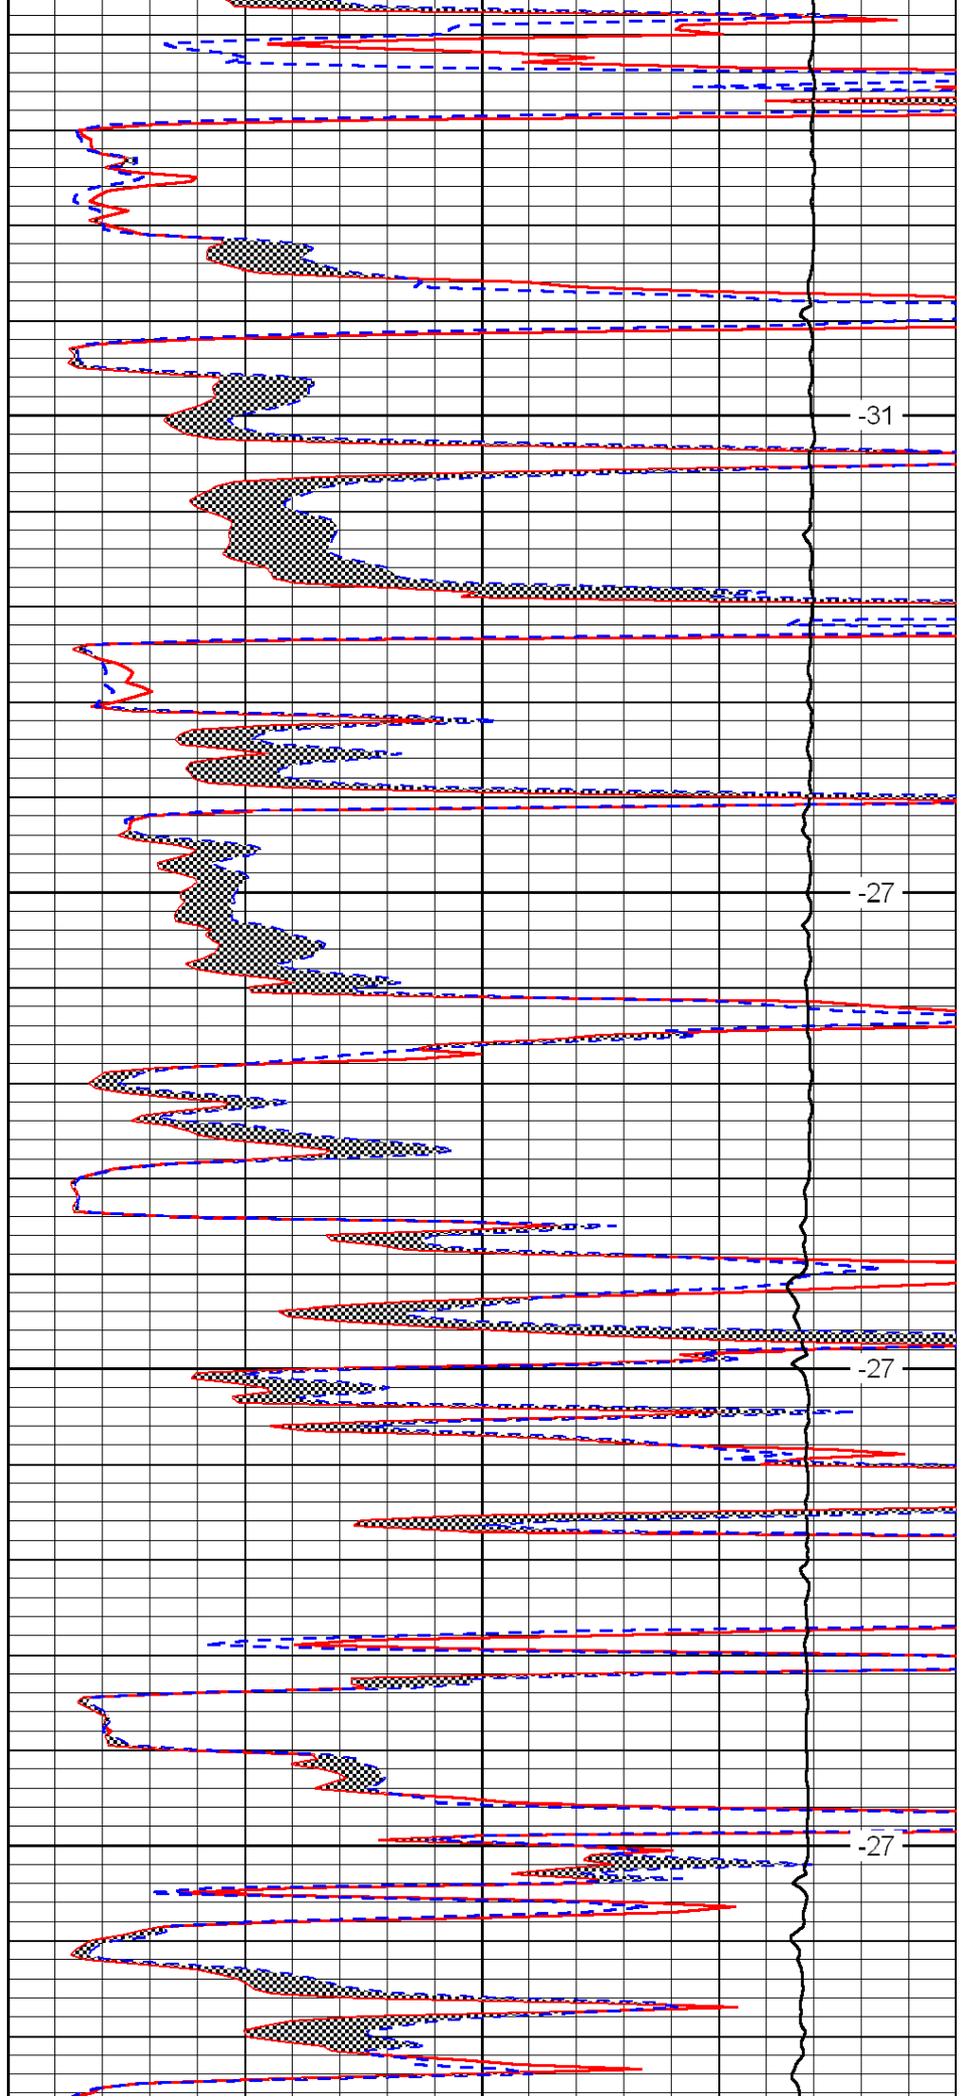


-31


-27

-27

-27

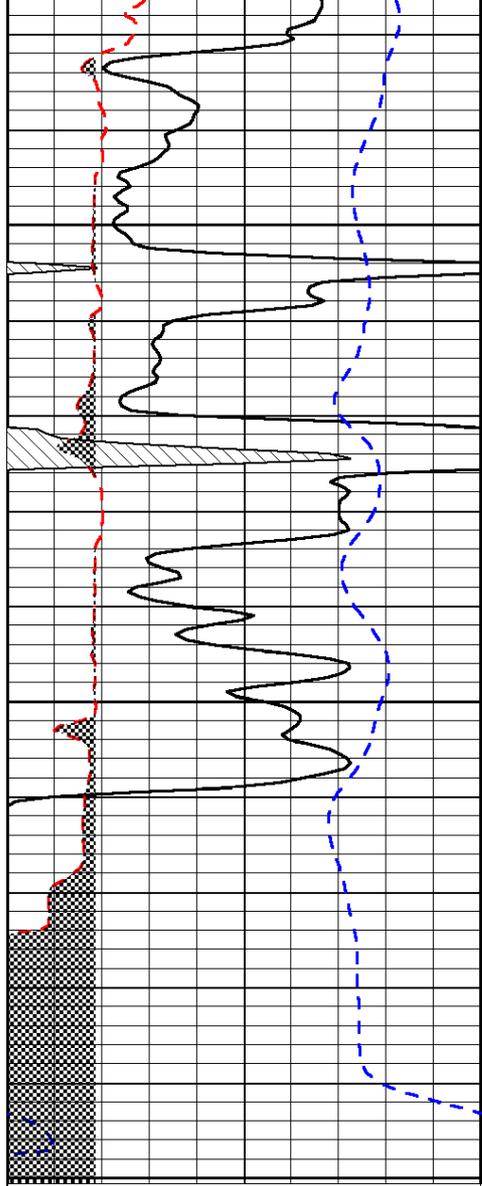

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

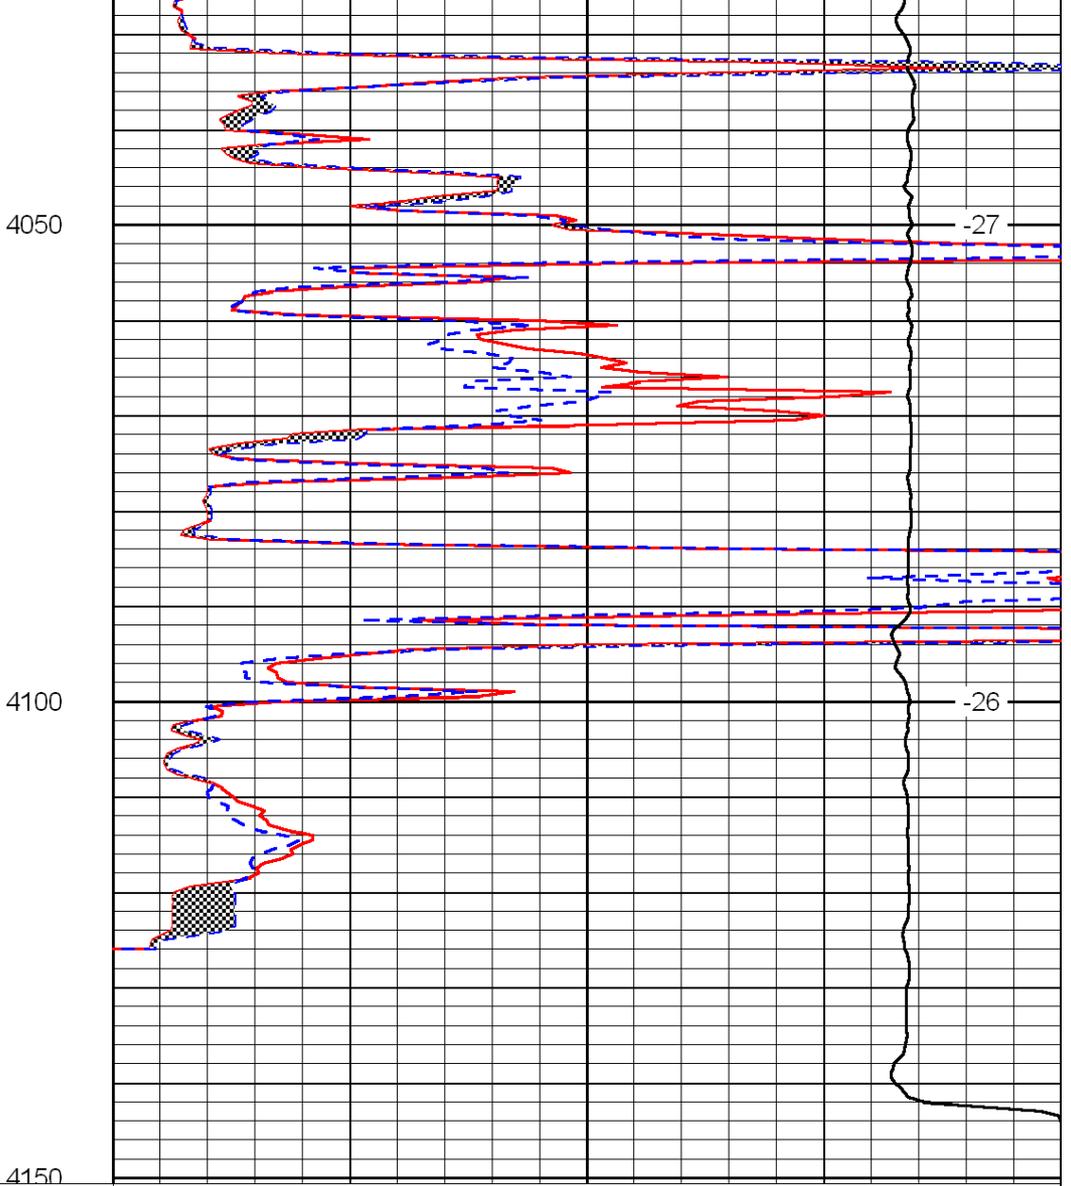

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2'' (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)