

LOG-TECH



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-131-20,214-00-00	Company Mustang Fuel Corporation Well Rilinger No. 2-25 Field Wildcat County Nemaha State Kansas	
Location 1100' FSL & 500' FWL	Sec: 25 Twp: 4 S Rge: 13 E	Other Services CNL/CDL DIL/BHCS

Permanent Datum	Ground Level	Elevation 1291	
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	K.B. 1301
Drilling Measured From	Front Kelly Bushing		D.F. 1291
Date	12/17/2009		
Run Number	Two		
Depth Driller	3875		
Depth Logger	3879		
Bottom Logged Interval	3878		
Top Log Interval	2500		
Casing Driller	8.625 @ 344		
Casing Logger	344		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	500		
Density / Viscosity	9.2 41		
pH / Fluid Loss	8.0 7.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.4 @ 60		
Rmf @ Meas. Temp	1.2 @ 60		
Rmc @ Meas. Temp	2.16 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.82 @ 117		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	117		
Equipment Number	4		
Location	Hays		
Recorded By	K Bange		
Witnessed By	Doug Davis		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Topeka, N on 75 to Hwy 9, W 10 to S rd, 1 N, 1 W, 1/2 N, E into

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	100
0	Micro Normal 2" (Ohm-m)	100
15000	Line Weight (lb)	0

LSPD
(ft/min)

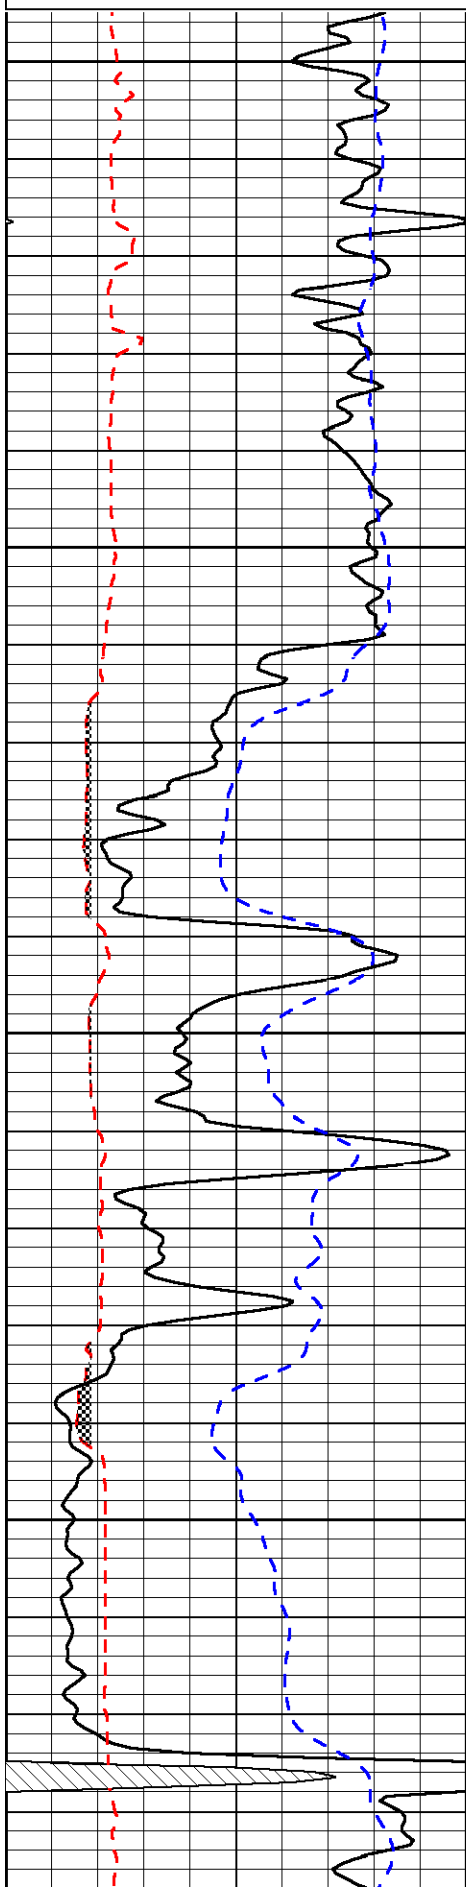


2500

2550

2600

2650

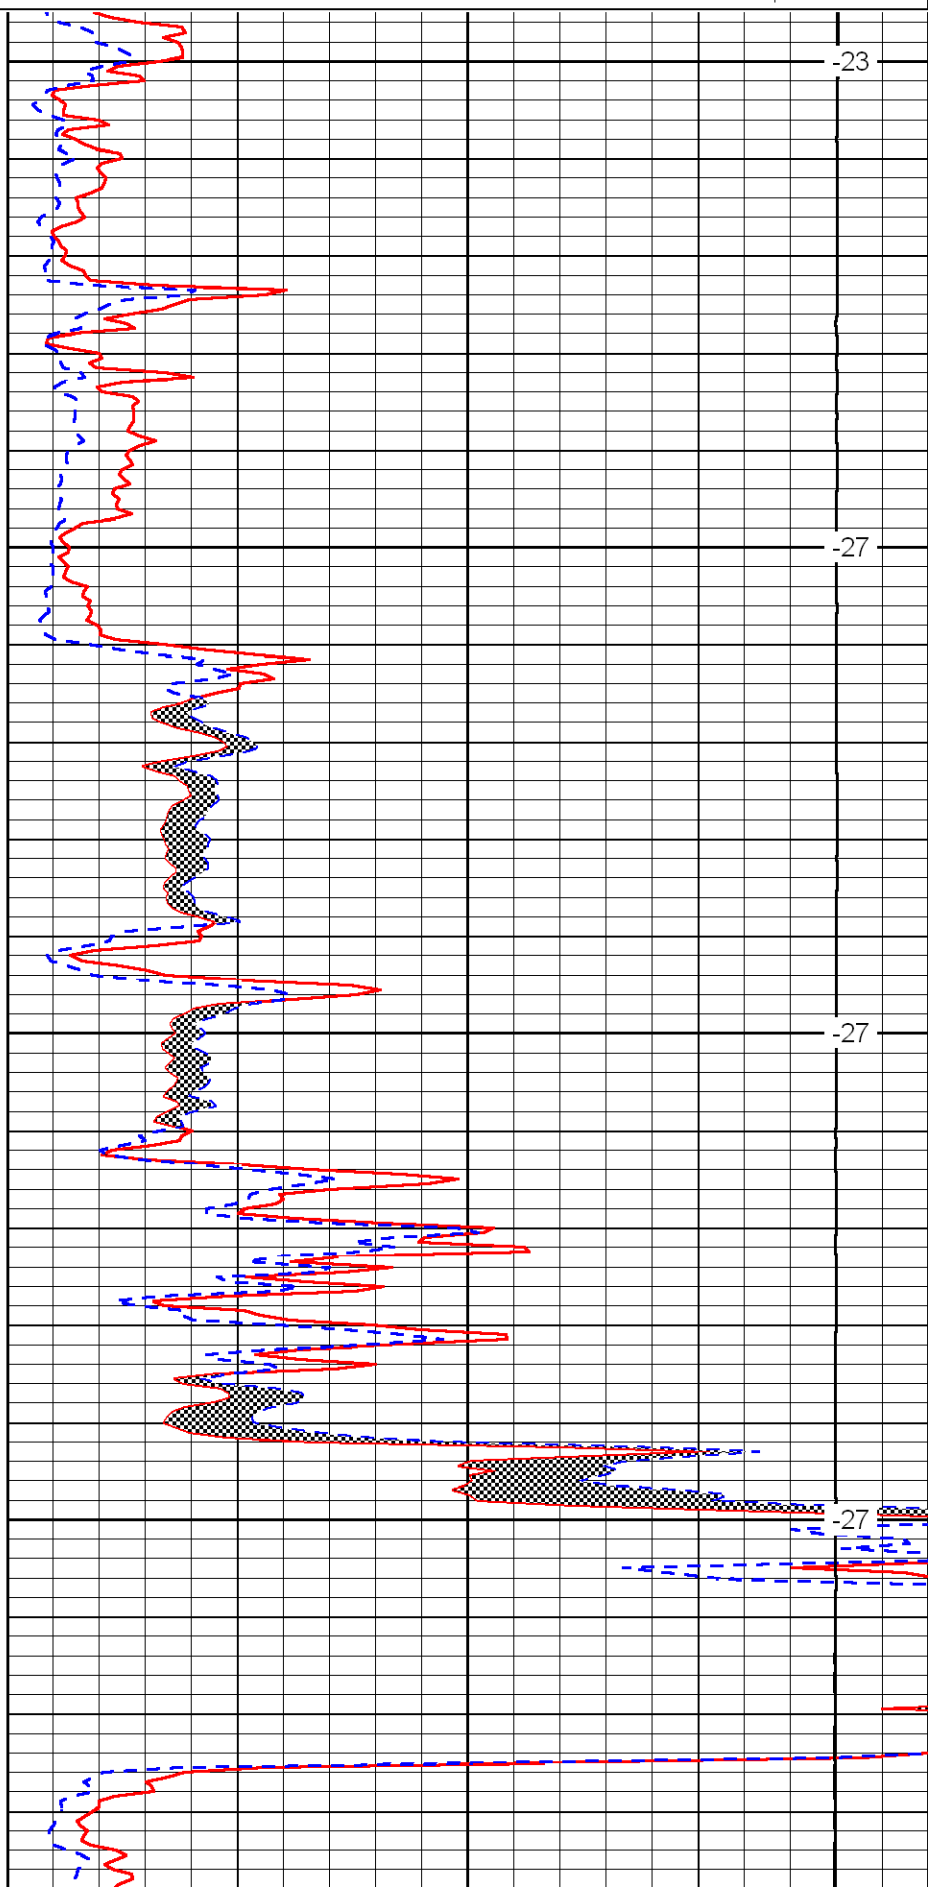


-23

-27

-27

-27

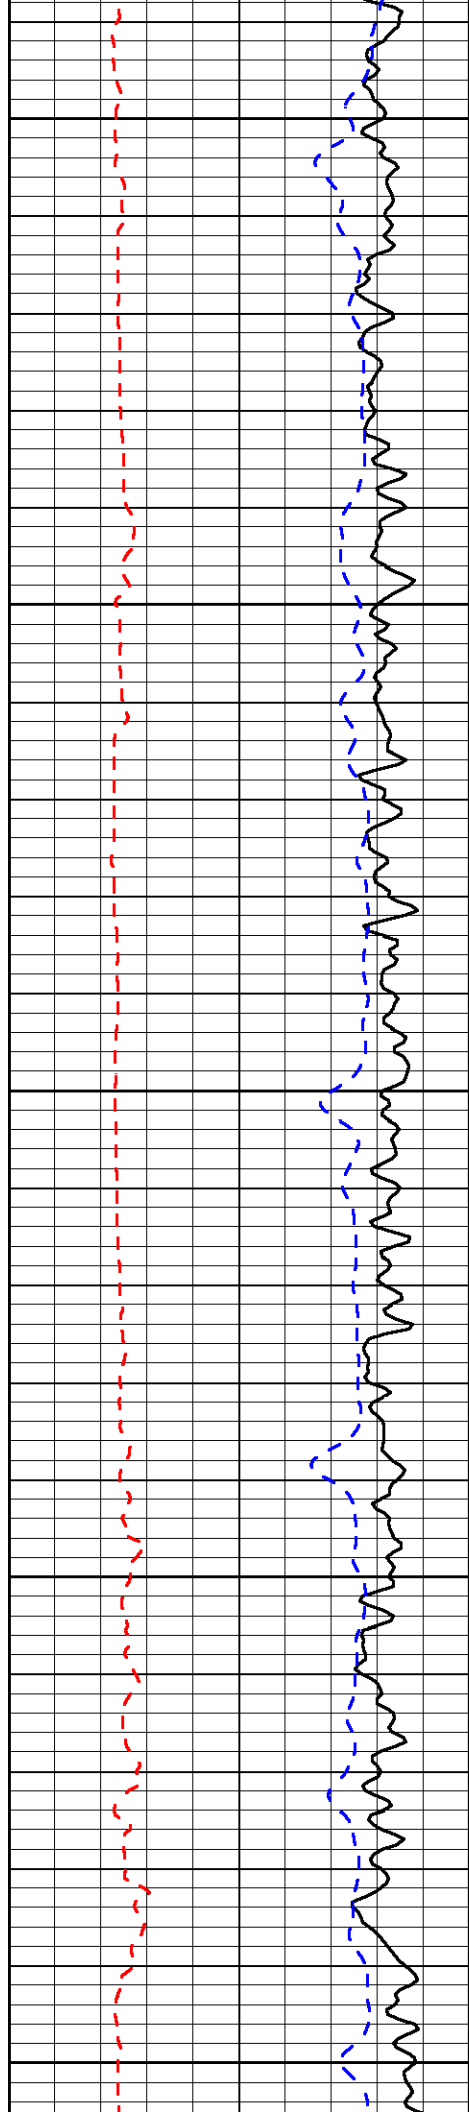


2700

2750

2800

2850

2900

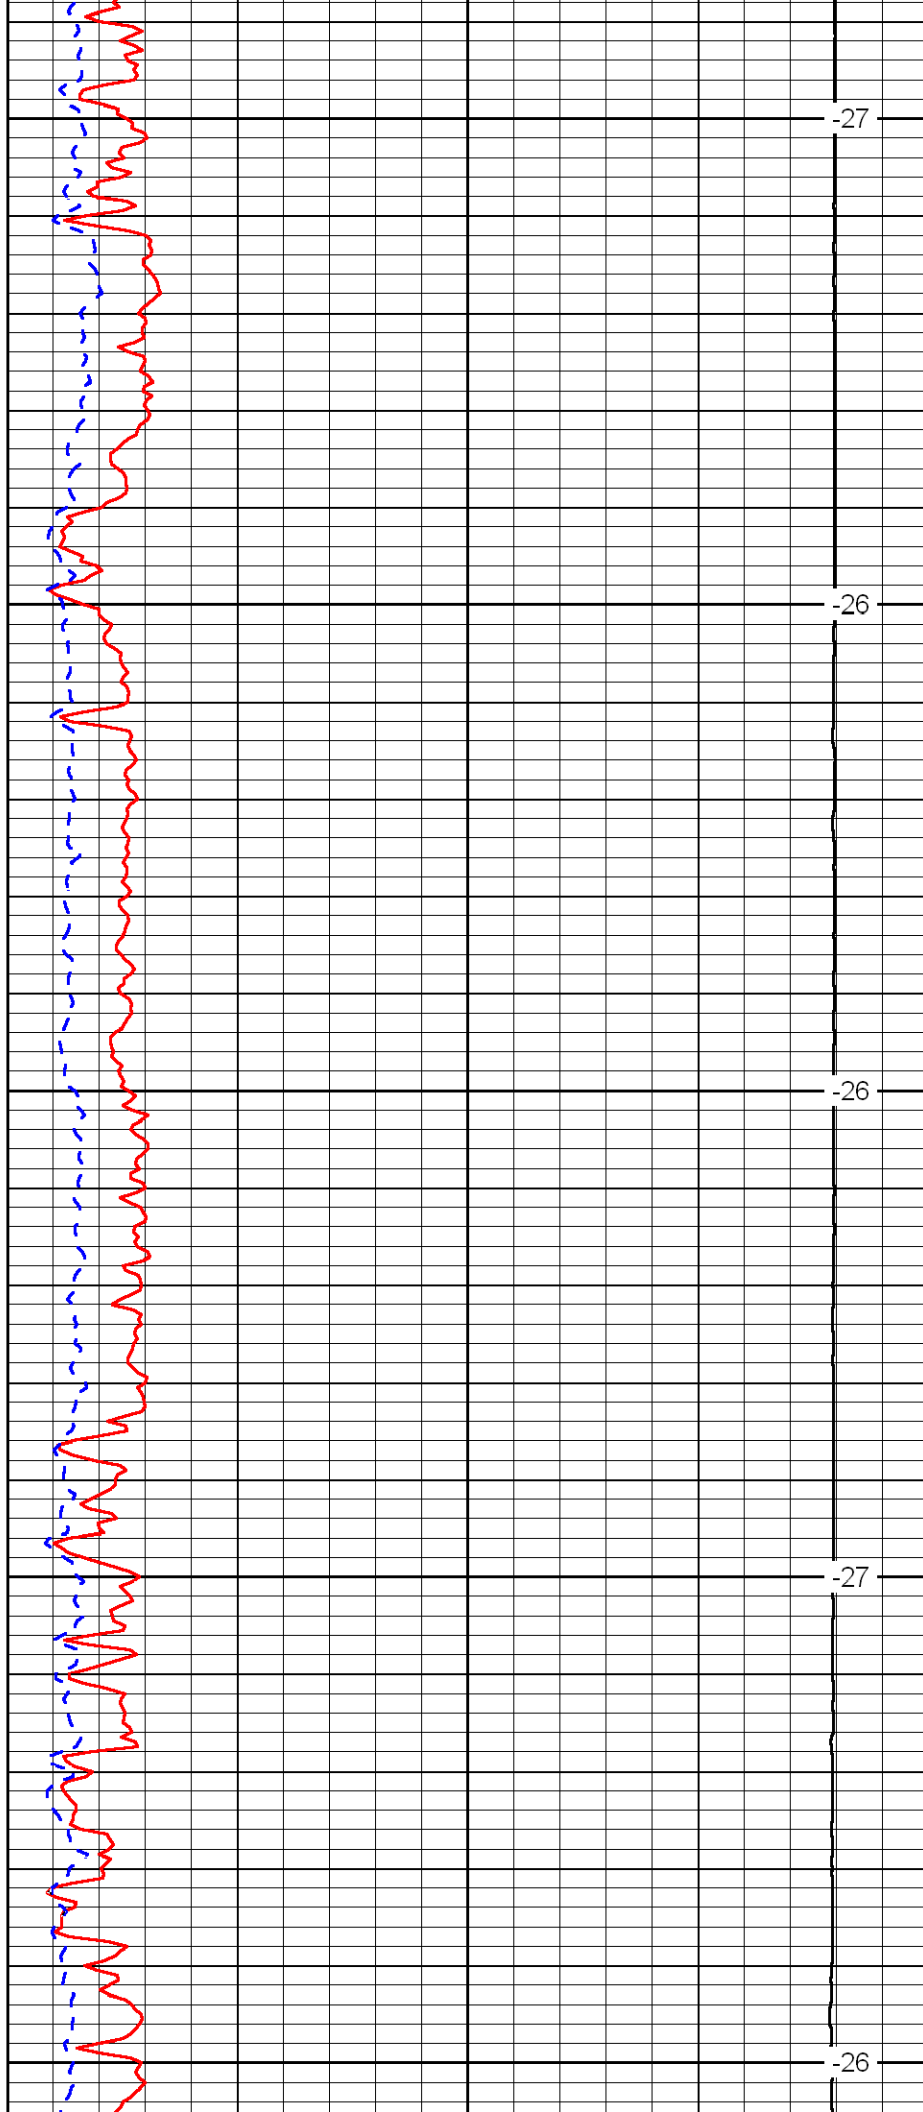



-27


-26

-26

-27

-26

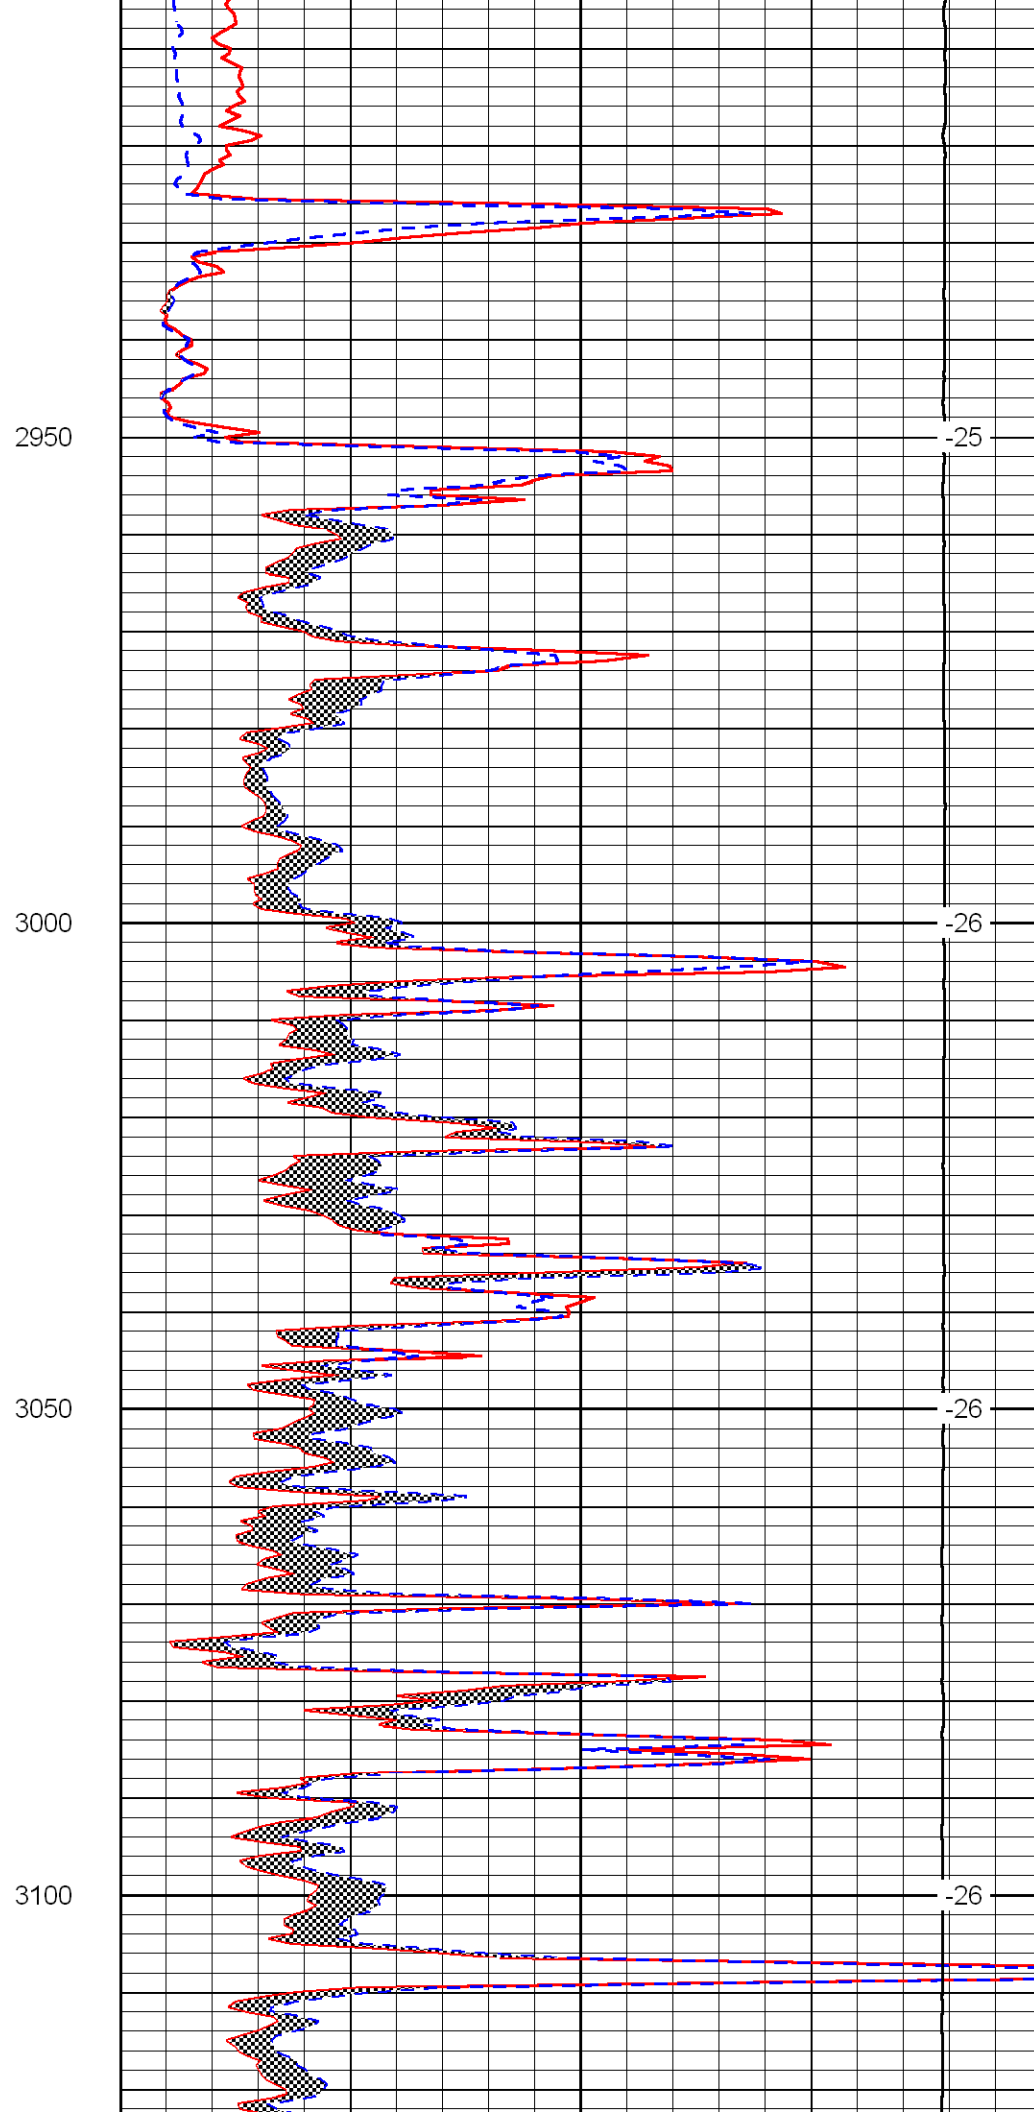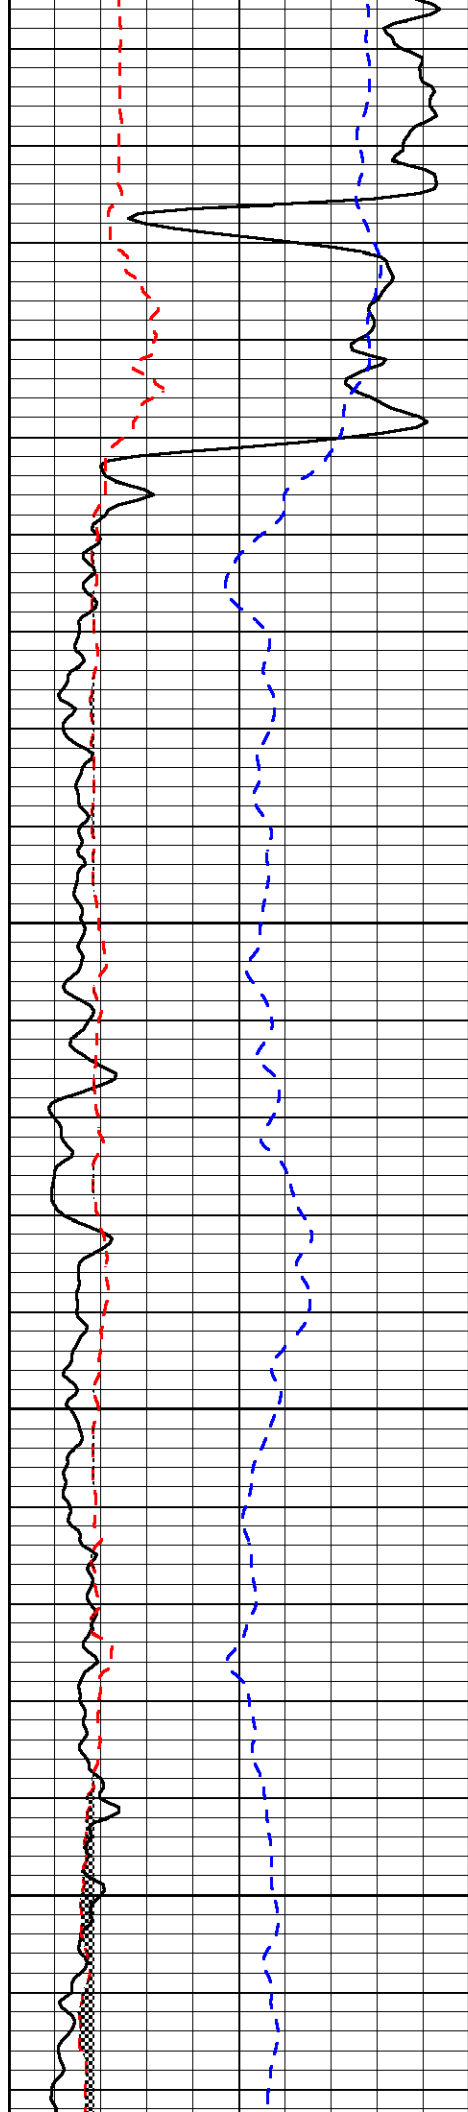

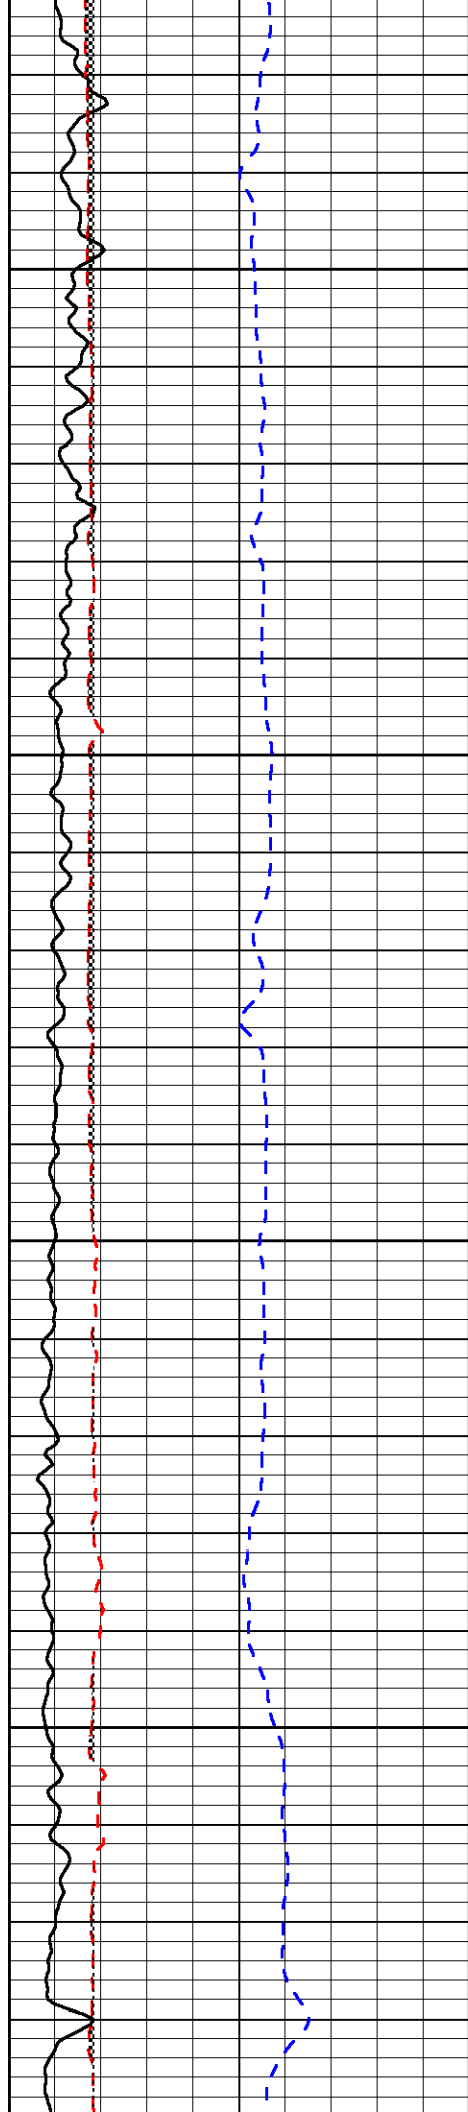


3150

3200

3250

3300

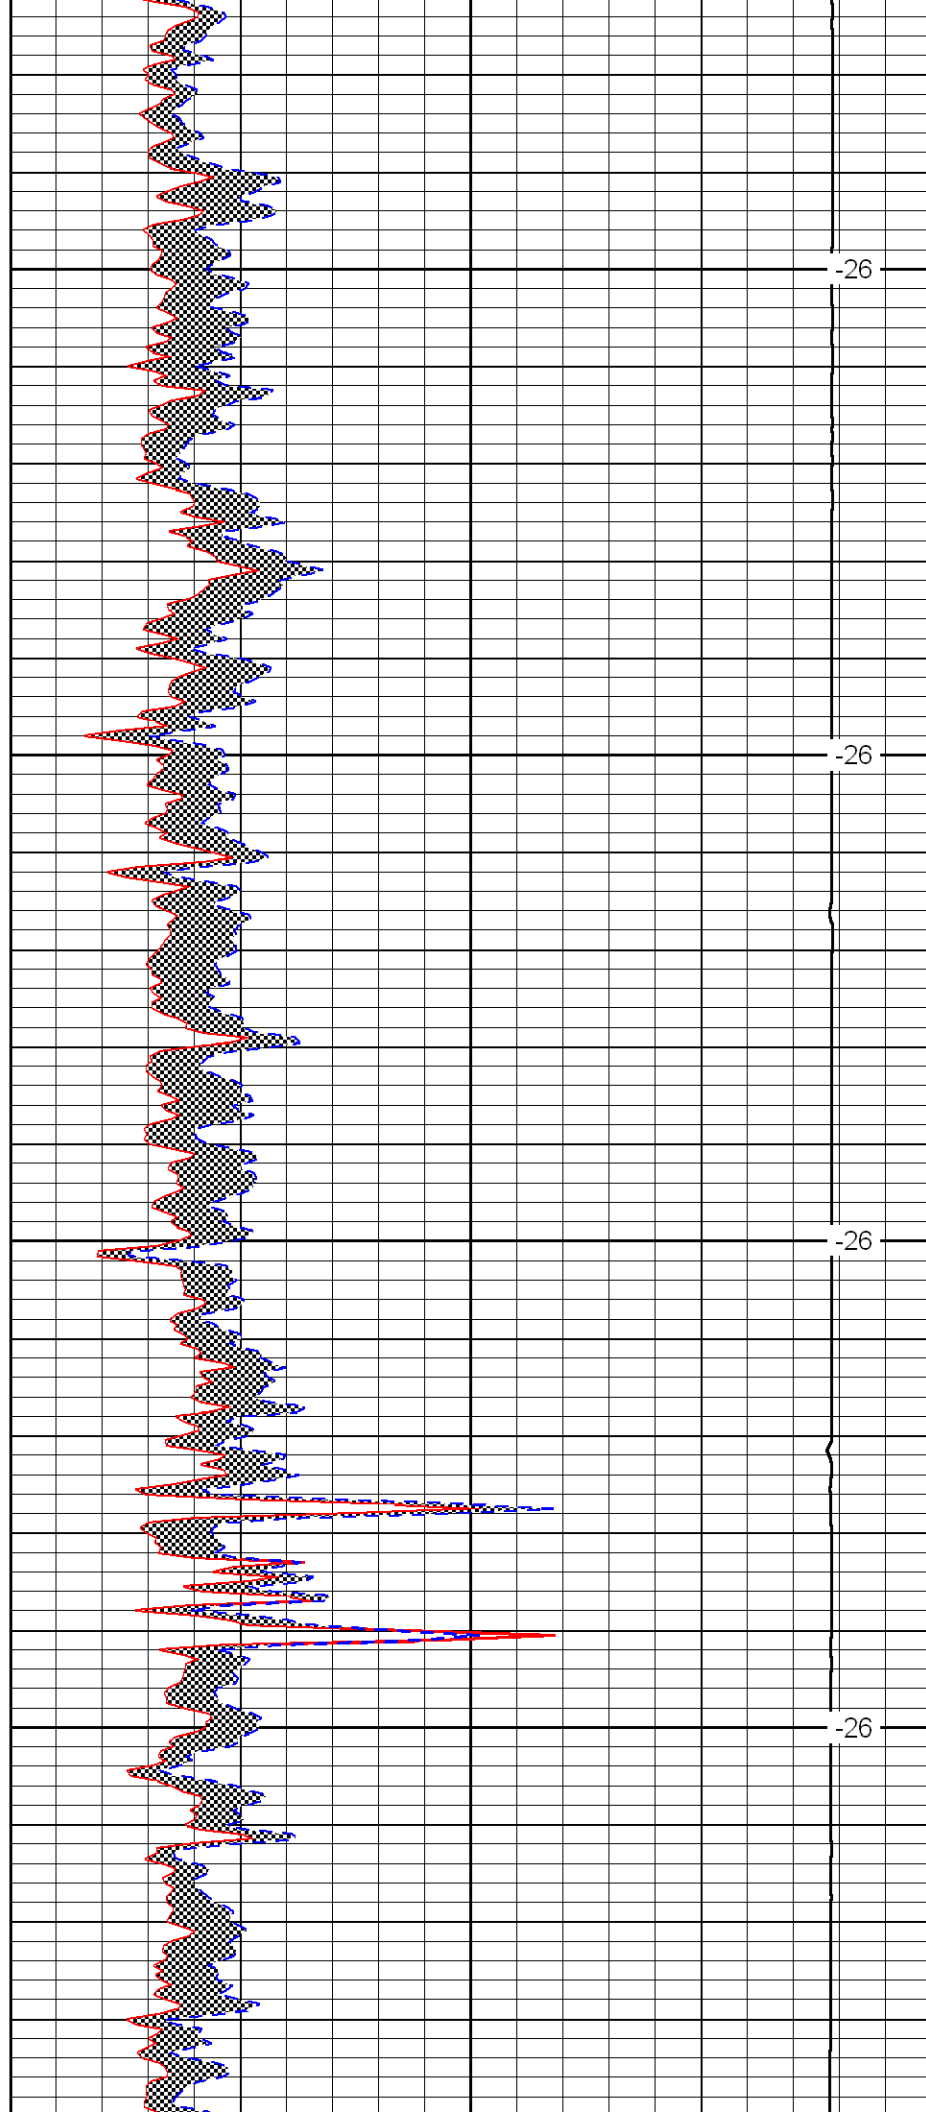


-26

-26

-26

-26

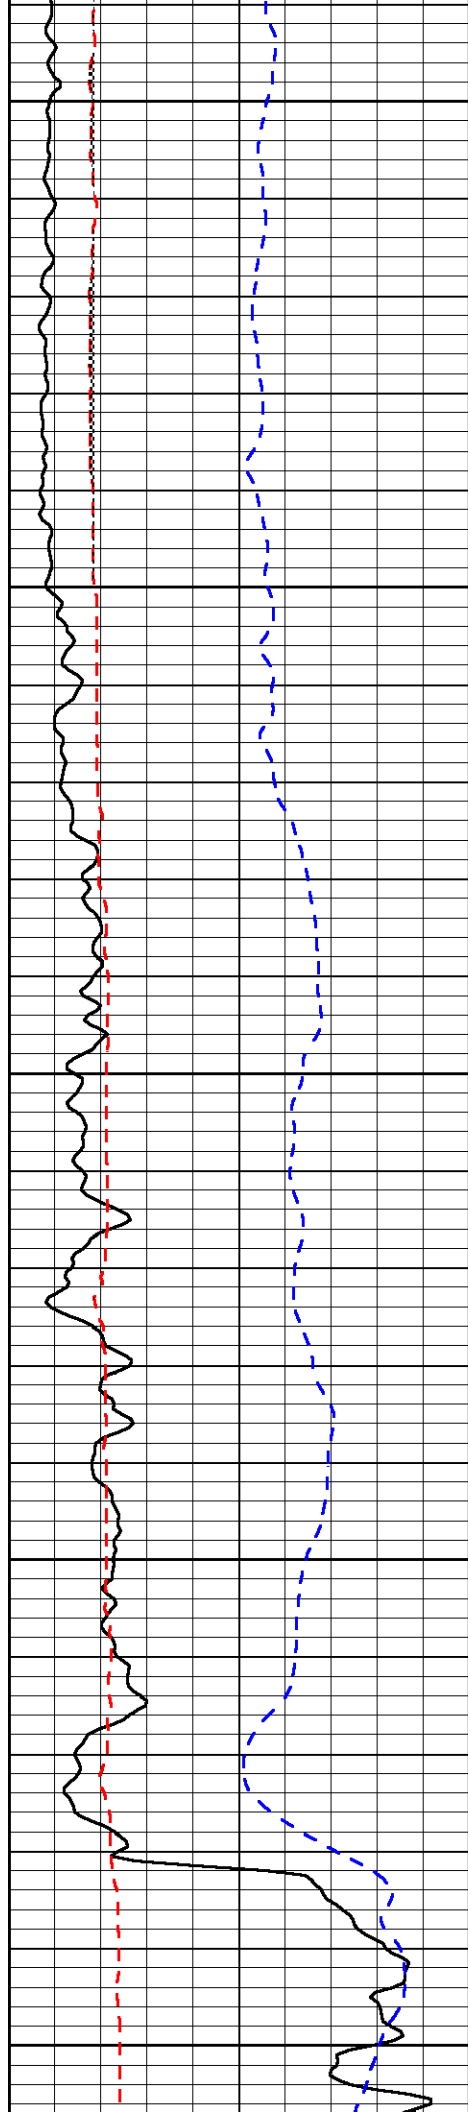


3350

3400

3450

3500

3550

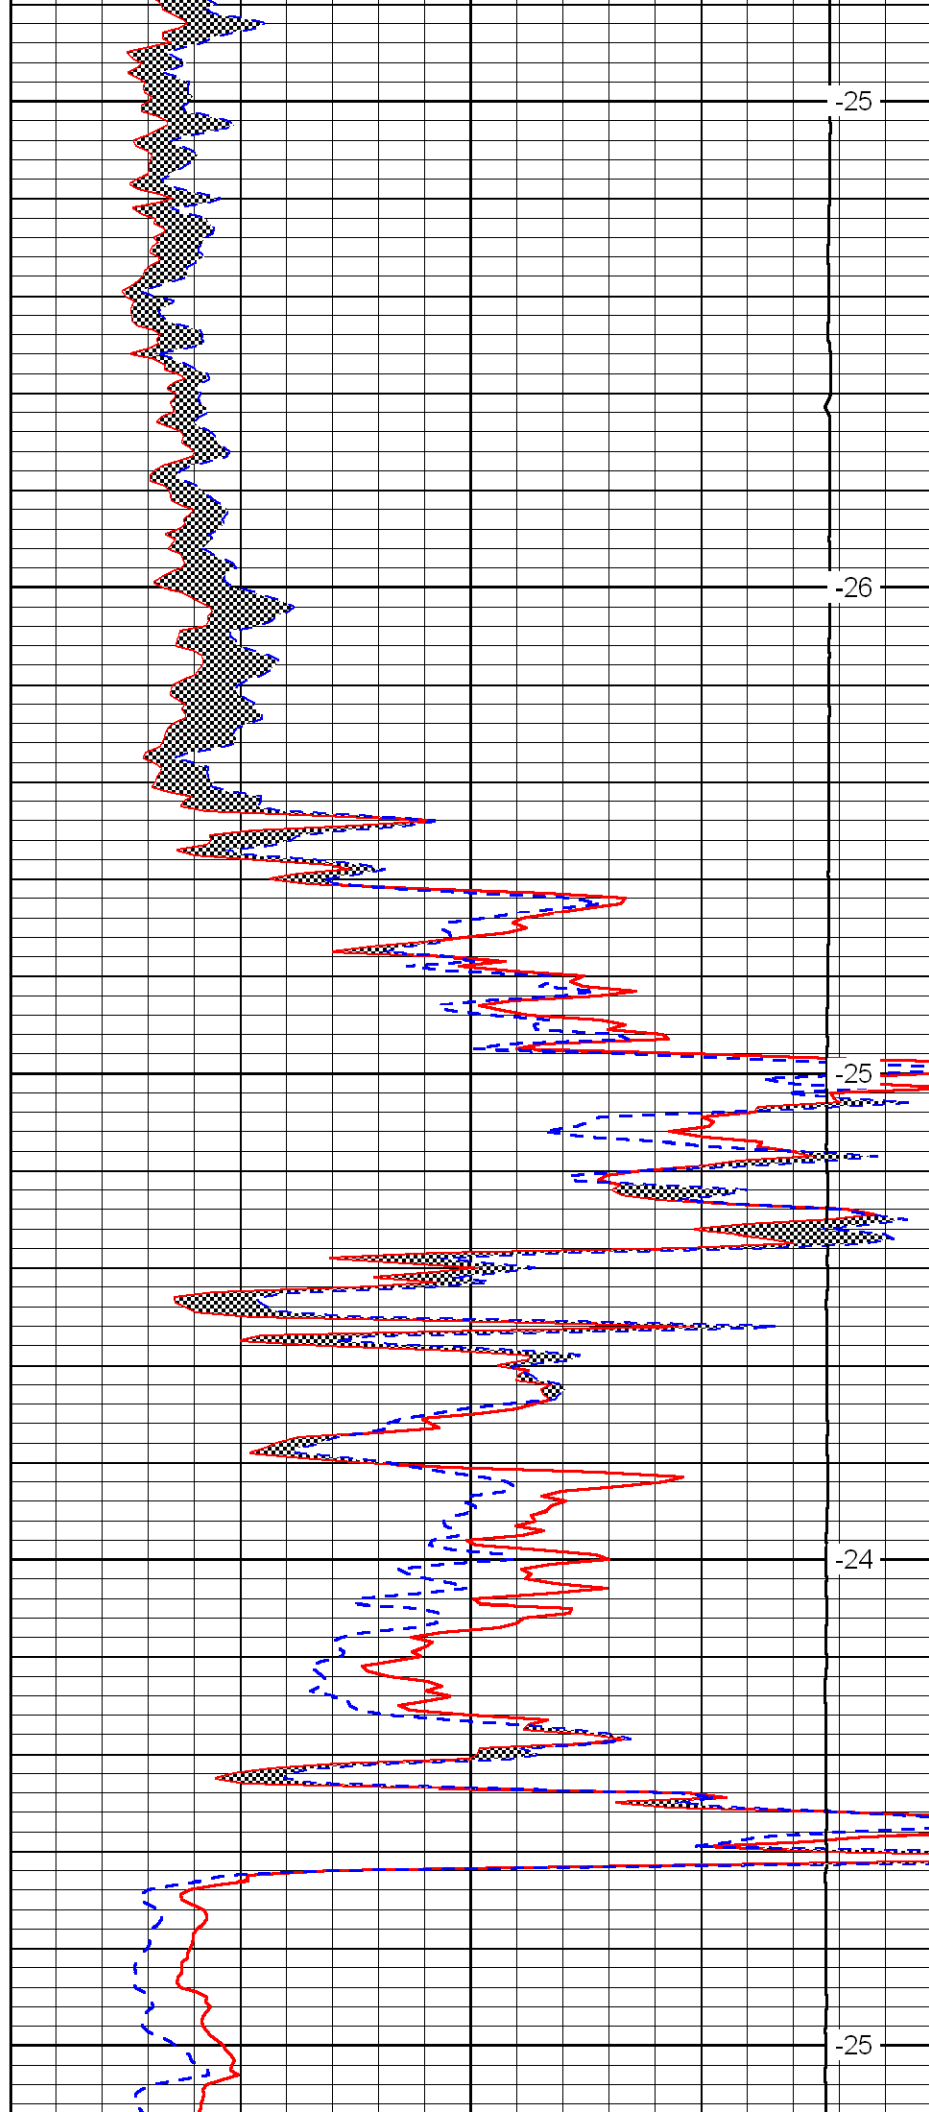


-25

-26

-25

-24

-25

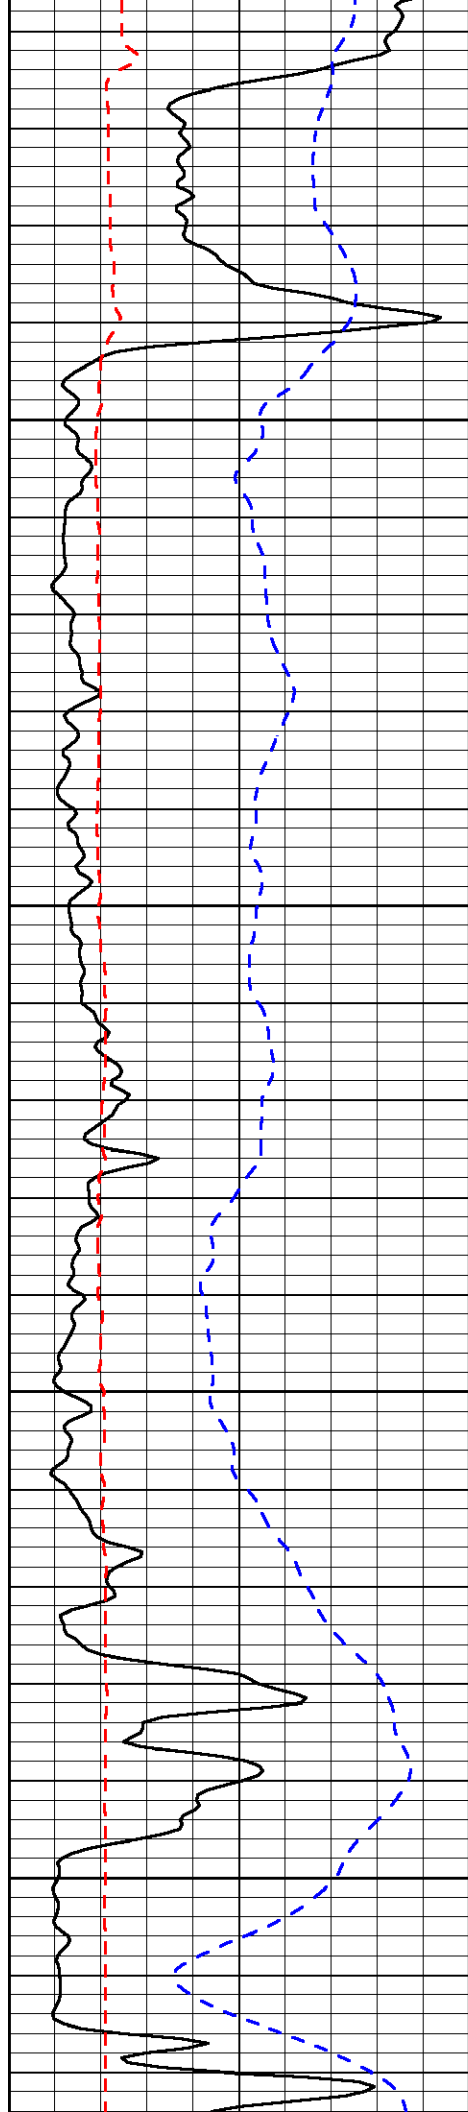


3600

3650

3700

3750

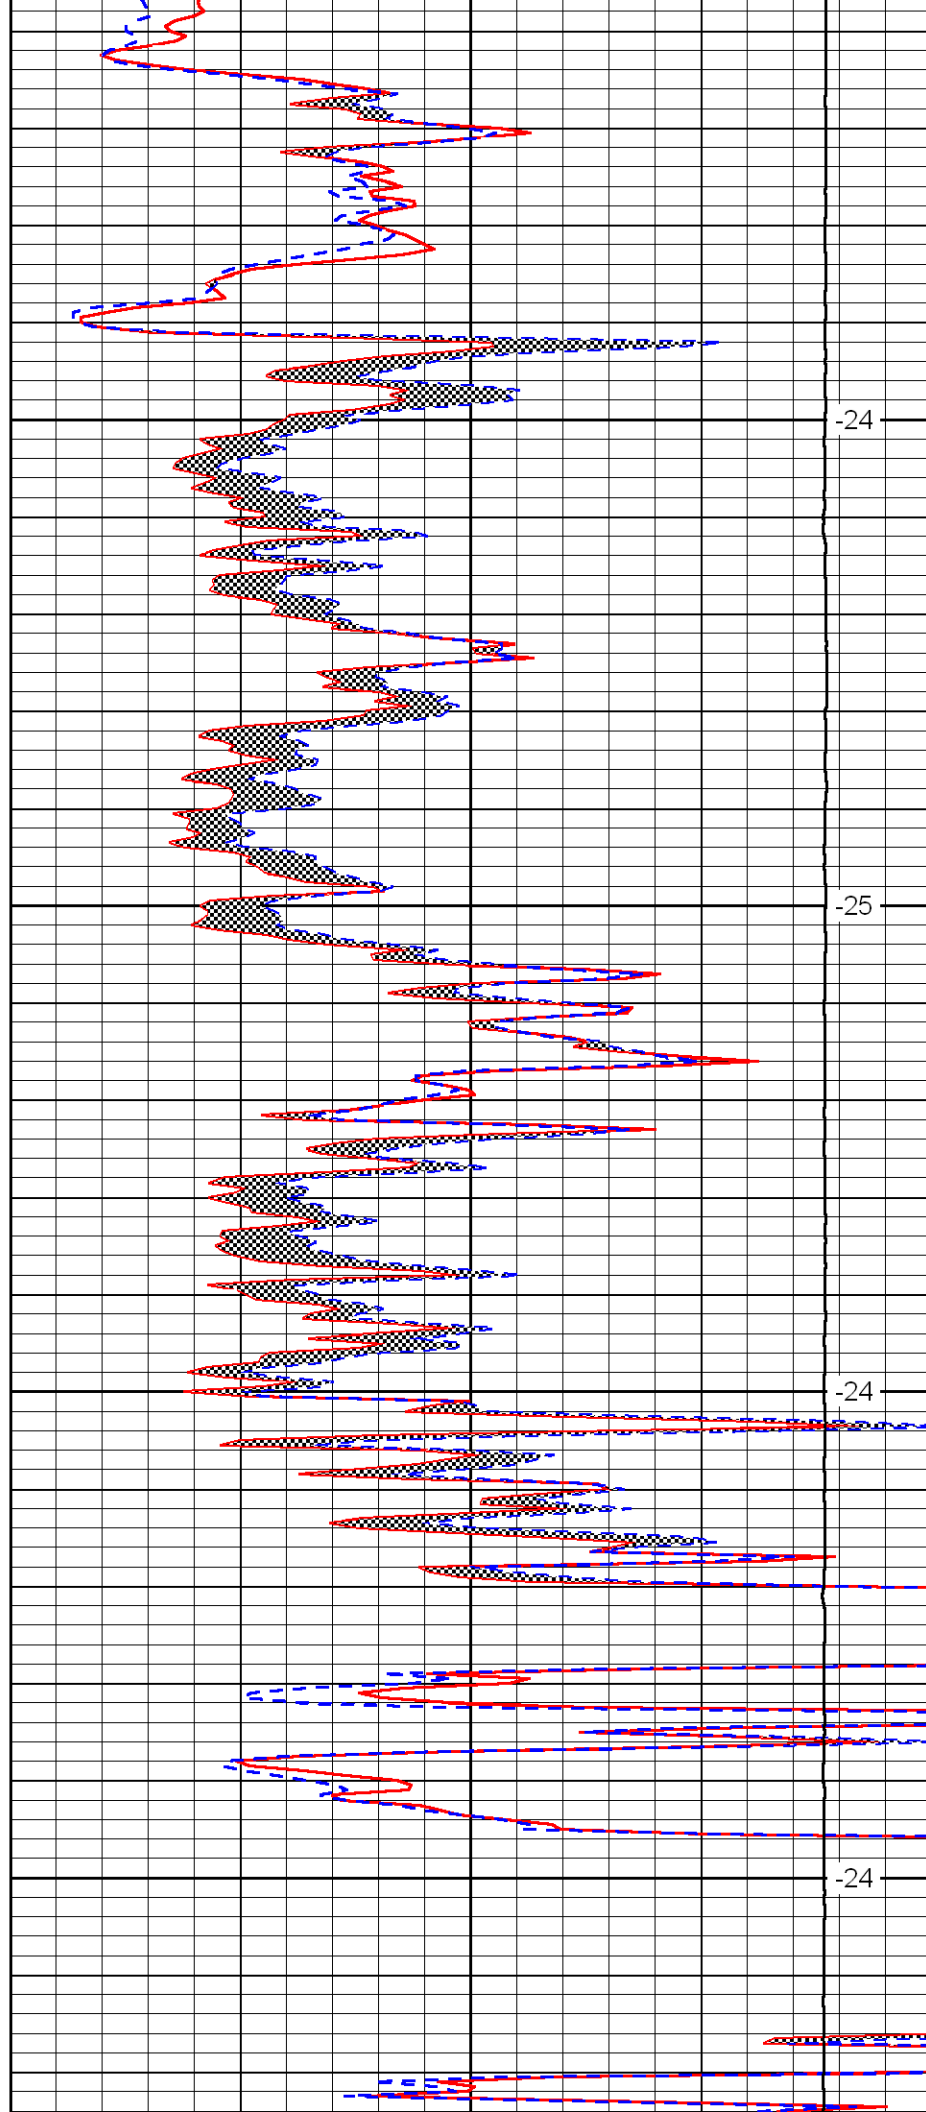


-24

-25


-24

-24

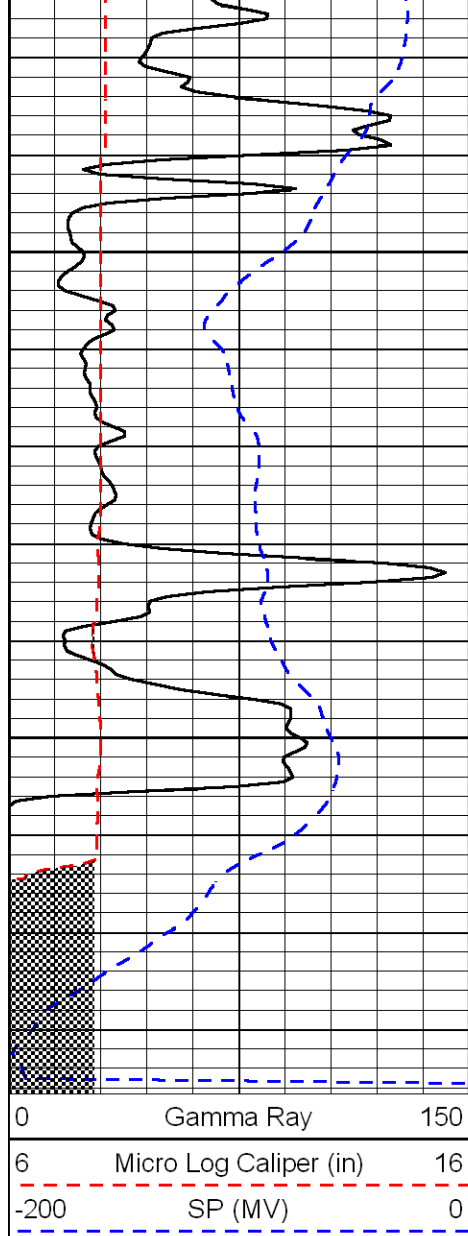

3800

3850

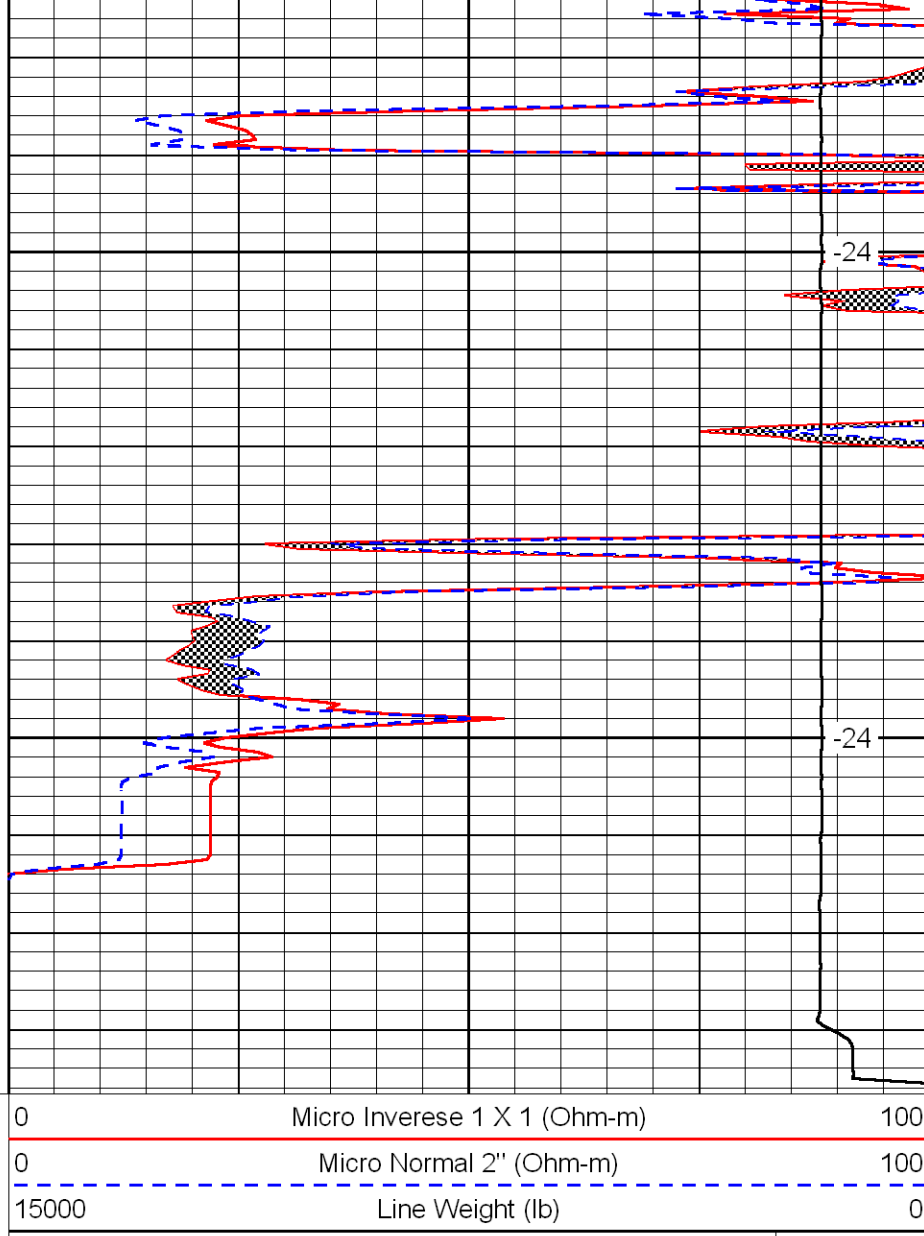

-24

-24

LSPD
(ft/min)