



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-109-20,889-00-00		Company Murfin Drilling Company, Inc.	
Well Stocker Unit No. 2-25		Field Funky Town West	
County Logan		State Kansas	
Location SW SW NW NE 1,300' FNL & 2,450' FEL		Other Services CNL/CDL DIL/BHCS	
Sec: 25 Twp: 12S Rge: 33W		Elevation K.B. 3056 D.F. 3045 G.L. 3045	
Permanent Datum	Ground Level	Elevation 3045	
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	9/28/2010		
Run Number	Two		
Depth Driller	4730		
Depth Logger	4733		
Bottom Logged Interval	4732		
Top Log Interval	3600		
Casing Driller	8.625 @ 227		
Casing Logger	224		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4500		
Density / Viscosity	9.2 58		
pH / Fluid Loss	11.5 6.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	.34 @ 74		
Rmf @ Meas. Temp	.26 @ 74		
Rmc @ Meas. Temp	.46 @ 74		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.20 @ 123		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	123		
Equipment Number	10		
Location	Hays		
Recorded By	J. Long		
Witnessed By	Tom Funk		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Oakley, 9 South to Ute Rd, 4 1/2 West, South Into

Database File: c:\warrior\data\murfin_stoecker unit #2-25\murfin.db
Dataset Pathname: dil/murfstck
Presentation Format: micro
Dataset Creation: Tue Sep 28 11:42:00 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

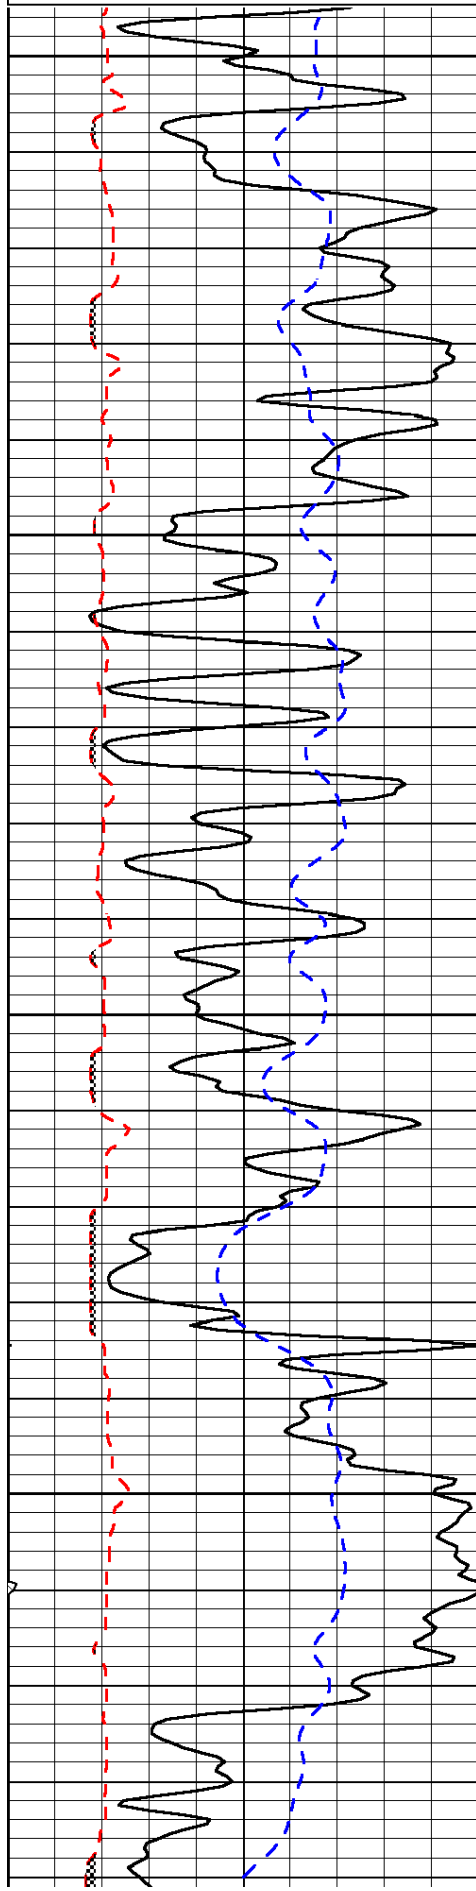

3600


3650


3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

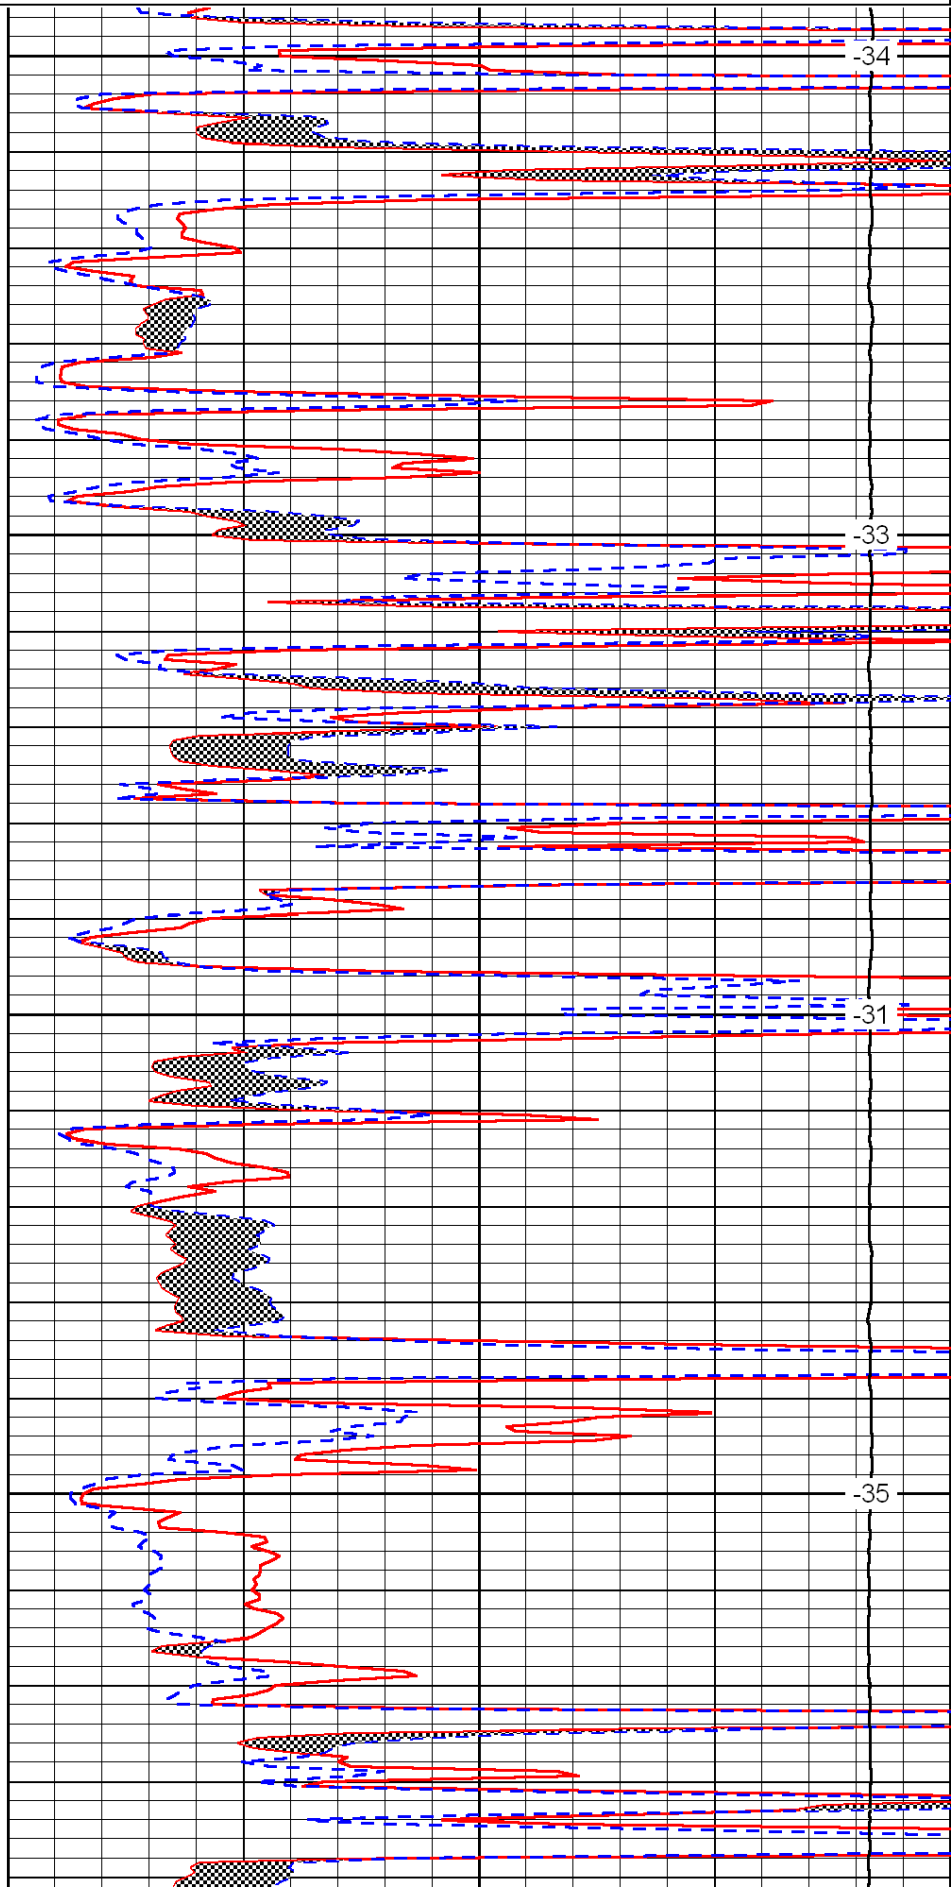

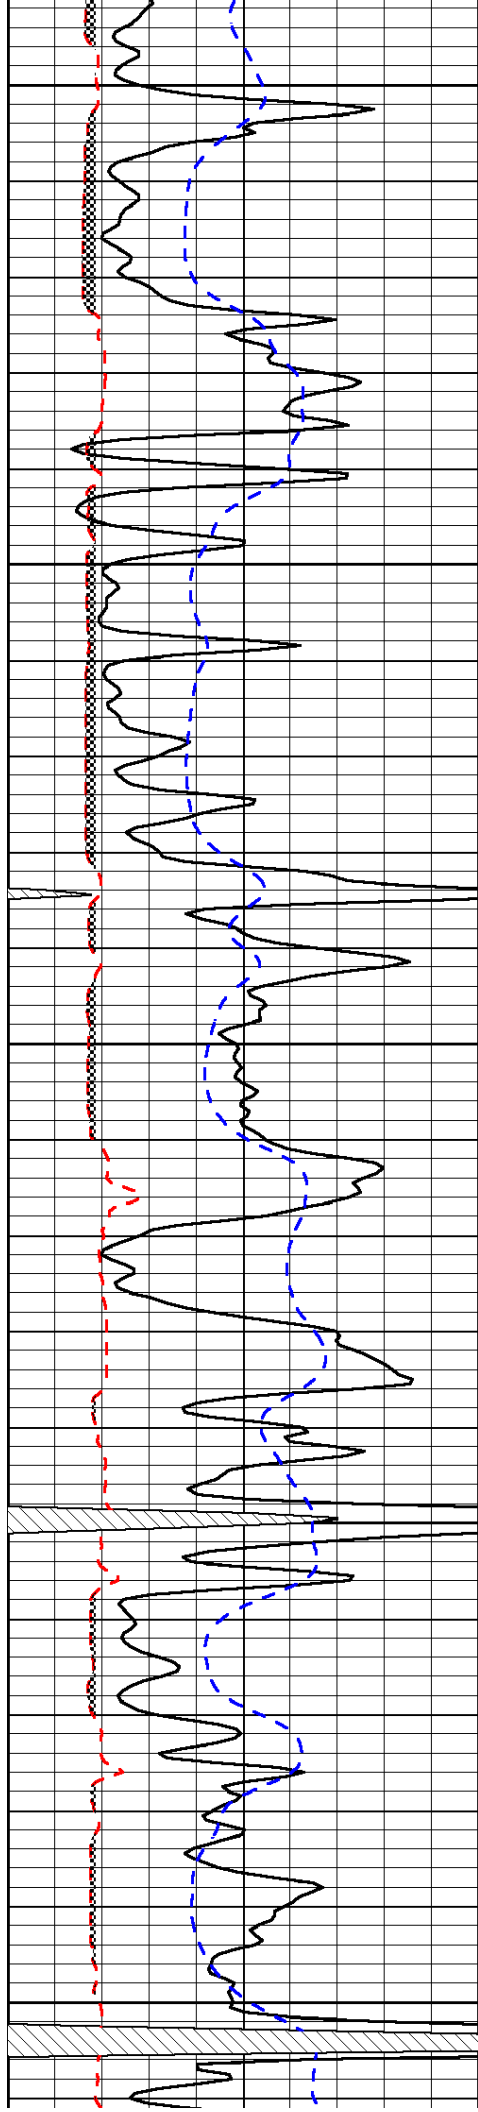


3800


3850

3900

3950

4000

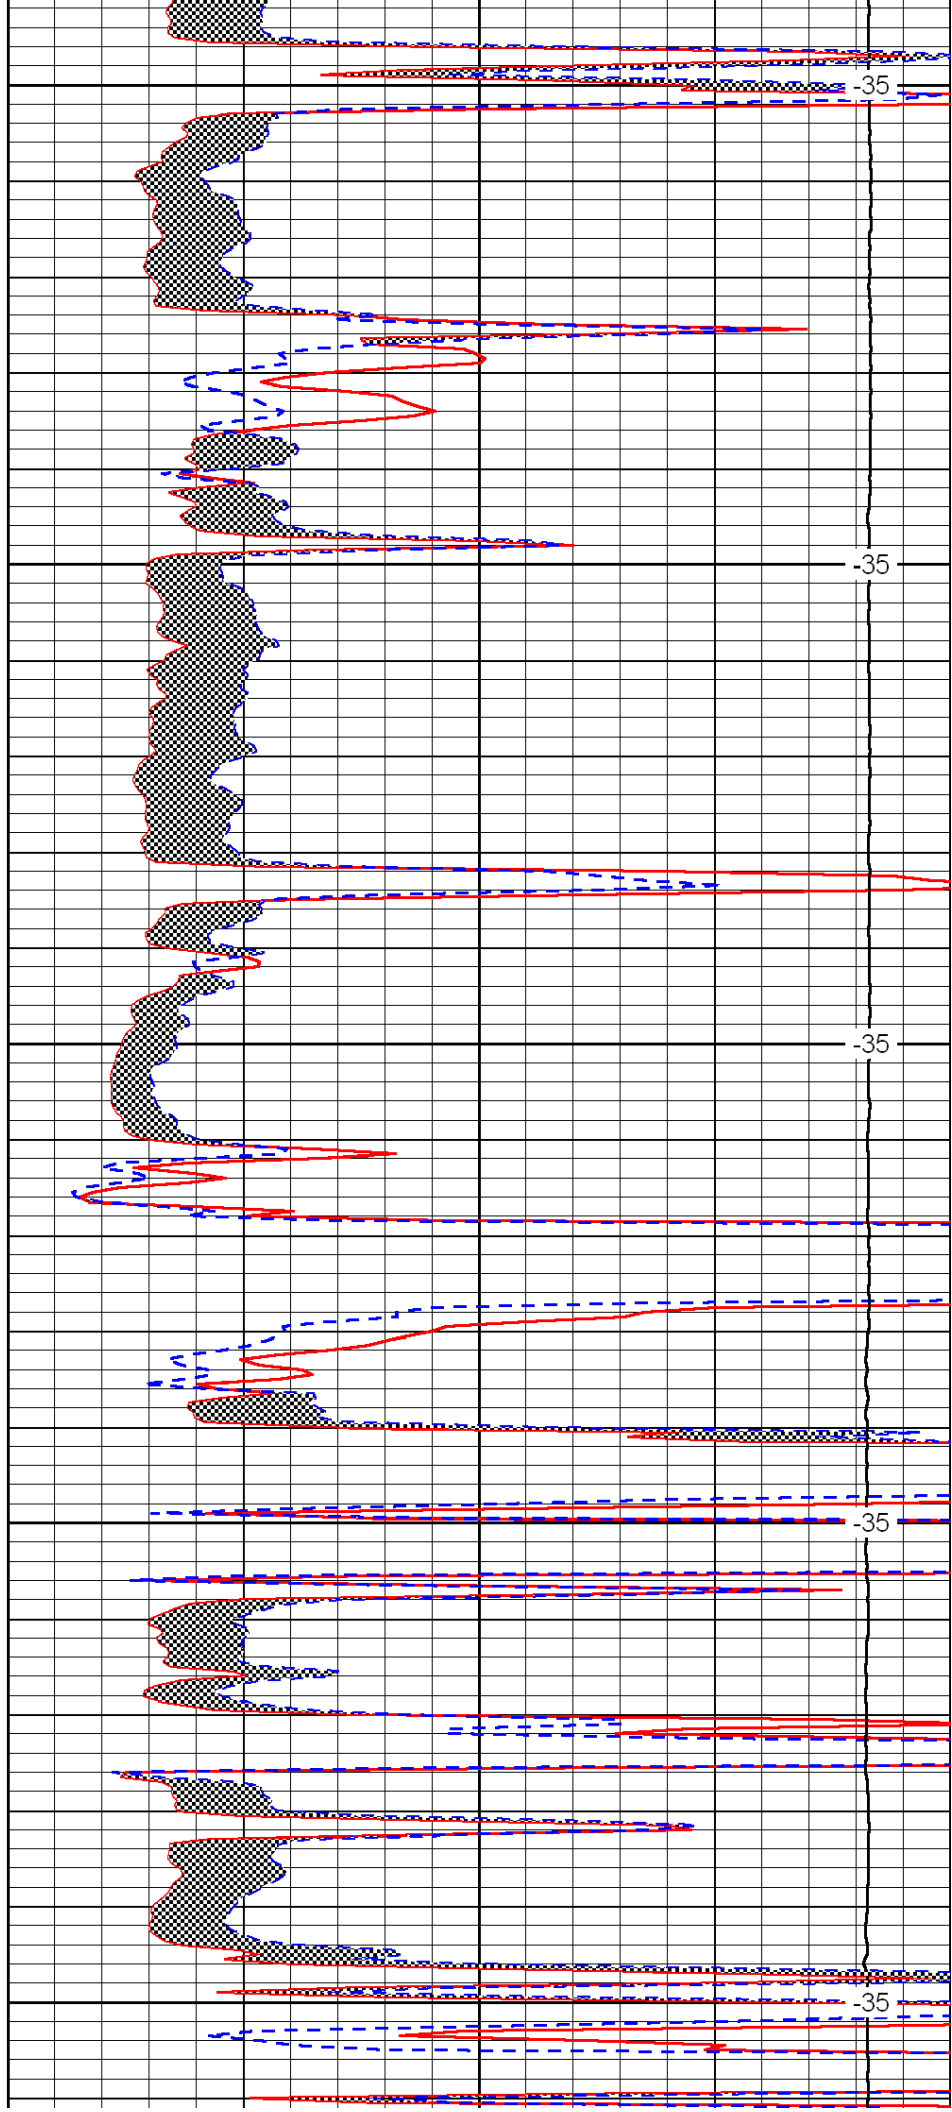

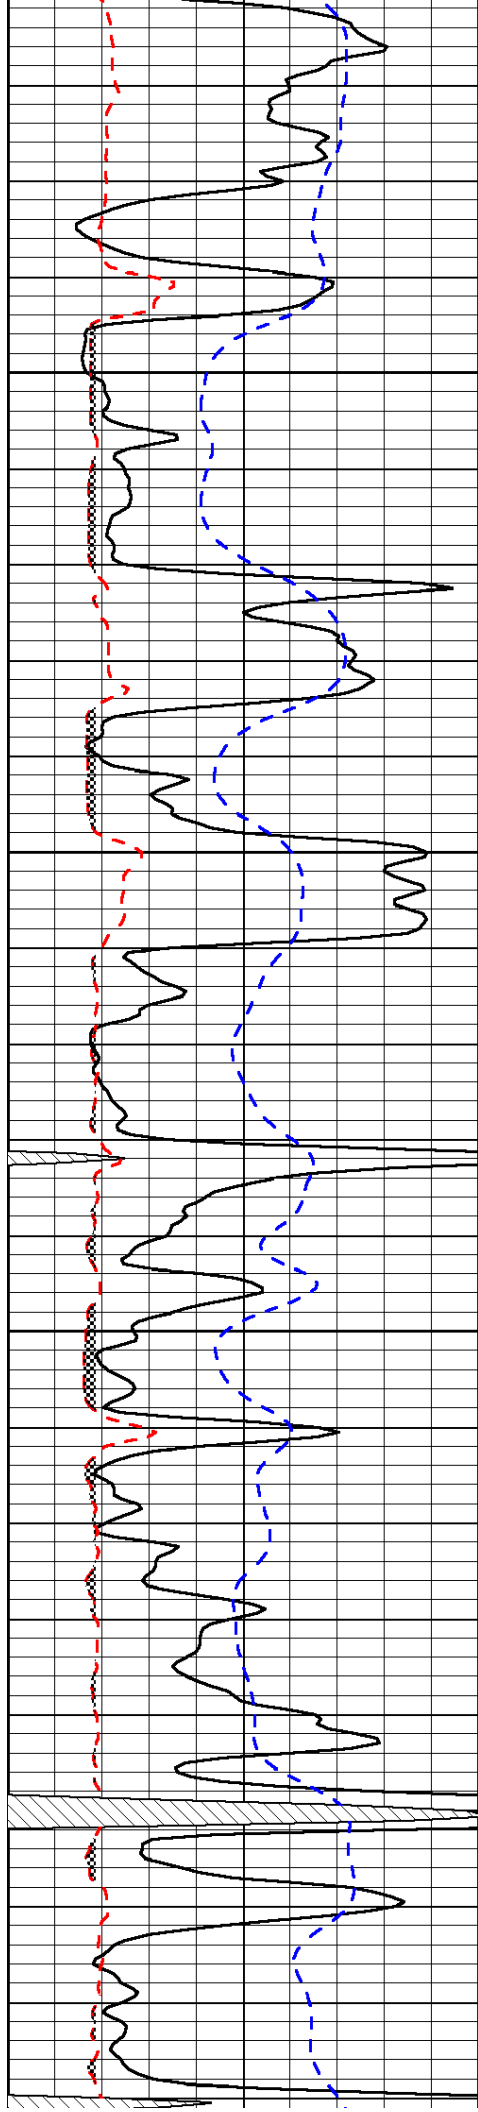


4050

4100

4150

4200

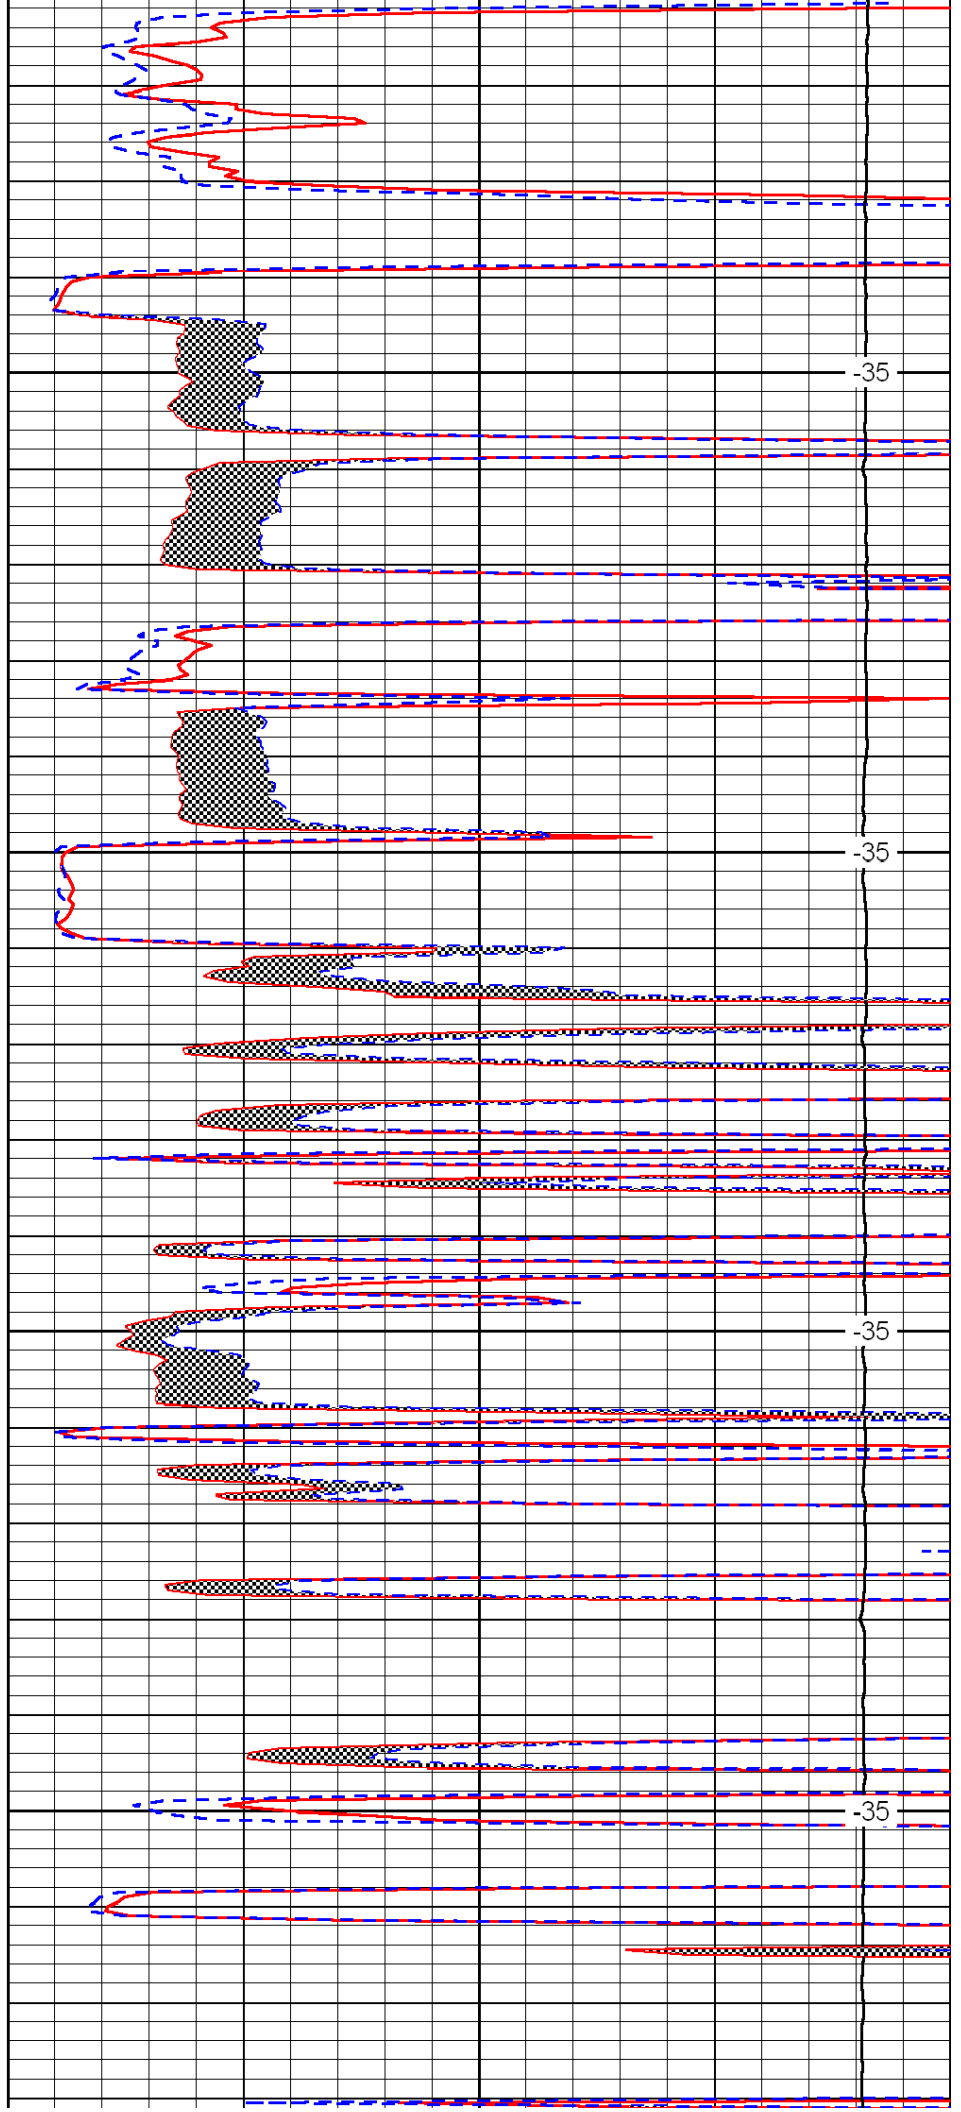


-35

-35

-35

-35

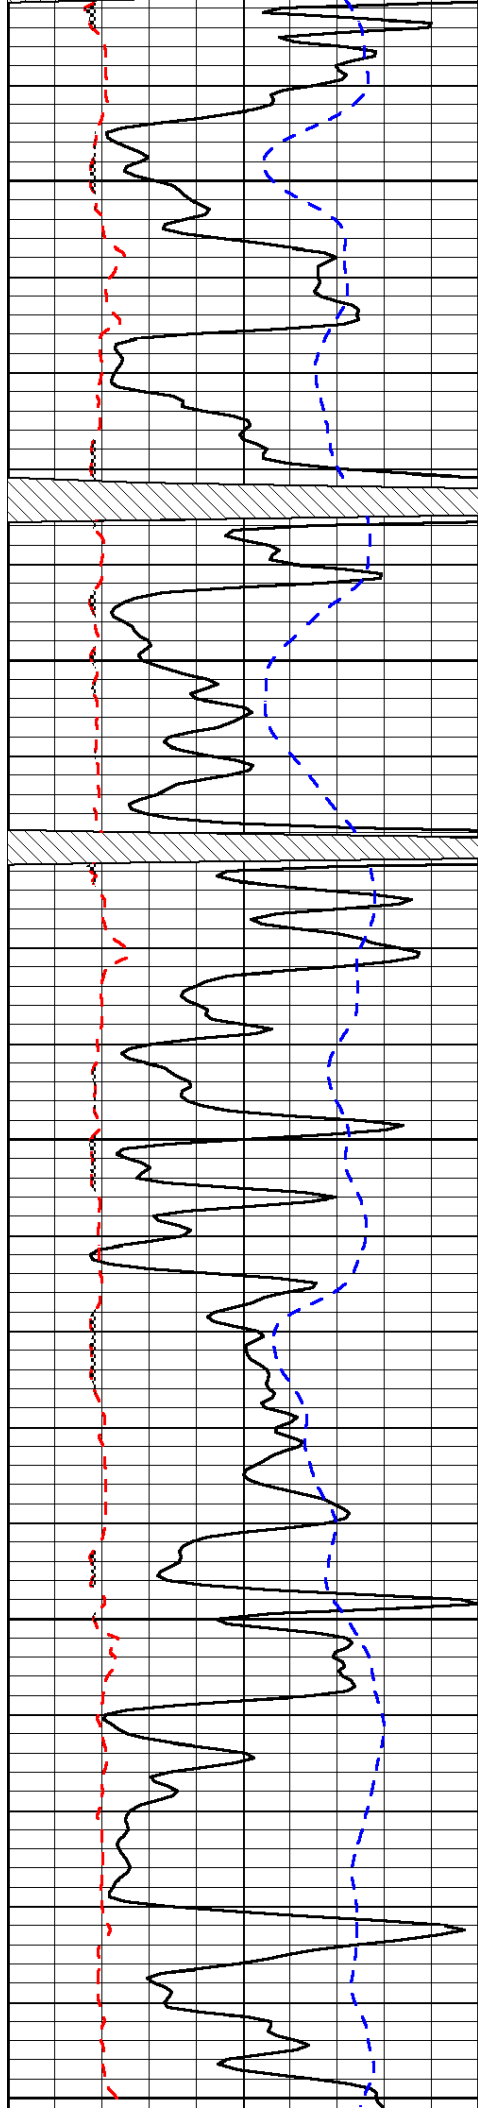


4250

4300

4350

4400

4450

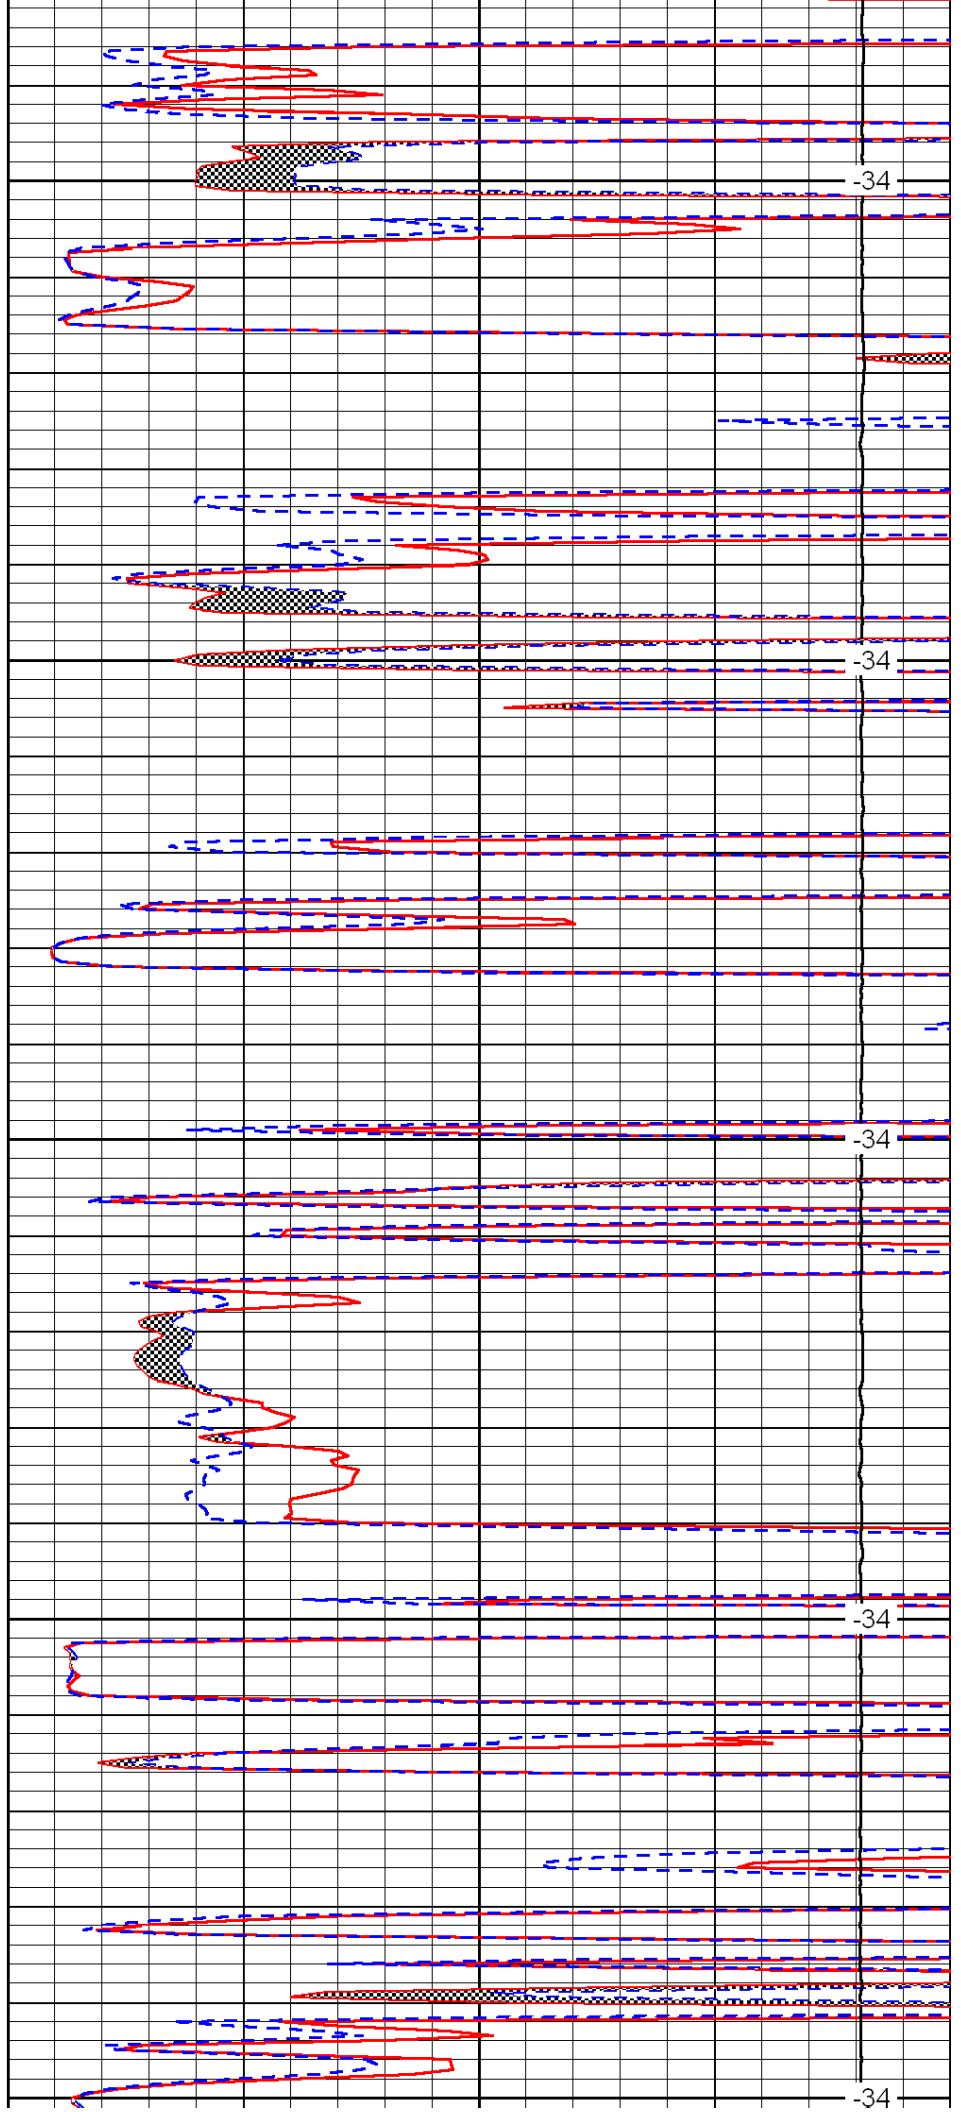


-34

-34

-34

-34

-34

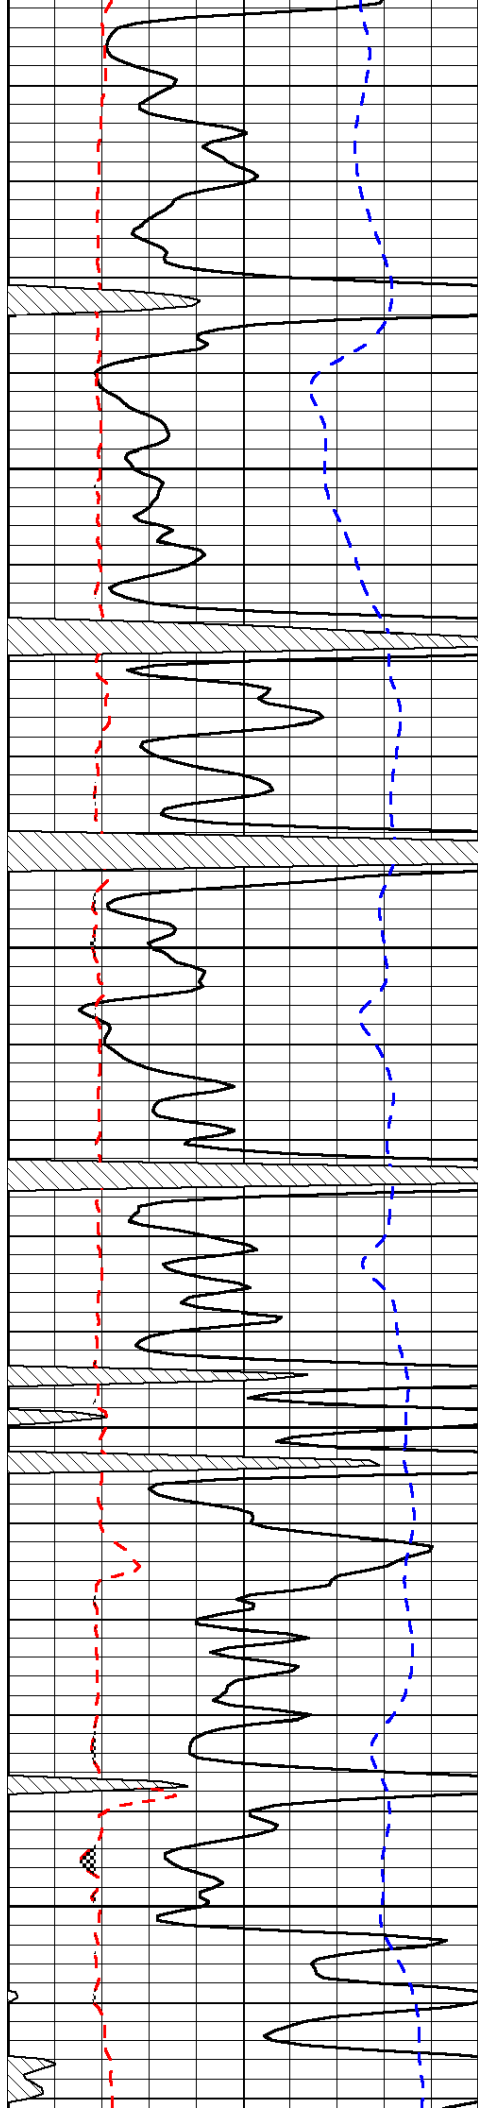



4500

4550


4600

4650

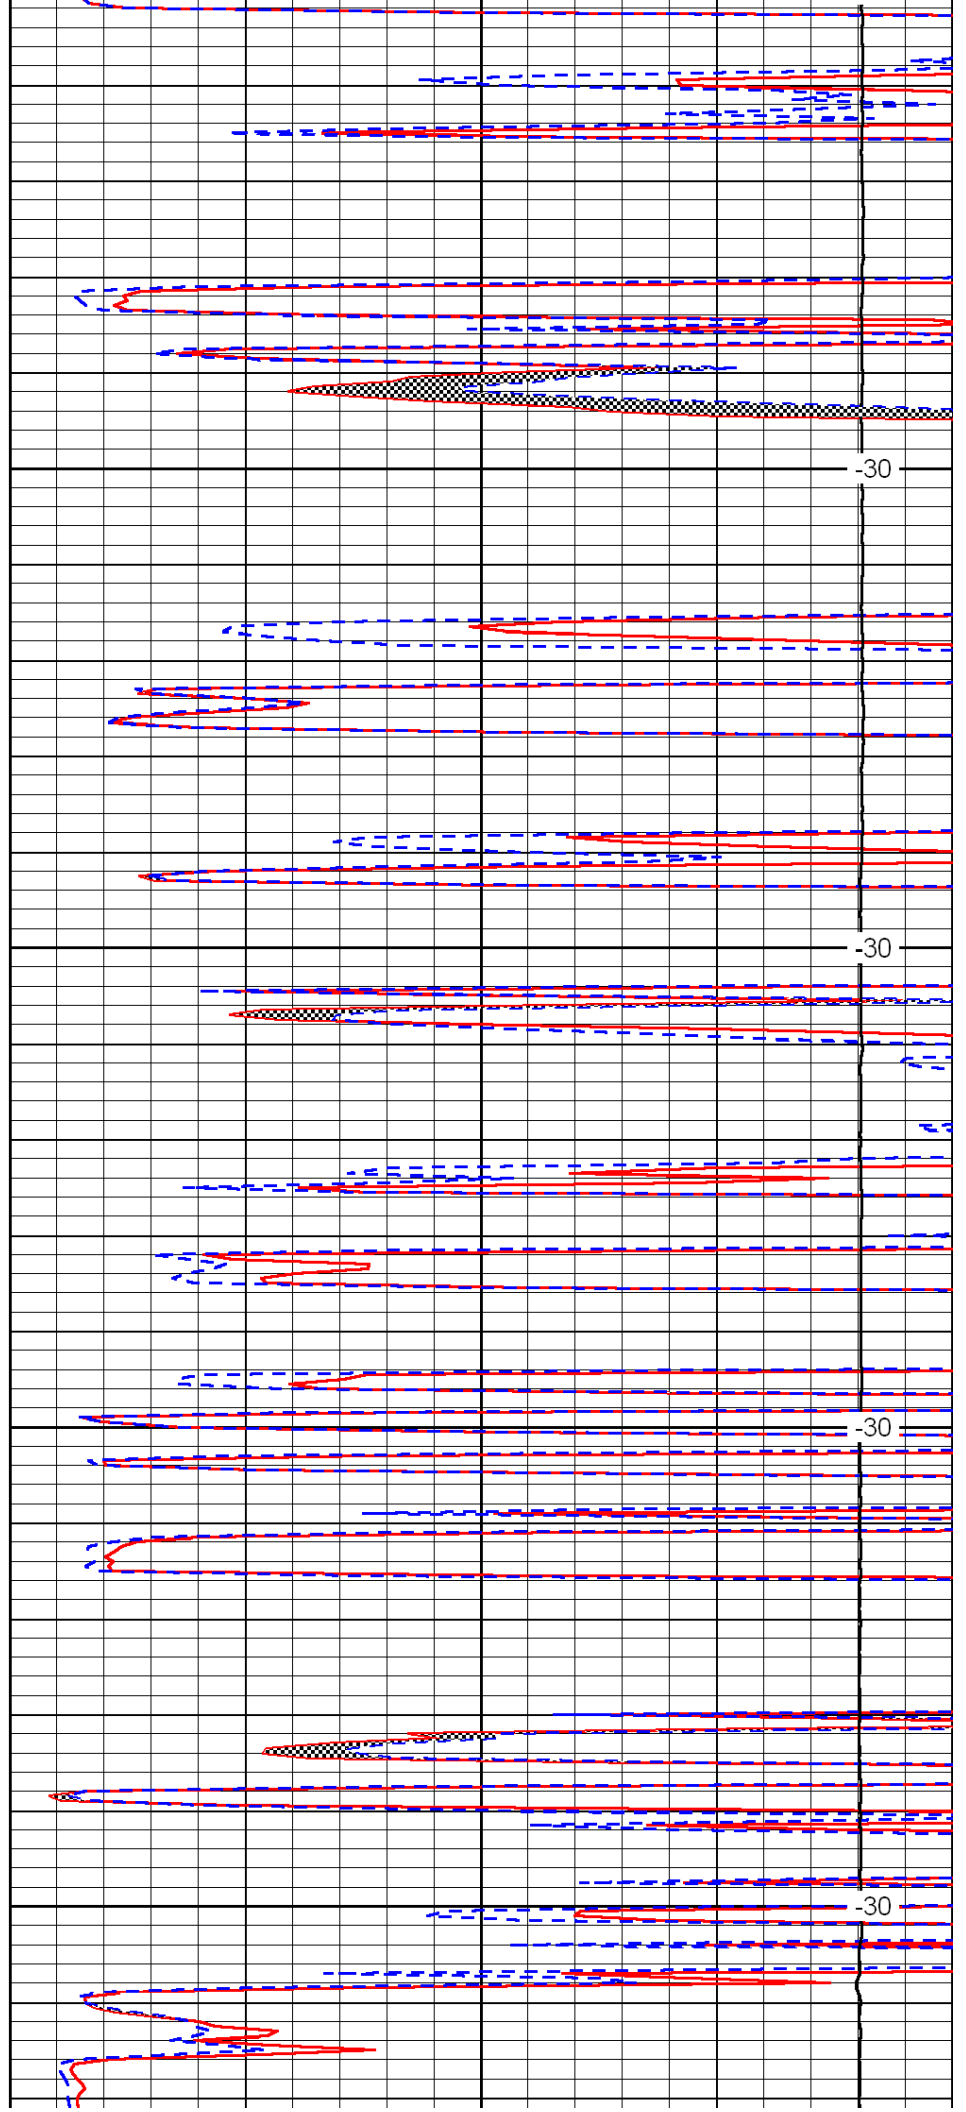

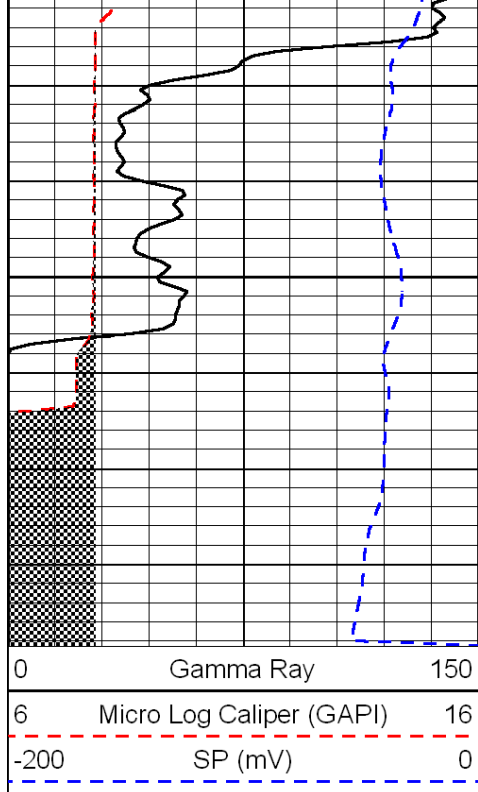

4700

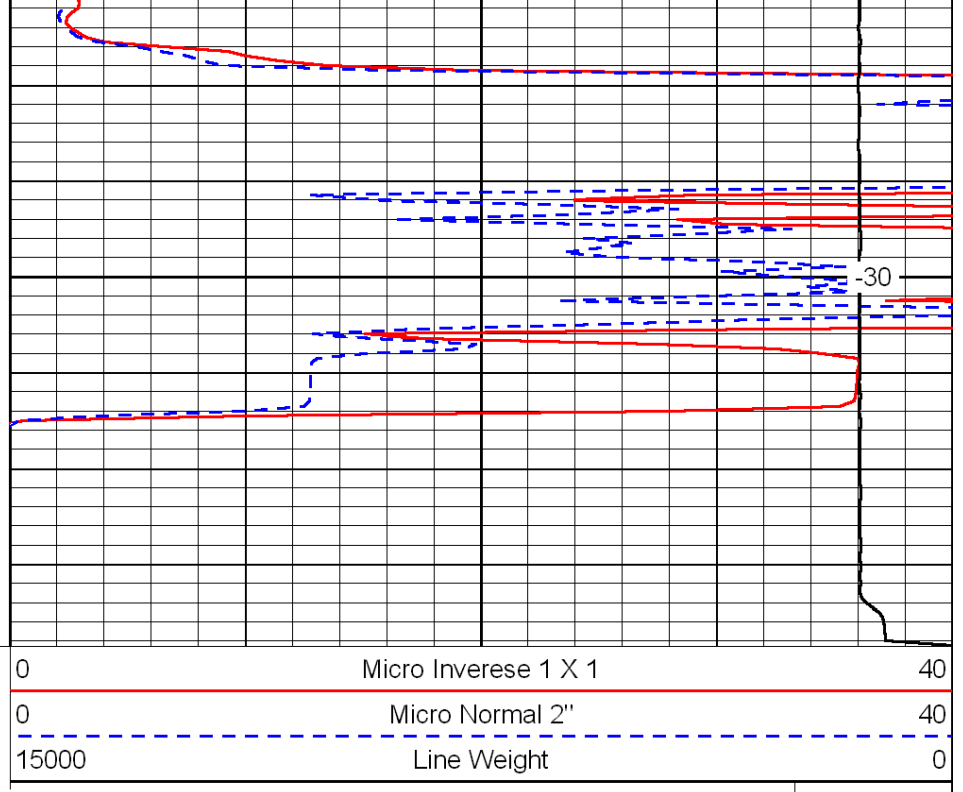

LSPD