



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company American Warrior, Inc.		
	Well Borger No. 1-3		
	Field Wildcat		
	County	Hodgeman State	Kansas
15-083-21,669-00-00	Location	690' FNL & 780' FEL	
	Sec: 3	Twp: 21 S	Rge: 25 W
Permanent Datum	Ground Level	Elevation 2358	Other Services CNL/CDL DIL
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum	K.B. 2369
Drilling Measured From	Kelly Bushing		D.F. 2358
Date	9/23/2010		
Run Number	Two		
Depth Driller	4540		
Depth Logger	4552		
Bottom Logged Interval	4551		
Top Log Interval	3600		
Casing Driller	8.625 @ 222		
Casing Logger	222		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4400		
Density / Viscosity	9.3 58		
pH / Fluid Loss	9.5 10.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.40 @ 75		
Rmf @ Meas. Temp	1.05 @ 75		
Rmc @ Meas. Temp	1.89 @ 75		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.86 @ 121		
Operating Rig Time	3-1/2 Hours		
Max Rec. Temp. F	121		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Jason Alm		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858
Ness City, Ks;
West to Laird Station; 1/2 West;
South to County Line; 1 East;
South into

Database File: c:\warrior\data\amwar_borger no. 1-3\amwarhd.db
Dataset Pathname: DIL\awstk
Presentation Format: micro
Dataset Creation: Thu Sep 23 11:09:02 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

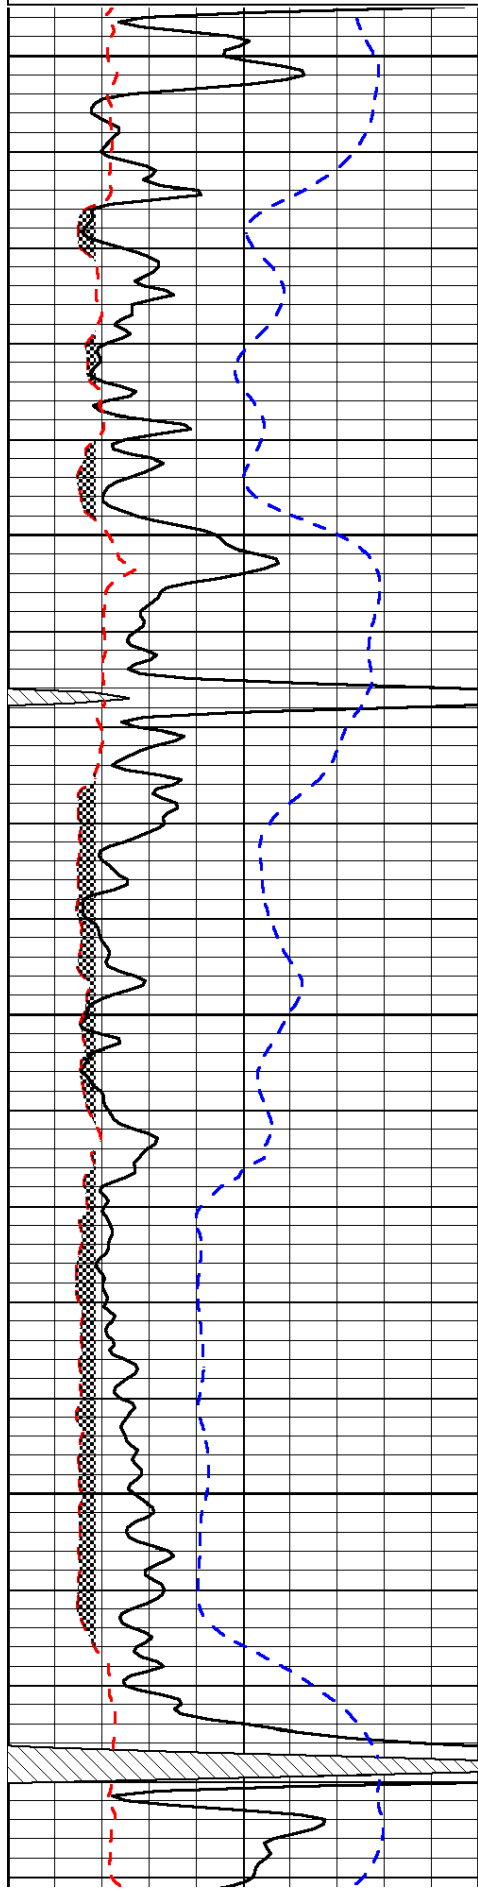


3600

3650



3700


3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

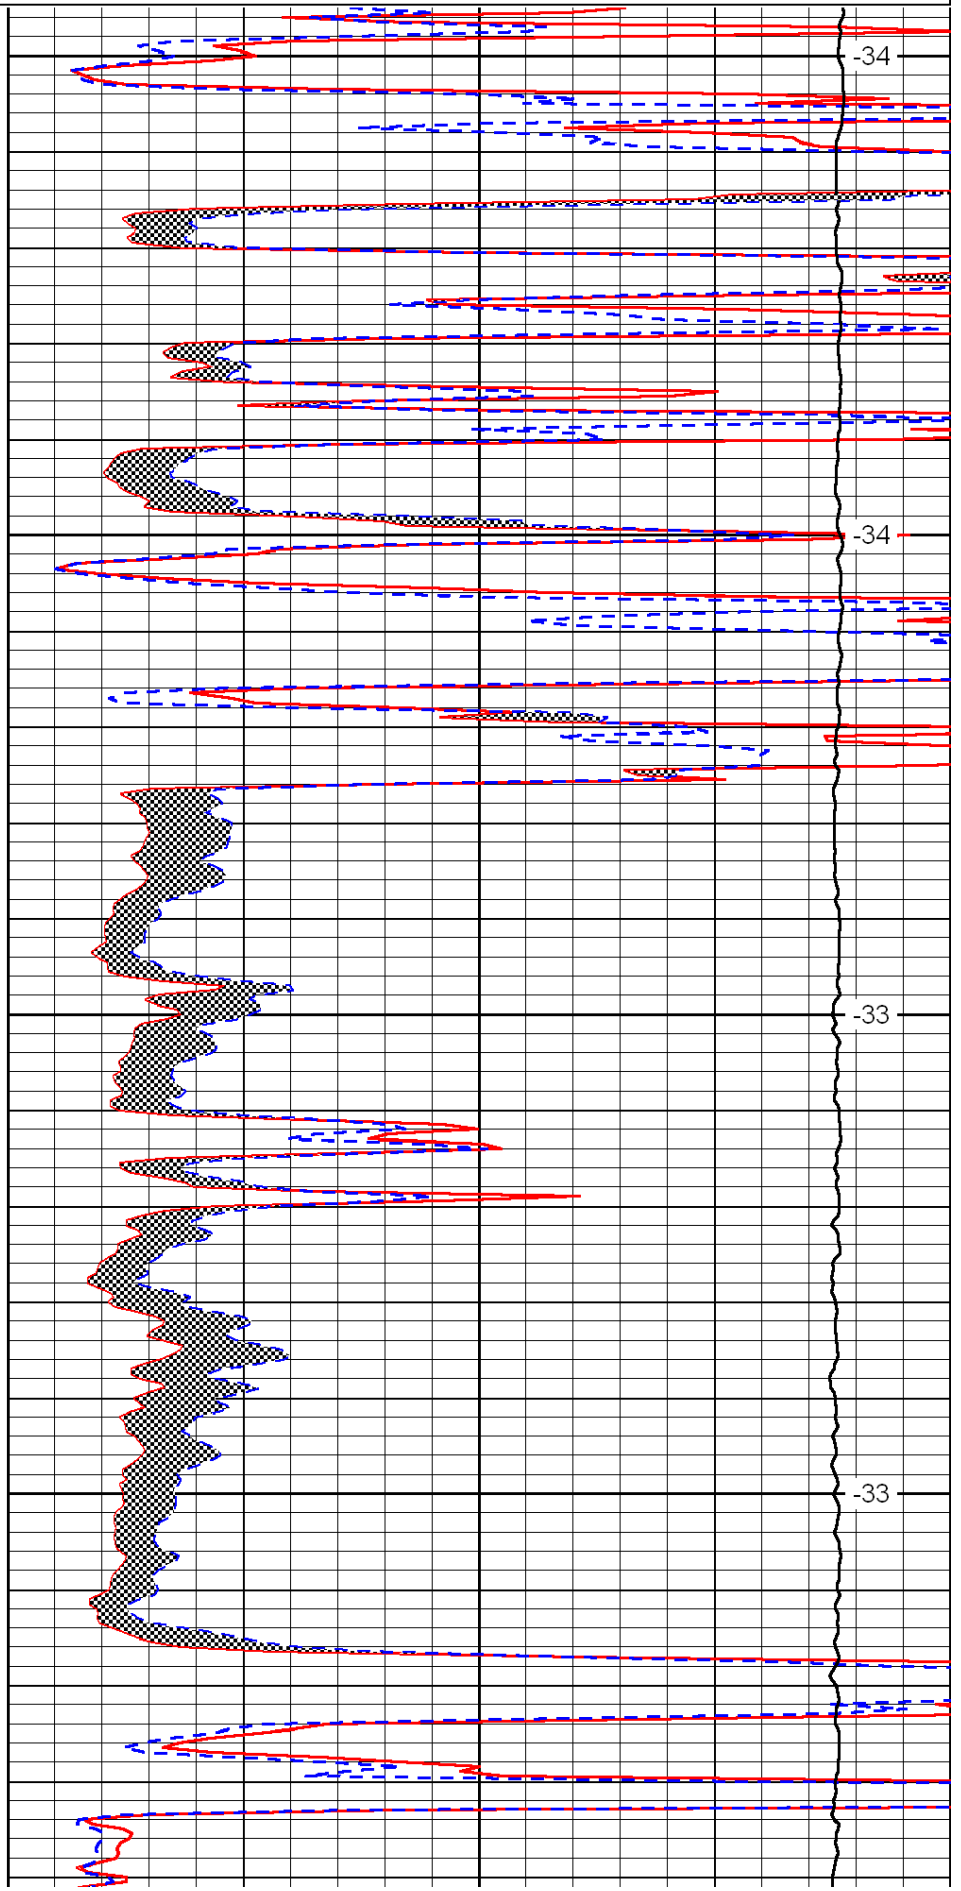

LSPD

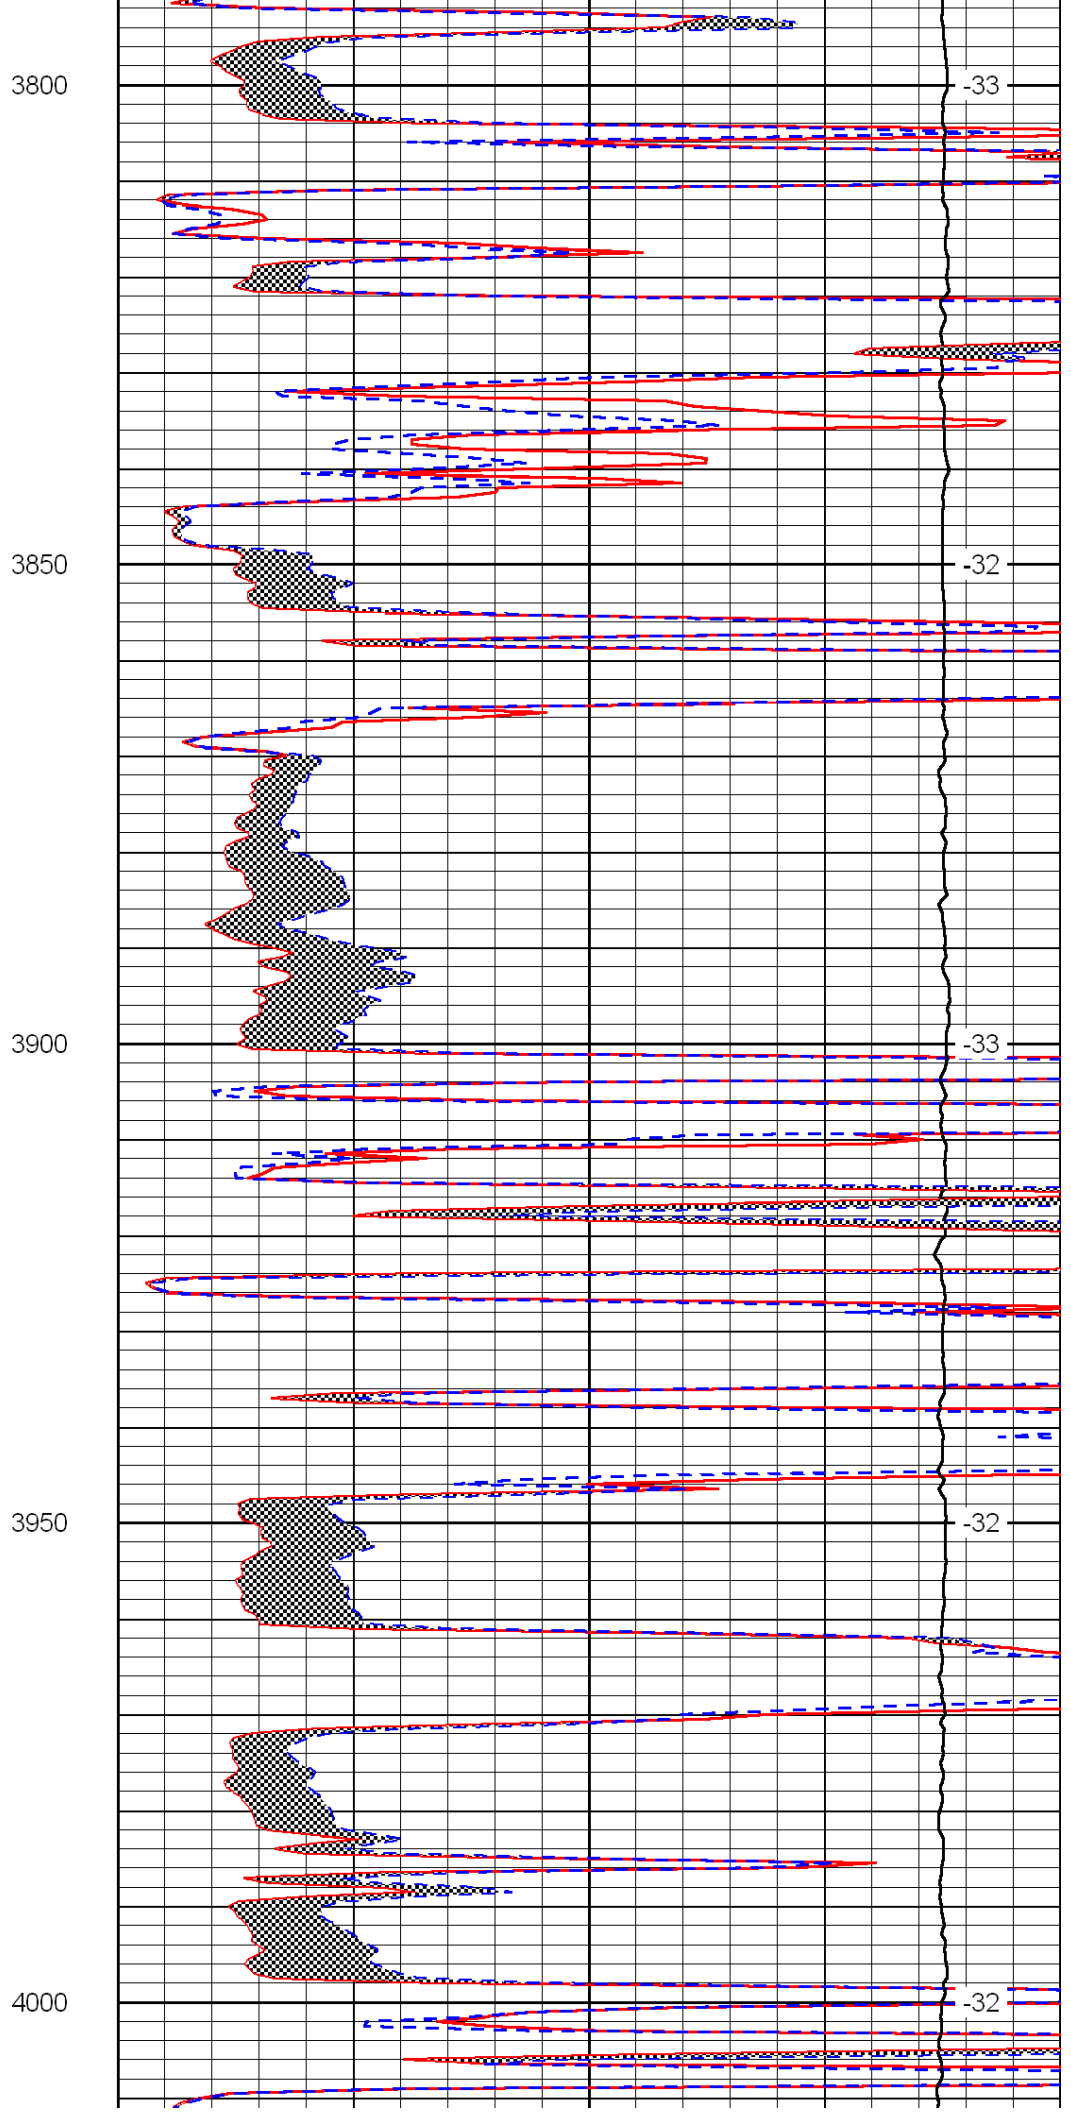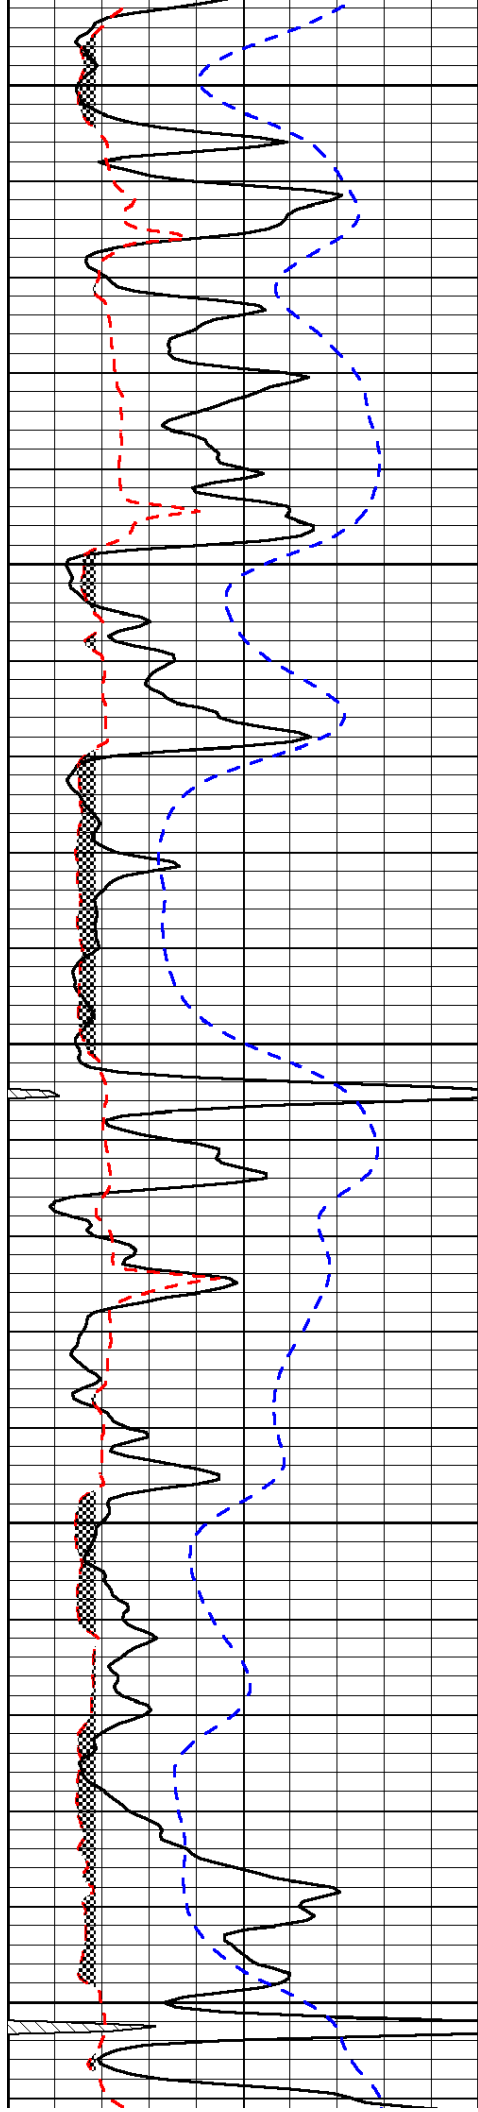

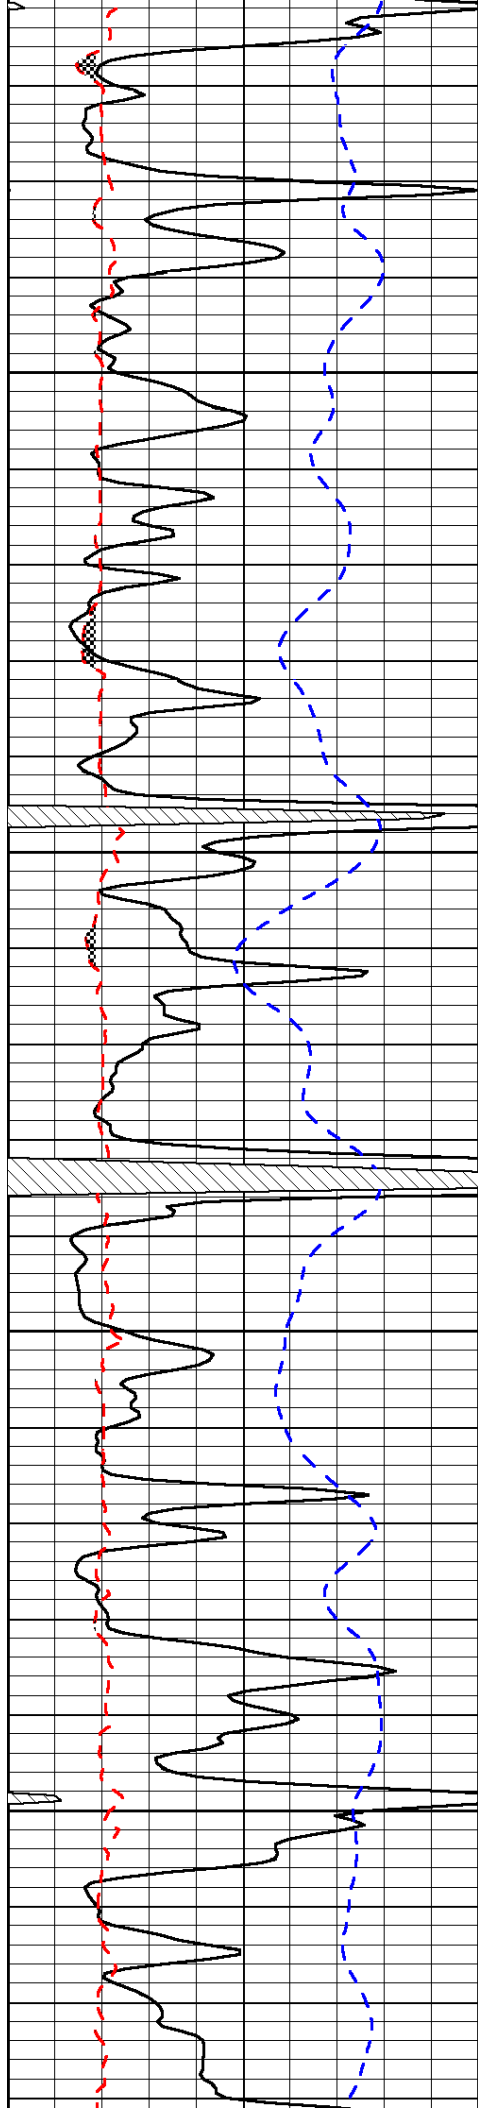



4050

4100

4150

4200

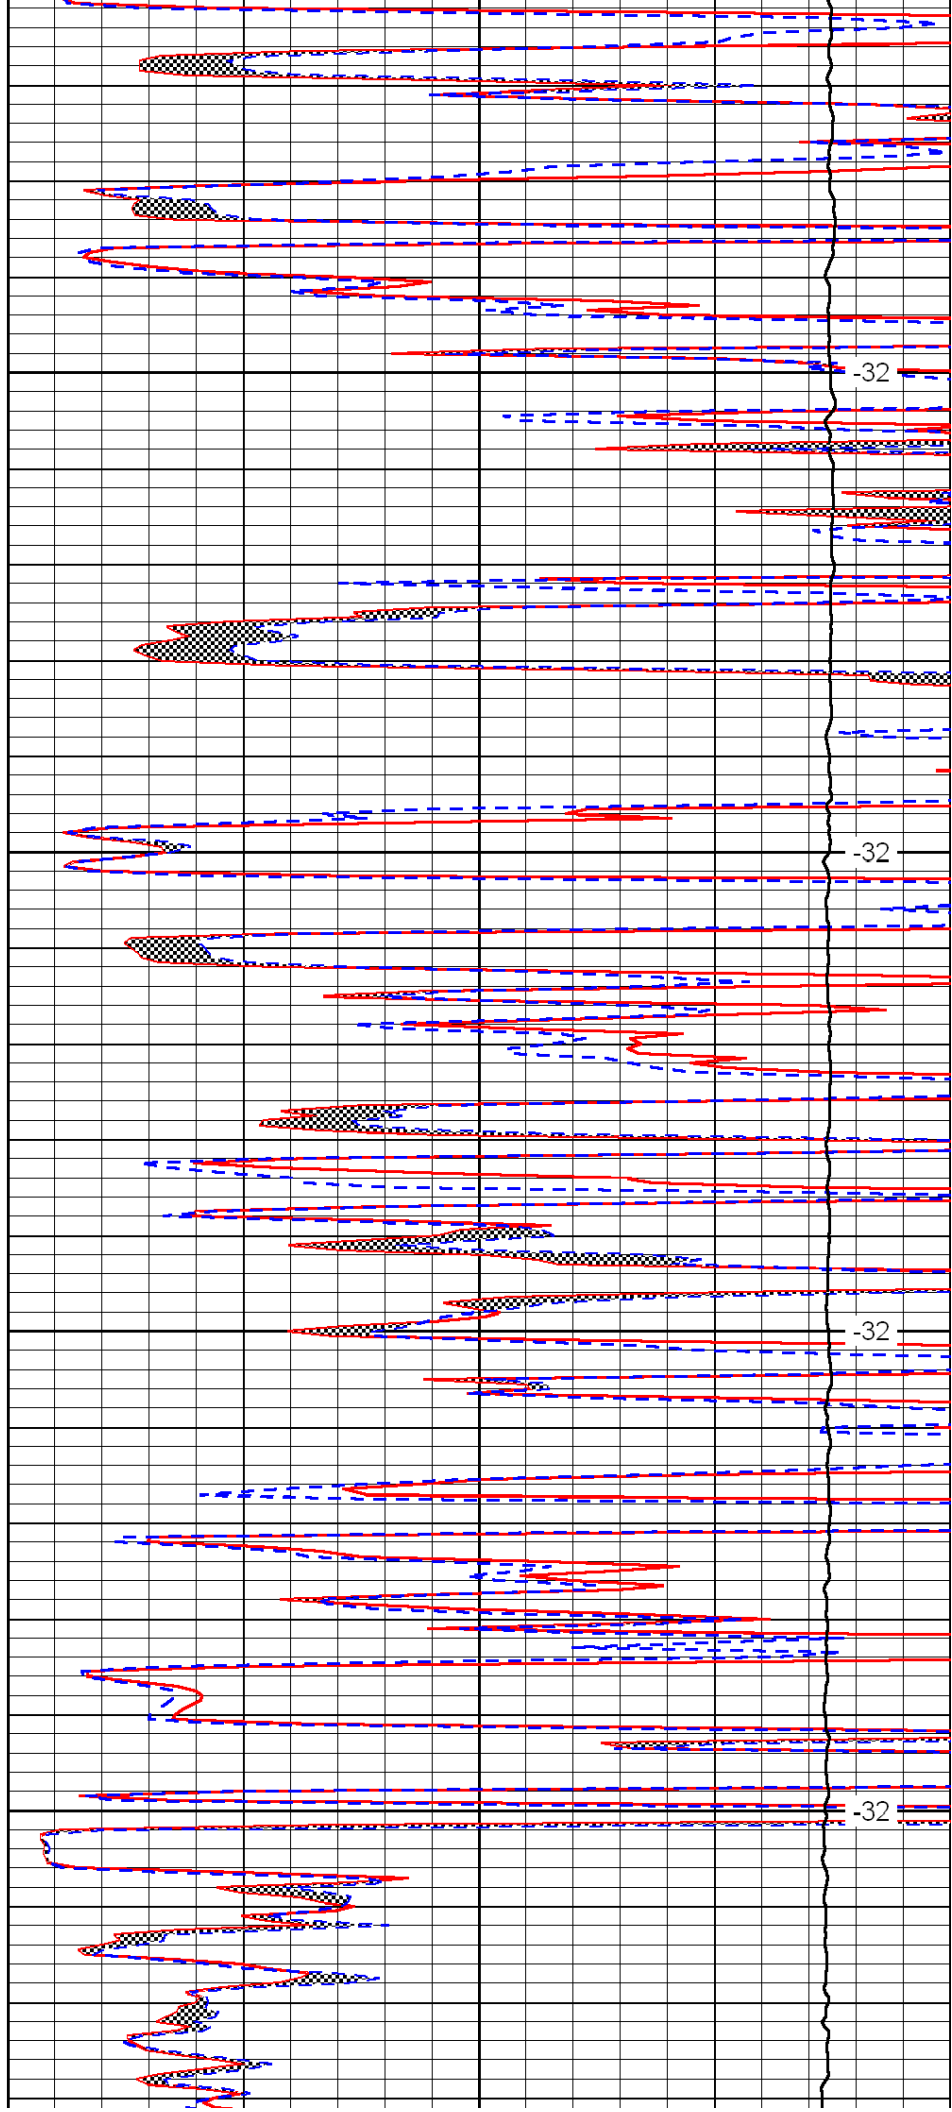

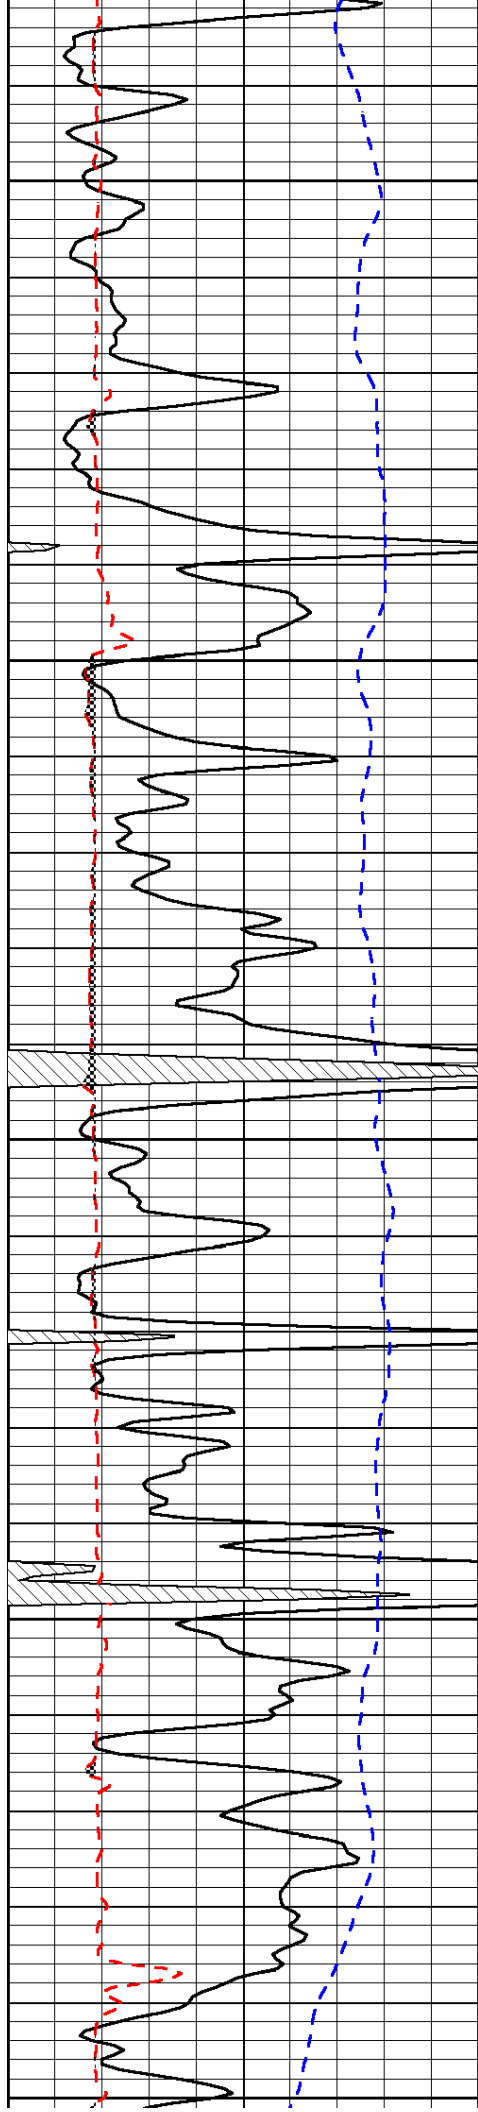


4250

4300

4350

4400

4450

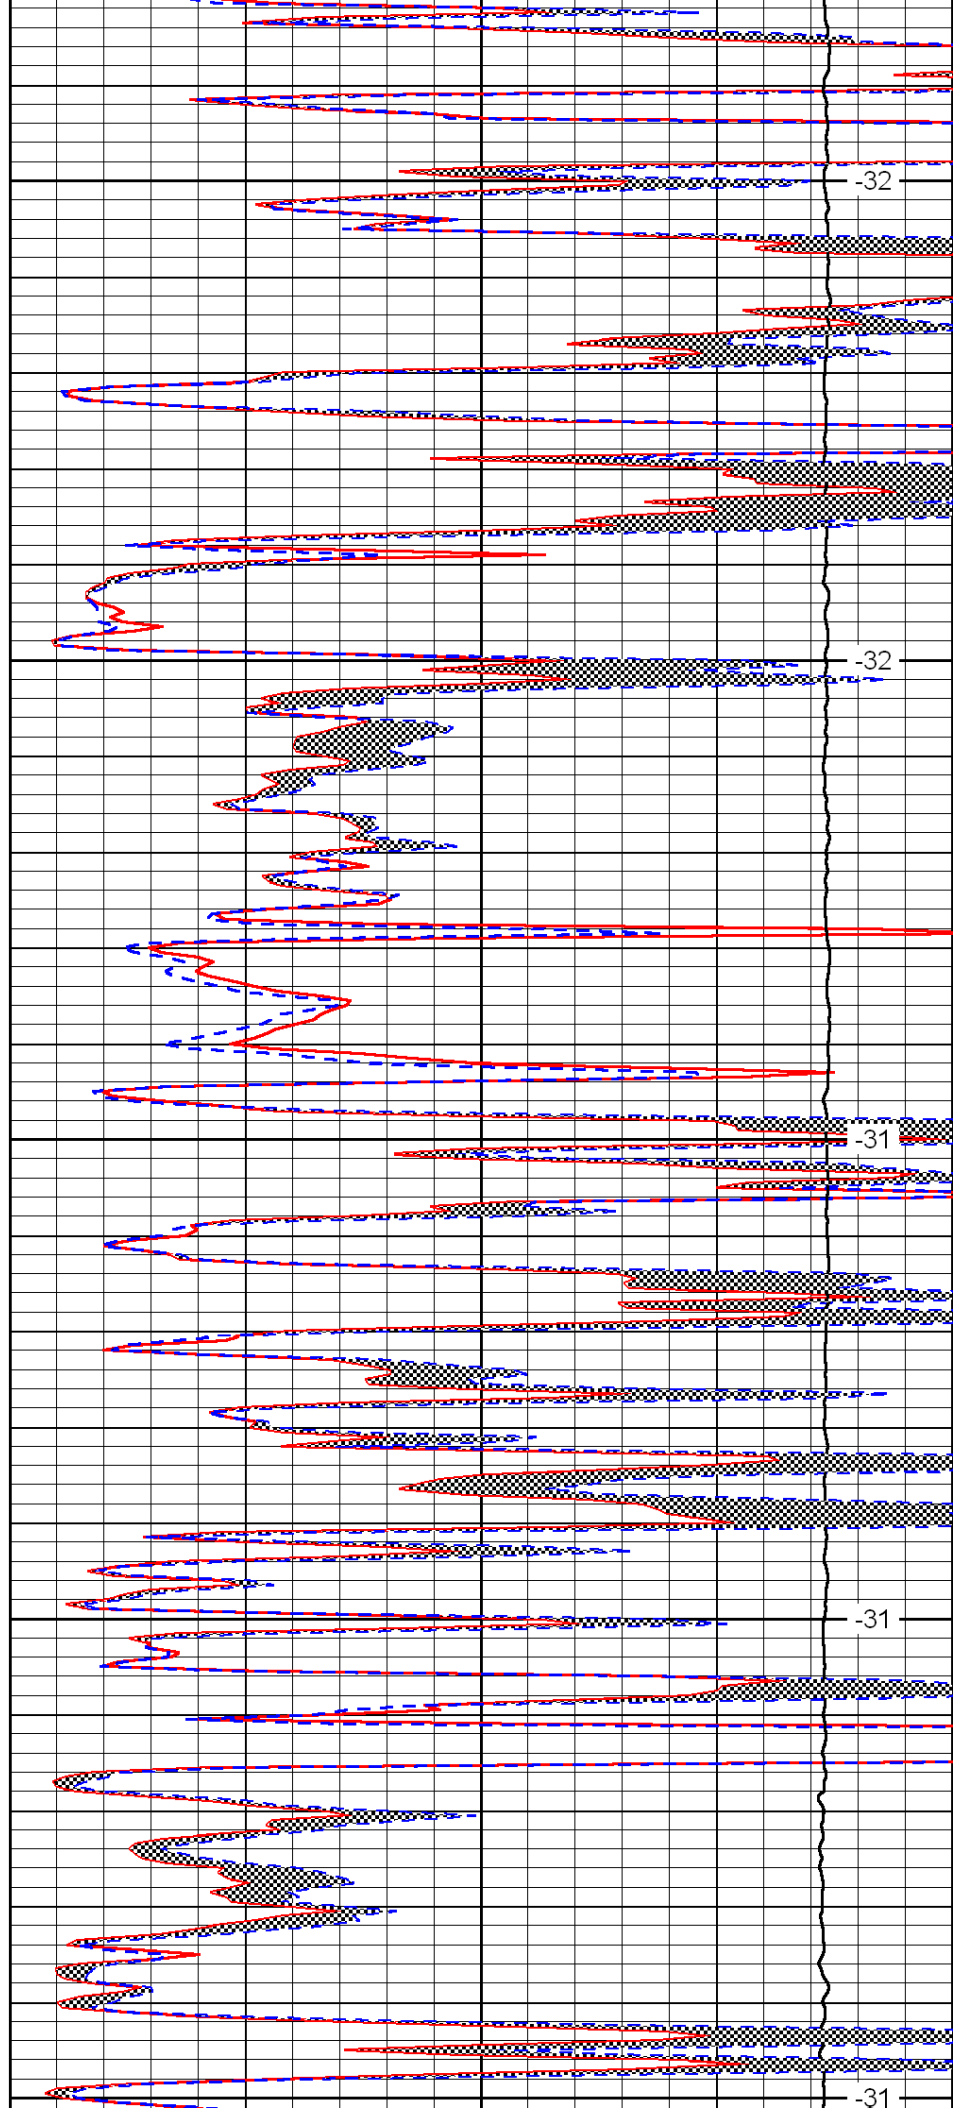


-32

-32

-31


-31

-31

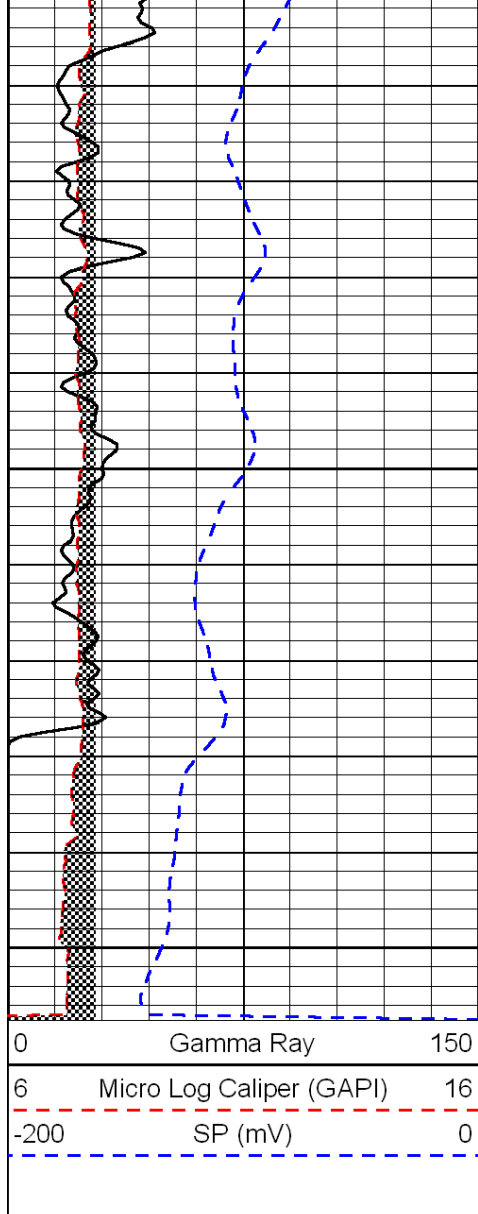

4500

4550

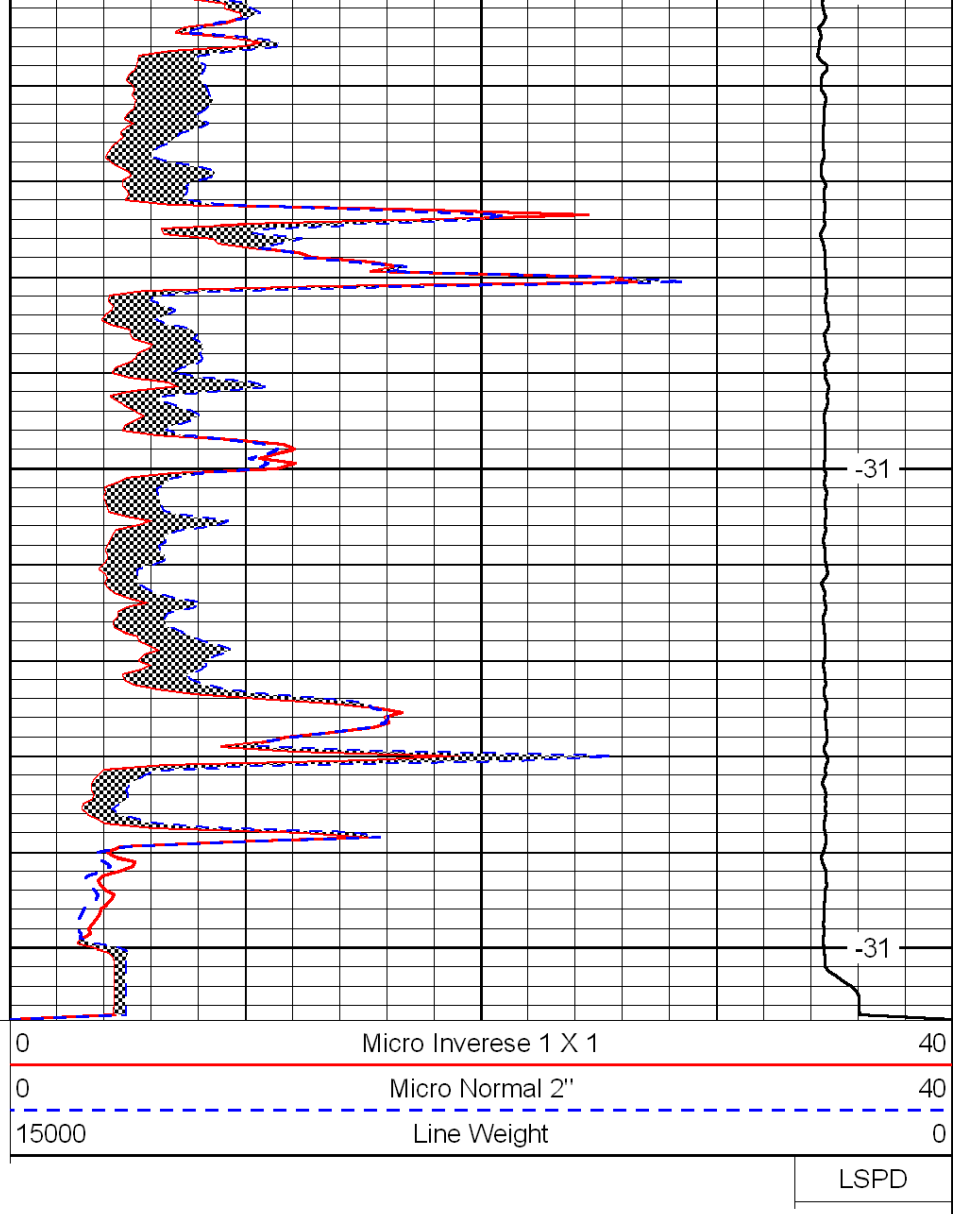

-31

-31

LSPD