

15-039-00146-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

DECATUR County. Sec. 16 Twp. 5S Rge. 29W (E) (W)
NW NW NE

Location as "NE/CNW/SW" or footage from lines
Lease Owner **K & E DRILLING, INC.**
Lease Name **KOERPERICH** Well No. **1**
Office Address **719 Union Center, Wichita 2, Kansas**
Character of Well (completed as Oil, Gas or Dry Hole) **D & A**
Date well completed **November 21, 1959** 19
Application for plugging filed **November 21, 1959** 19
Application for plugging approved **November 21, 1959** 19
Plugging commenced **November 21, 1959** 19
Plugging completed **November 21, 1959** 19
Reason for abandonment of well or producing formation _____

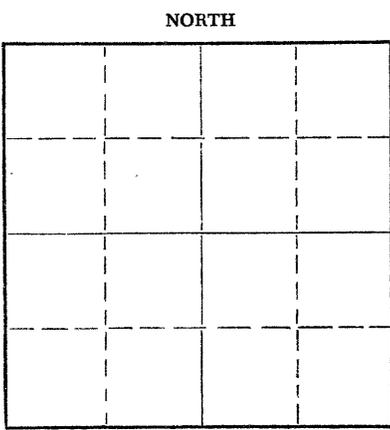

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? **yes**

Name of Conservation Agent who supervised plugging of this well **A. D. Fabricius**
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well **4420'** Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	254'	----

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 500' set plug with 20 sx cement thru drill pipe.
Filled with heavy mud to 250' set plug with 20 sx cement thru drill pipe.
Filled with heavy mud to 40' set solid bridge with 1/2 sx hulls & 10 sx cement to base of cellar. Job complete 11-21-59.

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1959
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet.)
Name of Plugging Contractor **K & E DRILLING, INC.** 12-3-59
Address **719 Union Center, Wichita 2, Kansas**

STATE OF **KANSAS**, COUNTY OF **SEDGWICK**, ss.
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Dale Silcott*
Dale Silcott, of K & E DRILLING, INC.
719 Union Center, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this **2nd** day of **December** 19 **59**

My commission expires **August 11th, 1962.**
Patricia M. Edwards, Notary Public.



15-039-00146-00-00

DRILLER'S WELL LOG

OPERATOR: **K & E DRILLING, INC.**
719 Union Center
Wichita 2, Kansas

WELL NAME: **#1 KOERPERICH**
LOCATION: **NW NW NE**
Sec. 16-5S-29W
DECATUR CO, KANSAS

CONTRACTOR: **K & E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: **November 12, 1959**

CASING RECORD: **8-5/8" @ 254 (200 sz cmt)**

COMPLETED: **November 21, 1959**

ELEVATION: **2778' KB**

ROTARY TOTAL DEPTH: **4420'**

PRODUCTION: **D & A**

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Sandy Clay	20
Sand	170
Blue Shale	195
Sand	215
Shale	1520
Sand & Shale	1700
Shale & Shells	1830
Shale	1860
Sand	2056
Shale	2150
Shale & Shells	2220
Anhydrite	2255
Shale & Shells	2355
Shale	2485
Red Bed	2512
Anhydrite	2545
Shale	2925
Lime	2945
Lime & Shale	3340
Lime	3700
Lime & Shale w/ sm red bed	3775
Lime	4130
Lime & Shale	4313
Lime	4420
R.T.D.	4420'

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1959
CONSERVATION DIVISION
Wichita, Kansas
12-3-59

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, Dale Silcott of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Dale Silcott

Dale Silcott

Subscribed and sworn to before me this 2nd day of December, 19 59.

Patricia M. Edwards

Patricia M. Edwards, Notary Public.

My Commission expires: August 11th, 1962.

