



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.		Company Pickrell Drilling Company, Inc.			
		Well Nuttle "A" No. 1 OWWO			
		Field Wildcat			
		County	Ness	State	Kansas
15-135-24710-00-01		Location	N/2 SW SW NE 2260' FNL & 2310' FEL		Other Services CNL / CDL
		Sec: 19	Twp: 16S	Rge: 24W	
Permanent Datum		Ground Level	Elevation 2550		Elevation K.B. 2555 D.F. 2553 G.L. 2550
Log Measured From		Kelly Bushing	5 Ft. Above Perm. Datum		
Drilling Measured From		Kelly Bushing			
Date		9/19/2010			
Run Number		One			
Depth Driller		4600			
Depth Logger		4607			
Bottom Logged Interval		4606			
Top Log Interval		4200			
Casing Driller		8.625 @ 265			
Casing Logger		265			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		3000			
Density / Viscosity		9.4	53		
pH / Fluid Loss		7.5	9.6		
Source of Sample		Flowline			
Rm @ Meas. Temp		.8 @ 70			
Rmf @ Meas. Temp		.6 @ 70			
Rmc @ Meas. Temp		1.08 @ 70			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.45 @ 124			
Operating Rig Time		2 Hours			
Max Rec. Temp. F		124			
Equipment Number		17			
Location		Hays			
Recorded By		R. Barnhart			
Witnessed By		Jerry Smith			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Arnold, KS:
2E, 1/4N, W into

Database File: c:\warrior\data\pickrell_nuttle a no. 1 owwo\pickrel.db
Dataset Pathname: dil/pickmain
Presentation Format: dil
Dataset Creation: Mon Sep 20 02:05:56 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD

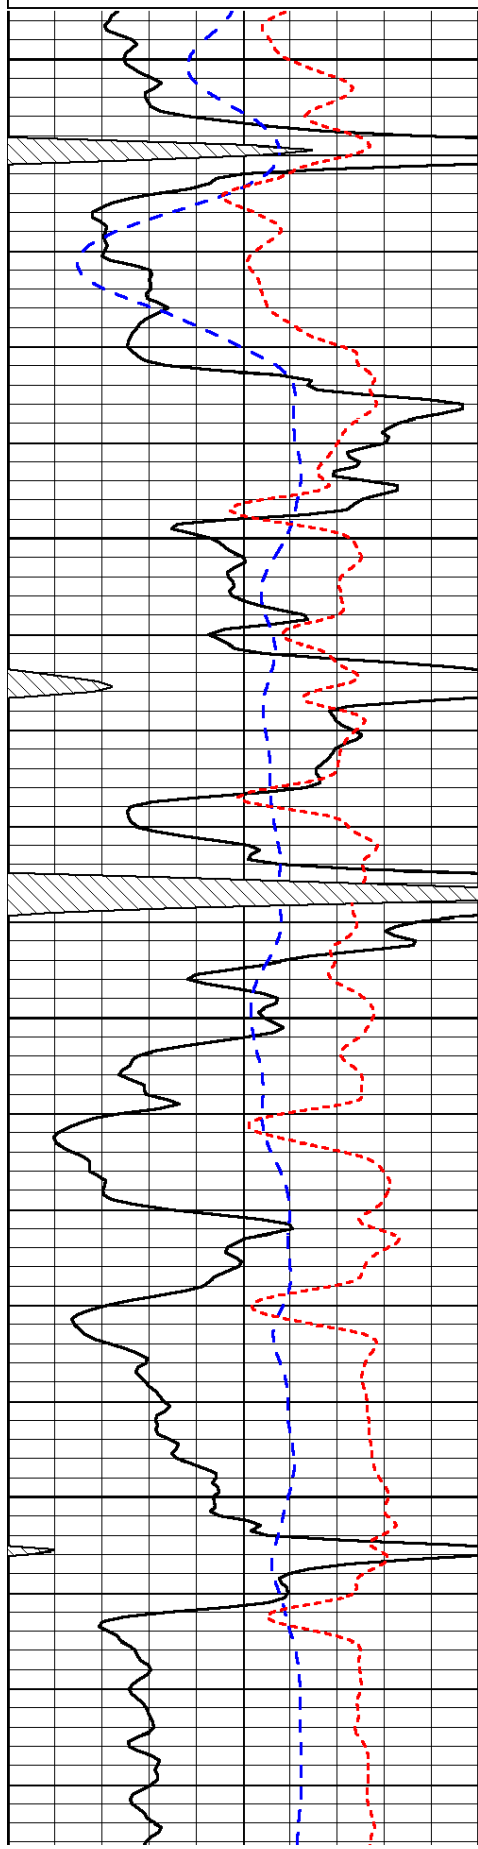



4200

4250

4300

4350

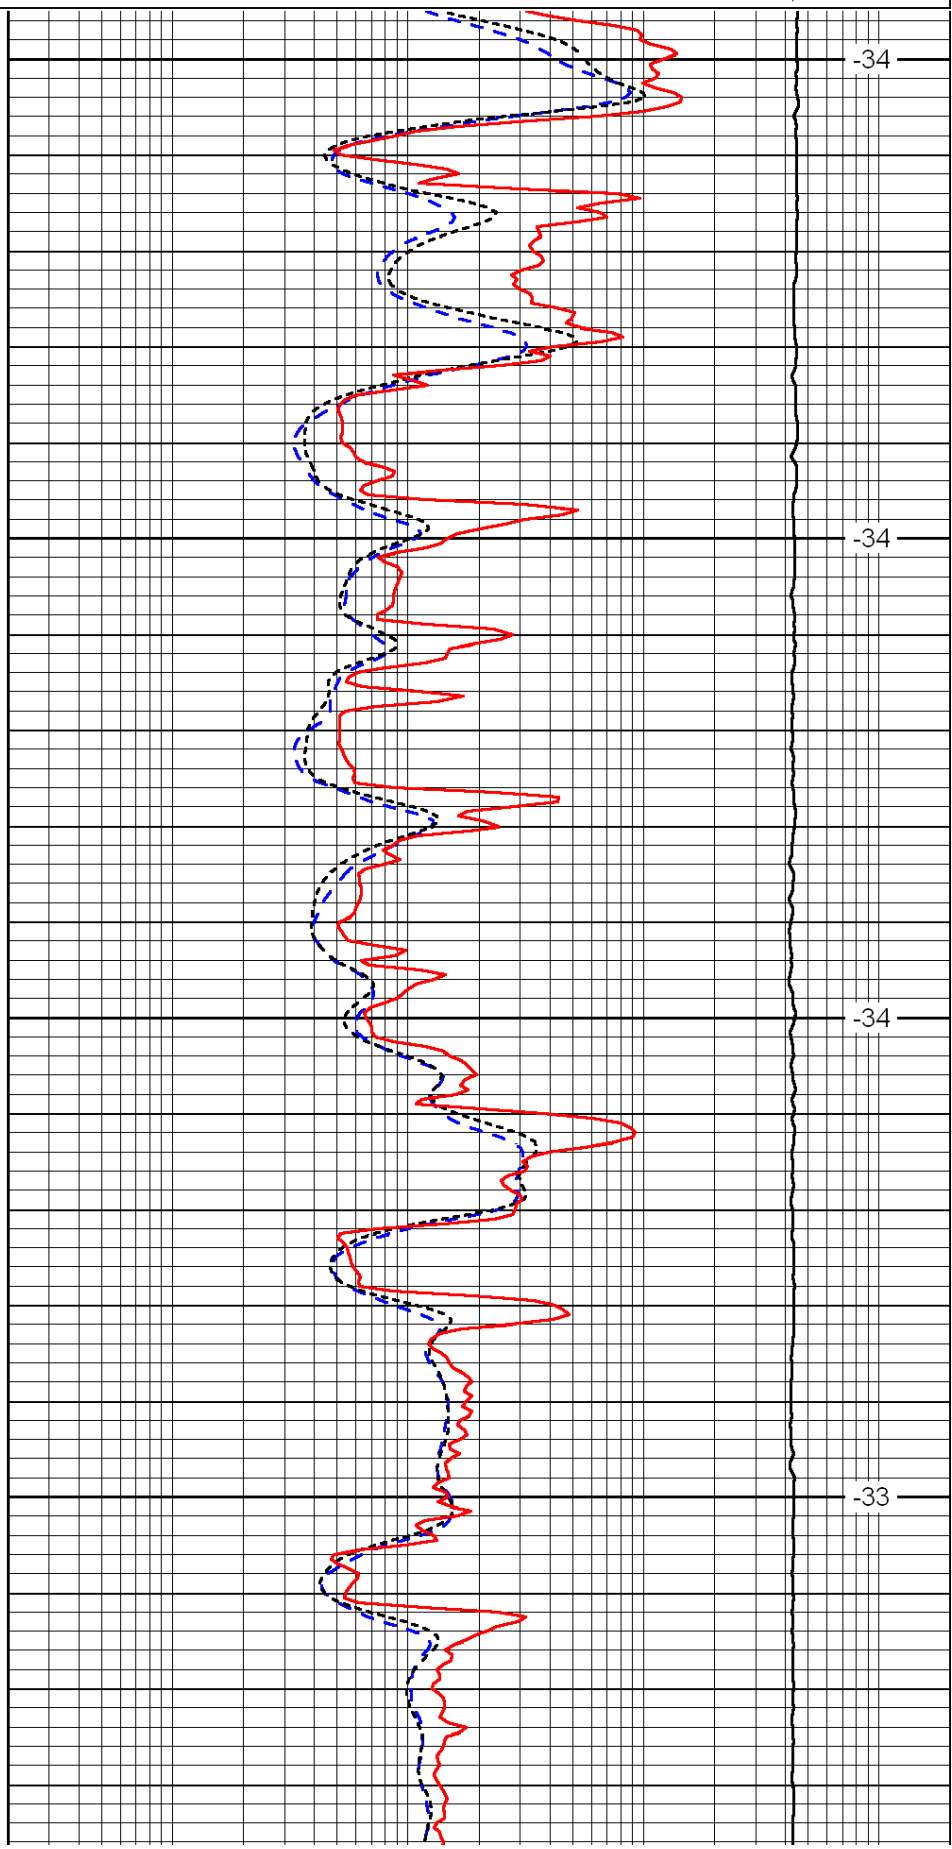

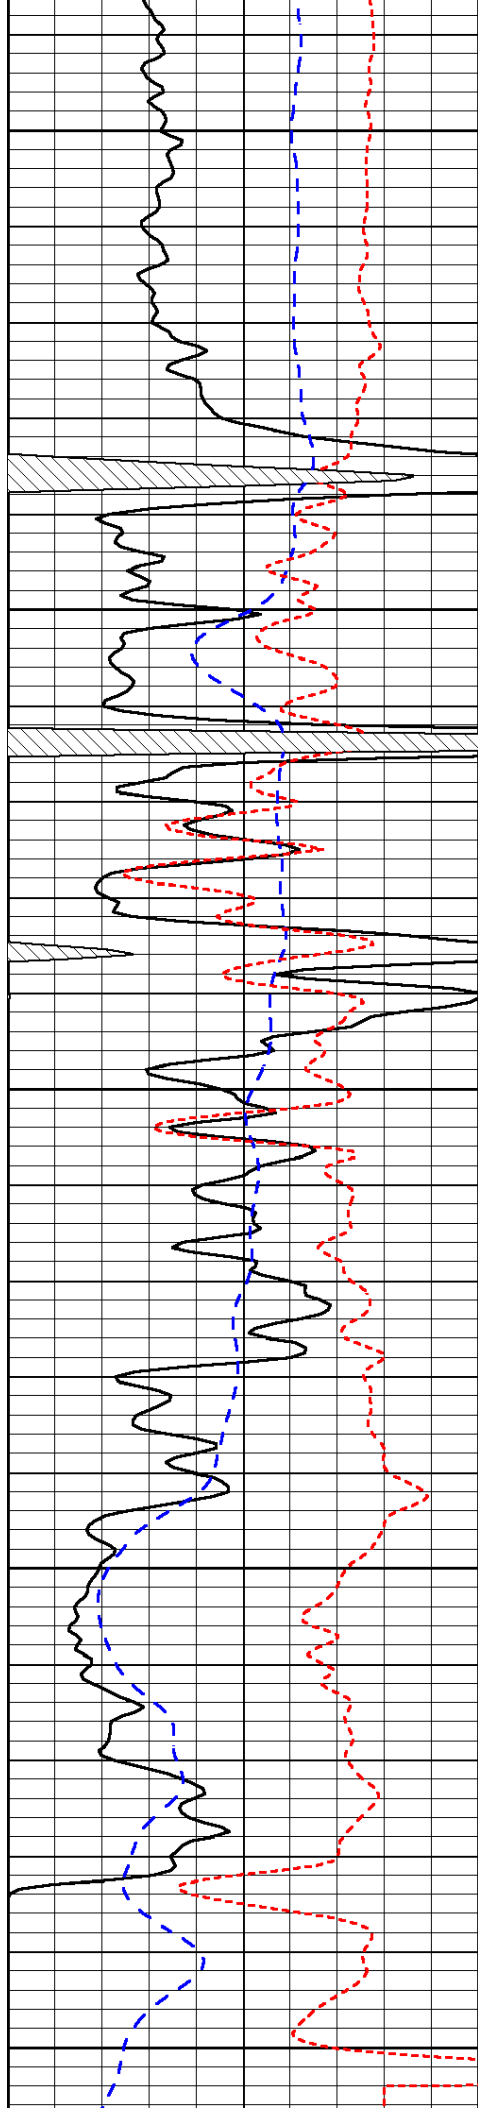


4400

4450

4500

4550

4600

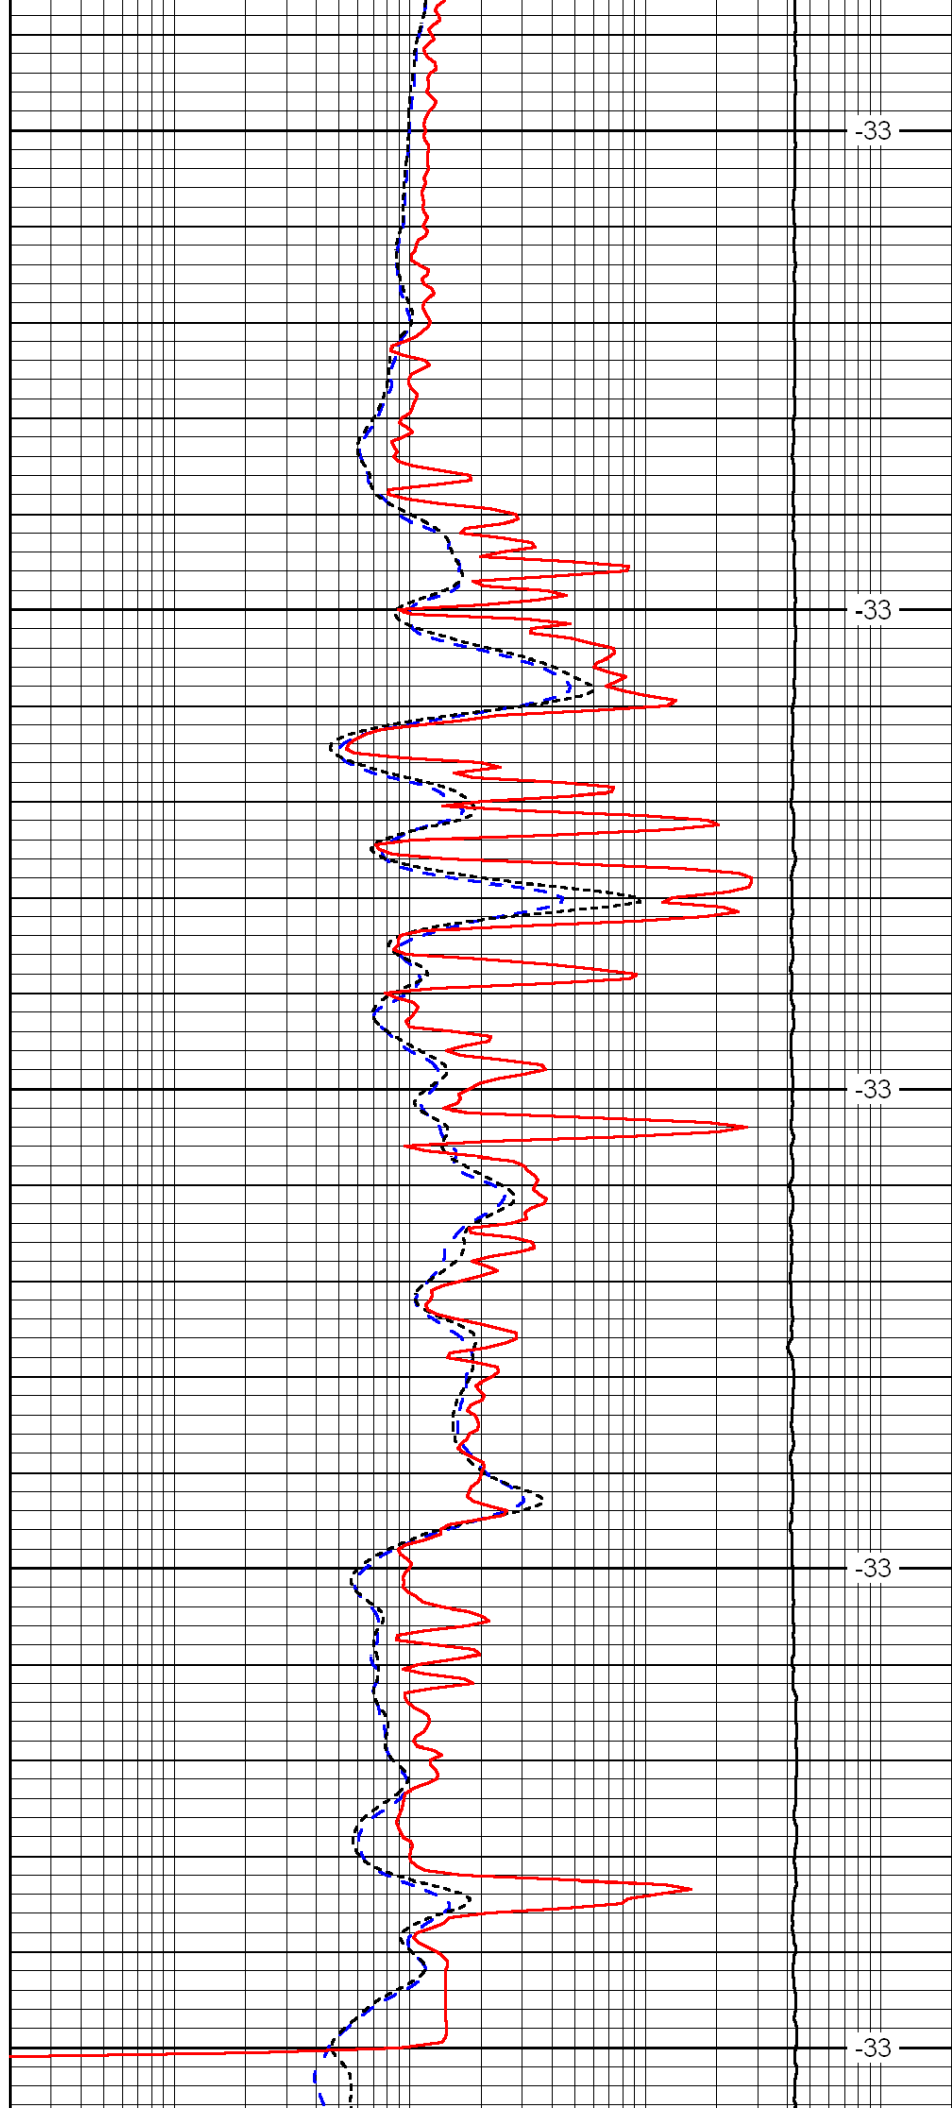



-33

-33

-33

-33

-33

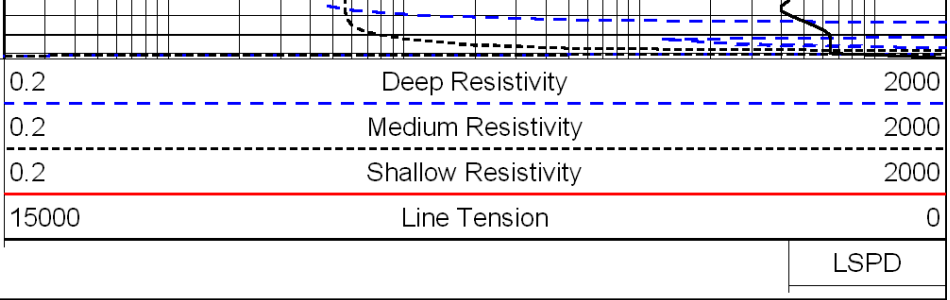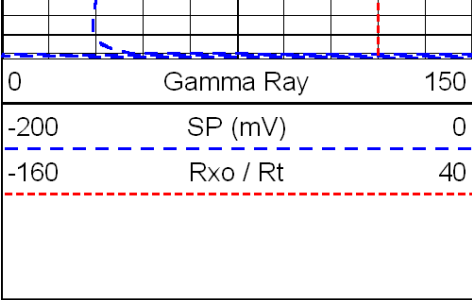

LSPD