



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.	15-101-22,244-00-00		
Company	Larson Engineering, Inc.		
Well	Stormont No. 2-27		
Field	Stormont		
County	Lane	State	Kansas
Location	580' FSL & 2222' FWL		Other Services CNL/CDL MEL
Sec: 27	Twp: 19 S	Rge: 28 W	Elevation K.B. 2775 D.F. 2768 G.L. 2768
Permanent Datum	Ground Level	Elevation 2768	
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	7/07/2010		
Run Number	One		
Depth Driller	4700		
Depth Logger	4702		
Bottom Logged Interval	4701		
Top Log Interval	250		
Casing Driller	8.625 @ 259		
Casing Logger	256		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.600		
Density / Viscosity	9.1 54		
pH / Fluid Loss	10.5 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	.95 @ 70		
Rmf @ Meas. Temp	.71 @ 70		
Rmc @ Meas. Temp	1.28 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.53 @ 125		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	125		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments




Thank you for using Log-Tech, Inc.
(785) 625-3858



Dighton, 8 S to 70 rd, 3 1/2 W, N into



Database File: c:\warrior\data\larson_stormont no. 2-27\larsonhd.db
Dataset Pathname: dil\lars2in
Presentation Format: dil2in
Dataset Creation: Wed Jul 07 07:47:54 2010
Charted by: Depth in Feet scaled 1:600




Charted by: Depth in Feet scaled 1:500								
0	Gamma Ray	150	0	Shallow Resistivity	50	LSPD		
-200	SP (mV)	0	0	Deep Resistivity	50			
			1000	Conductivity		0		
			15000	Line Tension		0		
			50	Shallow Resistivity	500			
			50	Deep Resistivity	500			


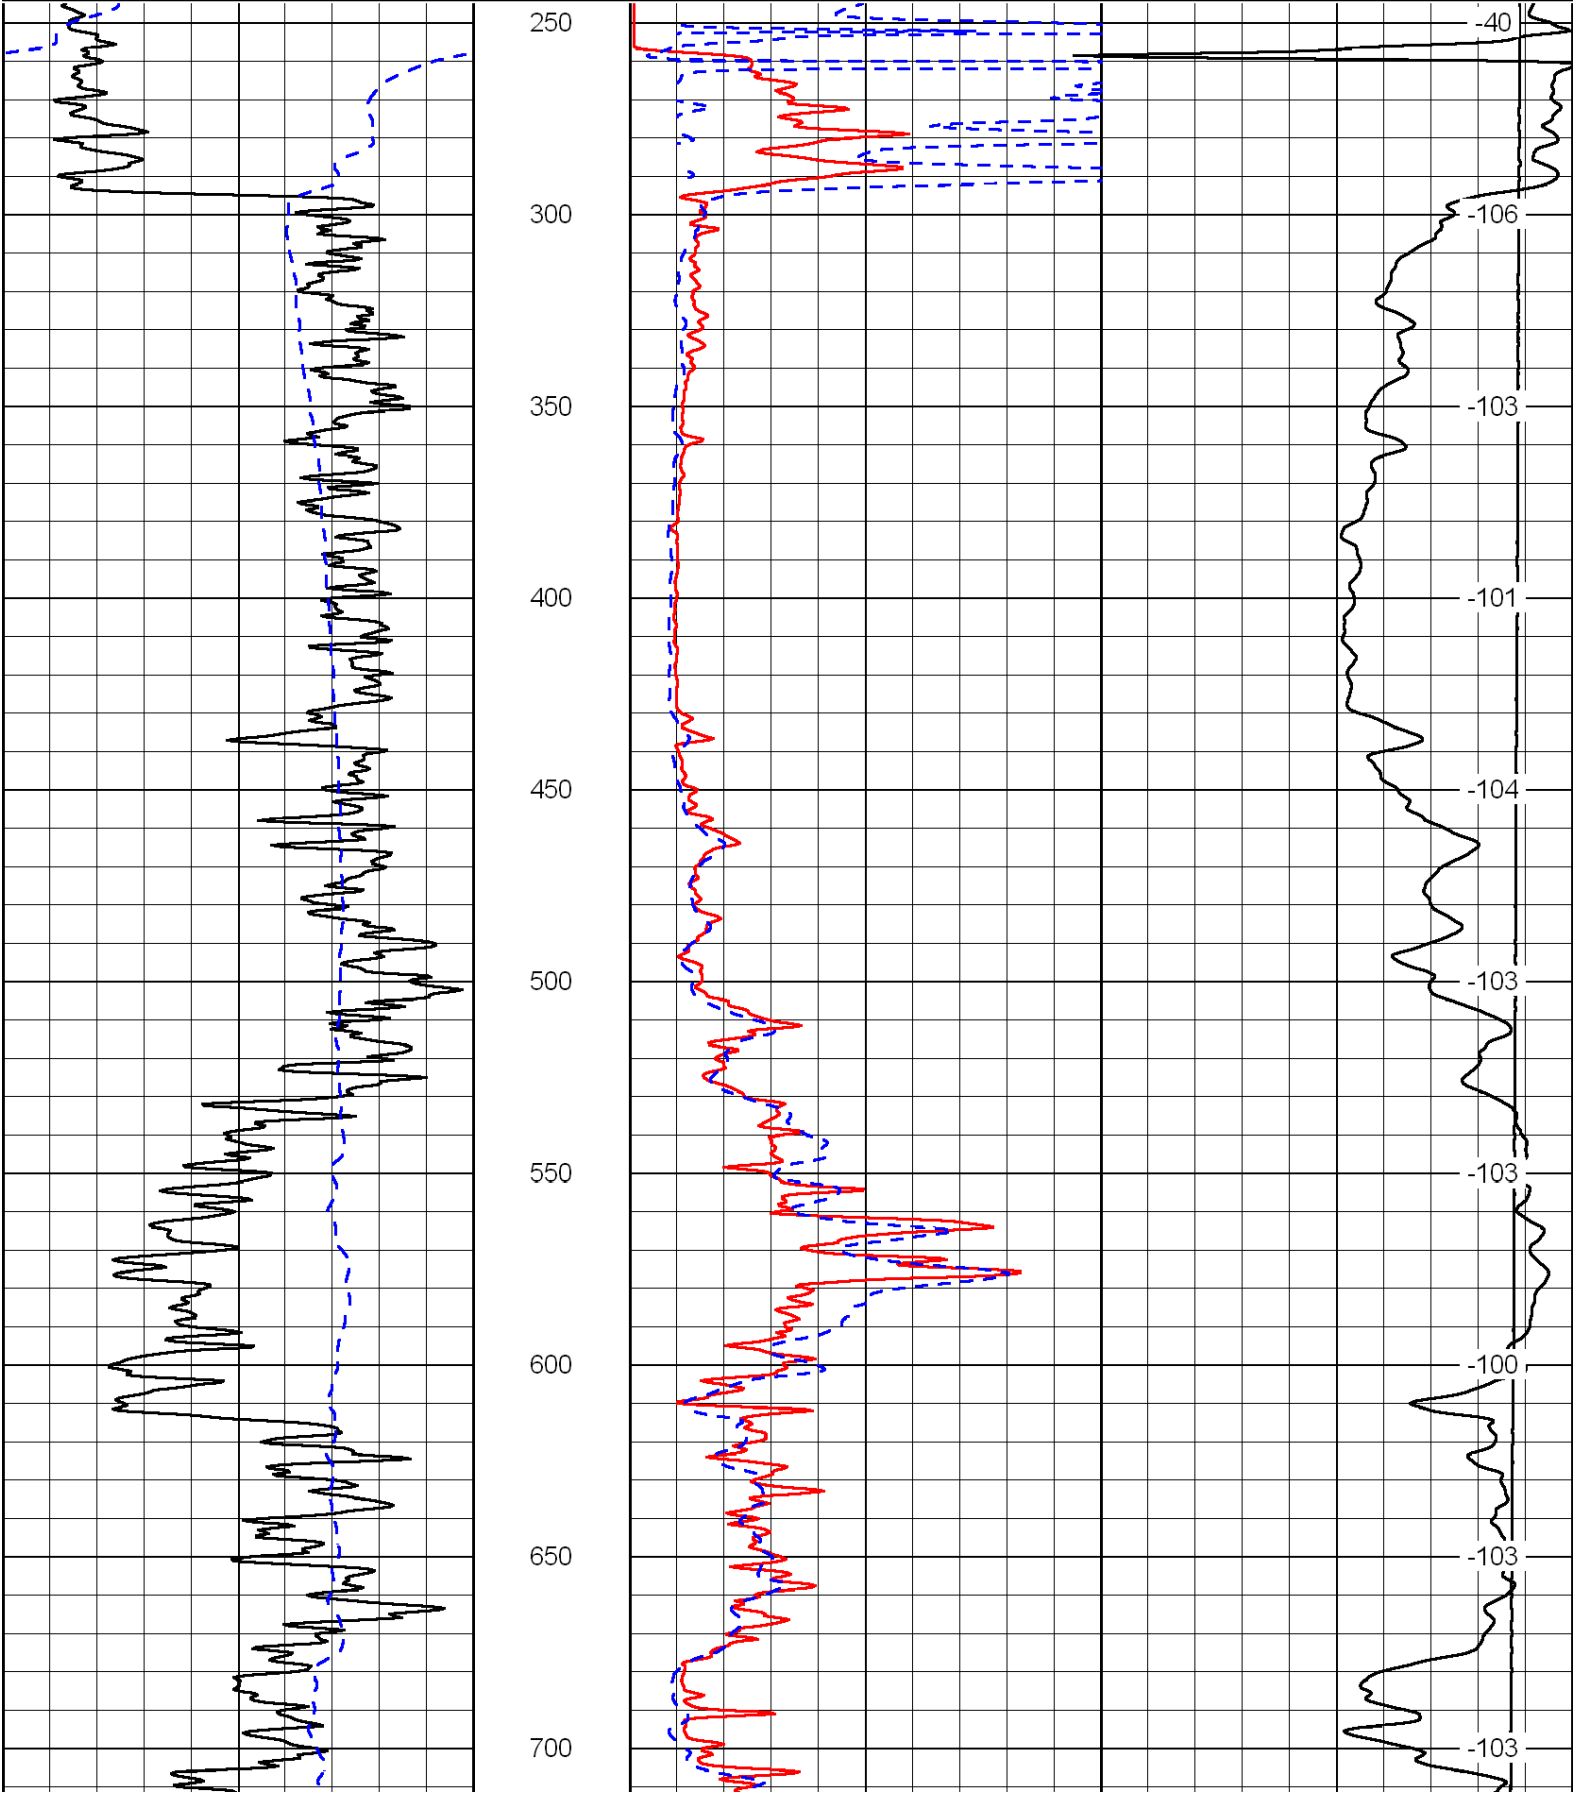


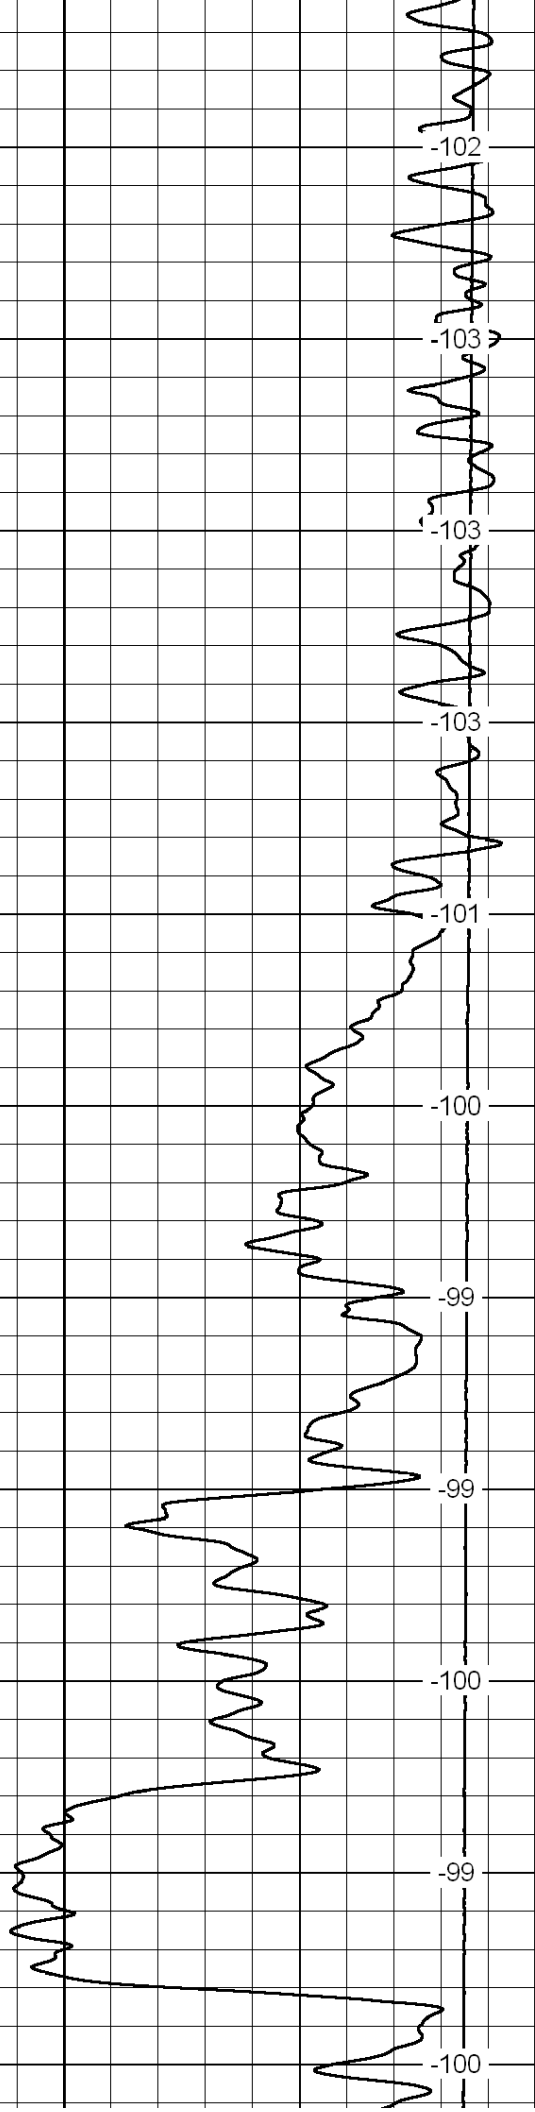
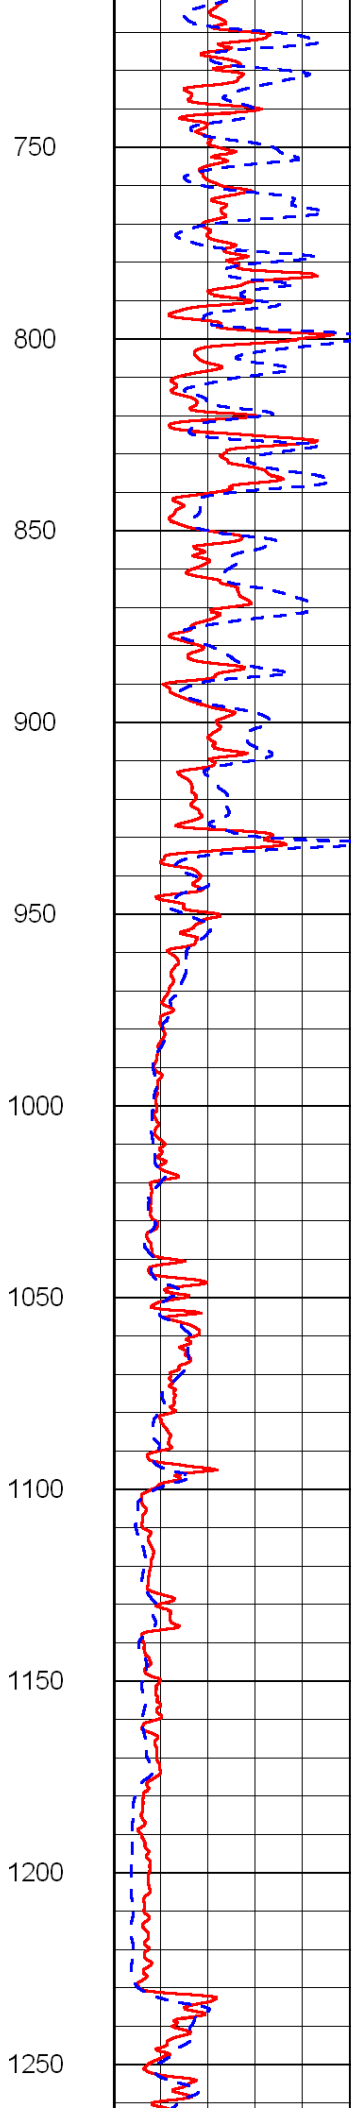
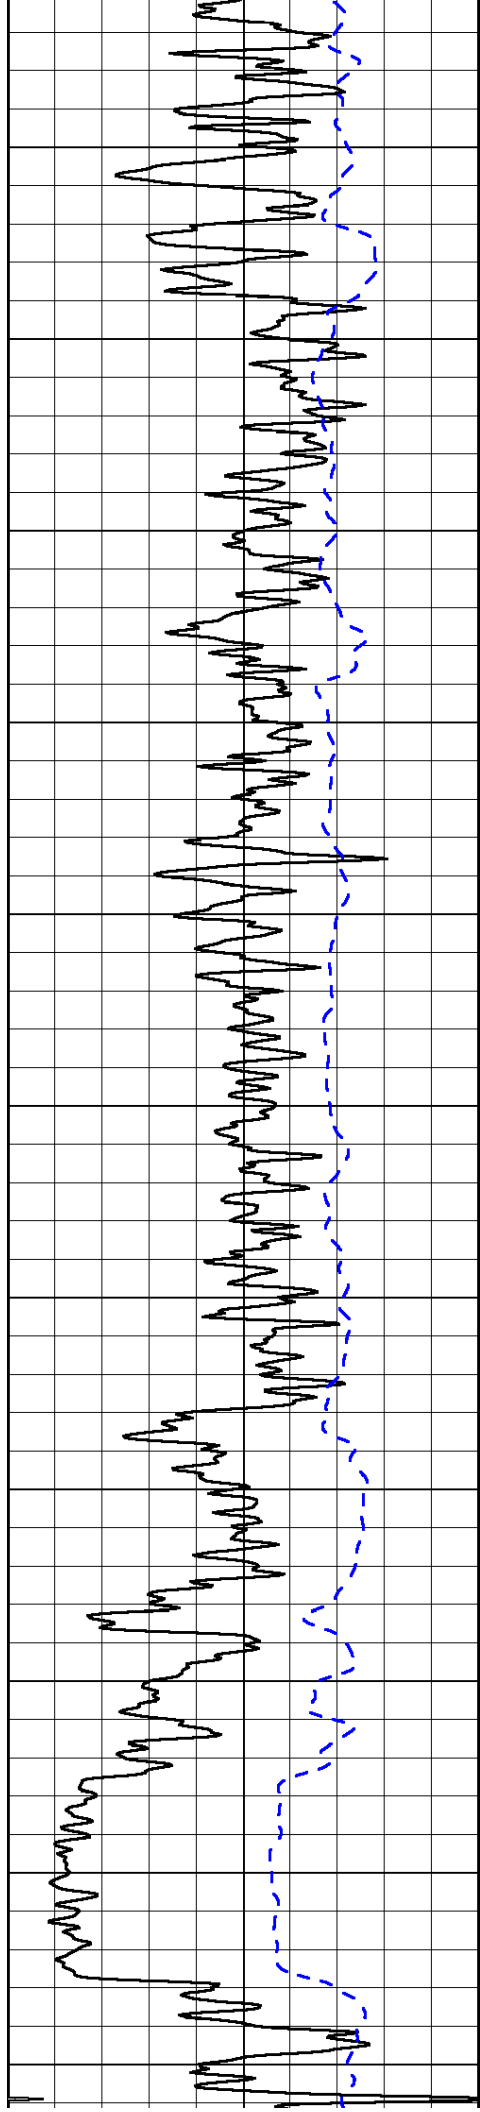



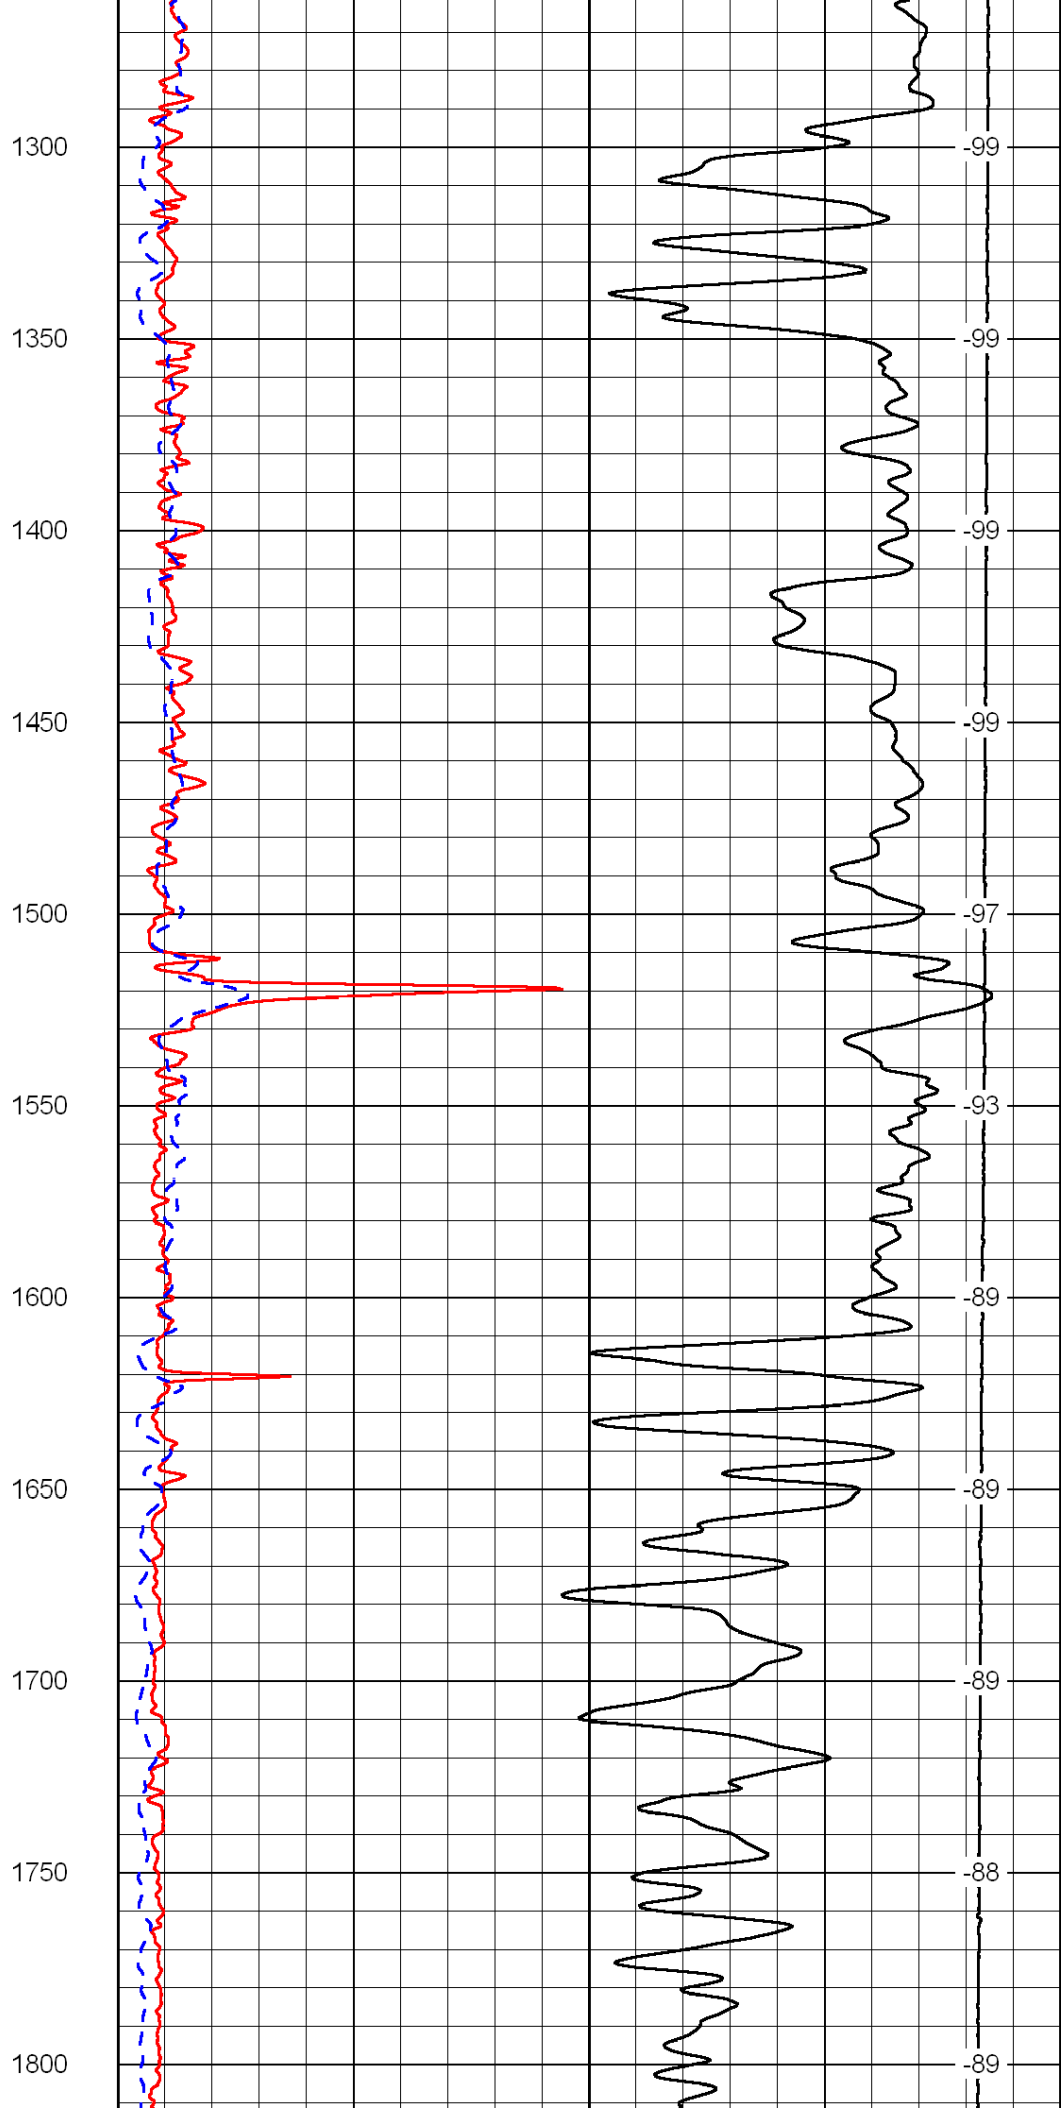
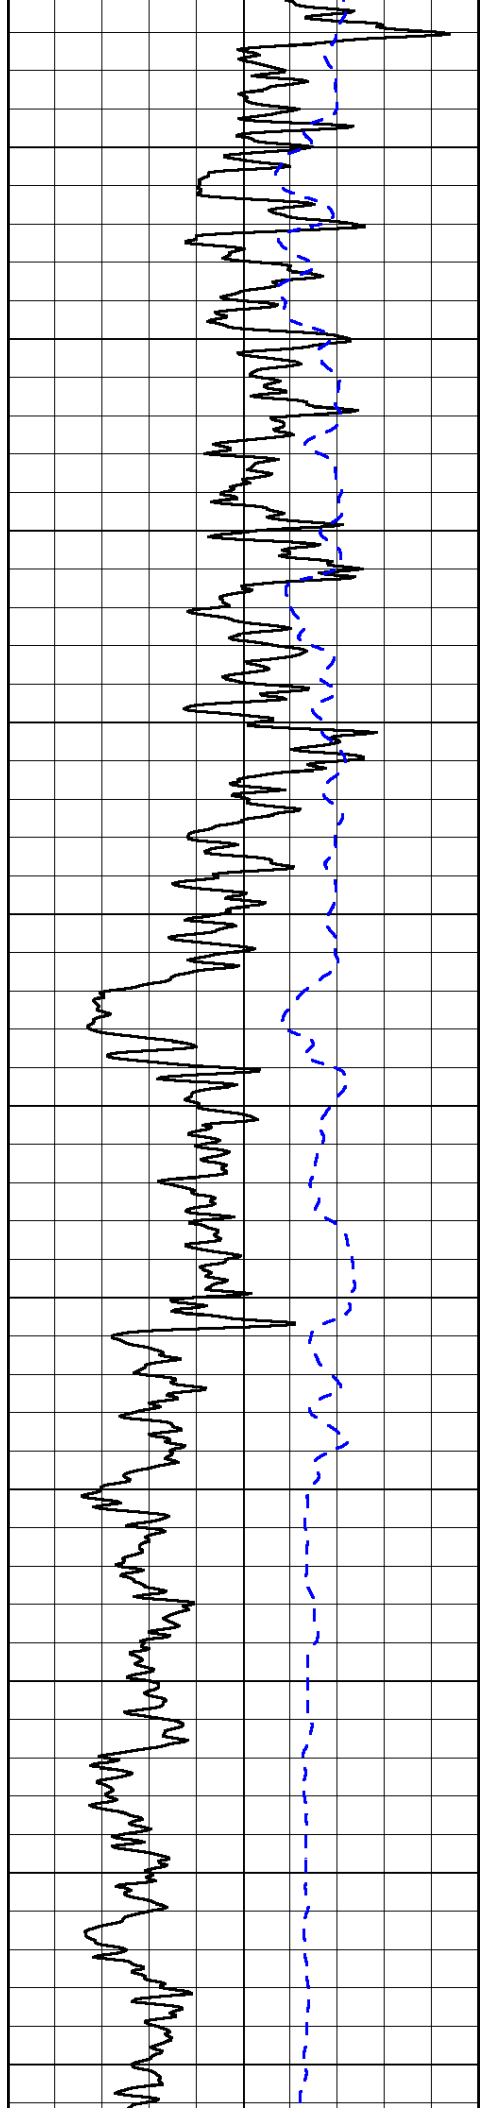


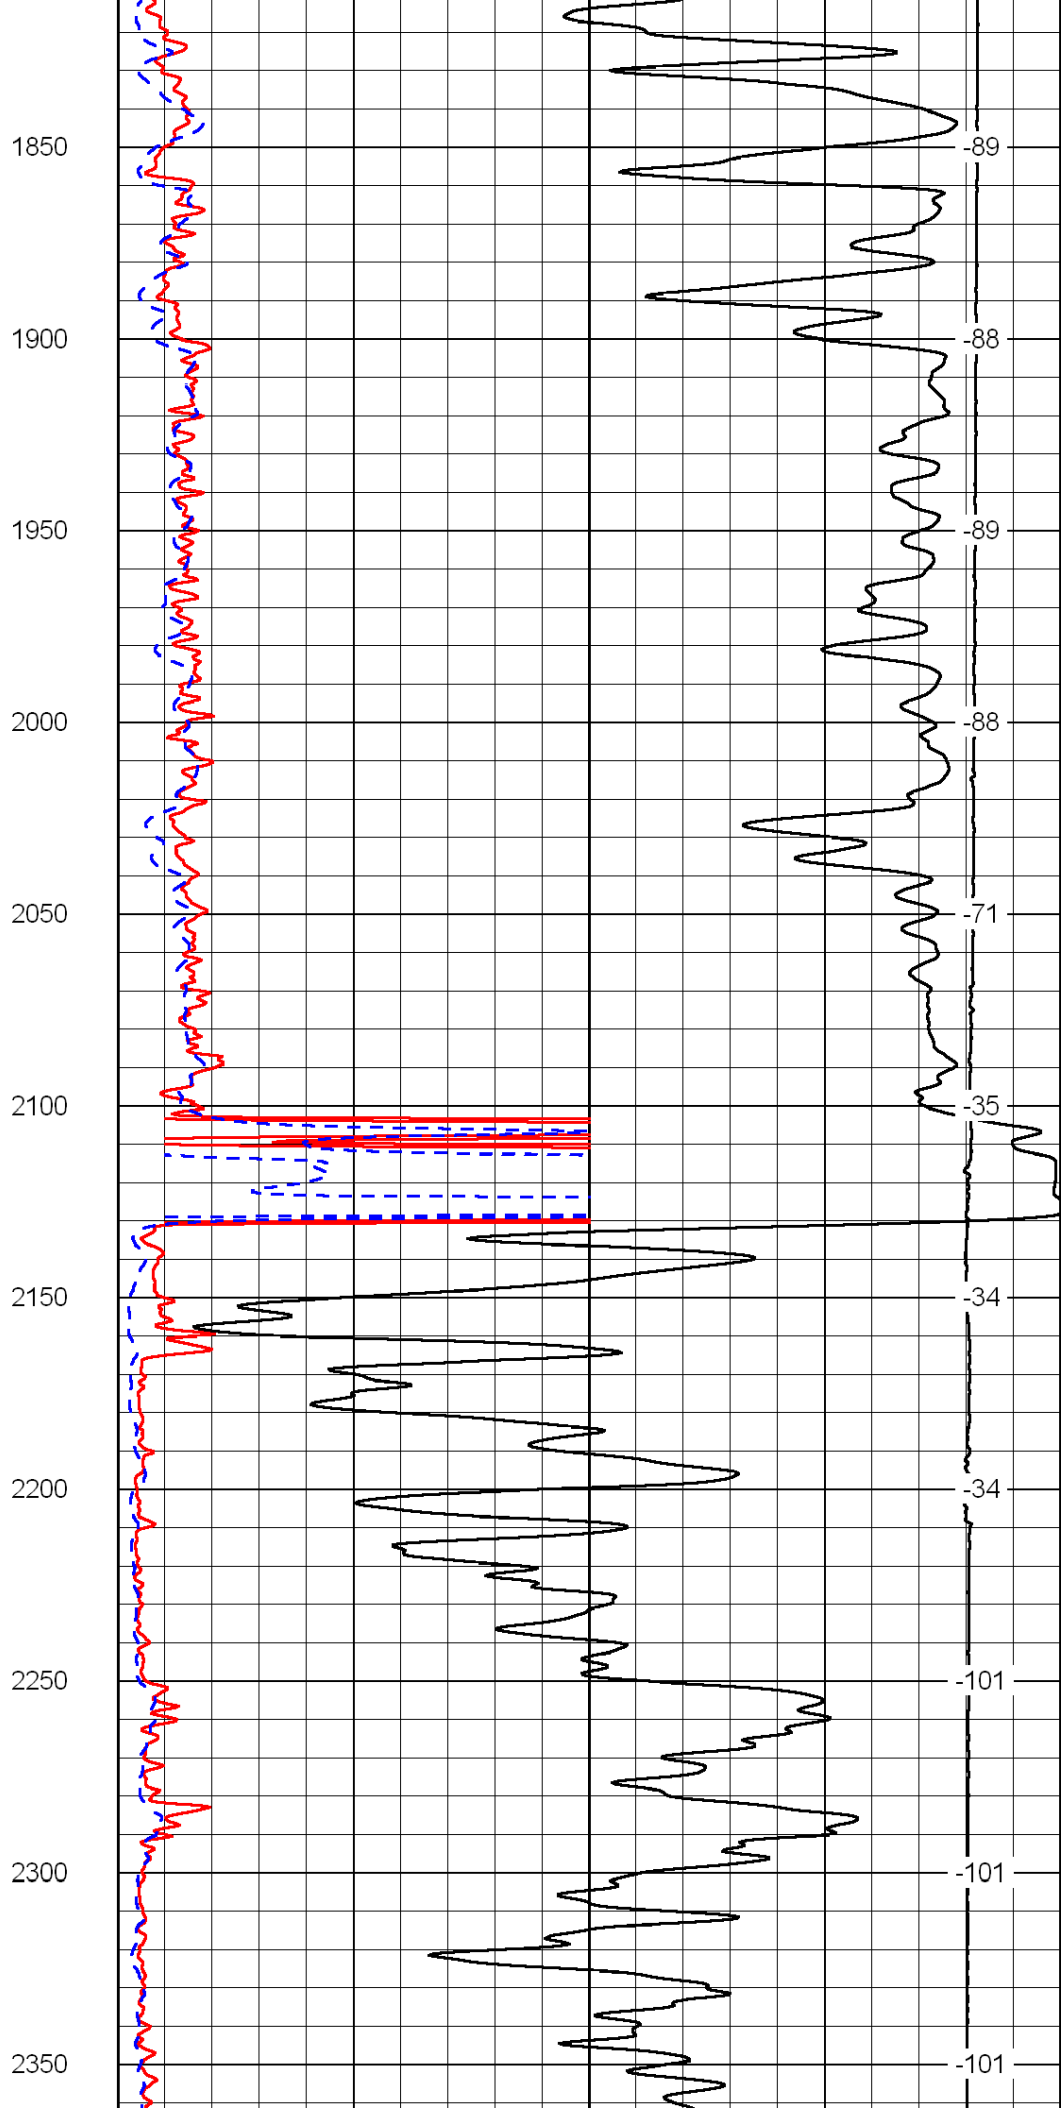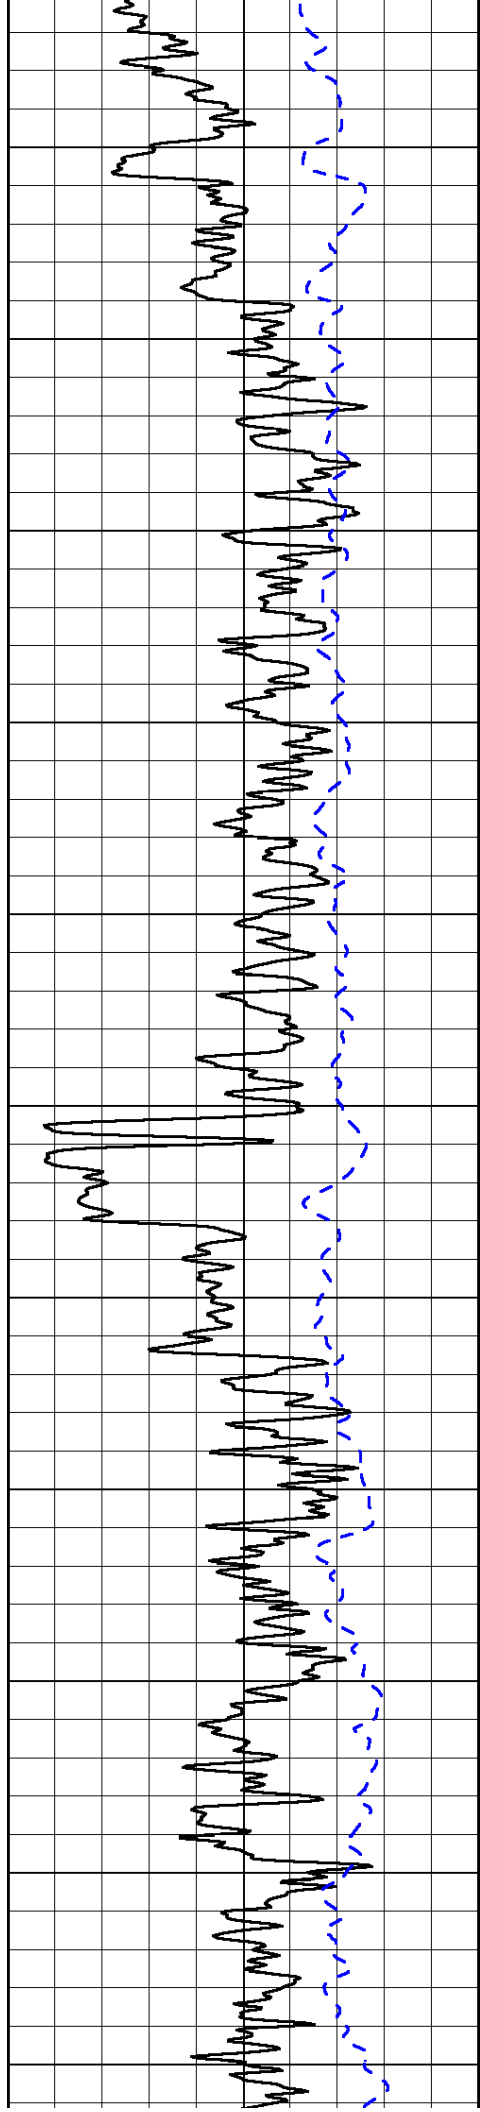


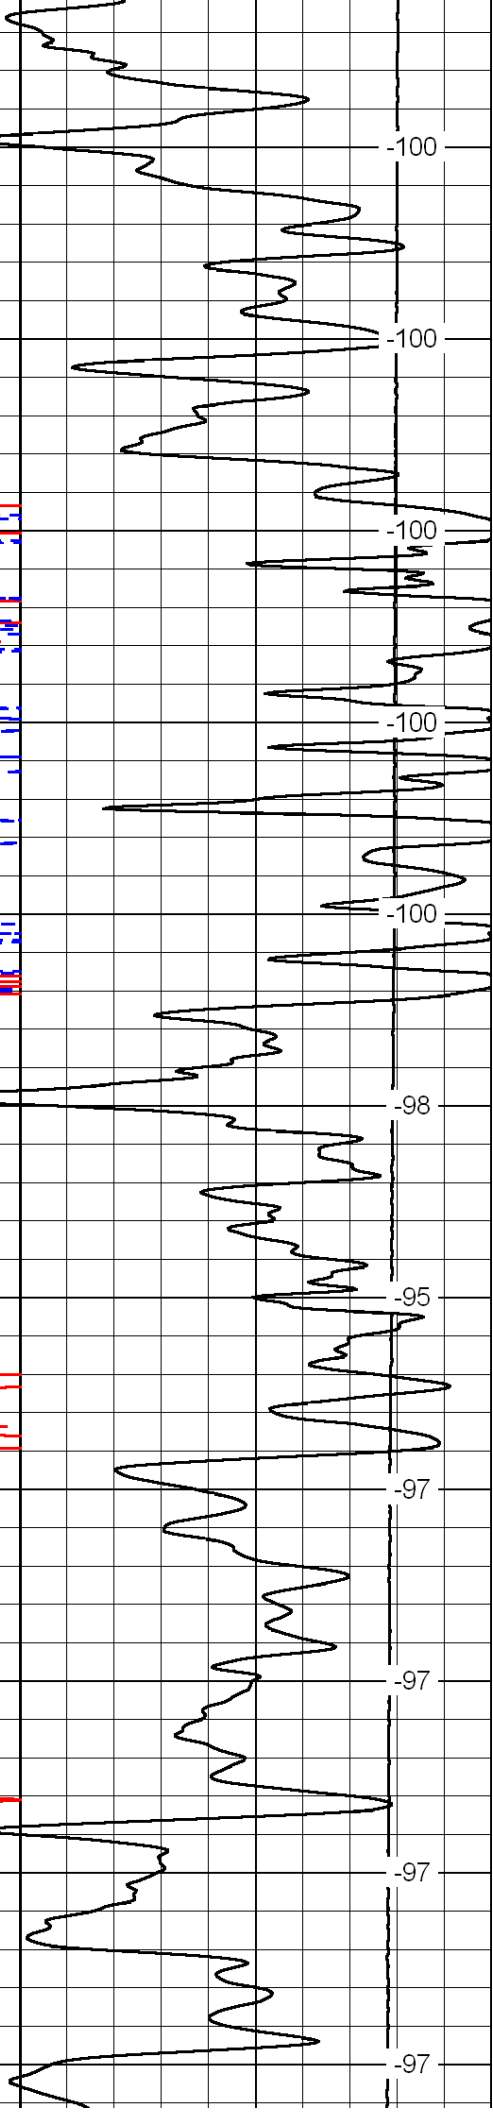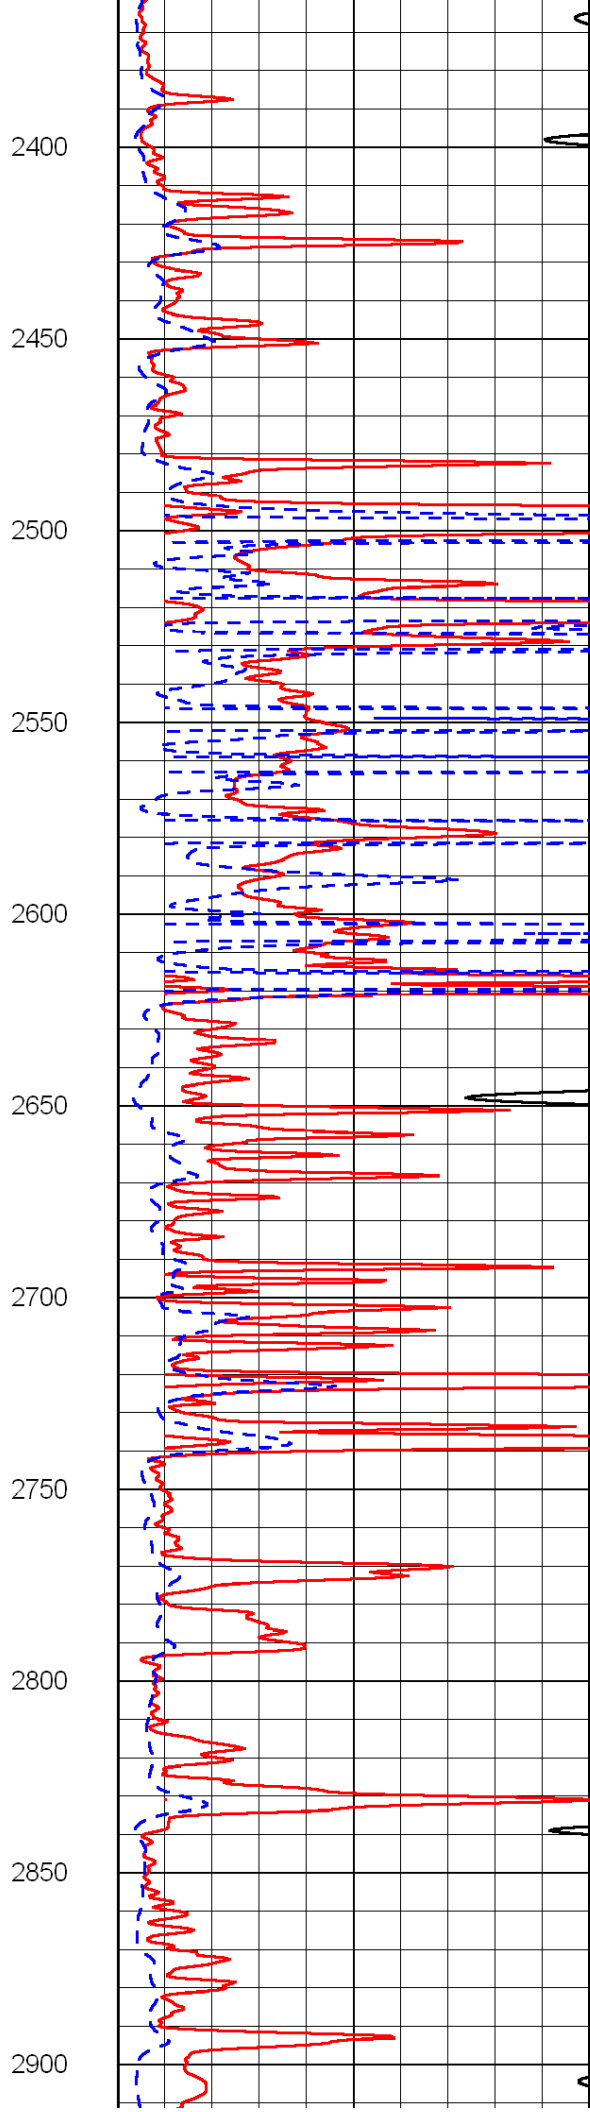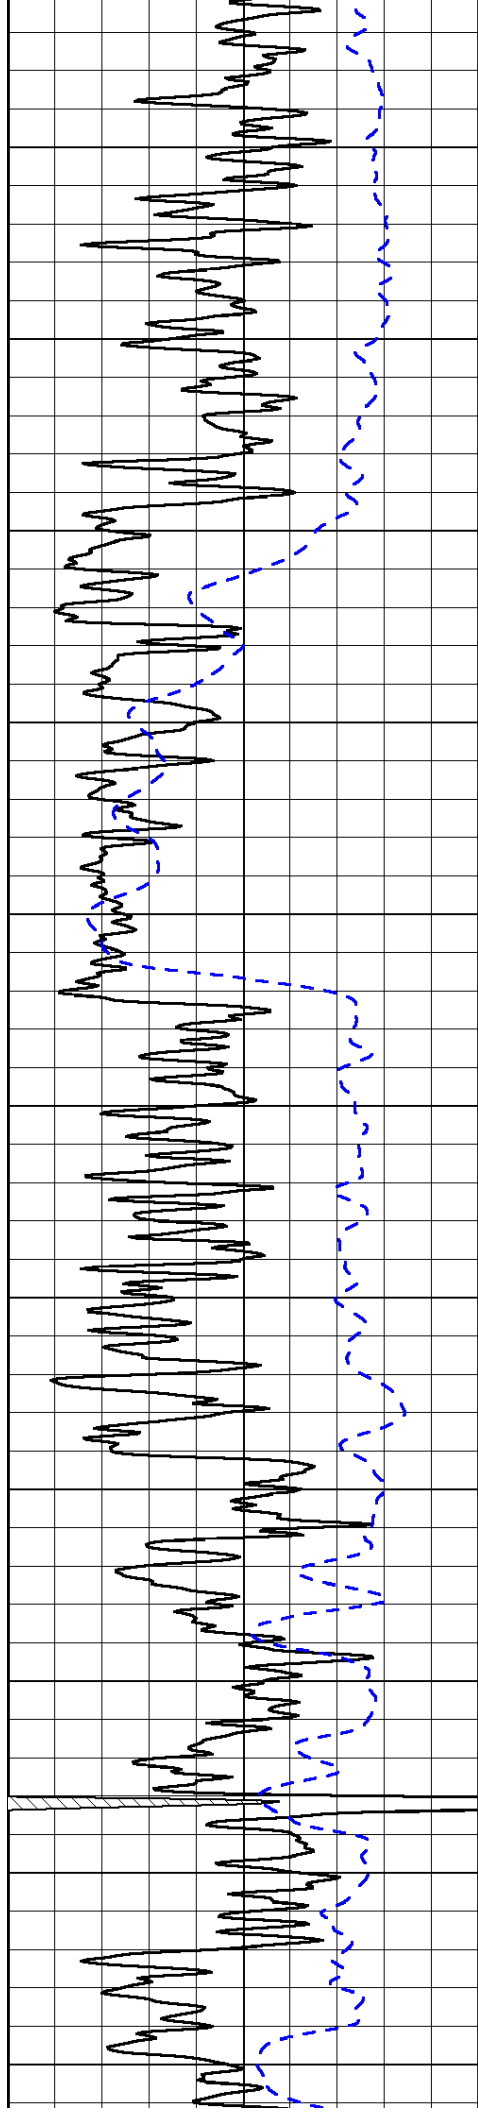

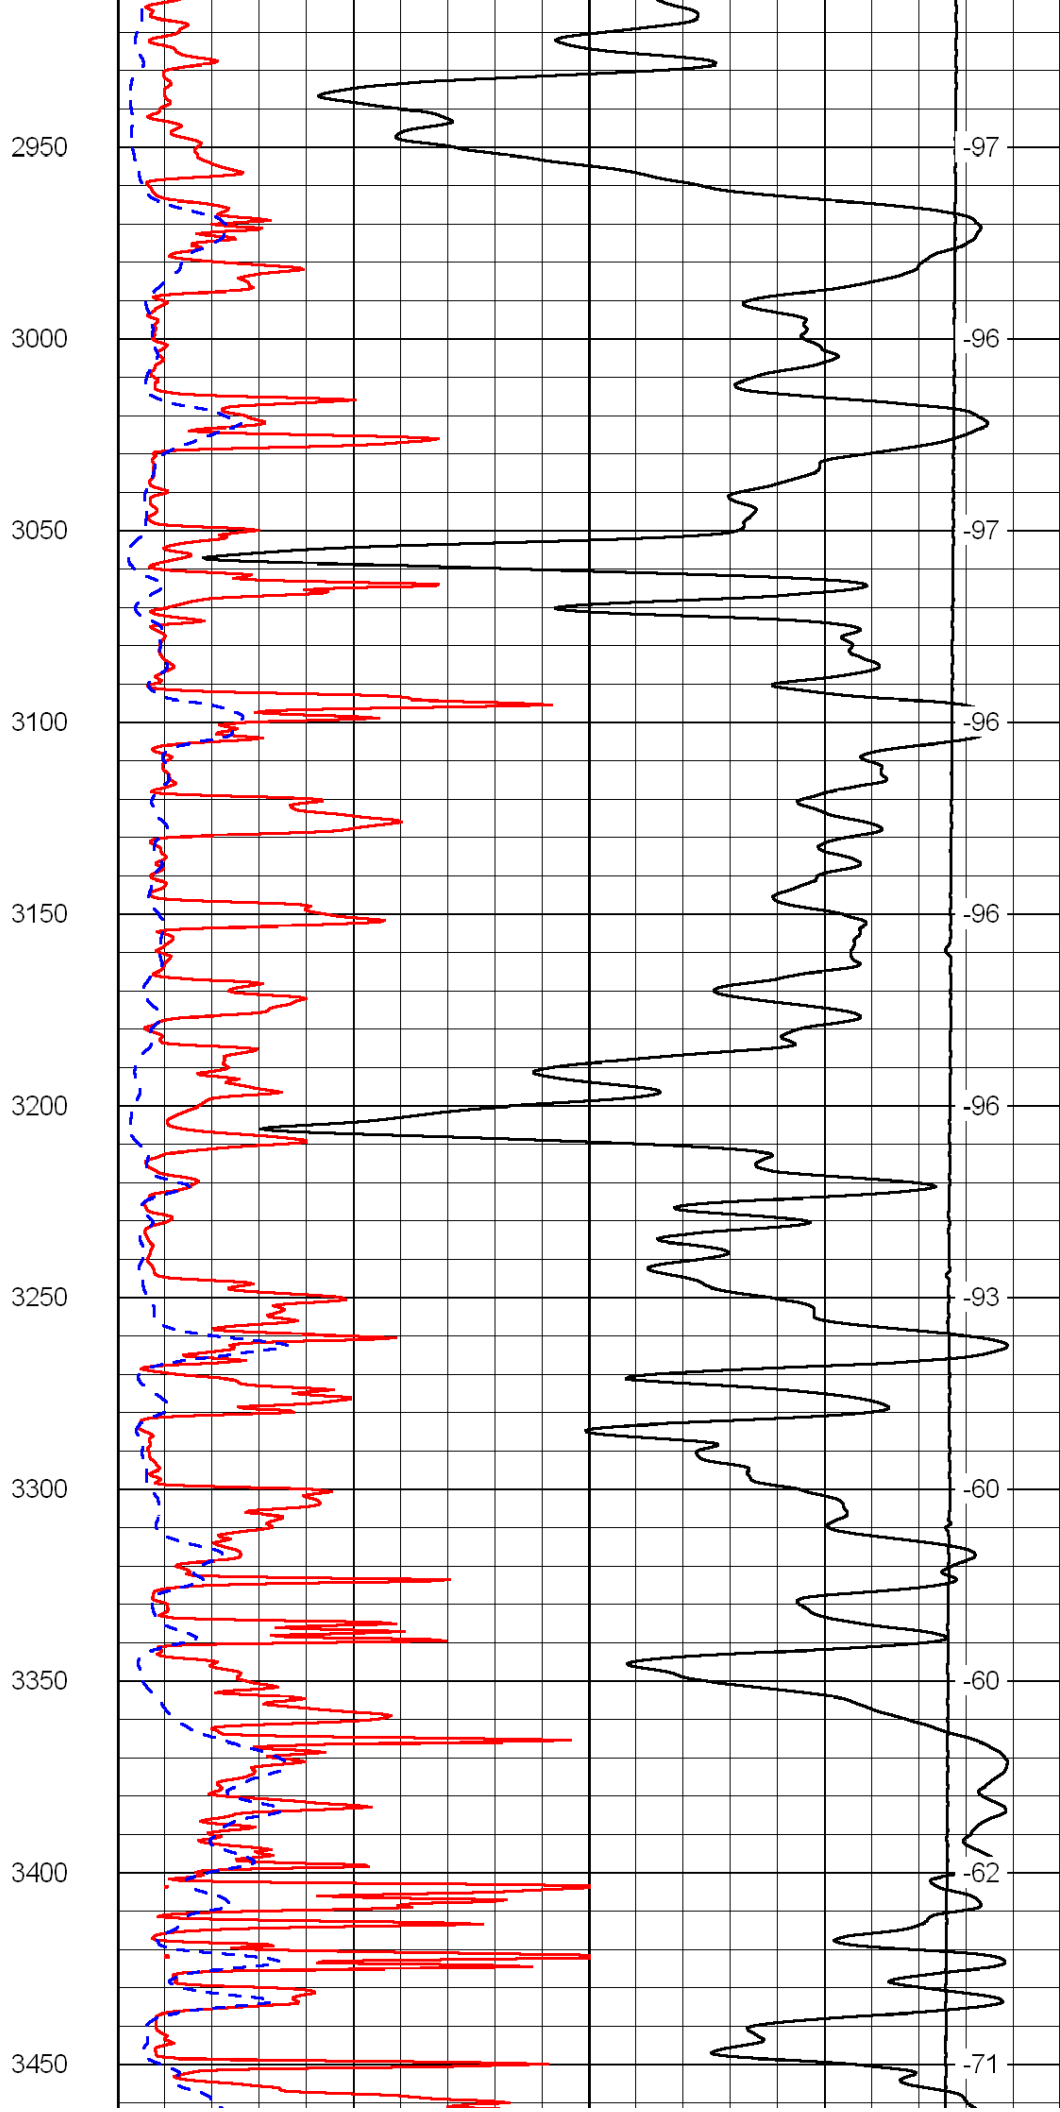
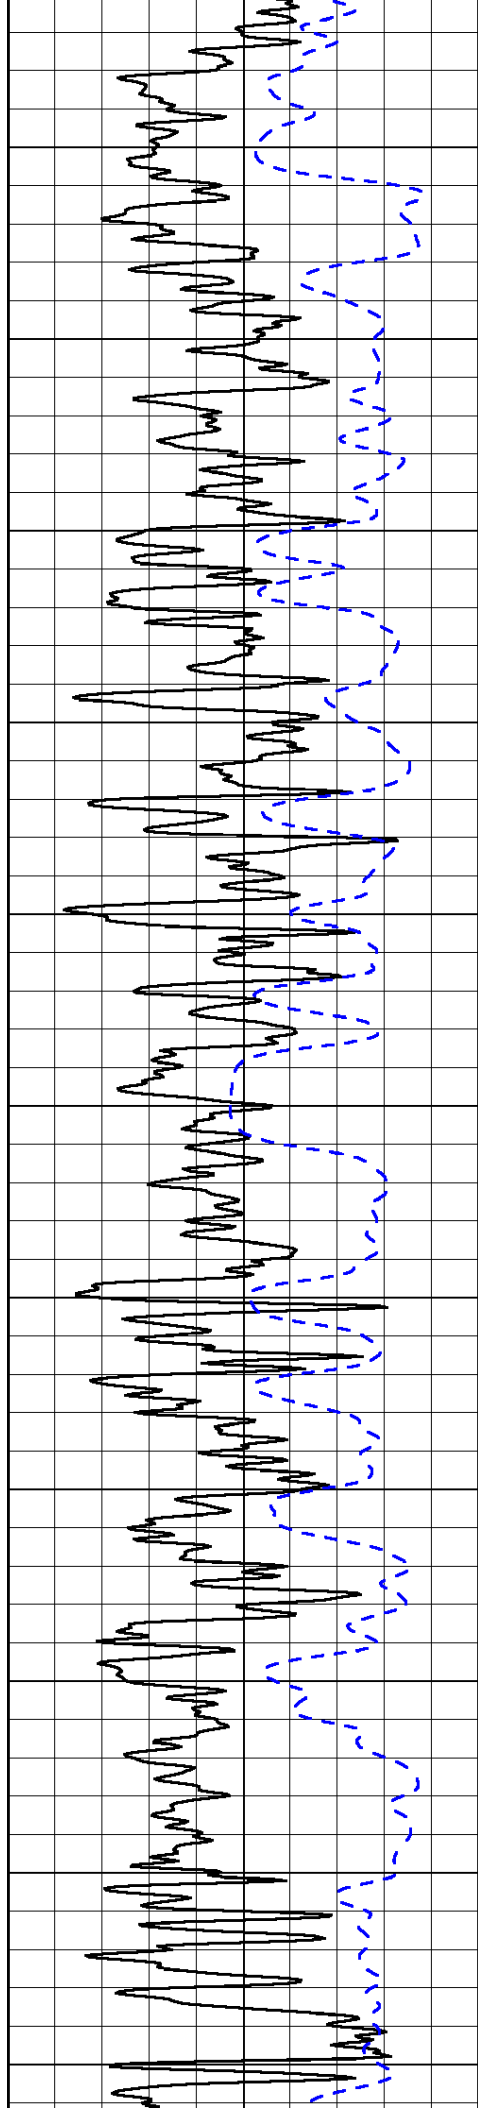


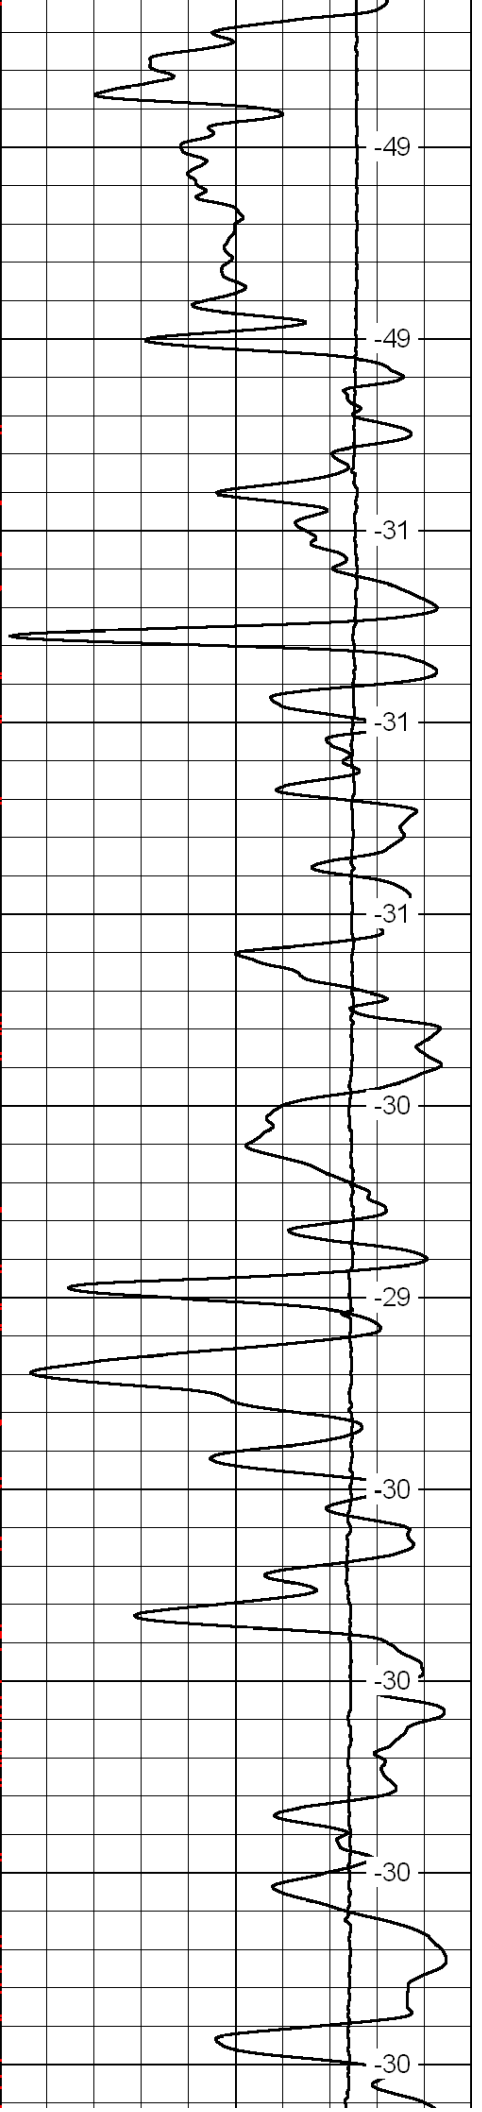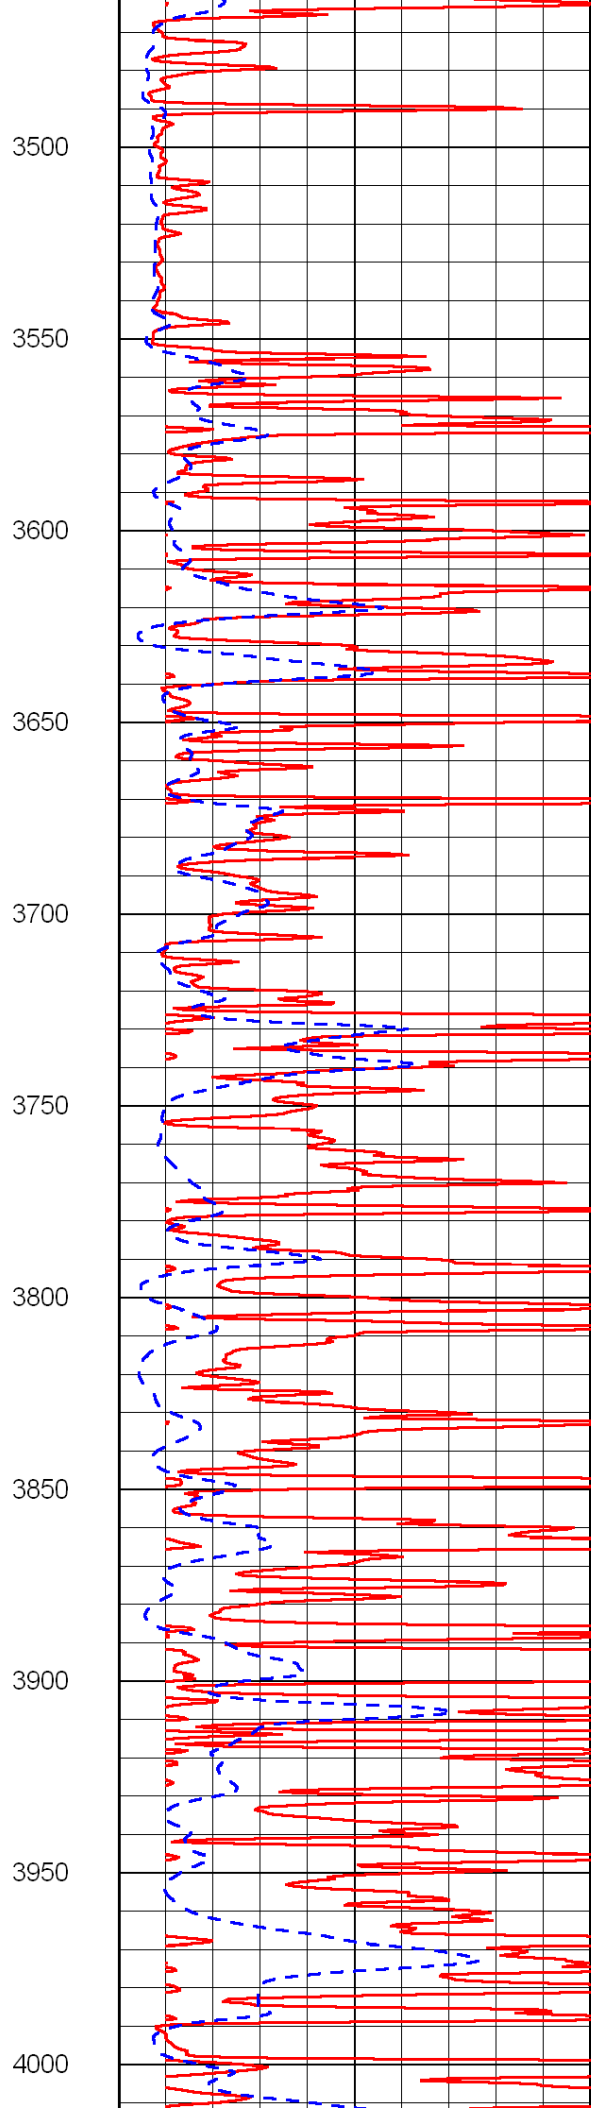
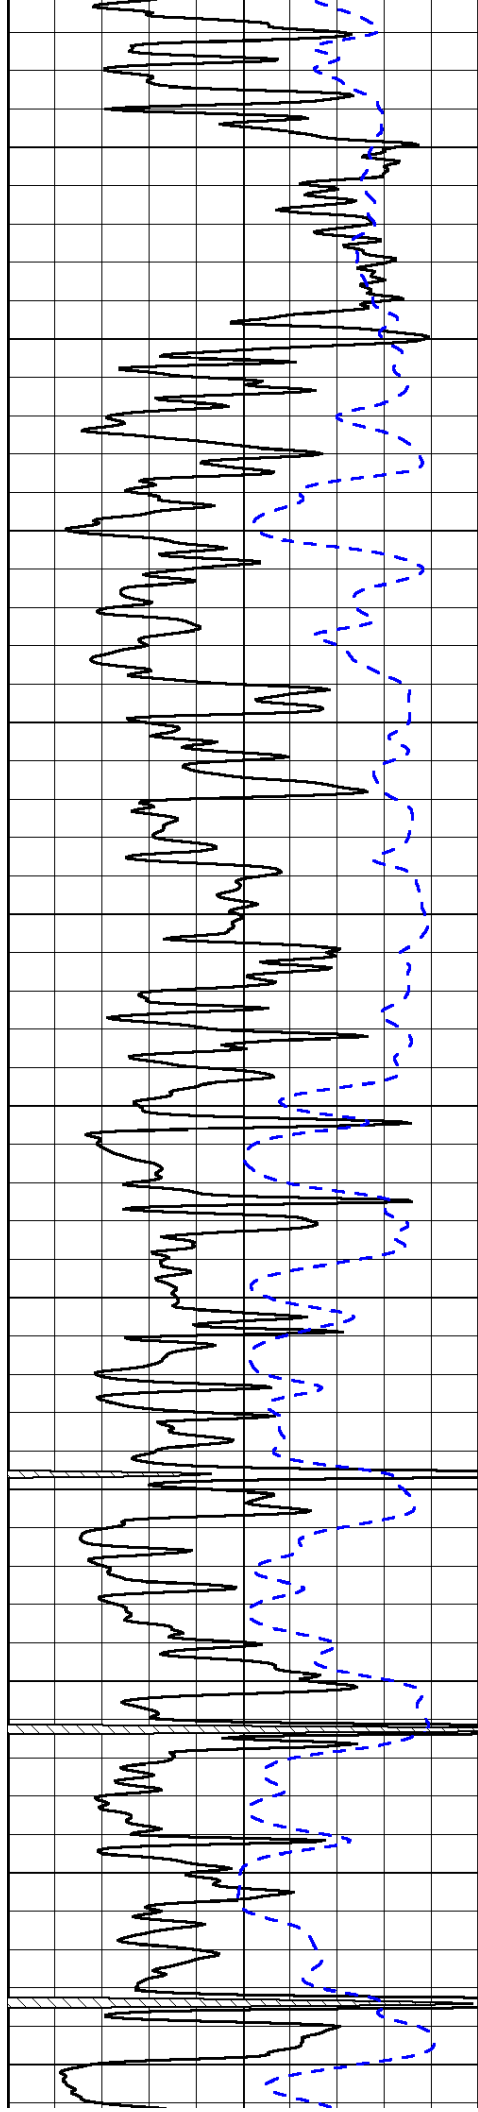


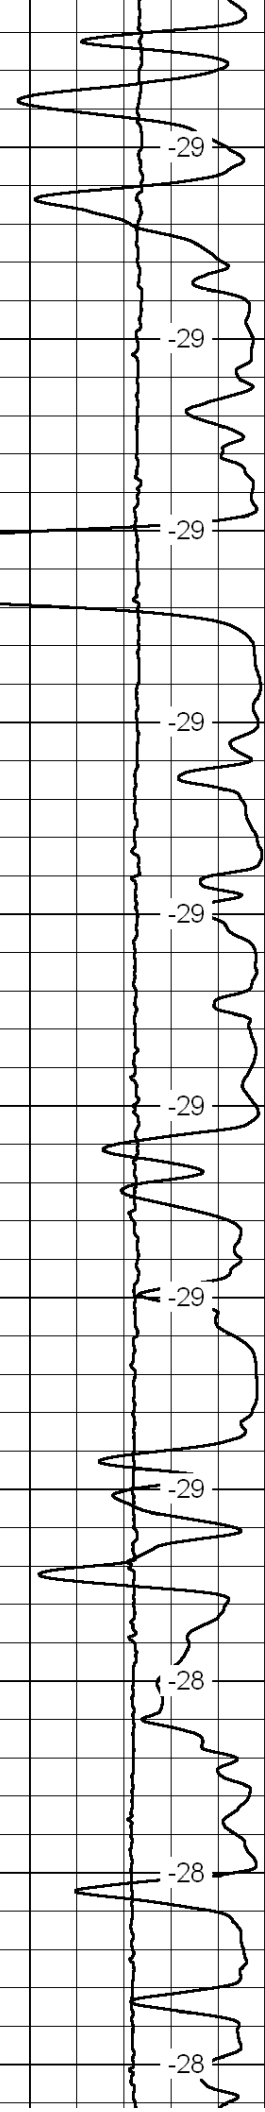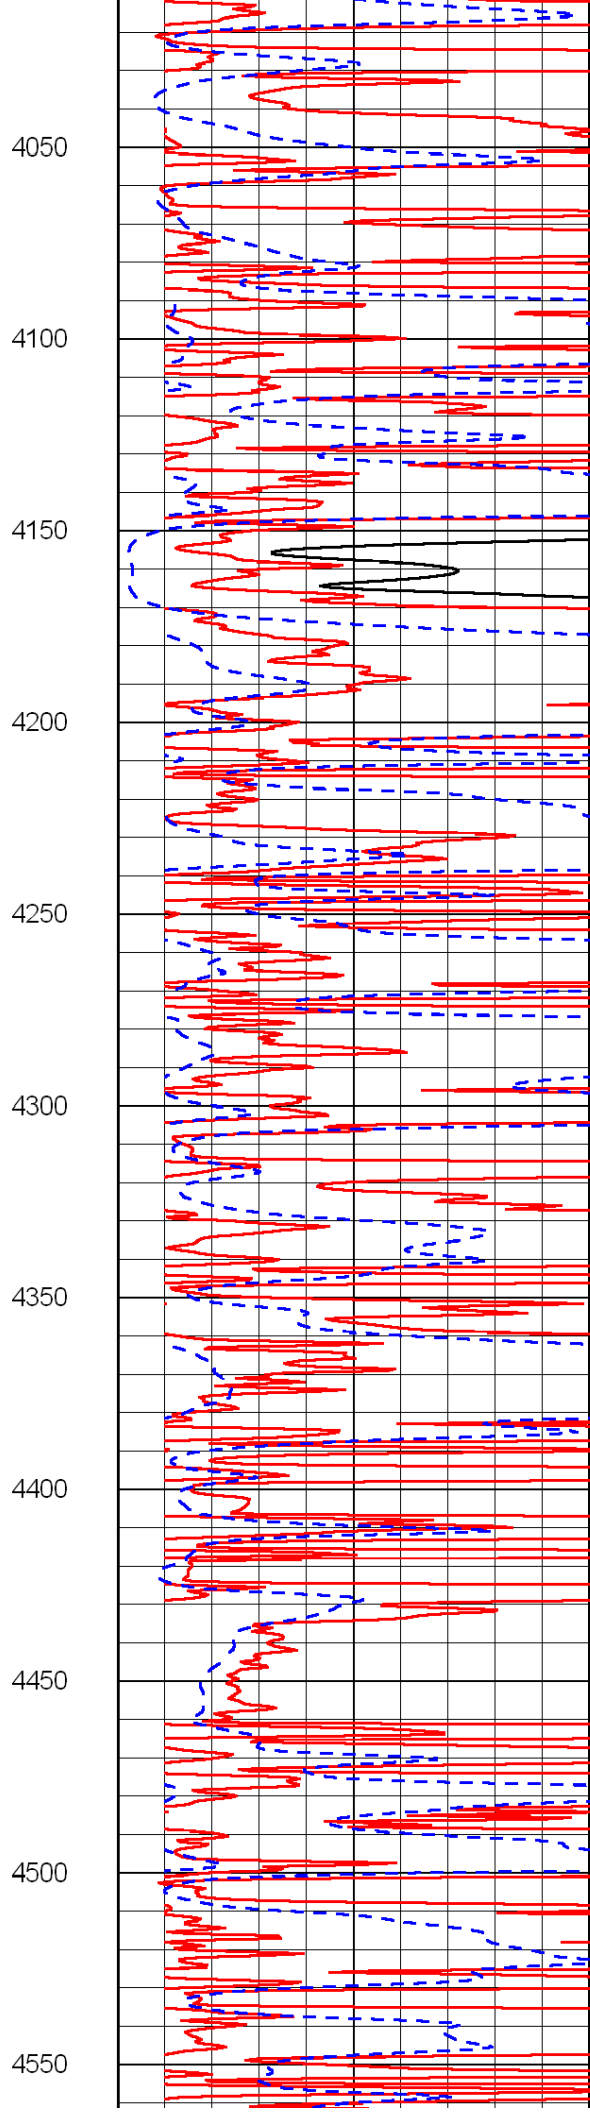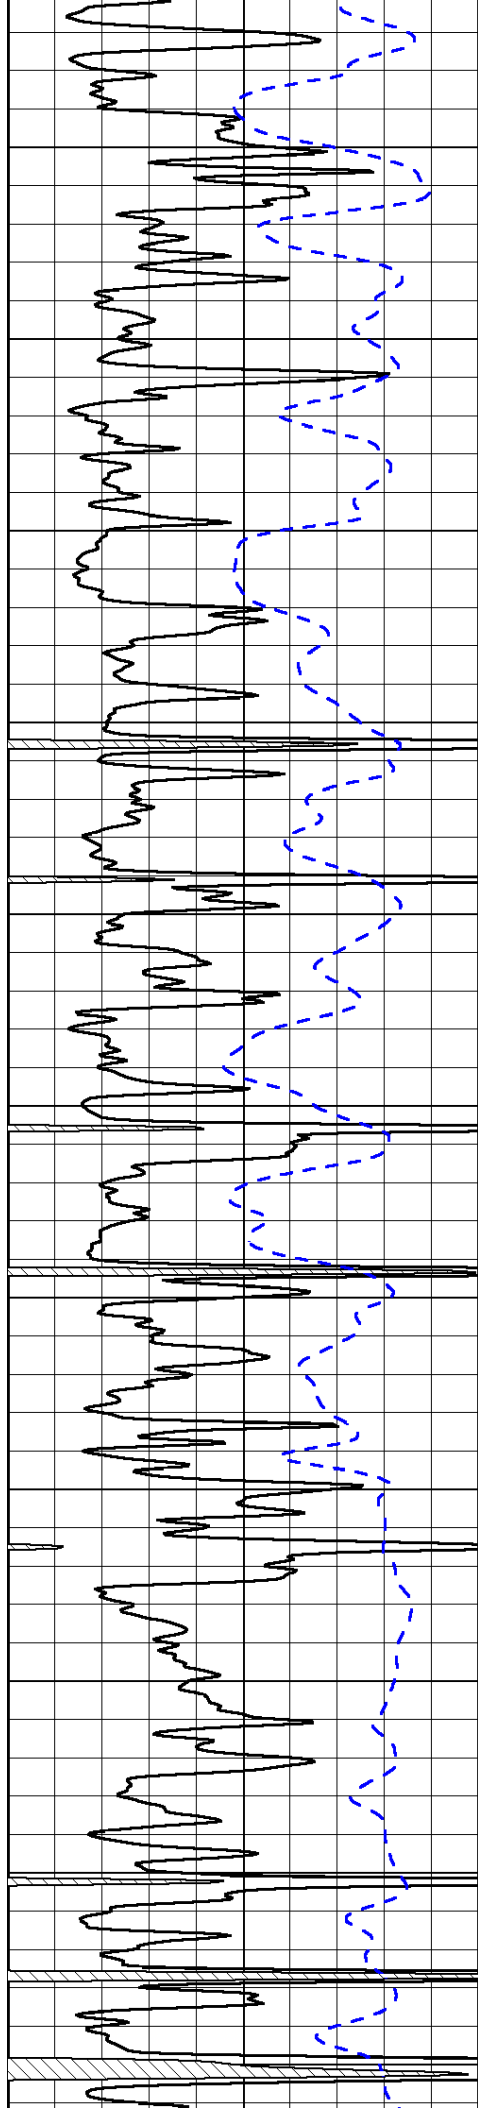

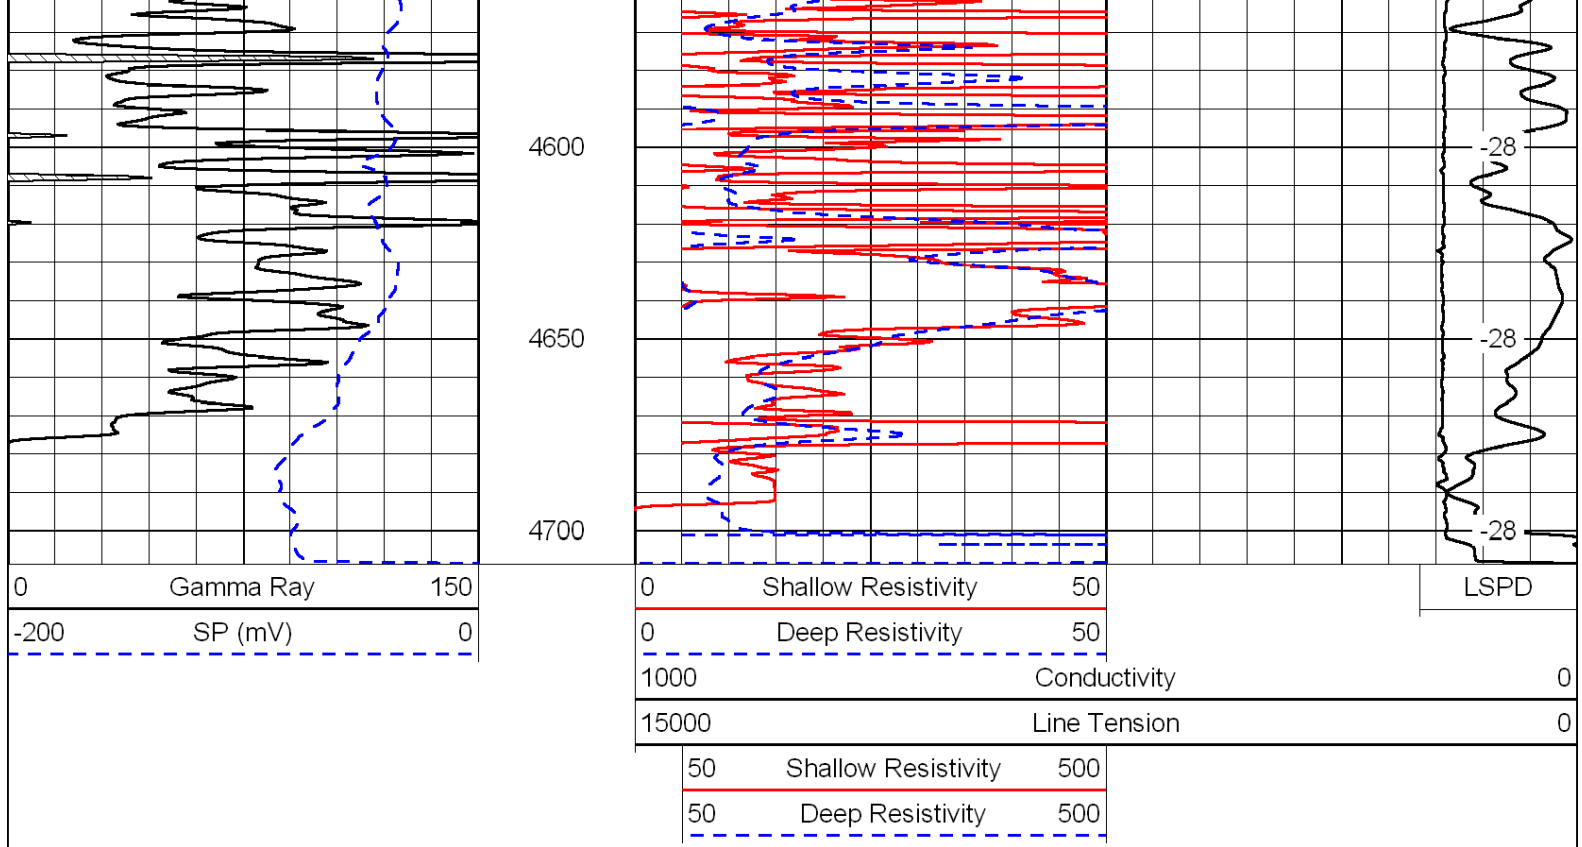



Database File: c:\warrior\data\larsen_stormont no. 2-27\larsenhd.db
Dataset Pathname: dil/lars2in
Presentation Format: dil
Dataset Creation: Wed Jul 07 07:47:54 2010
Charted by: Depth in Feet scaled 1:240

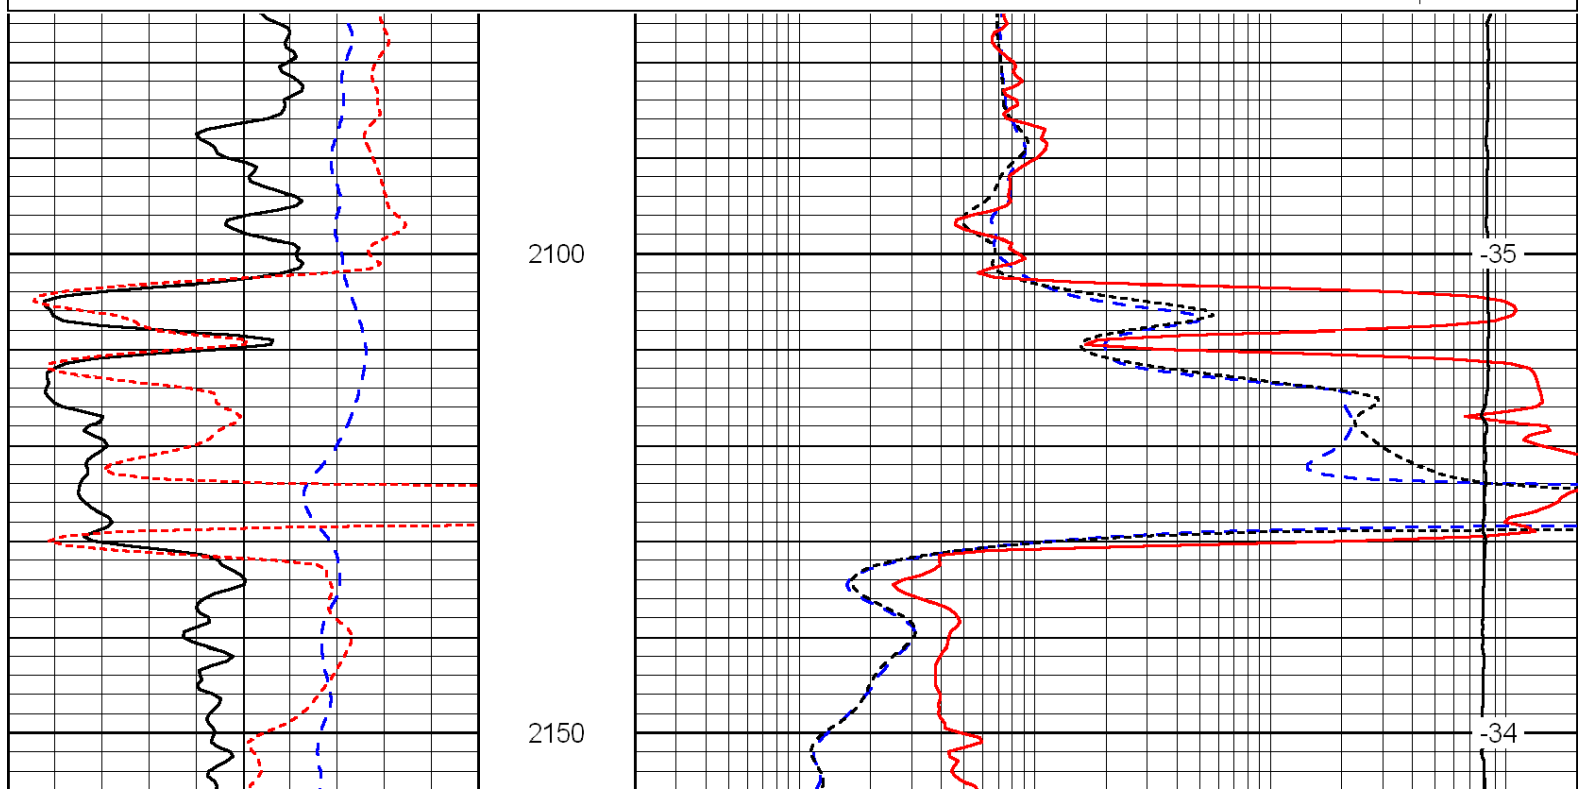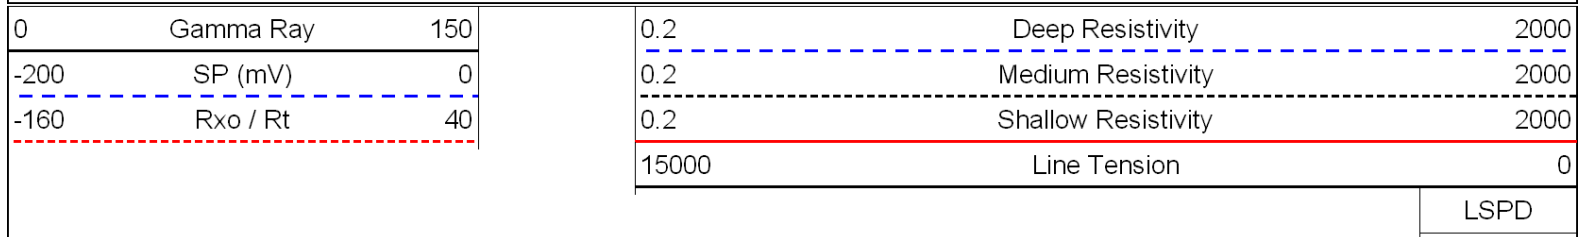

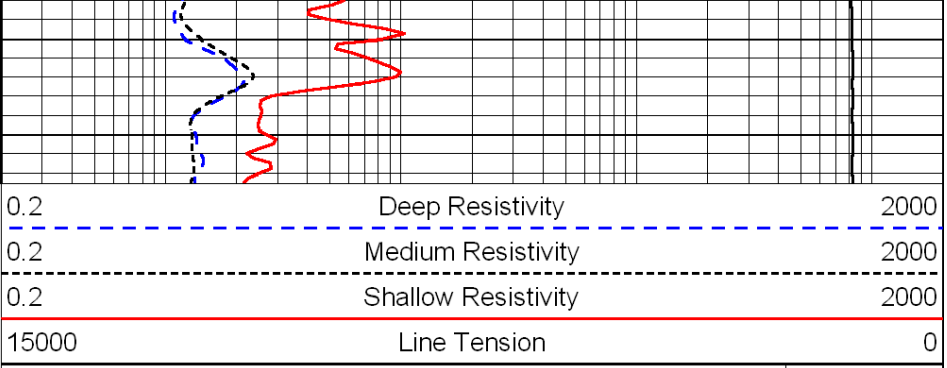
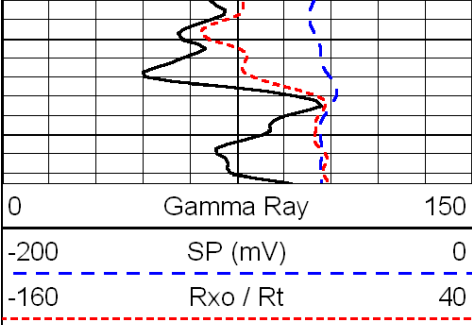



LSPD

Database File: c:\warrior\data\larson_stormont no. 2-27\larsonhd.db
Dataset Pathname: dil\lars2in
Presentation Format: dil
Dataset Creation: Wed Jul 07 07:47:54 2010
Charted by: Depth in Feet scaled 1:240

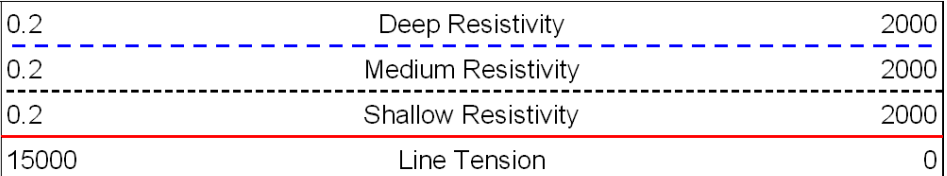

LSPD

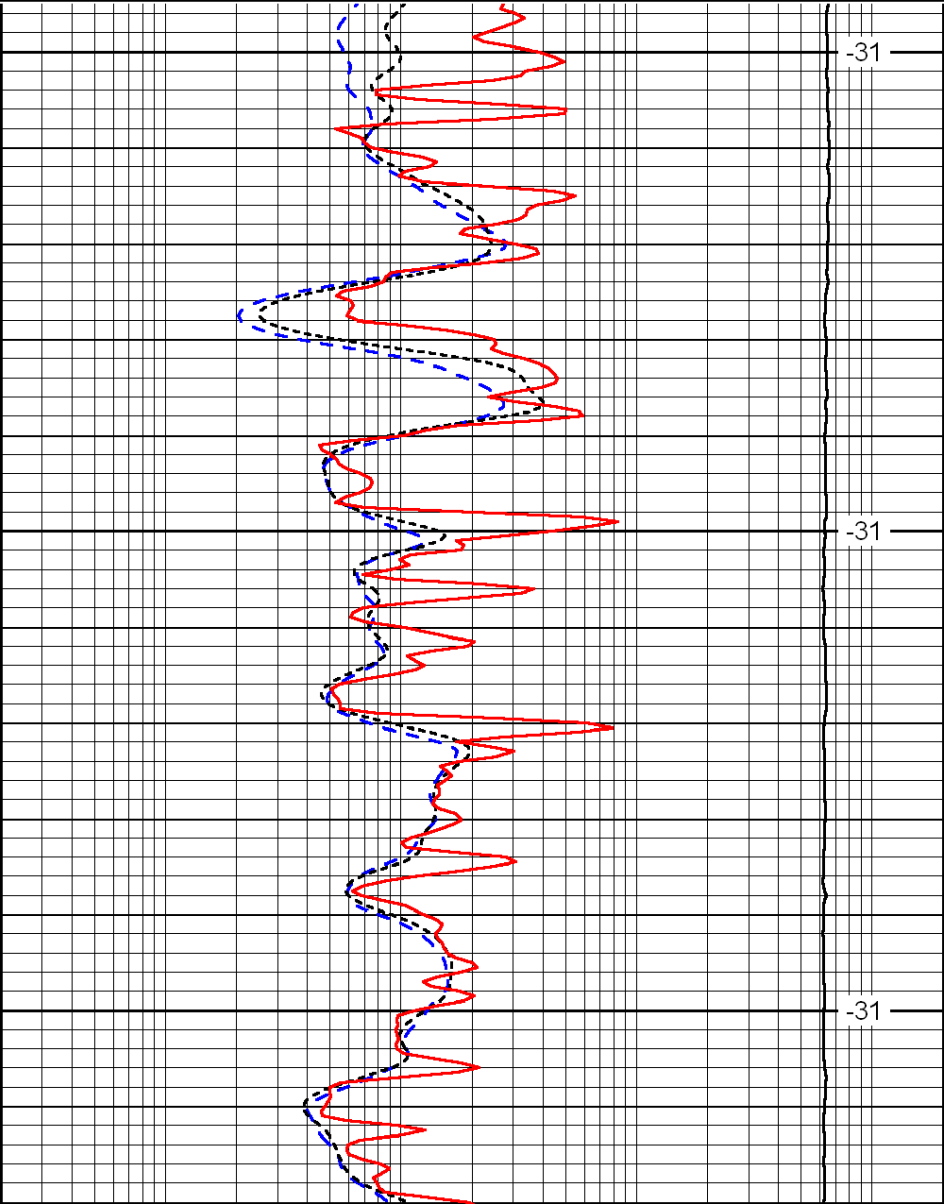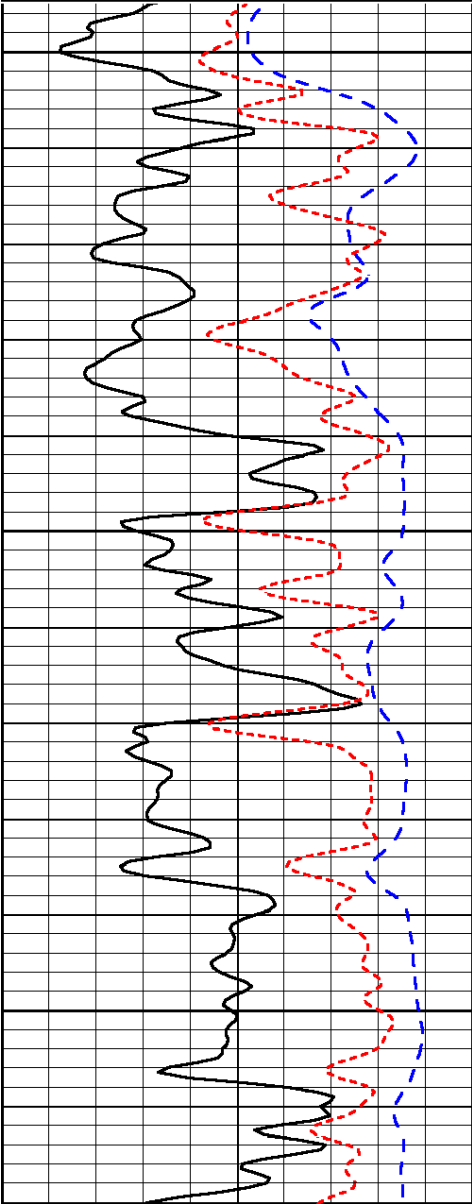

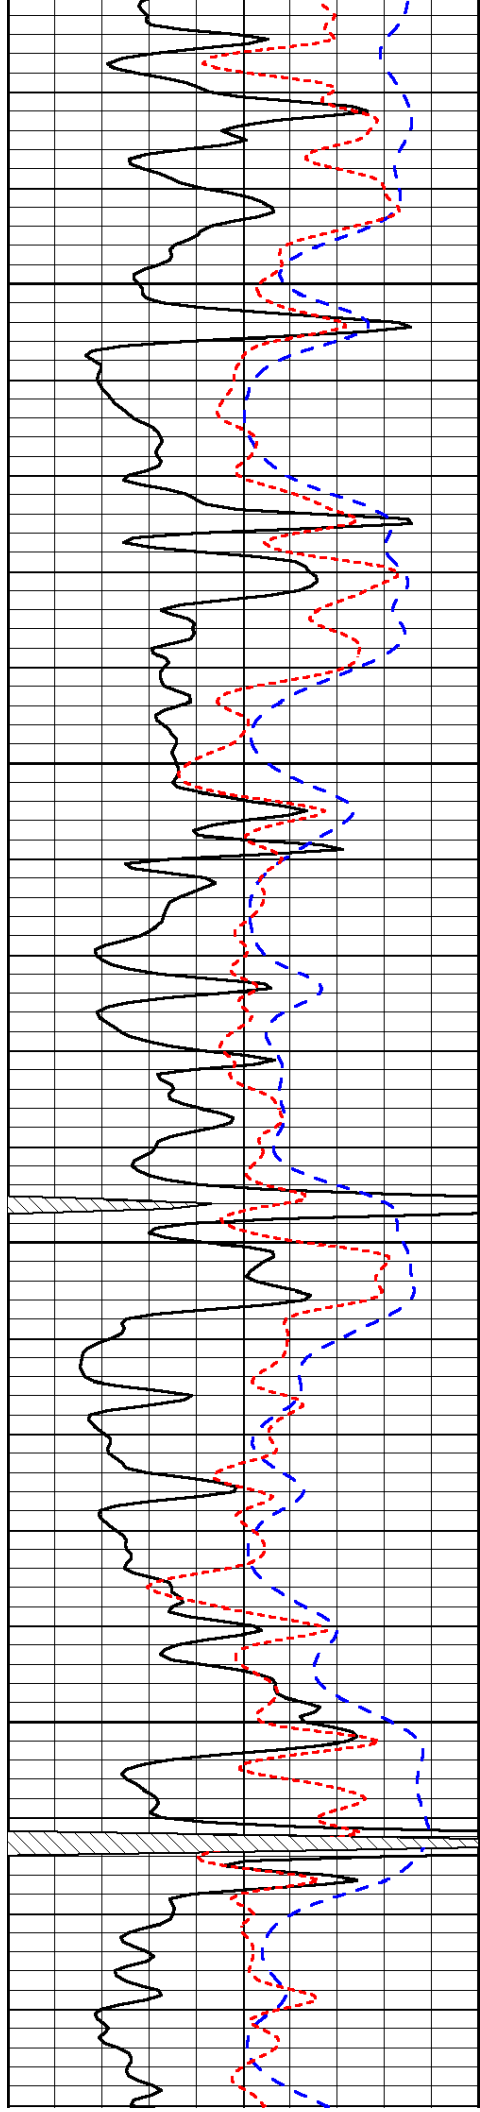


3750

3800

3850

3900

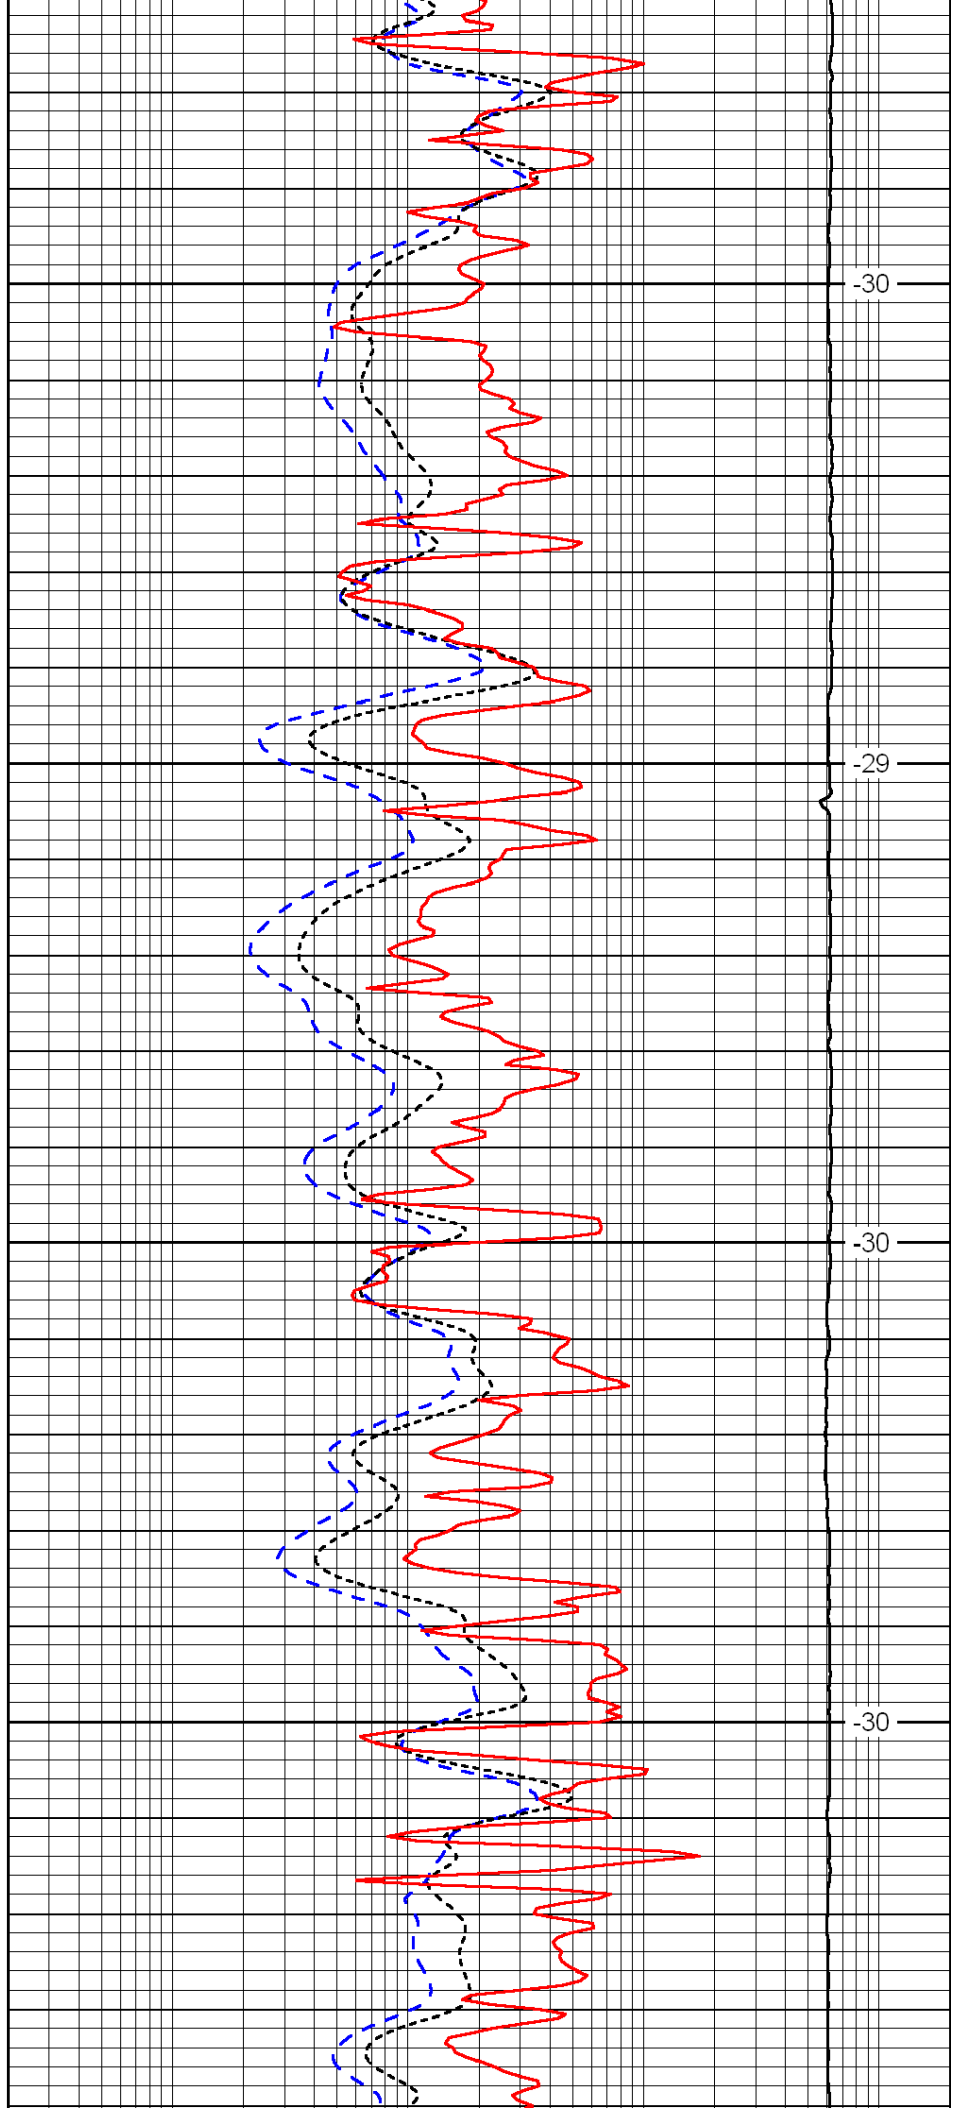


-30

-29

-30

-30

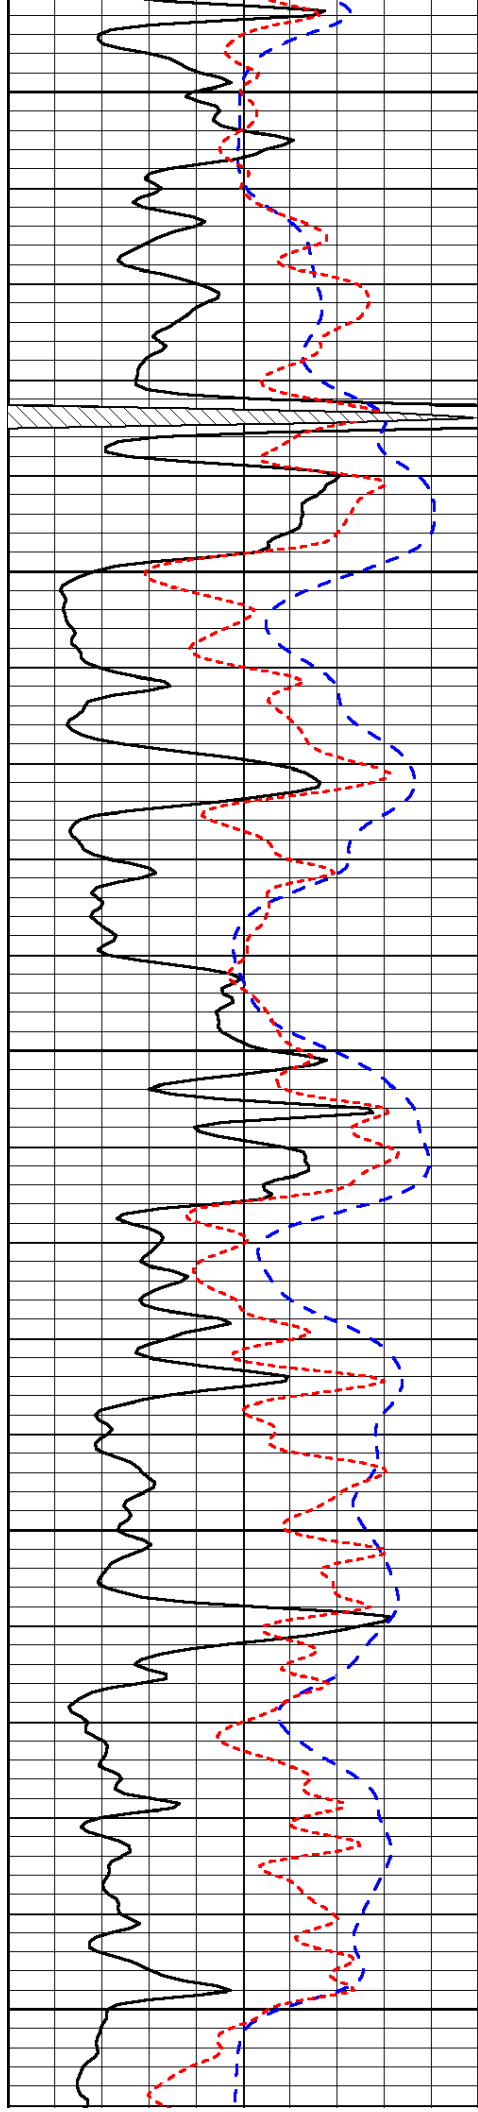


3950

4000

4050

4100

4150

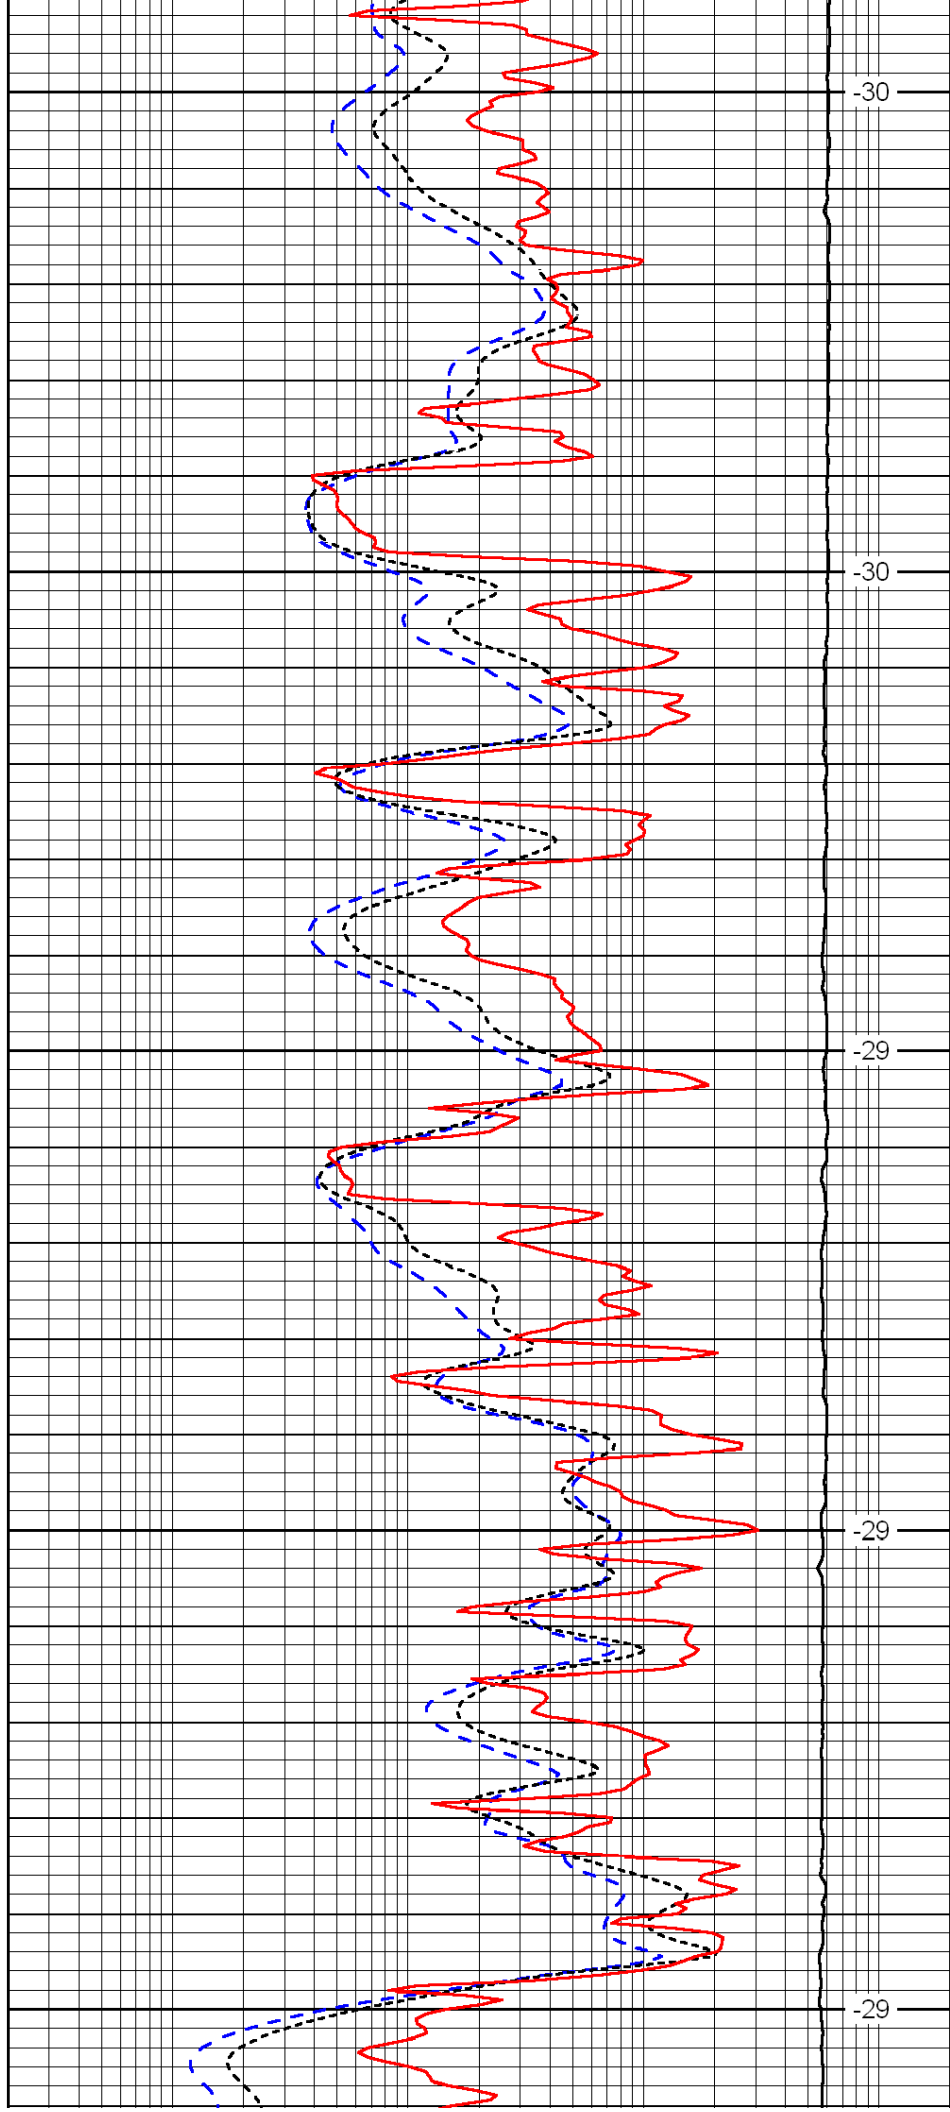


-30

-30

-29

-29

-29

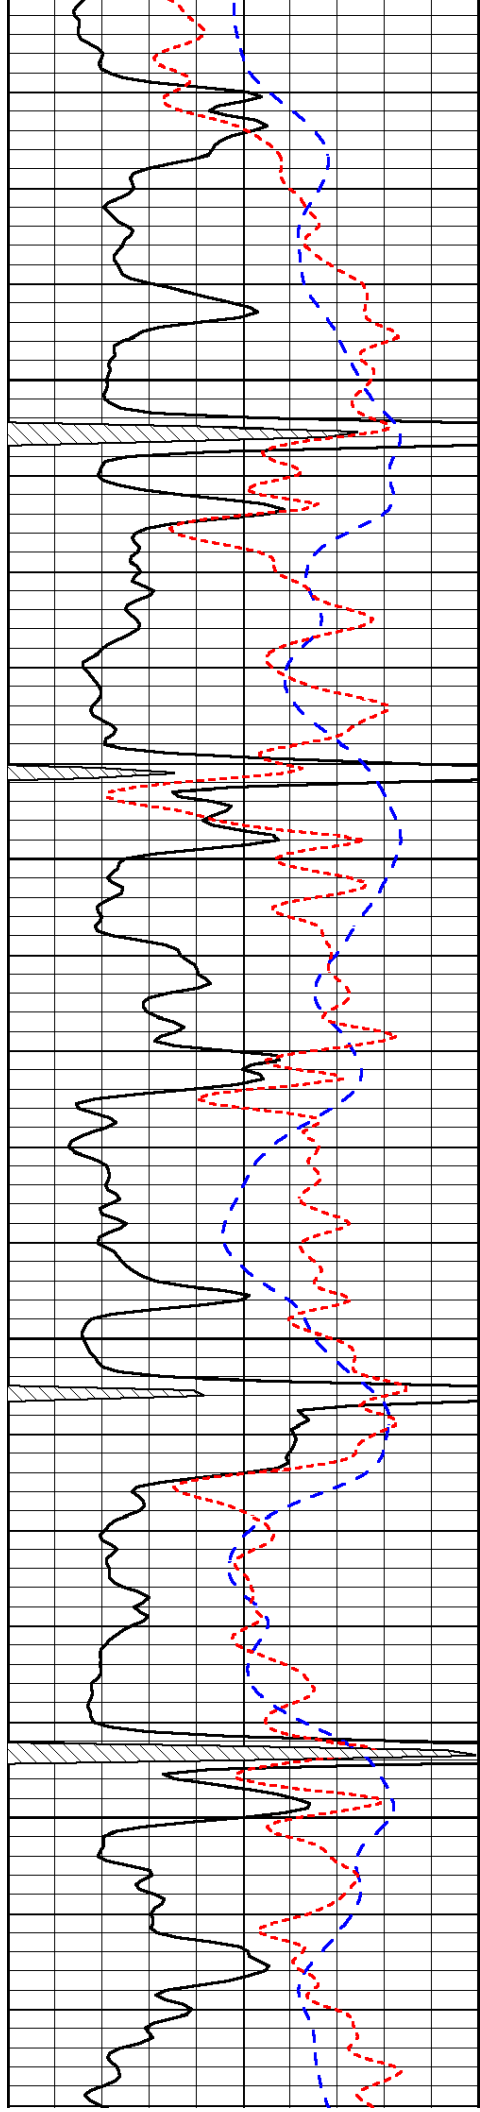


4200

4250

4300

4350

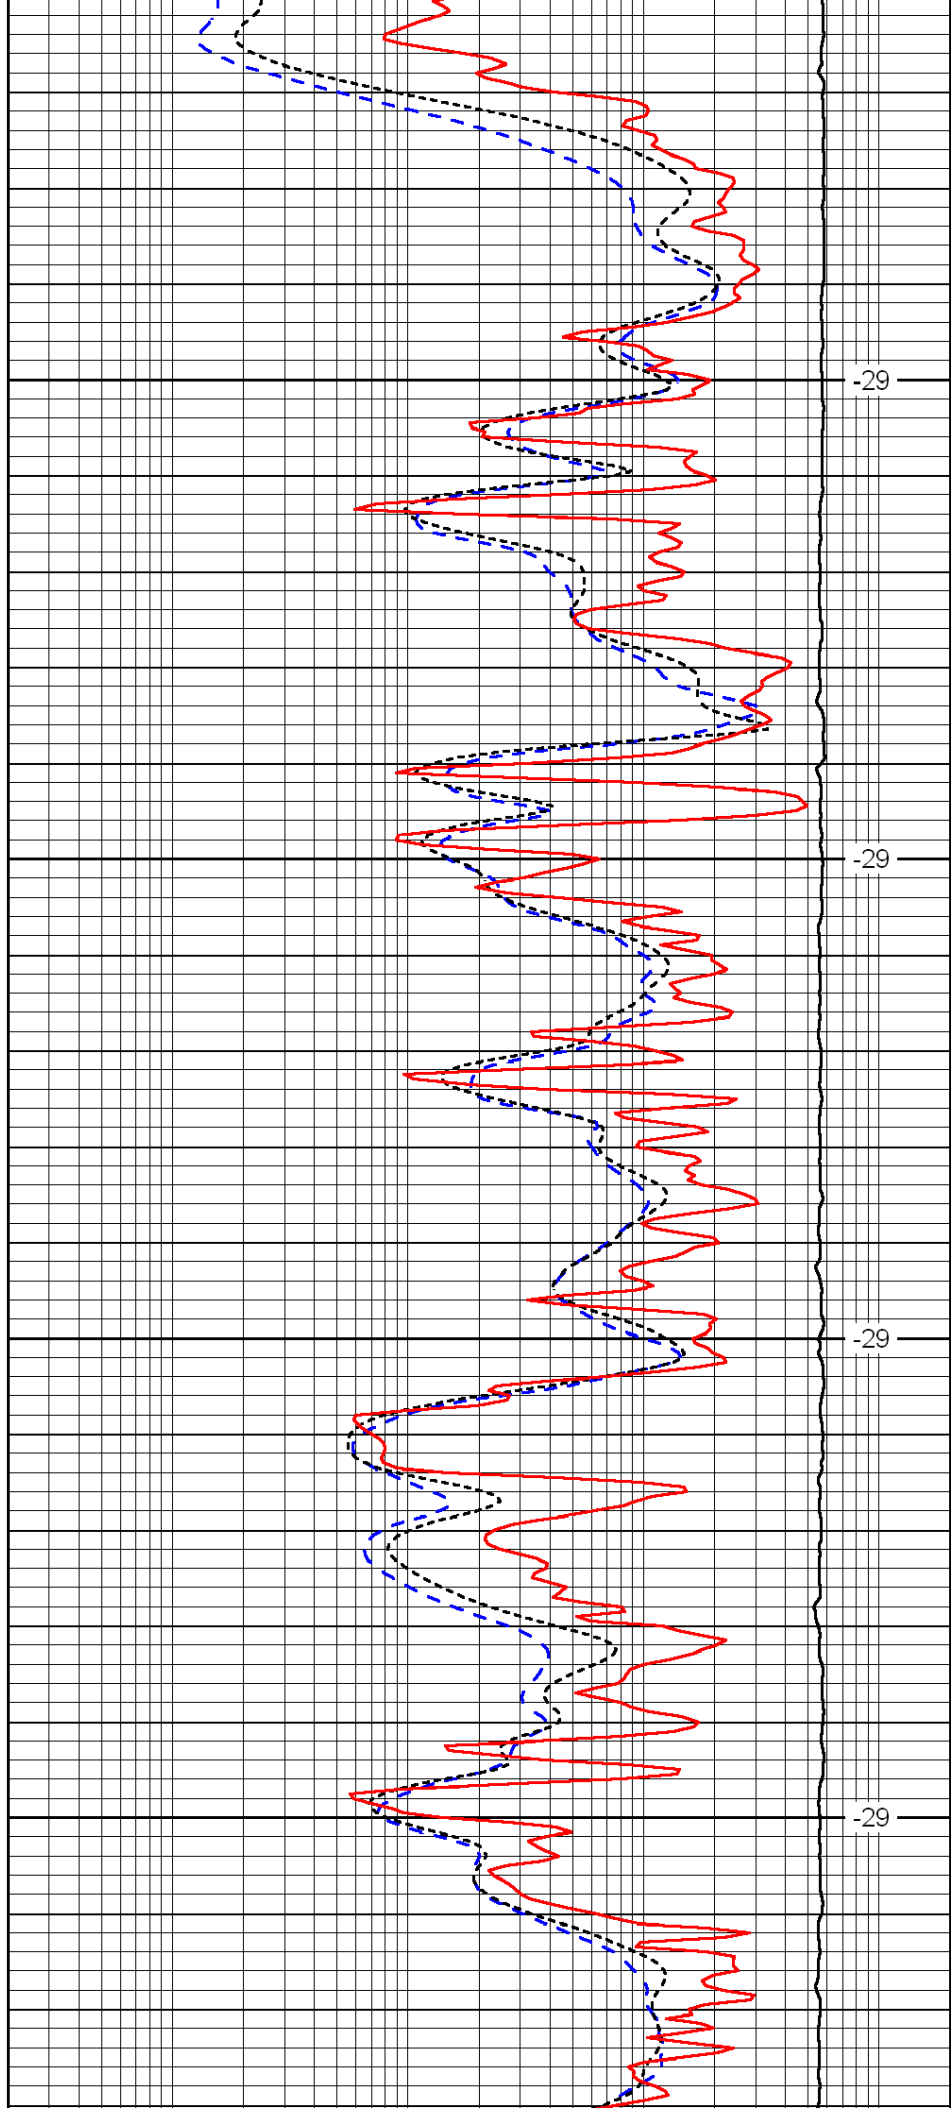


-29

-29

-29

-29

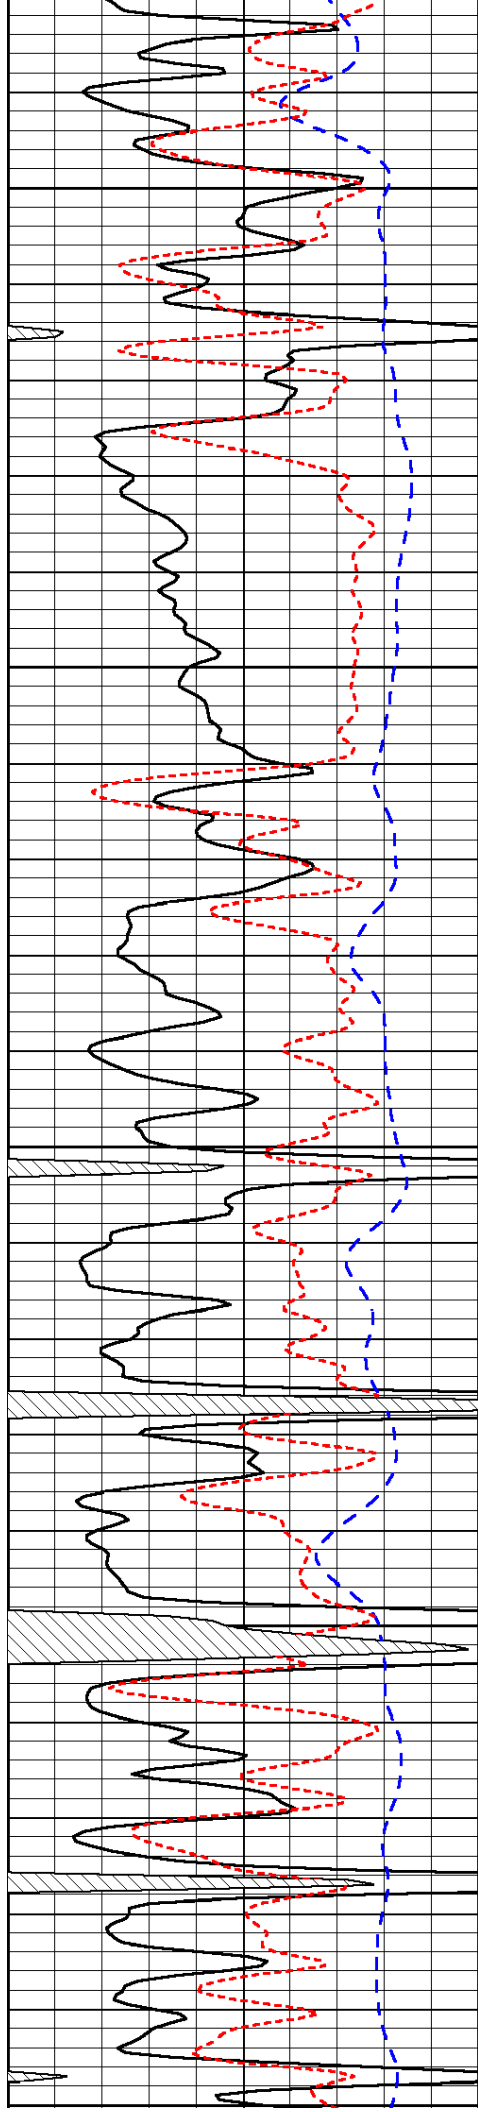


4400

4450

4500

4550

4600

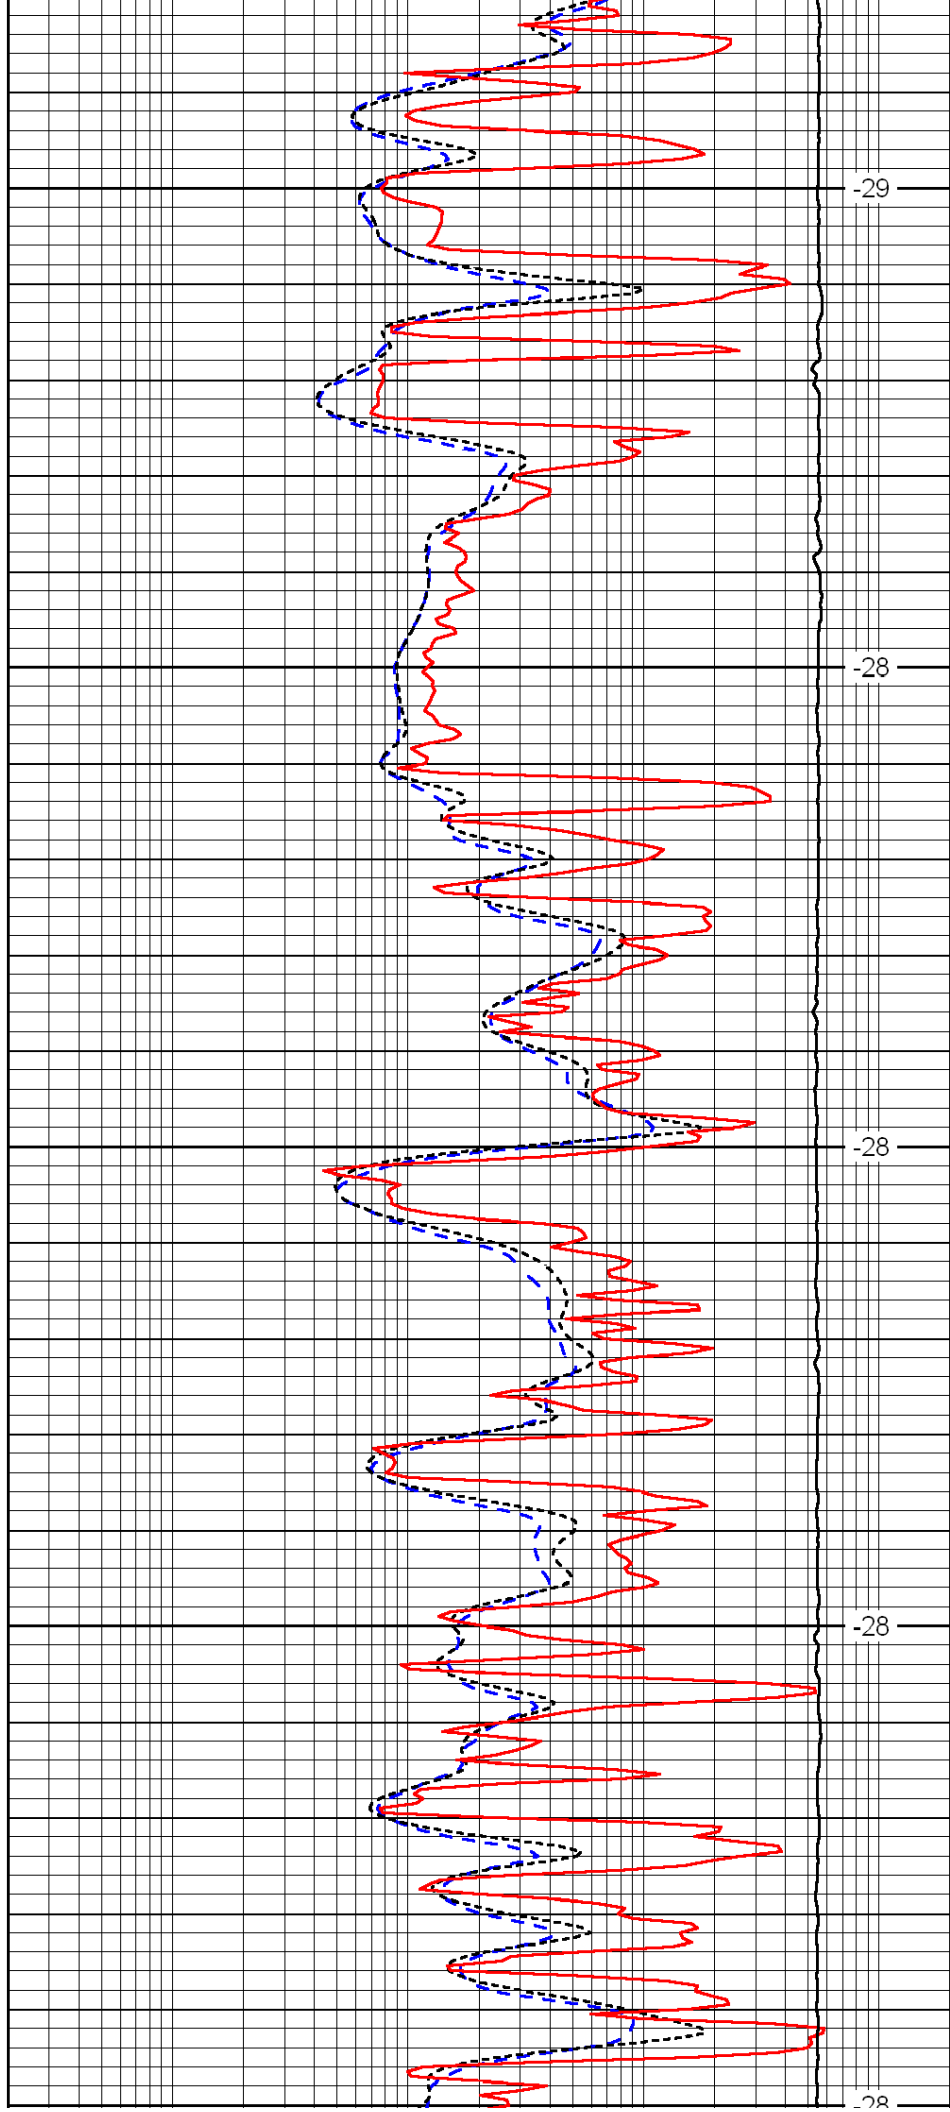



-29

-28

-28

-28

-28

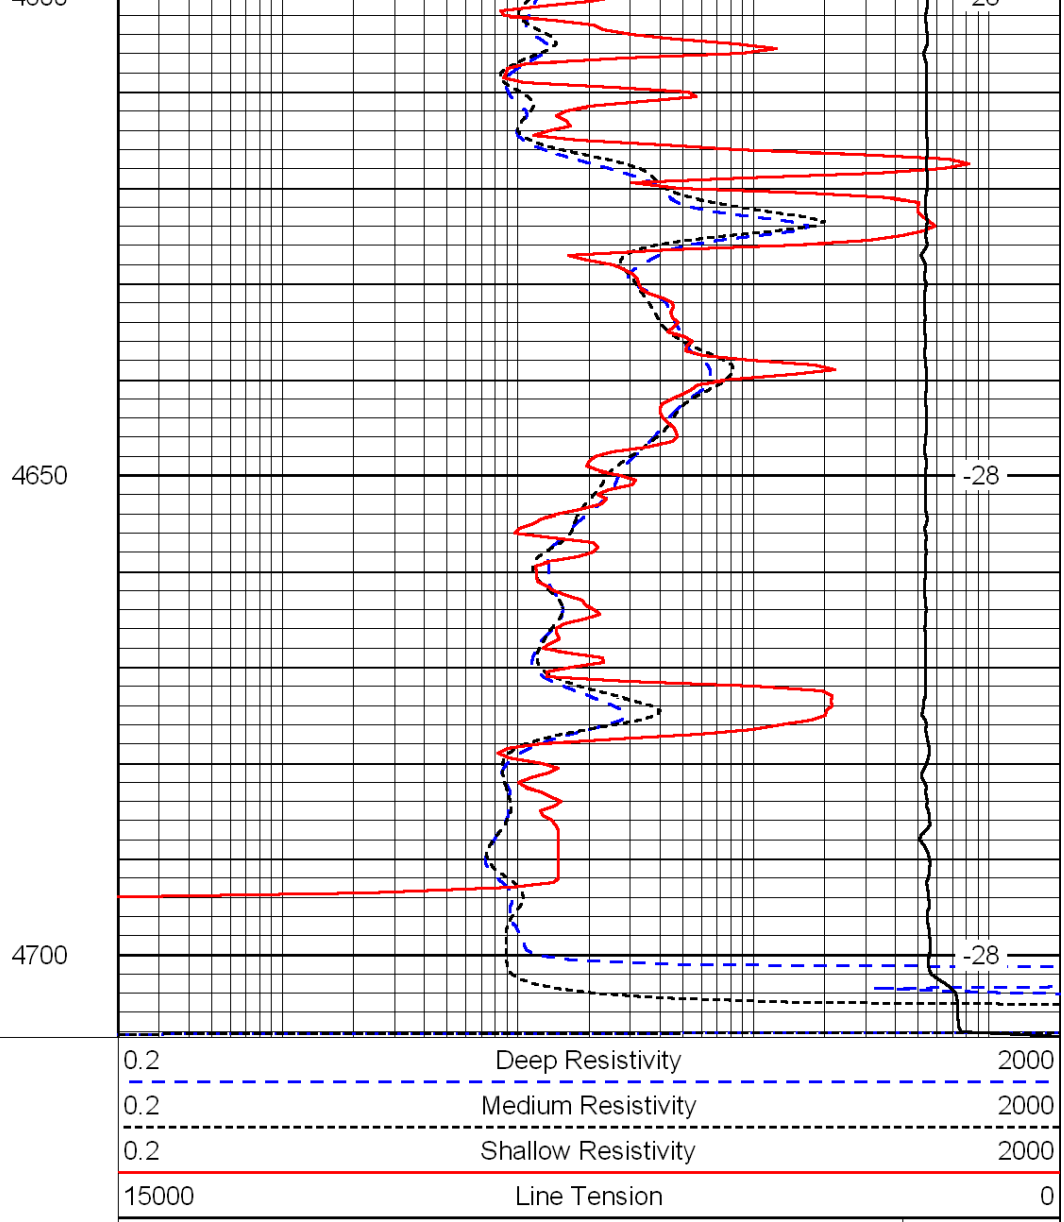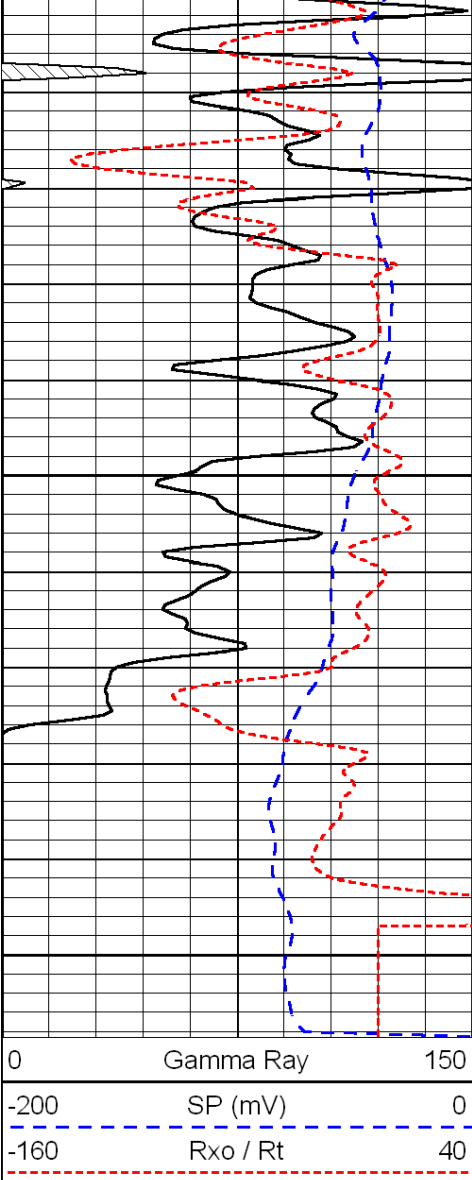

LSPD