



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.			
15-101-22,244-00-00		Well Stormont No. 2-27			
		Field Stormont			
		County Lane		State Kansas	
		Location 580' FSL & 2222' FWL			
Sec: 27		Twp: 19 S		Rge: 28 W	
Permanent Datum		Ground Level		Elevation 2768	
Log Measured From		Kelly Bushing		7 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 2775 D.F. 2768 G.L. 2768	
Date		7/07/2010			
Run Number		Two			
Depth Driller		4700			
Depth Logger		4702			
Bottom Logged Interval		4701			
Top Log Interval		3600			
Casing Driller		8.625 @ 259			
Casing Logger		256			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		2.600			
Density / Viscosity		9.1 54			
pH / Fluid Loss		10.5 8.0			
Source of Sample		Flowline			
Rm @ Meas. Temp		.95 @ 70			
Rmf @ Meas. Temp		.71 @ 70			
Rmc @ Meas. Temp		1.28 @ 70			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.53 @ 125			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		125			
Equipment Number		4			
Location		Hays			
Recorded By		K. Bange			
Witnessed By		Bob Lewellyn			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton, 8 S to 70 rd, 3 1/2 W, N into

Database File: c:\warrior\data\larson_stormont no. 2-27\larsonhd.db
Dataset Pathname: dil\lars2in
Presentation Format: micro
Dataset Creation: Wed Jul 07 07:47:54 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

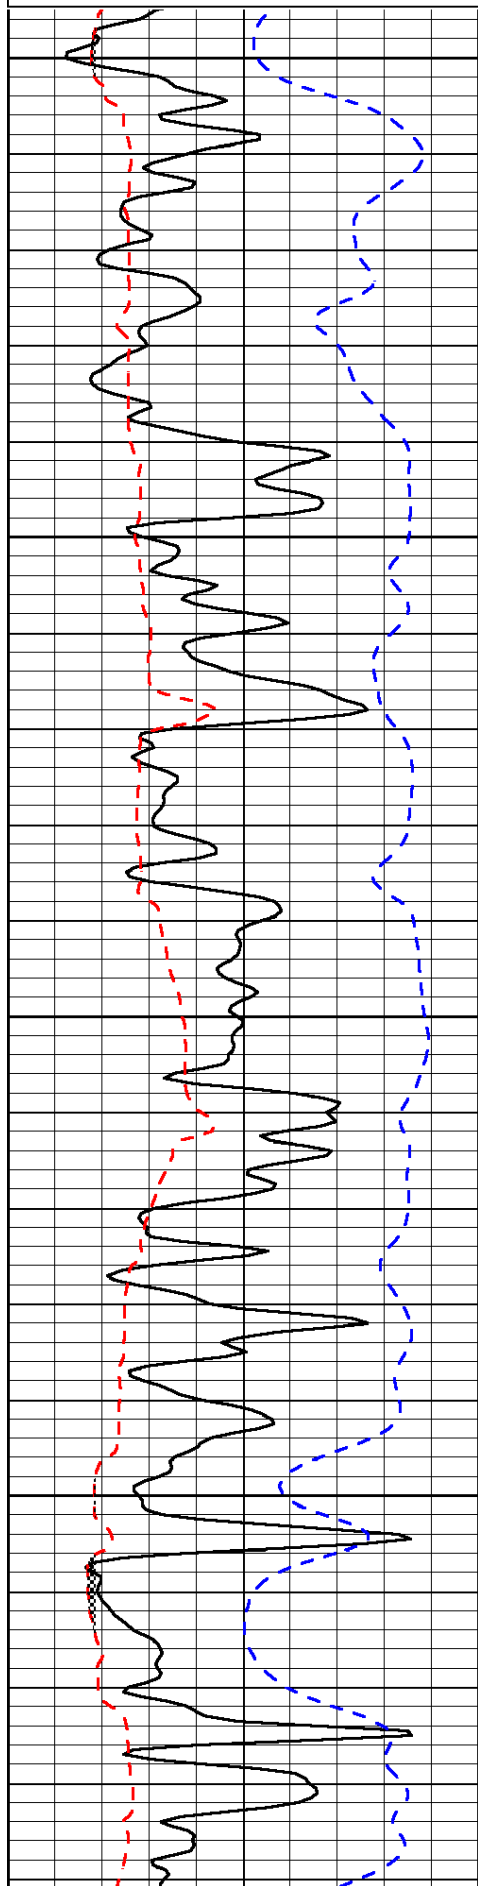

3600


3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

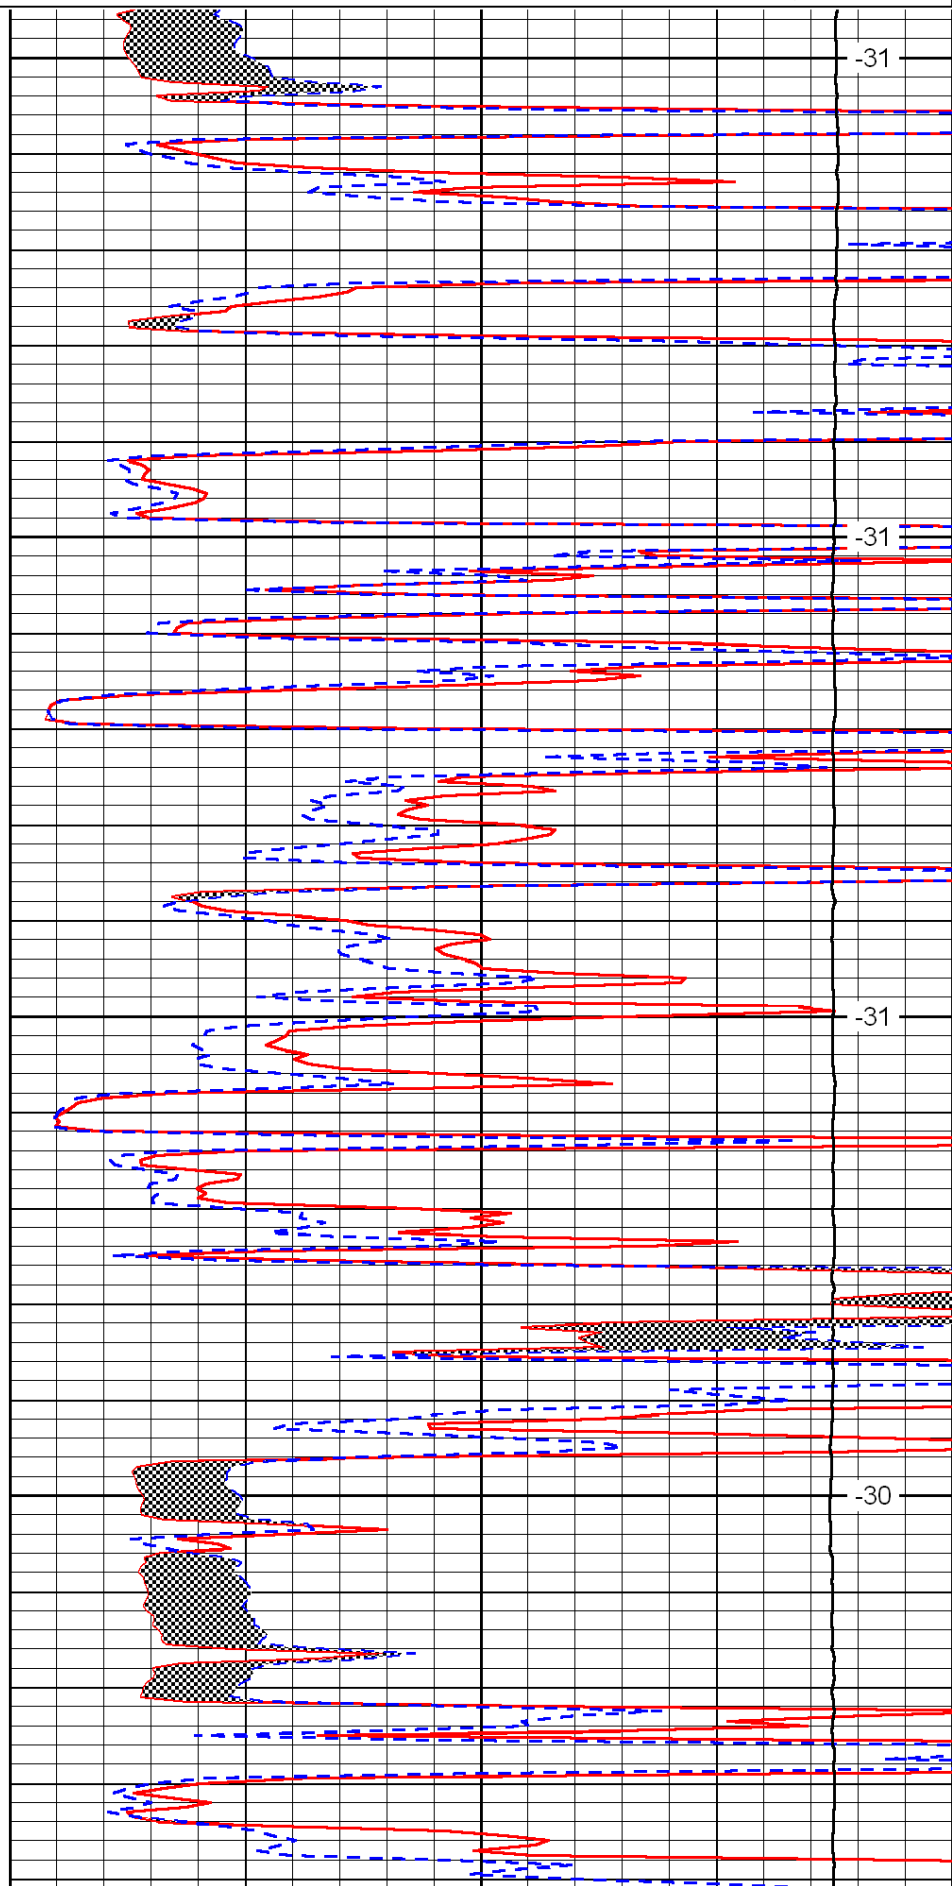


-31

-31

-31

-30

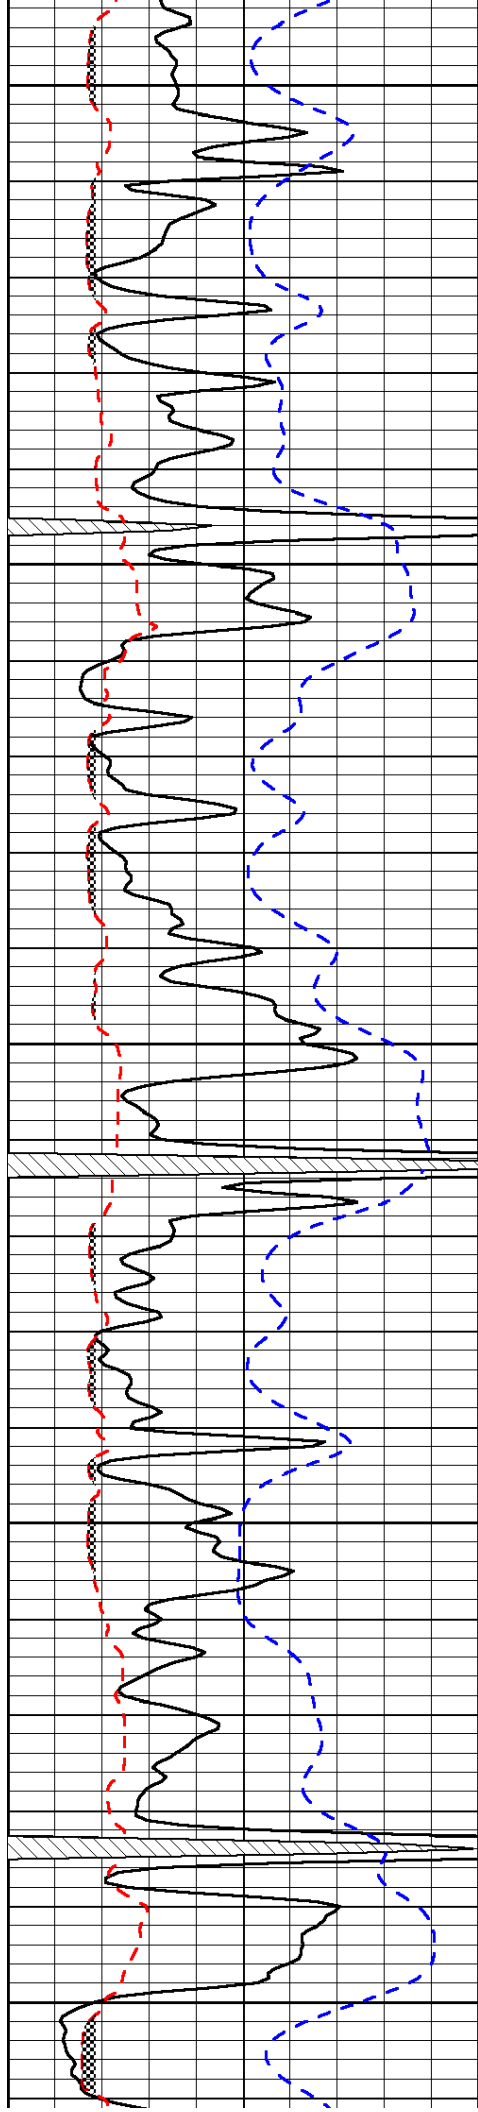


3800

3850

3900

3950

4000

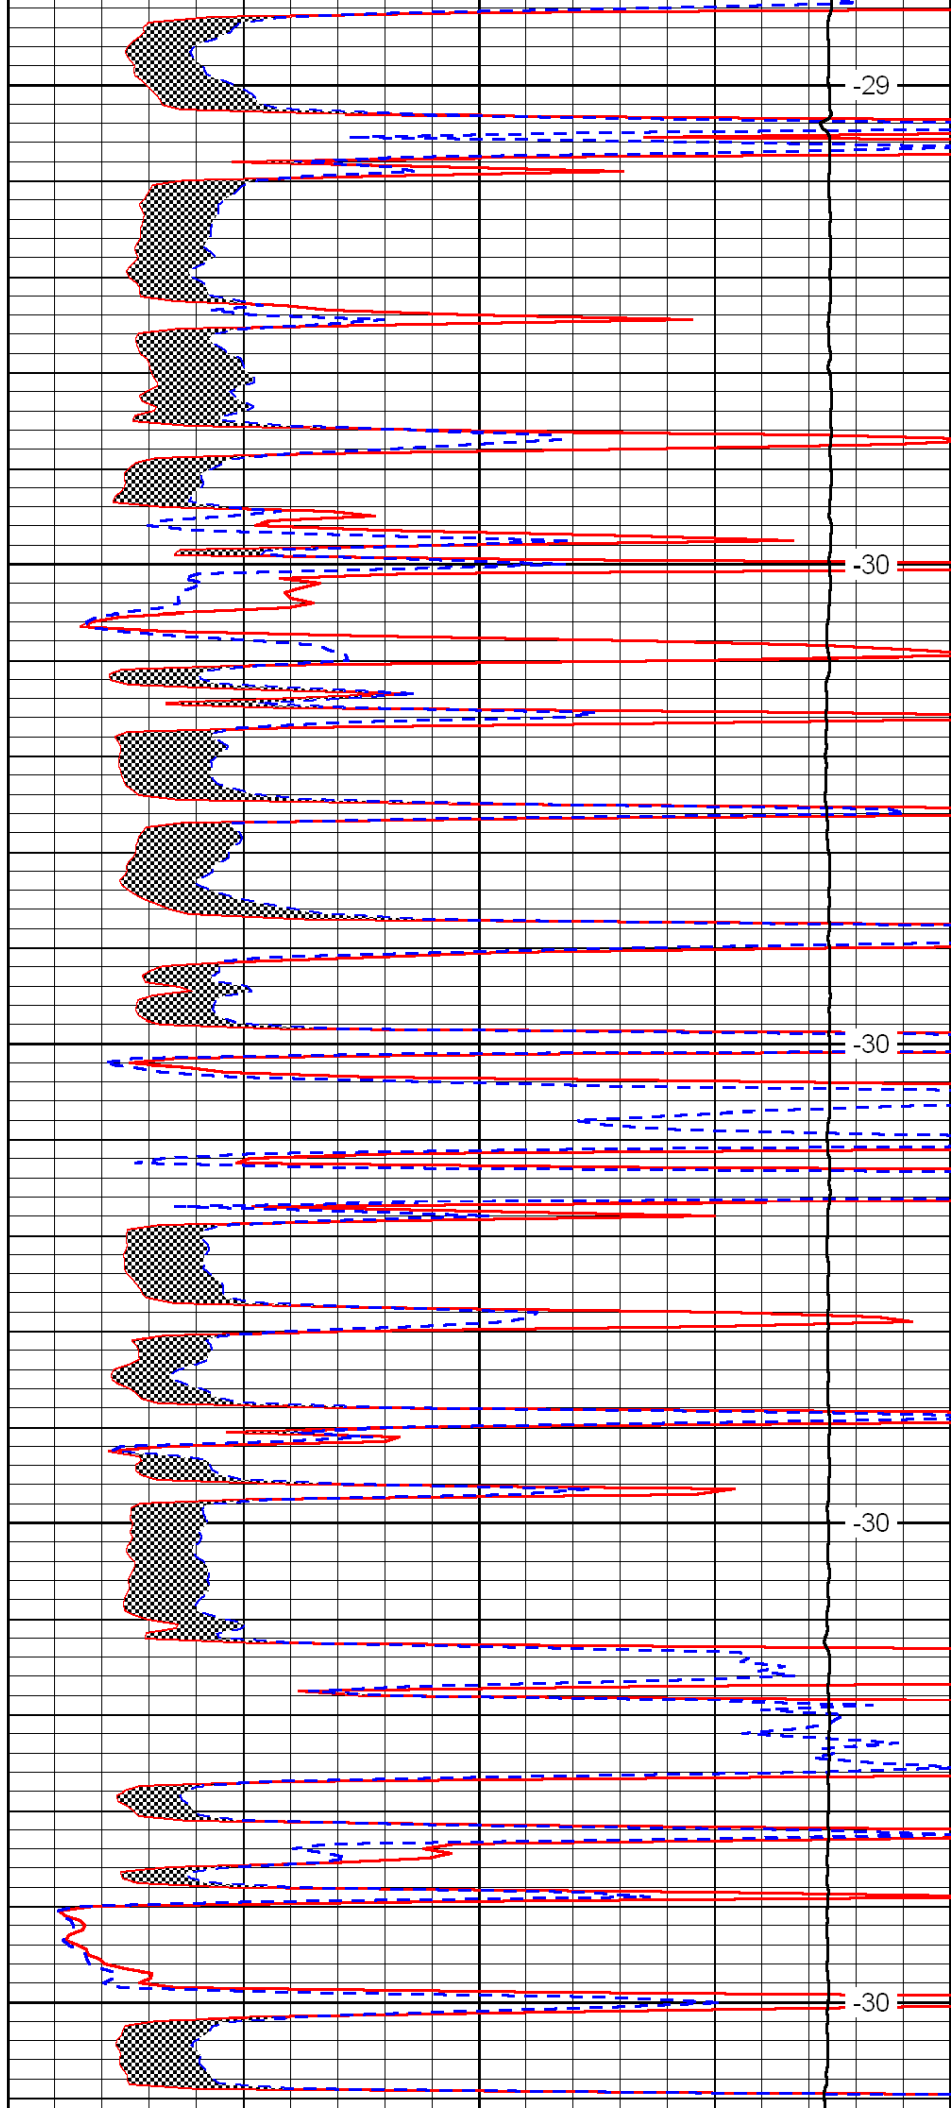


-29

-30

-30

-30

-30

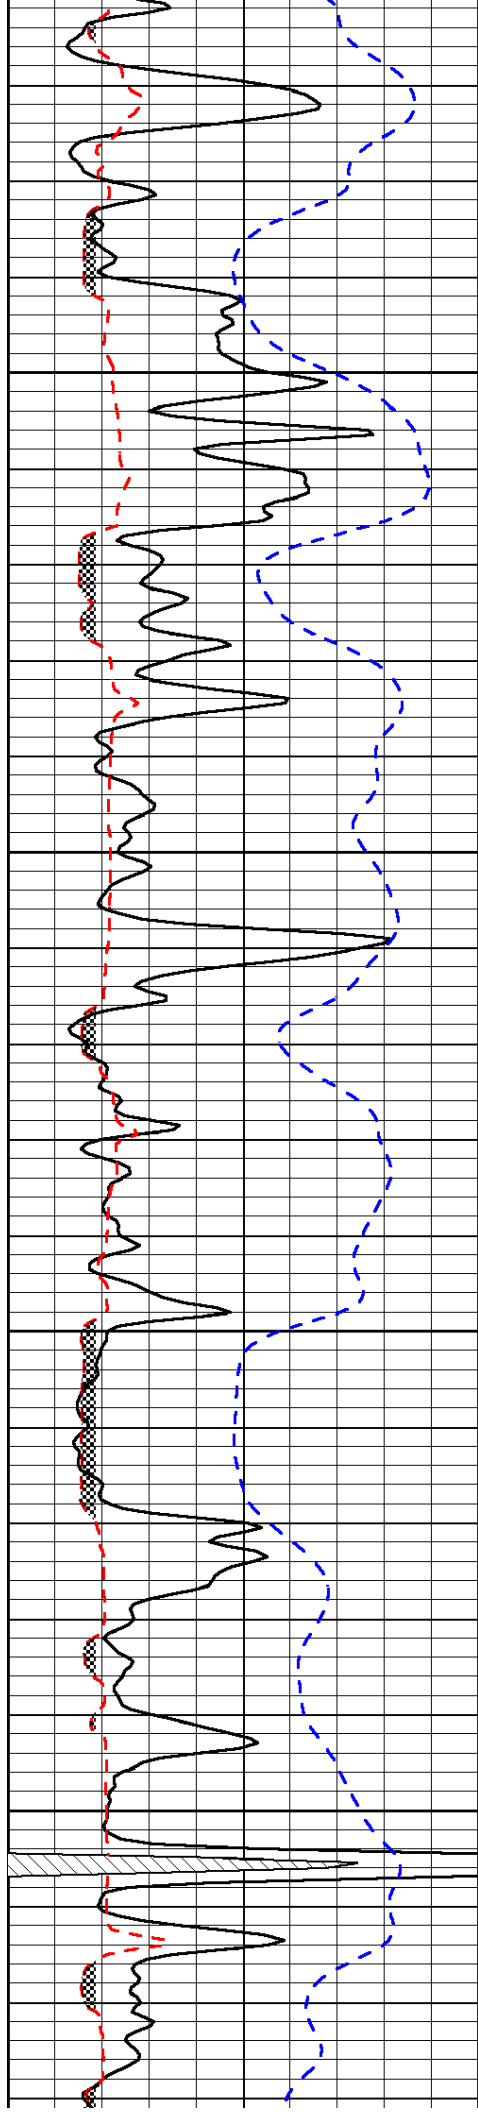



4050

4100

4150

4200

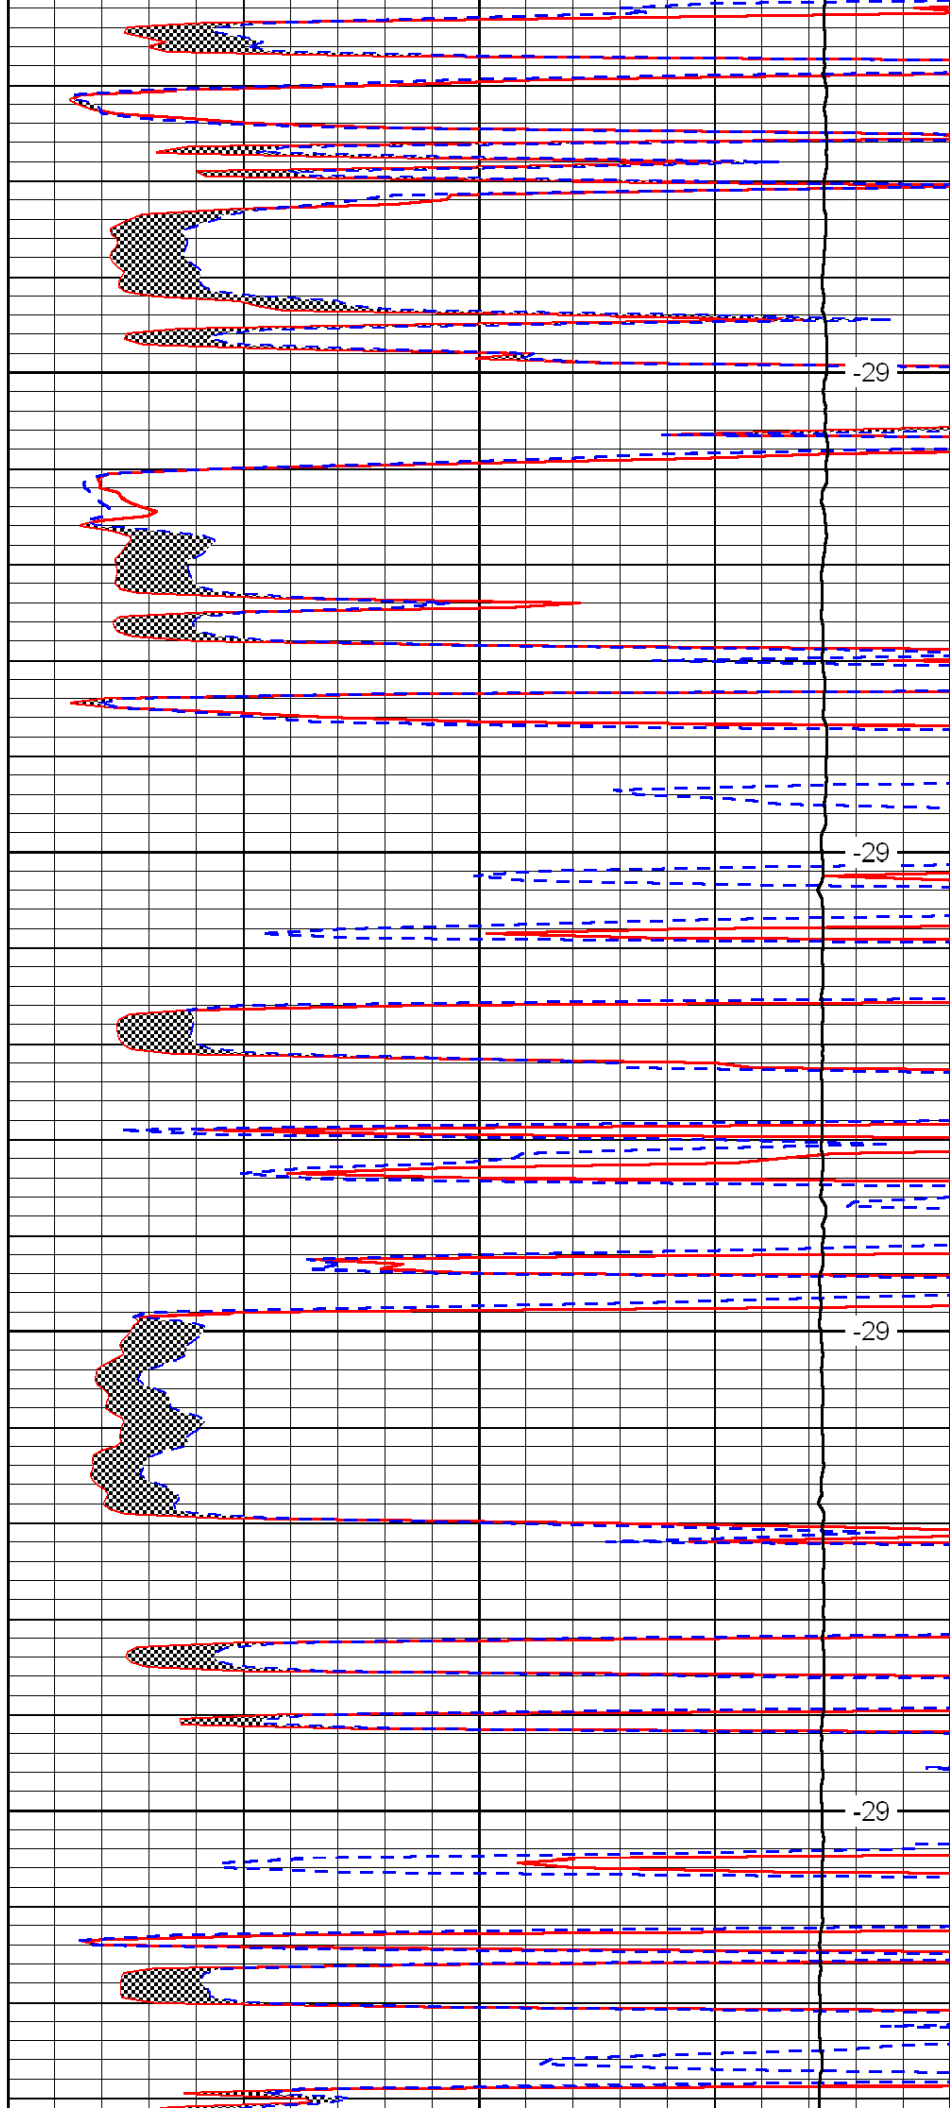

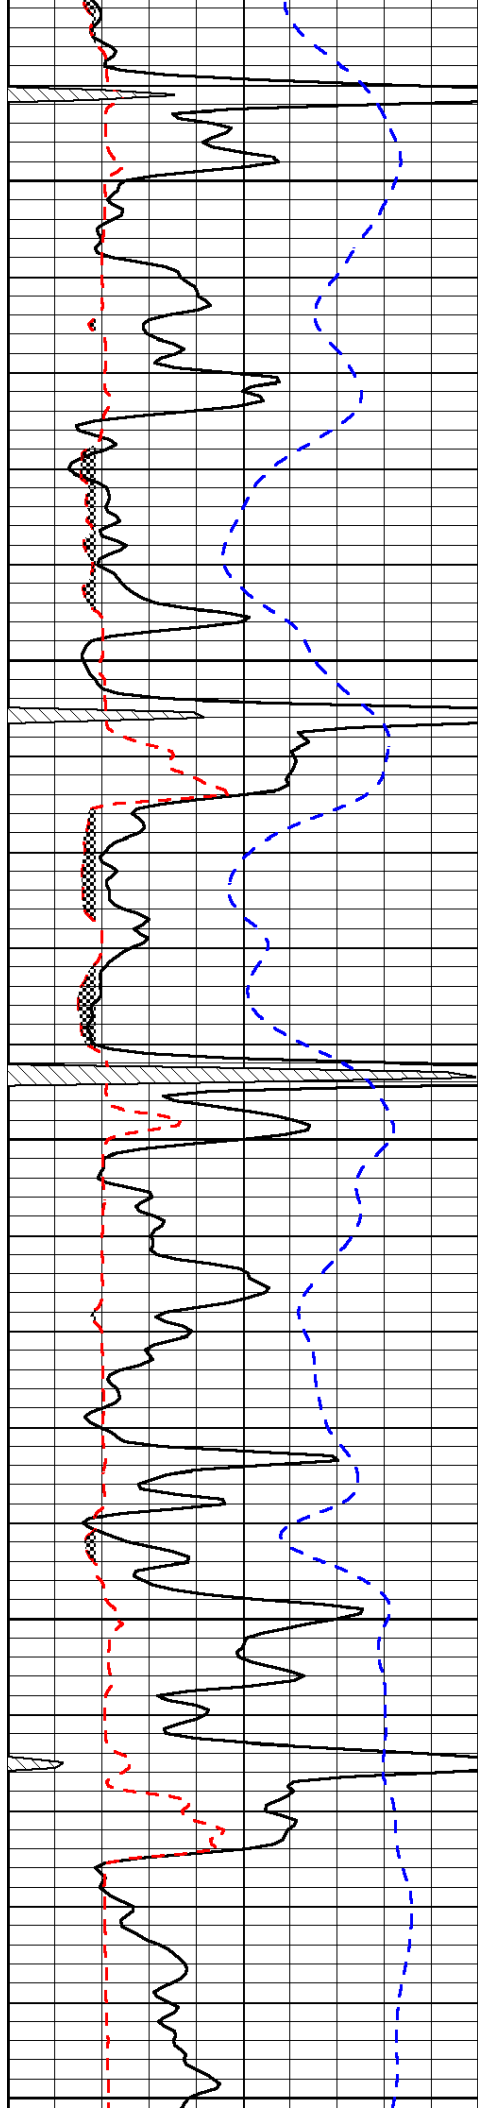


4250

4300

4350

4400

4450

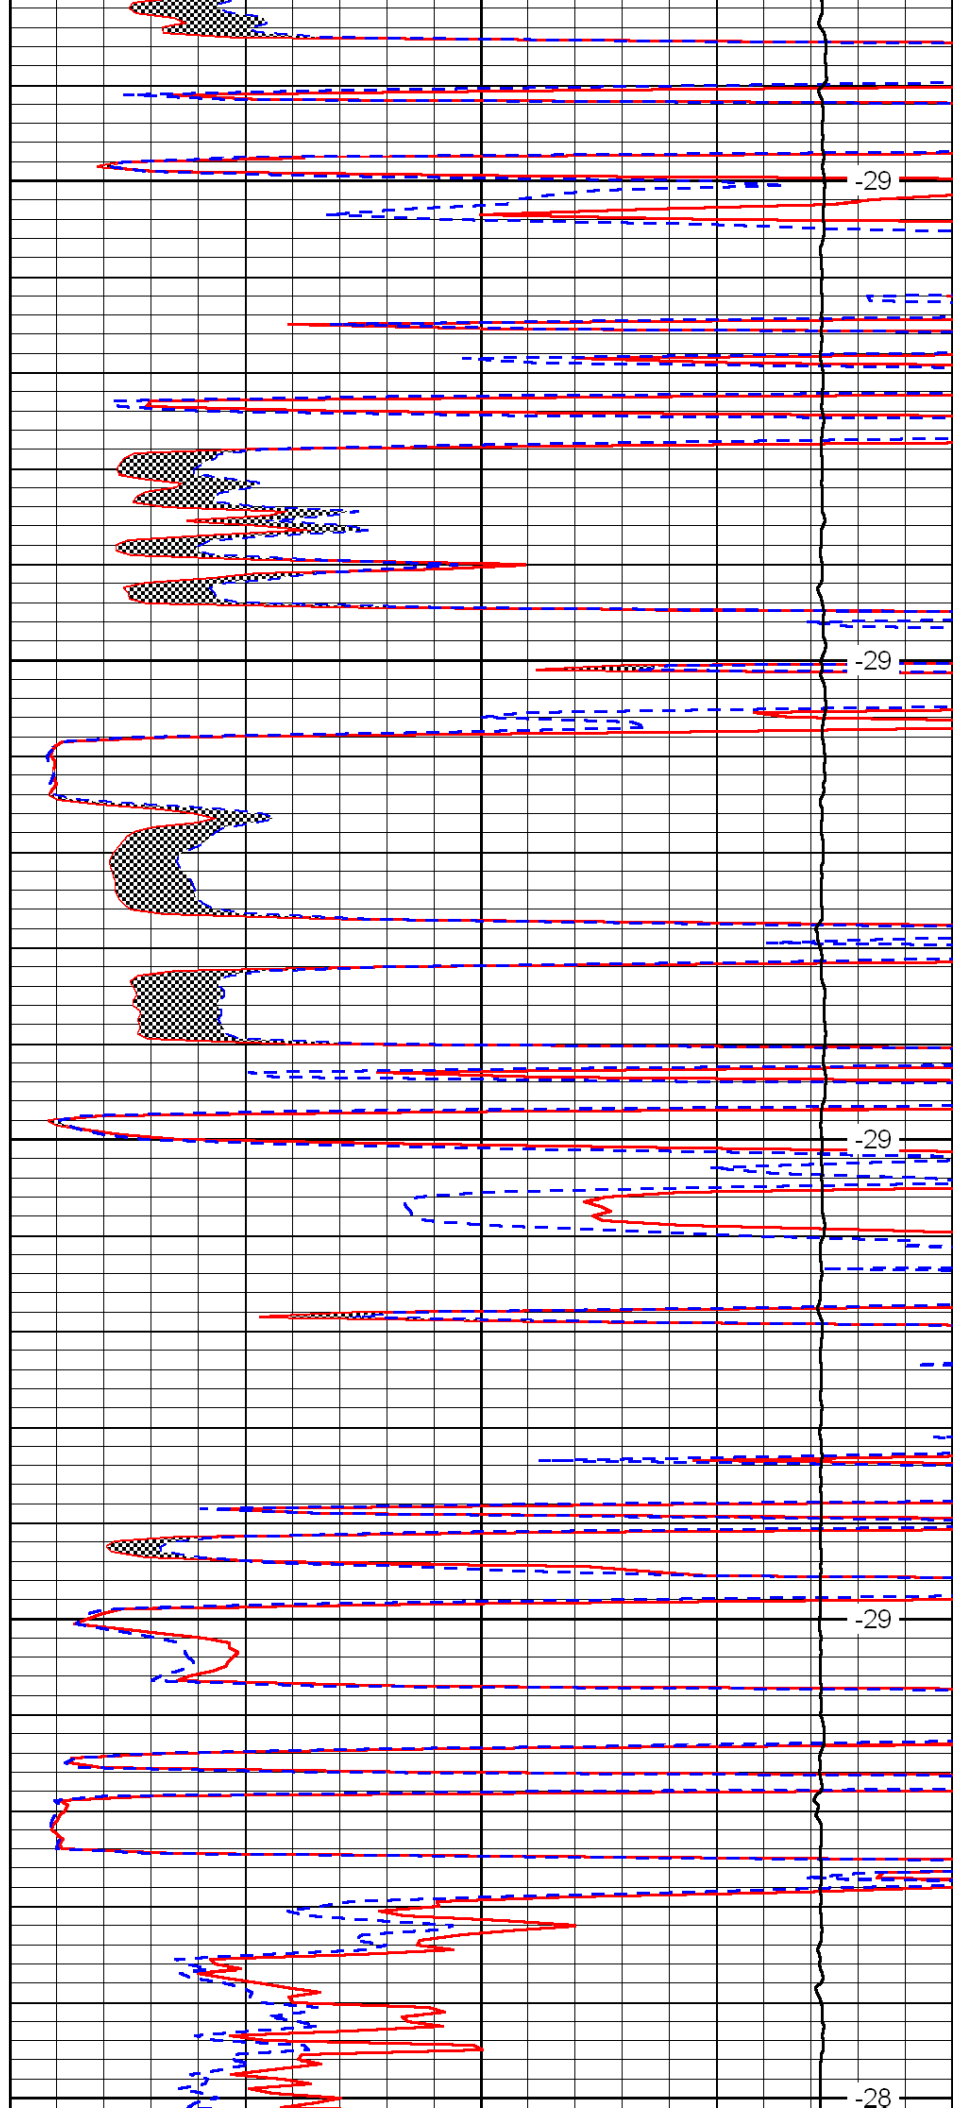


-29

-29

-29

-29

-28

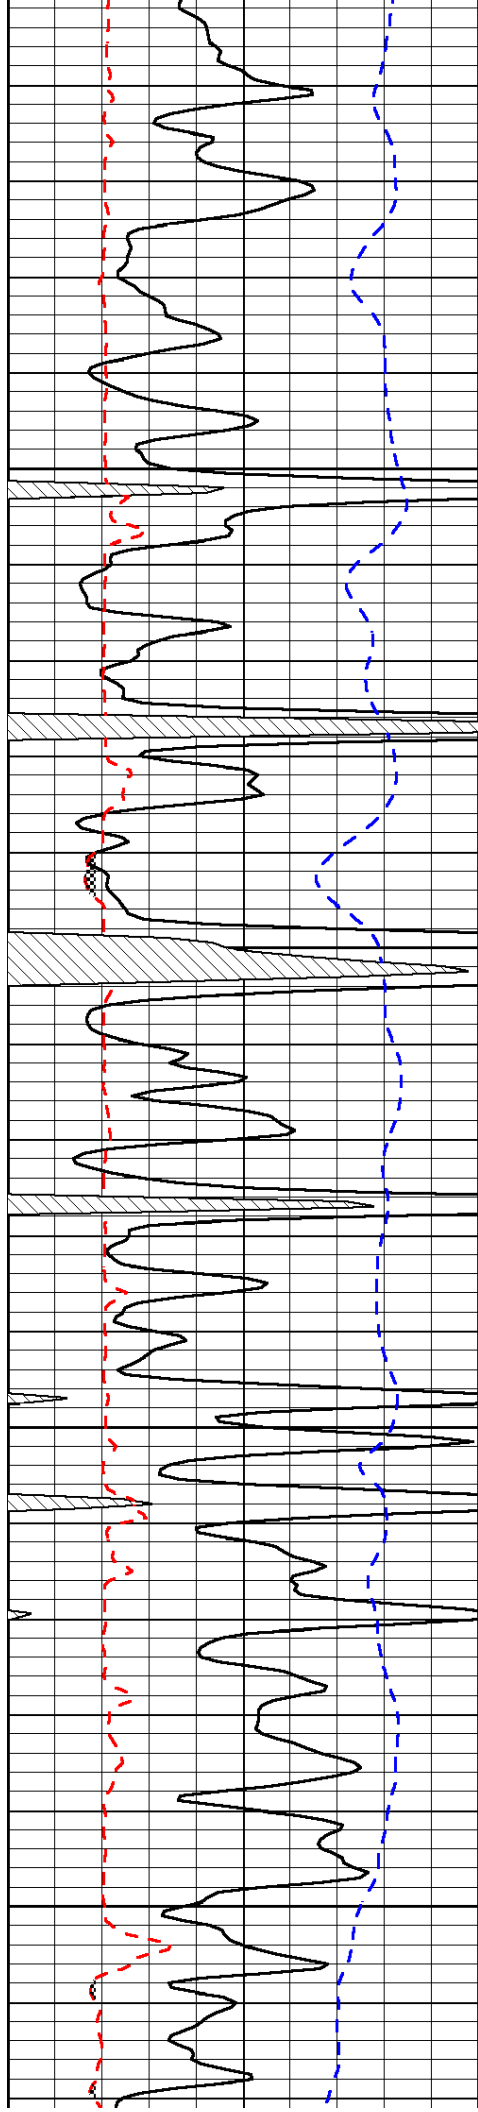


4500

4550

4600

4650

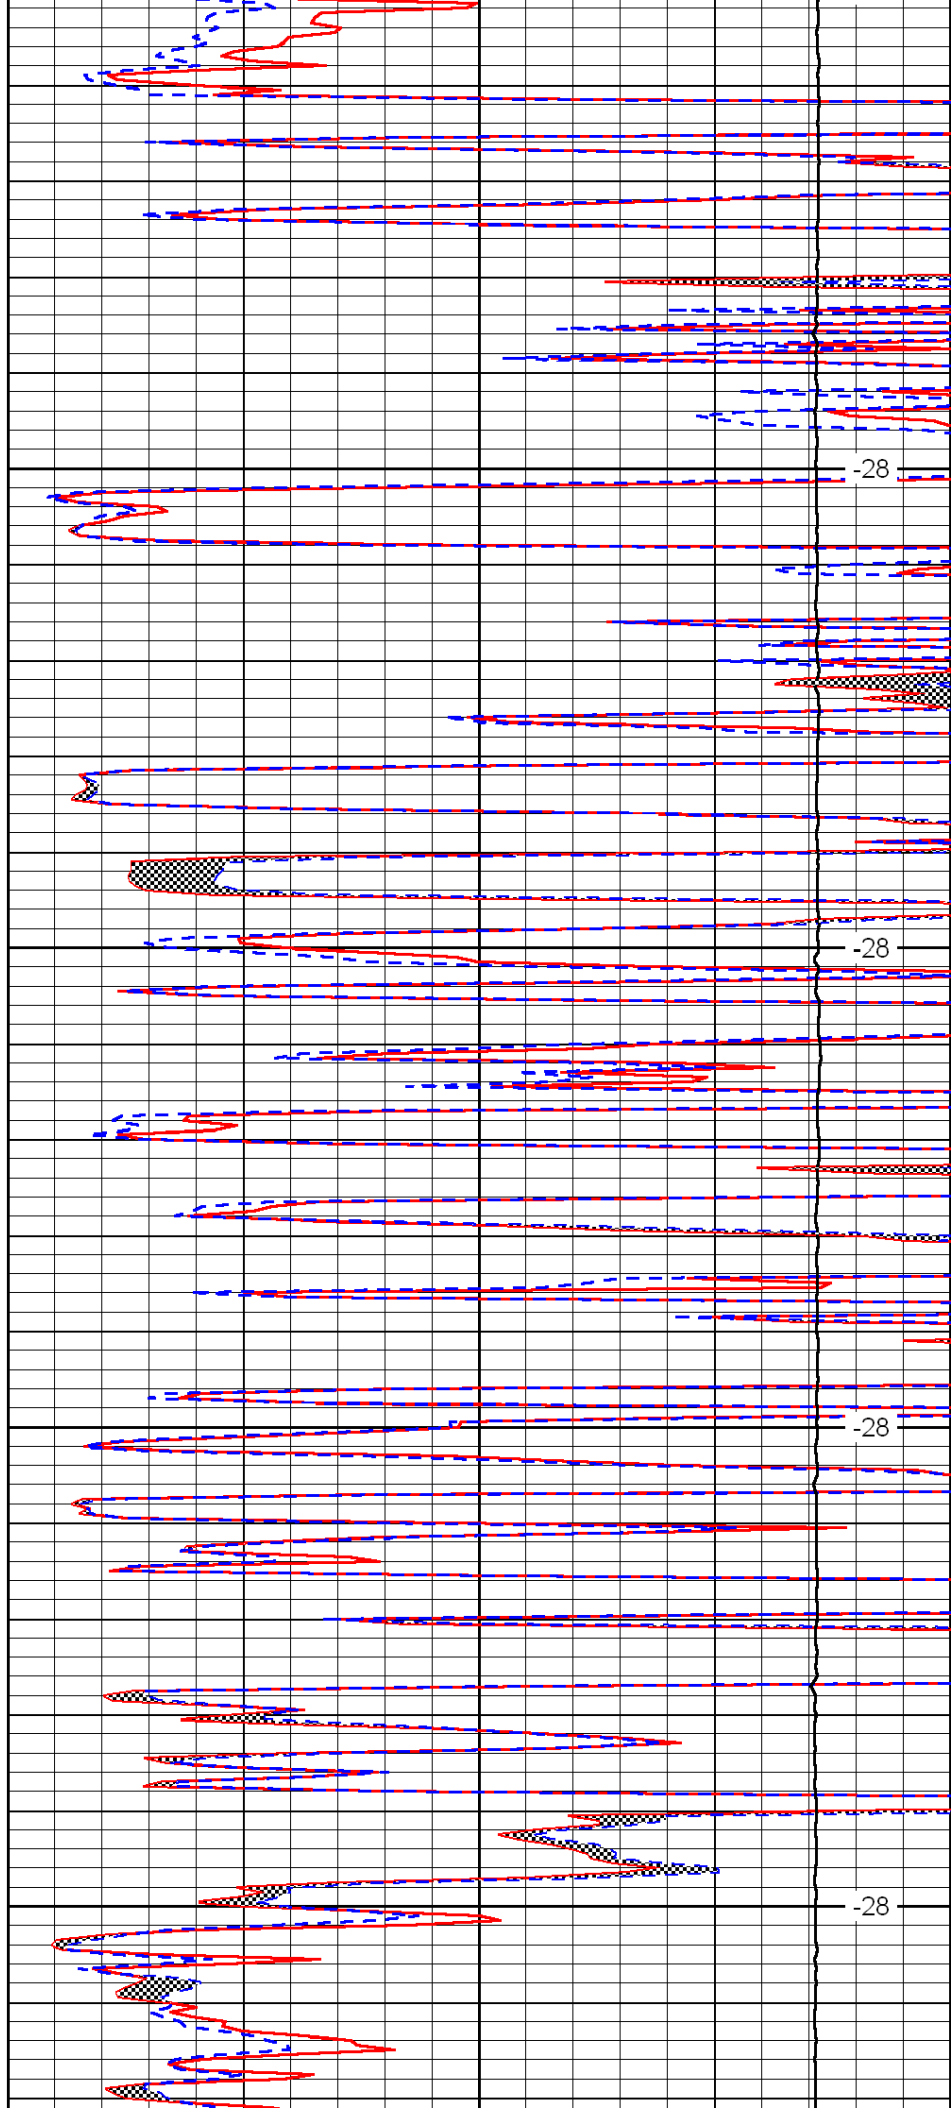


-28

-28

-28

-28

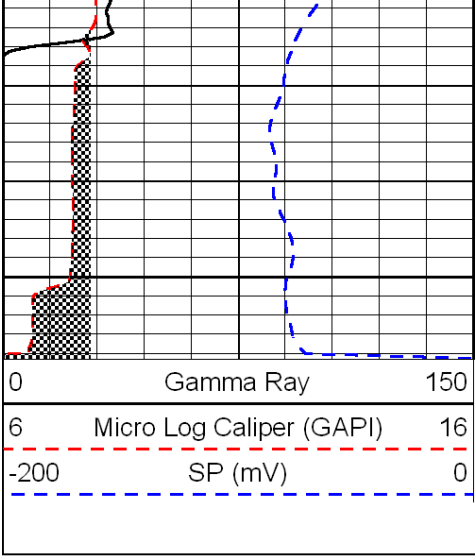

4700

