



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-025-21,502-00-00

Company Falcon Exploration, Inc.

Well YBC No. 2-34 (NW)

Field Wildcat

County Clark

State

Kansas

Location

2010' FNL & 1790' FWL

Sec: 34

Twp: 30S

Rge: 22W

Elevation

Permament Datum Ground Level Elevation 2337
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2347
D.F. 2337
G.L. 2337

Date 06/25/2010

Run Number Two

Depth Driller 6113

Depth Logger 6113

Bottom Logged Interval 6112

Top Log Interval 4000

Casing Driller 8.625 @ 651

Casing Logger 652

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 11,400

Density / Viscosity 9.5 48

pH / Fluid Loss 10.5 11.6

Source of Sample Flowline

Rm @ Meas. Temp .6 @ 85

Rmf @ Meas. Temp .45 @ 85

Rmc @ Meas. Temp .81 @ 85

Source of Rmf / Rmc Charts

Rm @ BHT .37 @ 139

Operating Rig Time 3 Hours

Max Rec. Temp. F 139

Equipment Number 17

Location Hays

Recorded By Jason Wellbrock

Witnessed By Derek Patterson

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Kingsdown 8 1/2S to E rd, 1 1/2E, S Into 2 miles

Database File: falhd.db
Dataset Pathname: dil/fal2in
Presentation Format: micro
Dataset Creation: Fri Jun 25 14:20:24 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

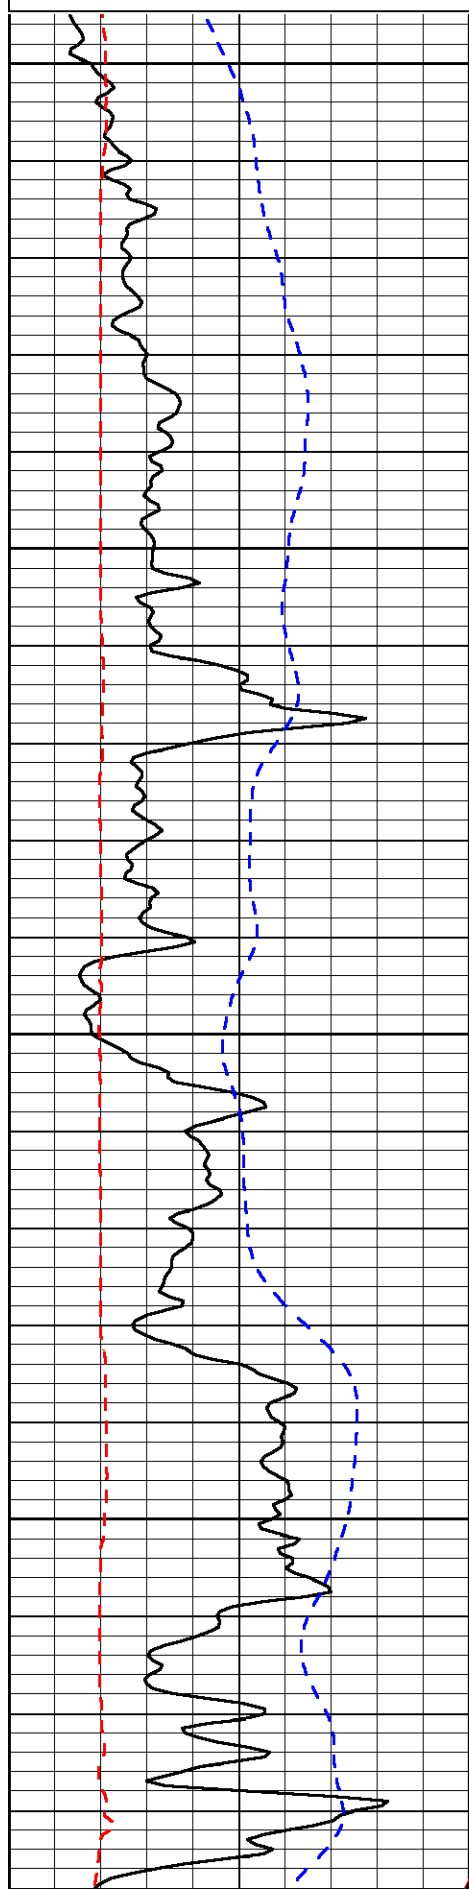


4000

4050

4100

4150

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD

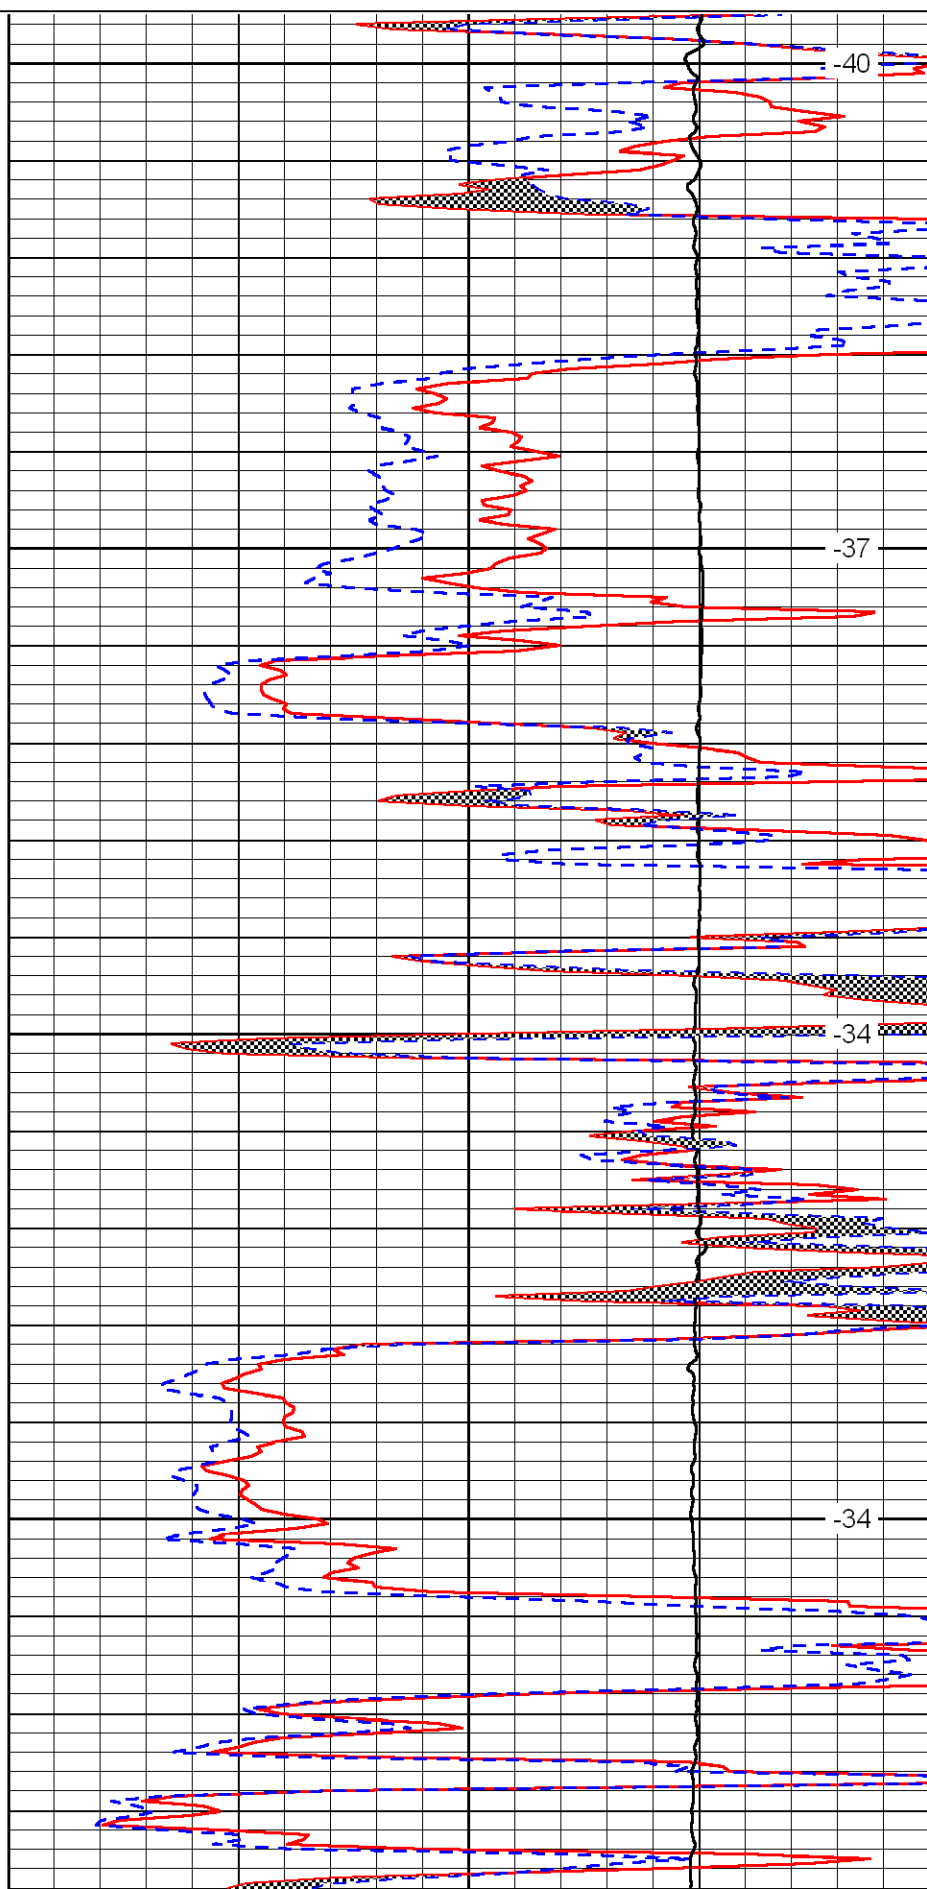


-40

-37

-34

-34

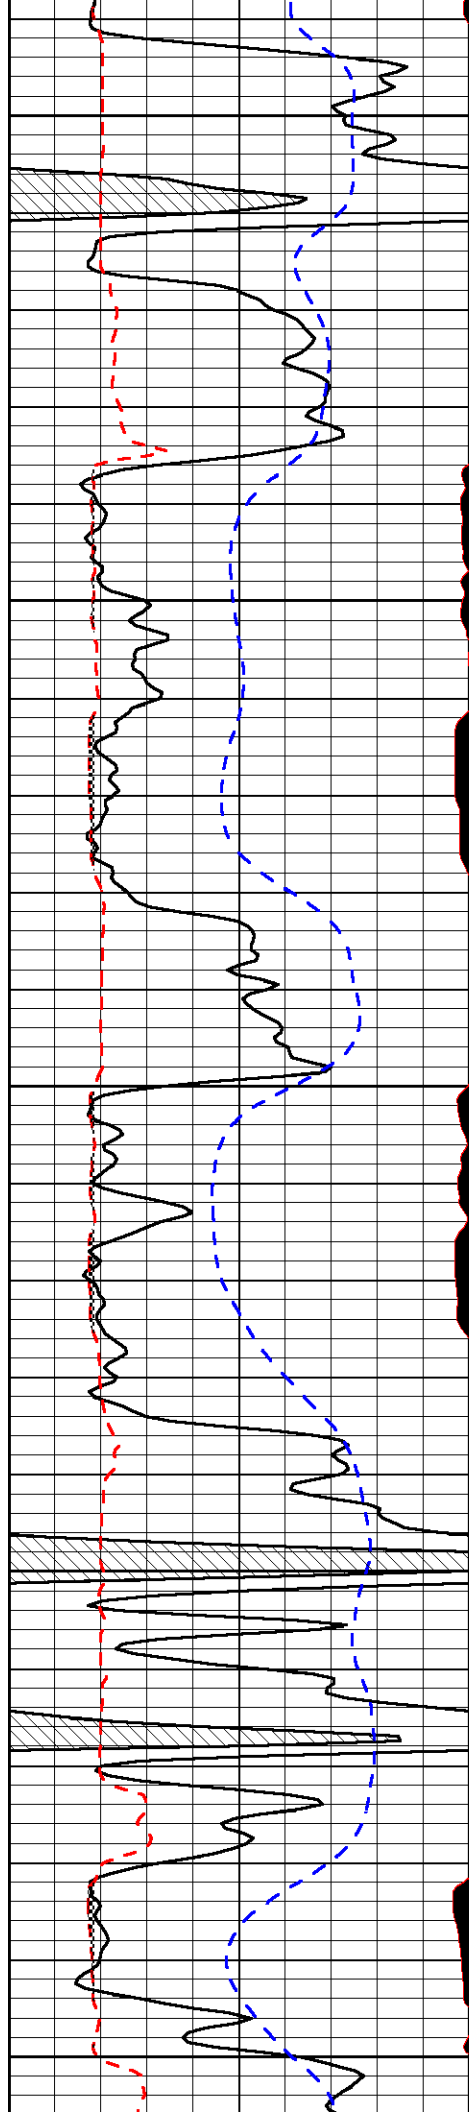


4200

4250

4300

4350

4400

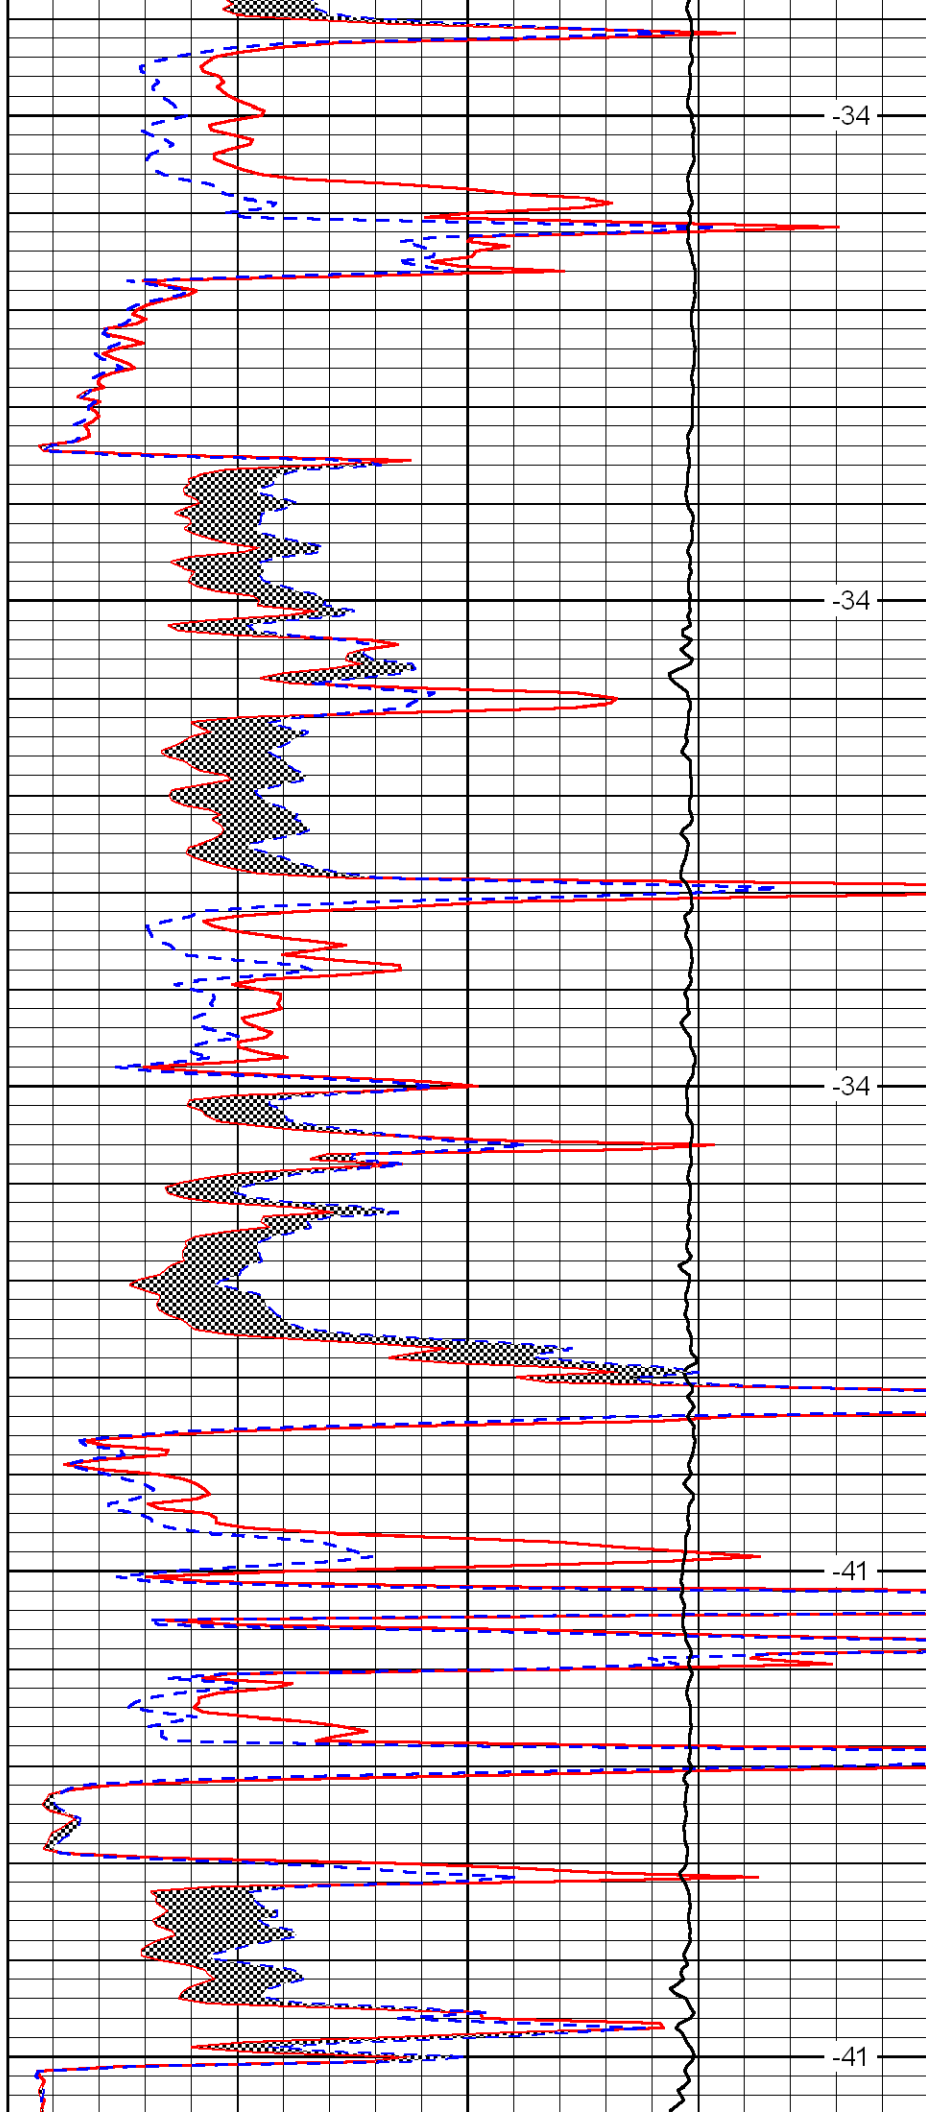


-34

-34

-34

-41

-41

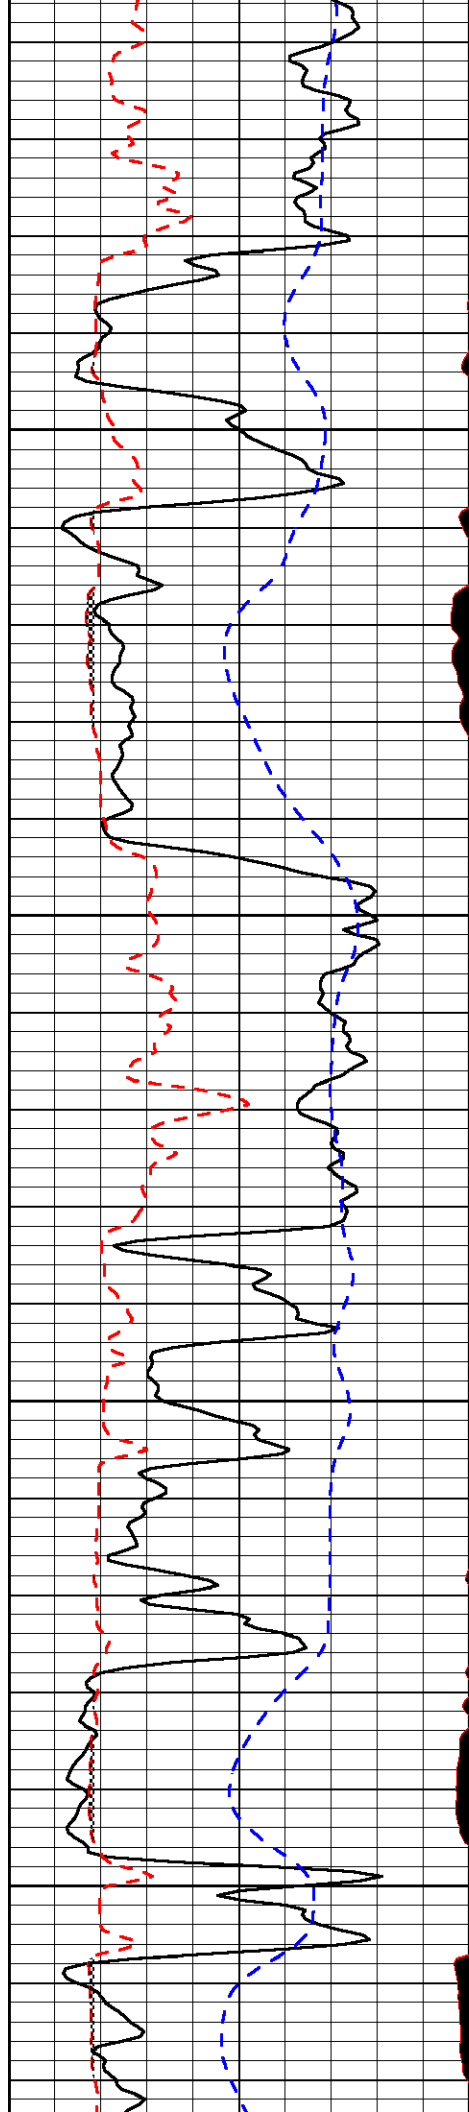


4450

4500

4550

4600

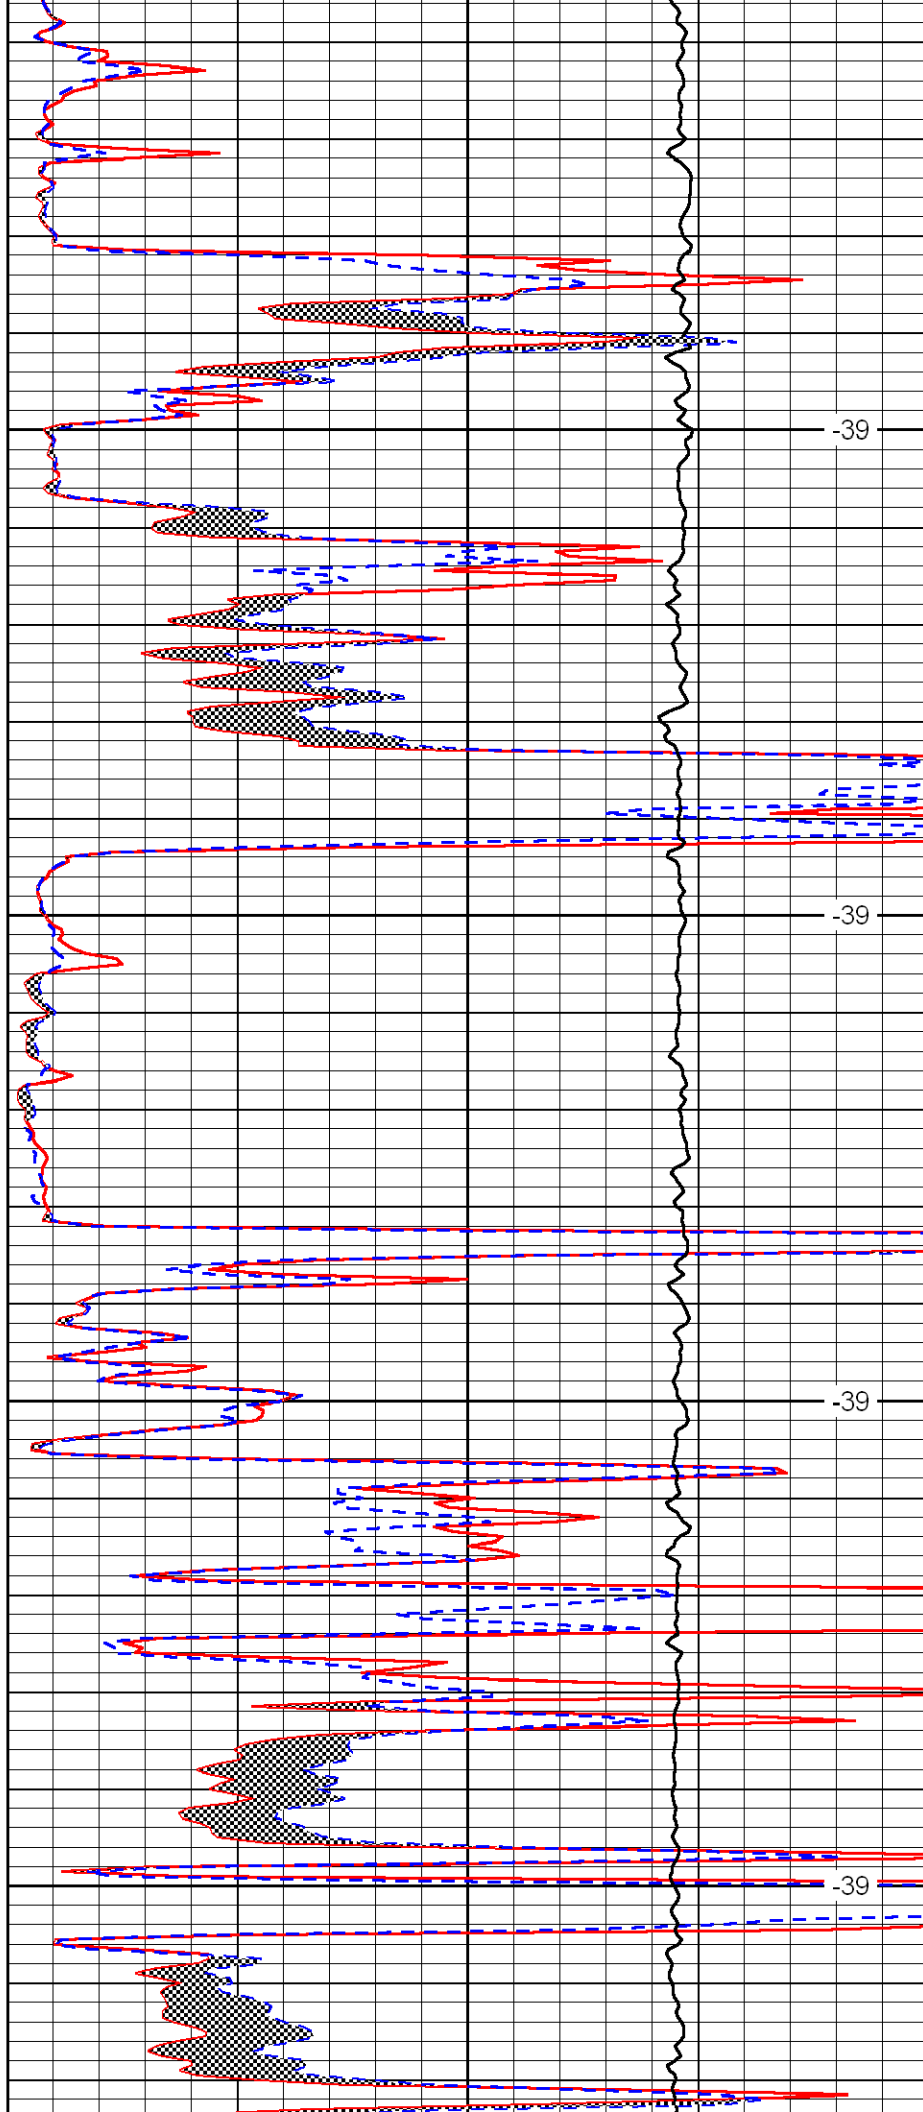


-39

-39

-39

-39

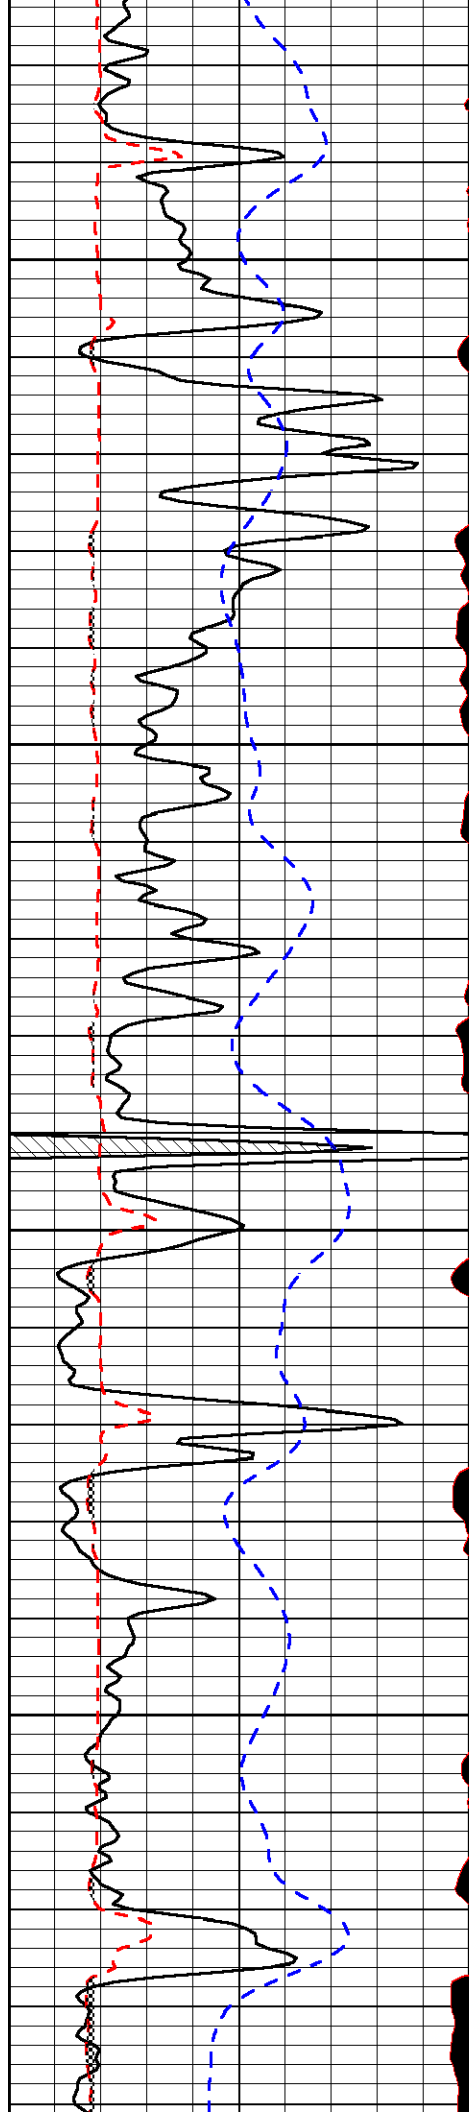



4650

4700

4750

4800

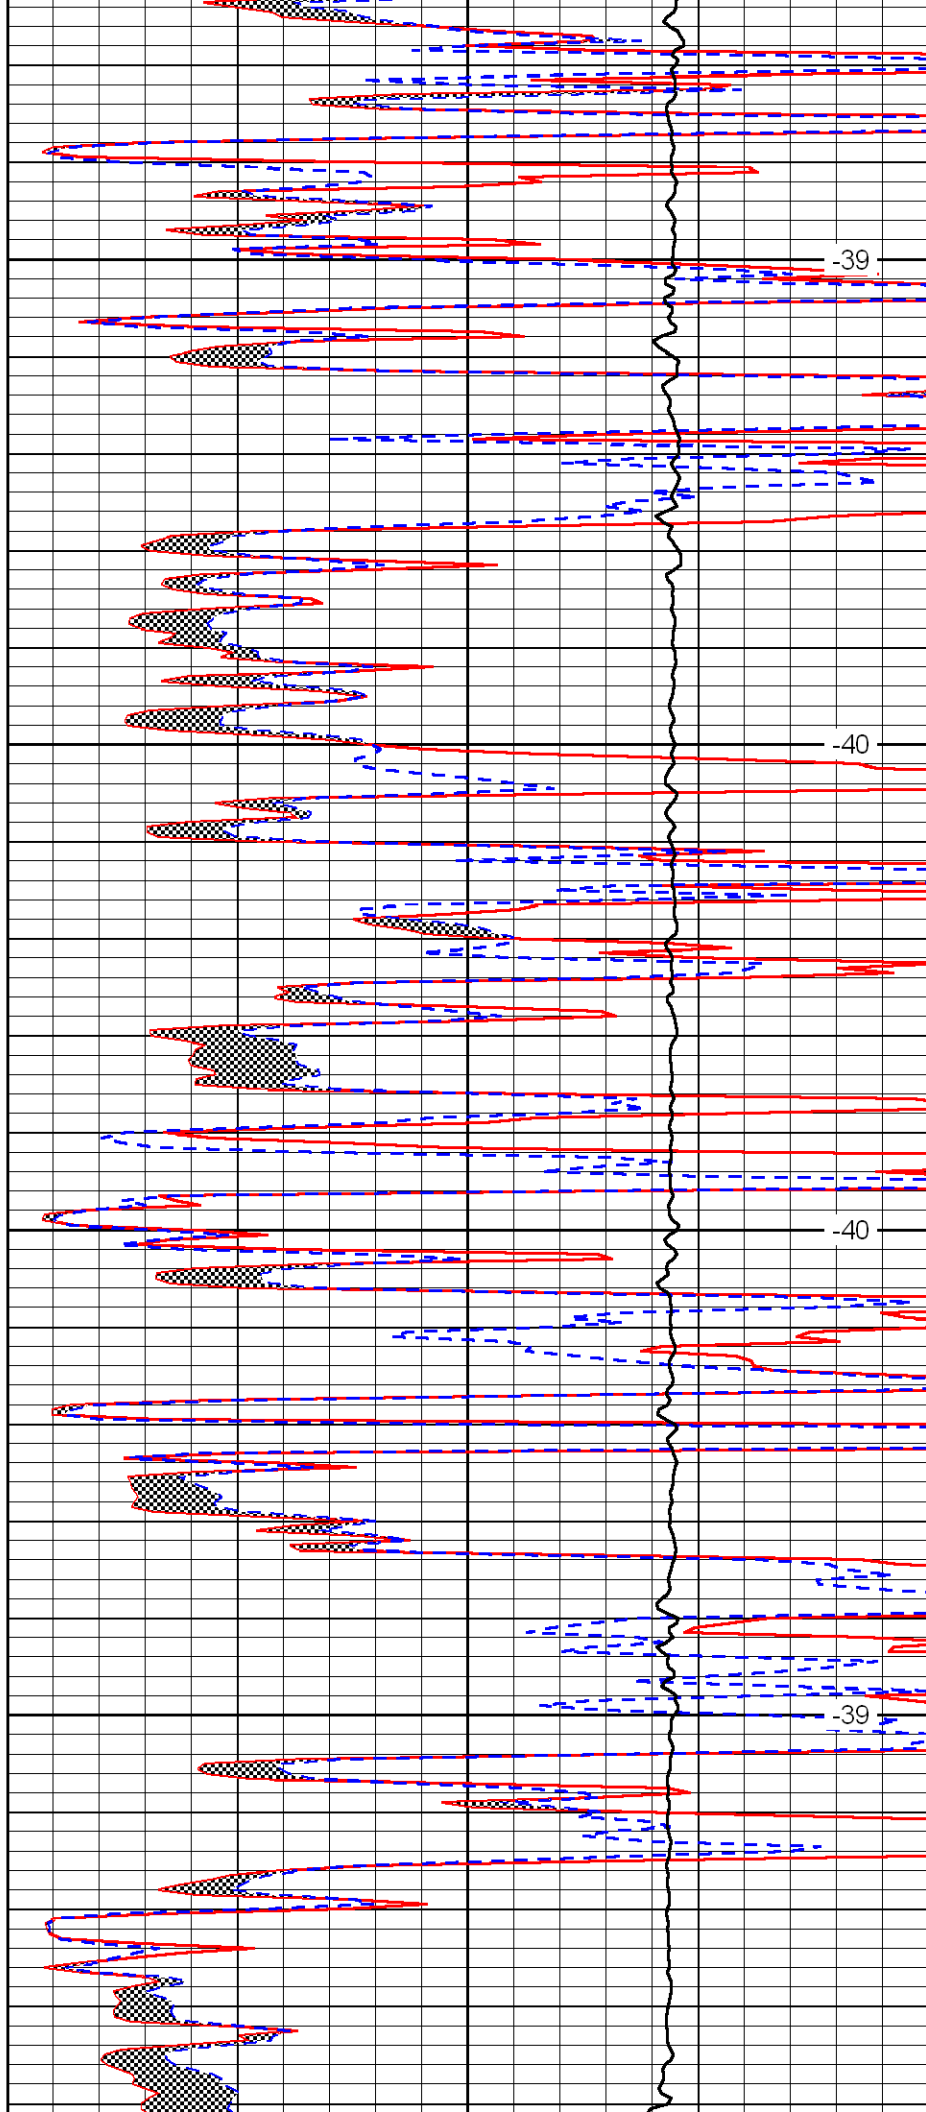

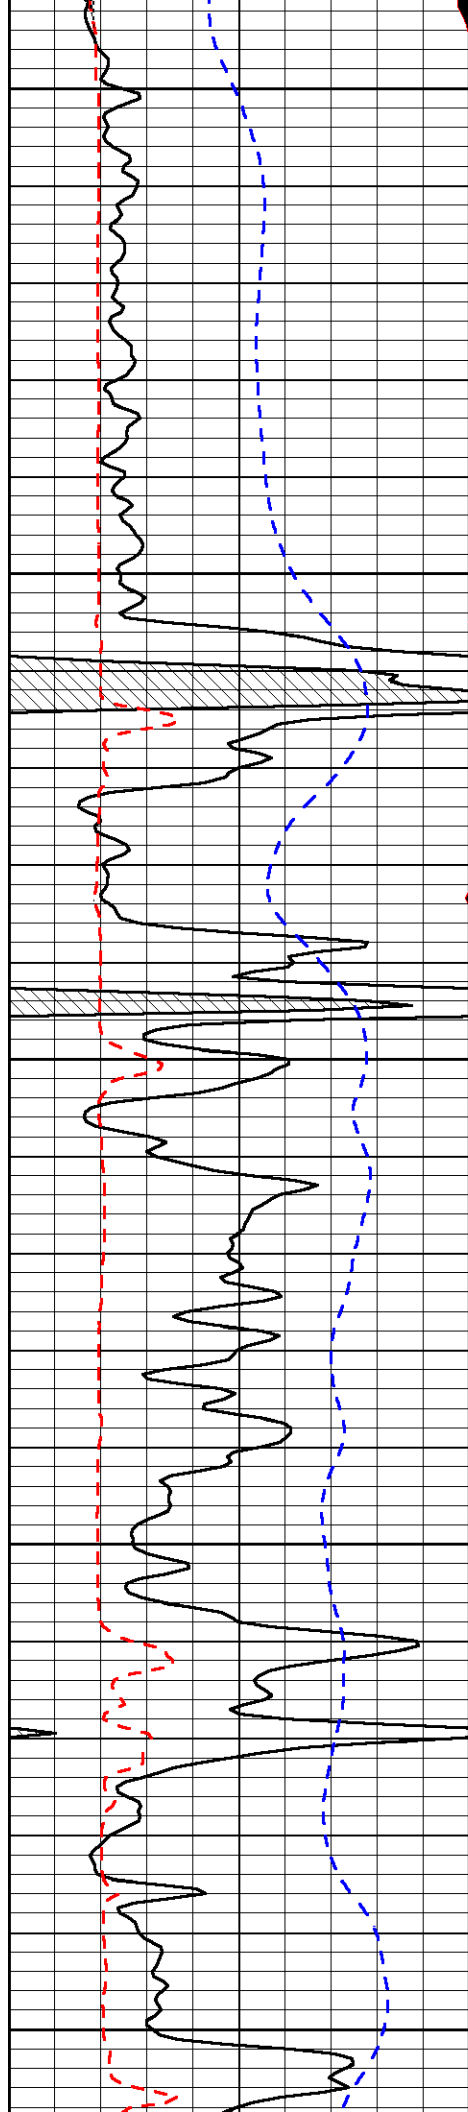


4850

4900

4950

5000

5050

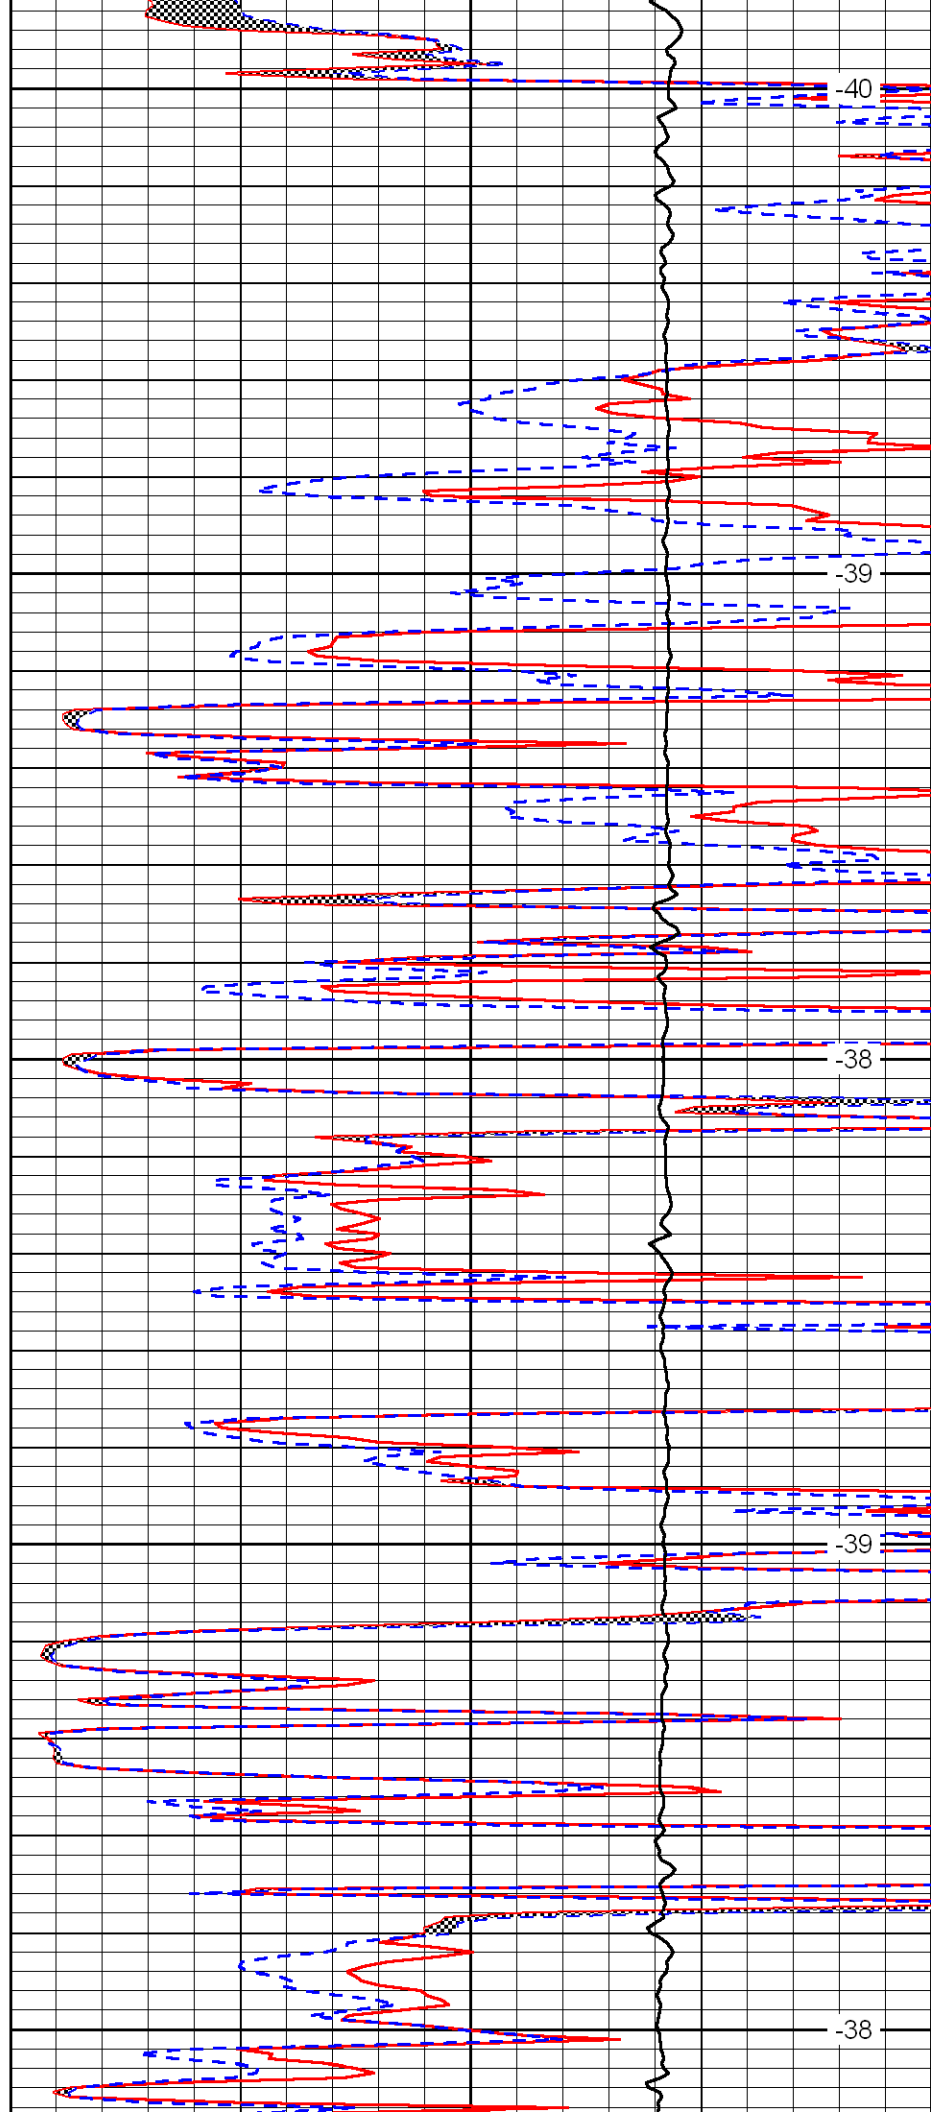


-40

-39

-38

-39

-38

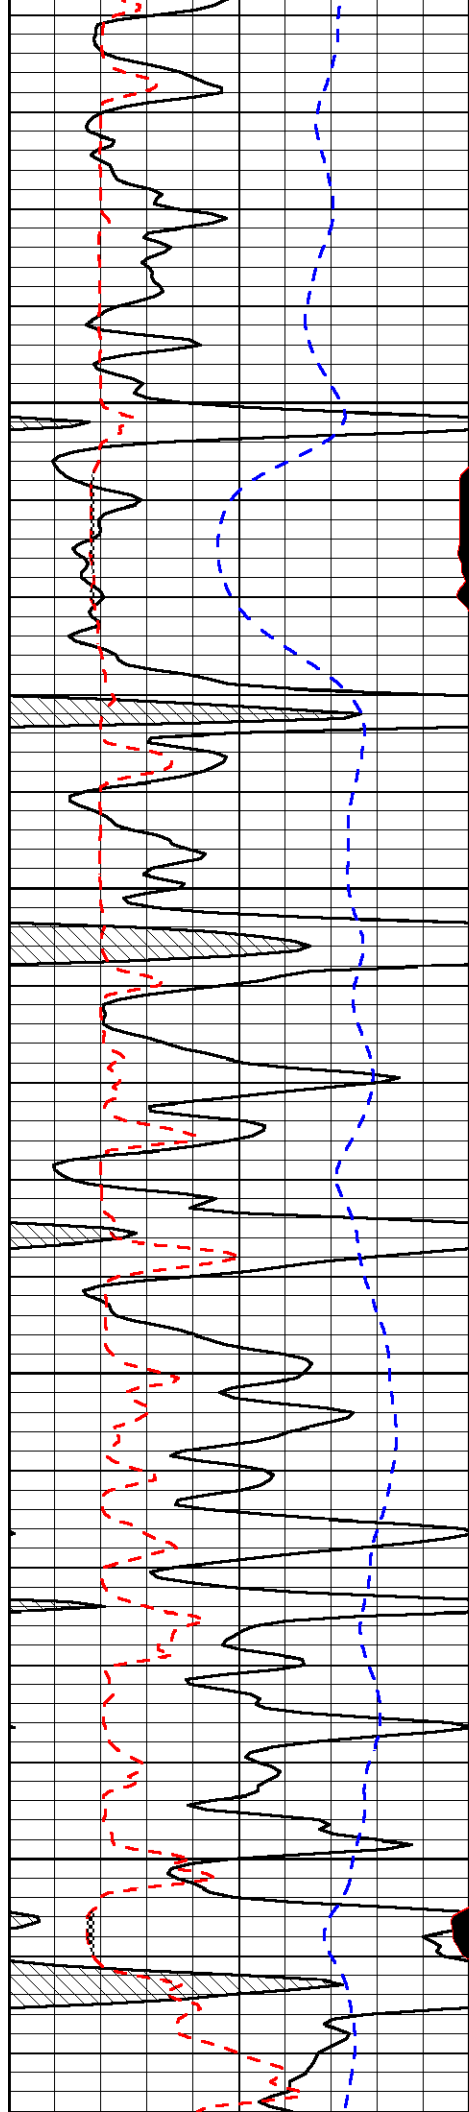


5100

5150

5200

5250

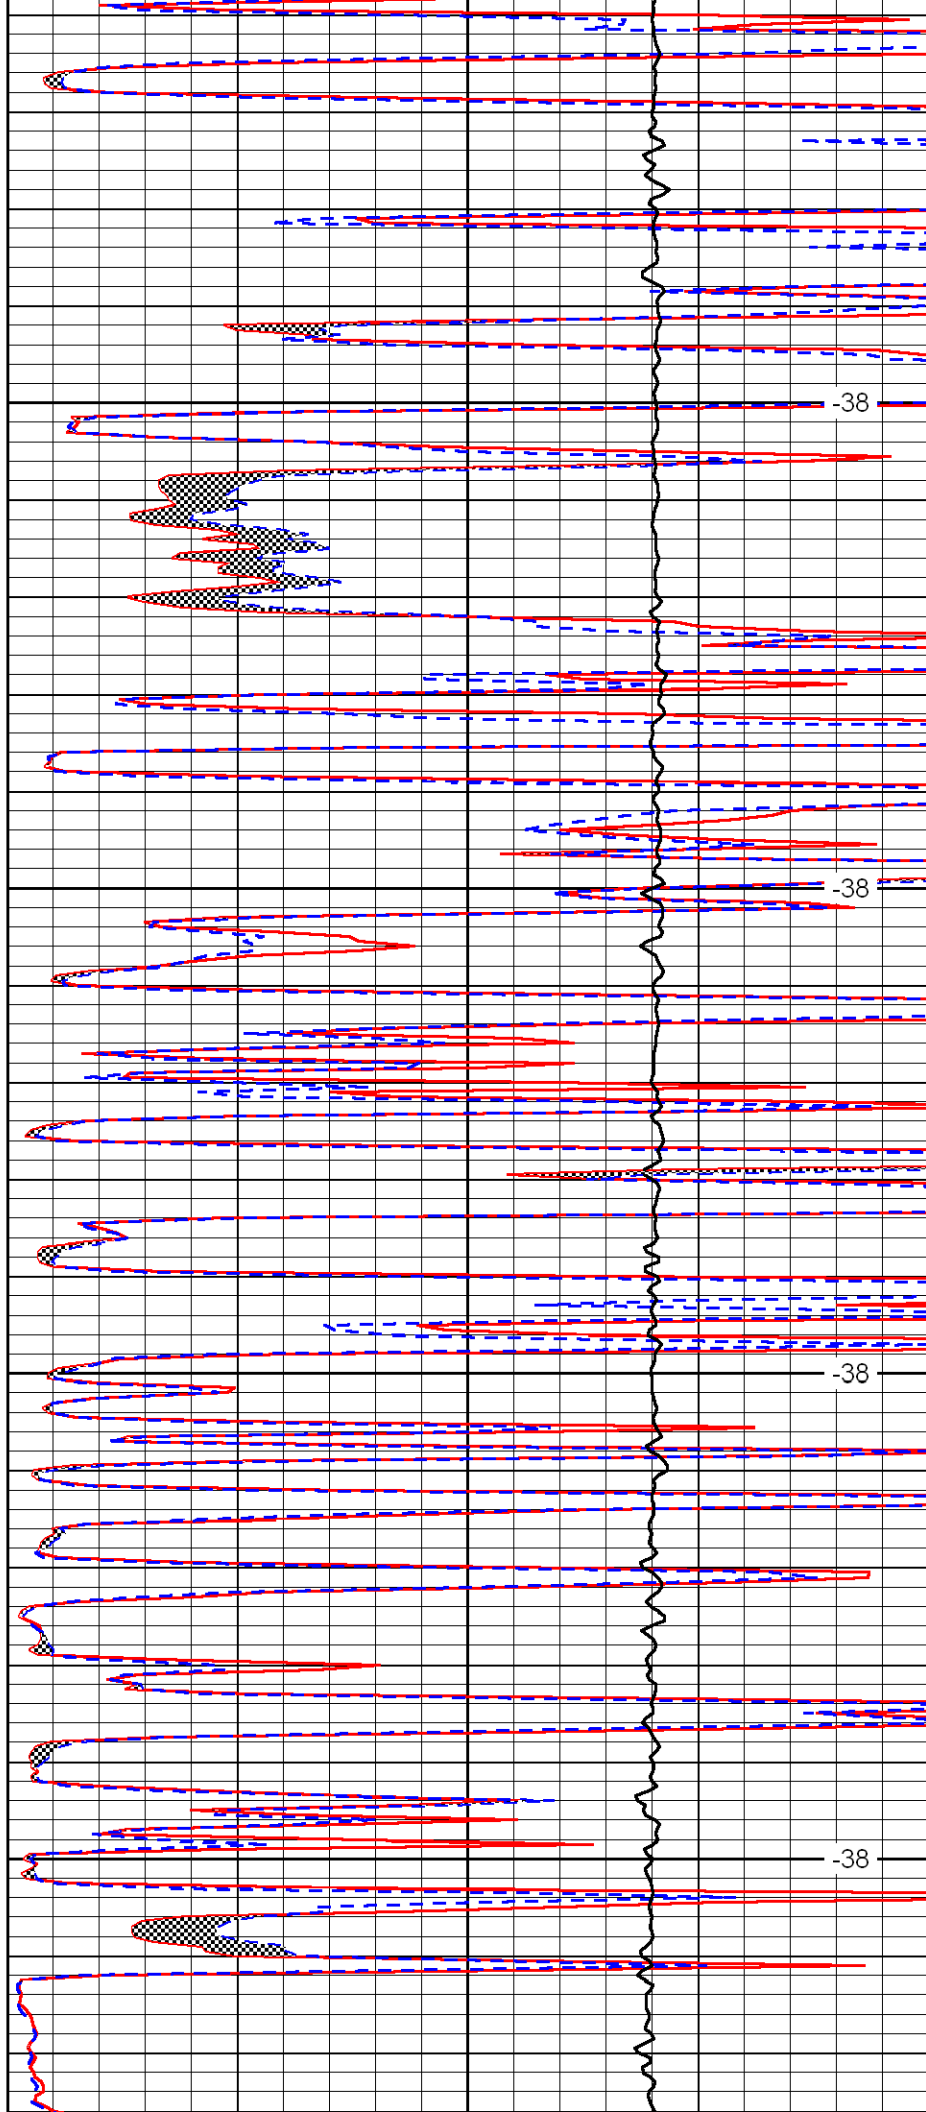


-38

-38

-38

-38

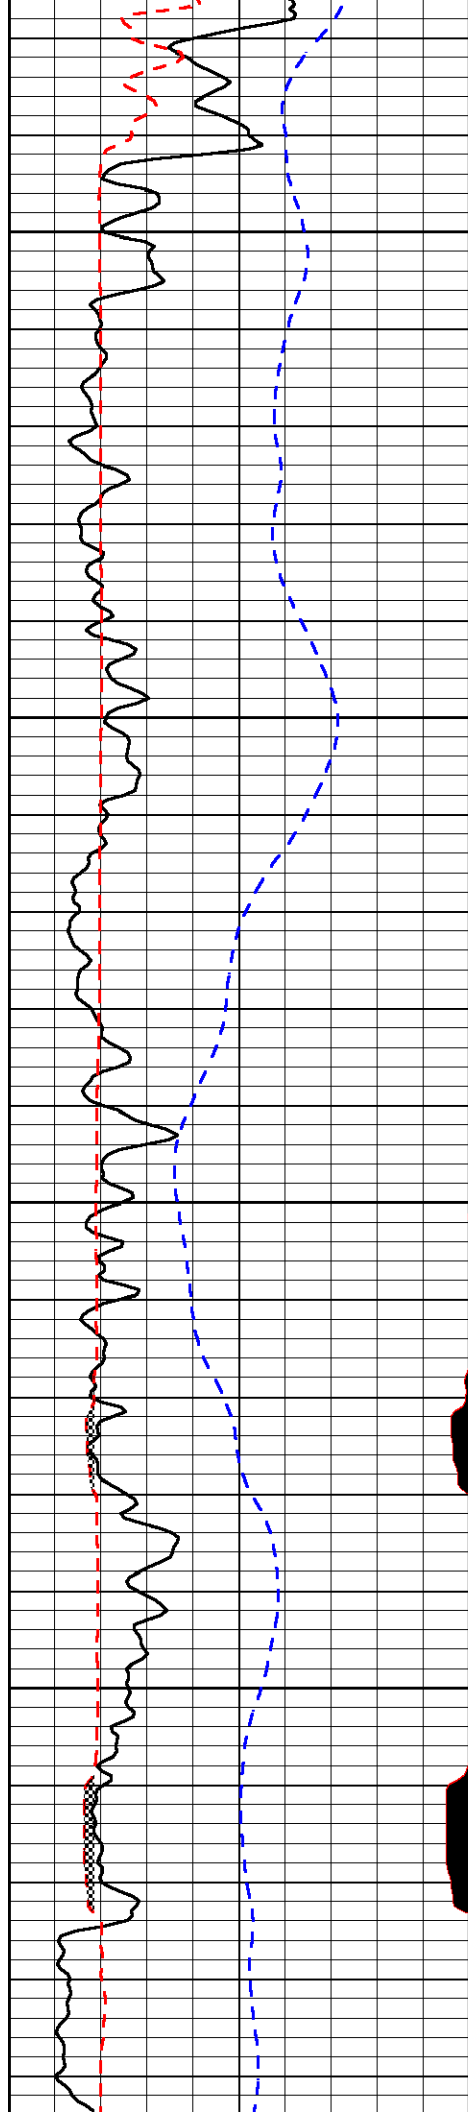


5300

5350

5400

5450

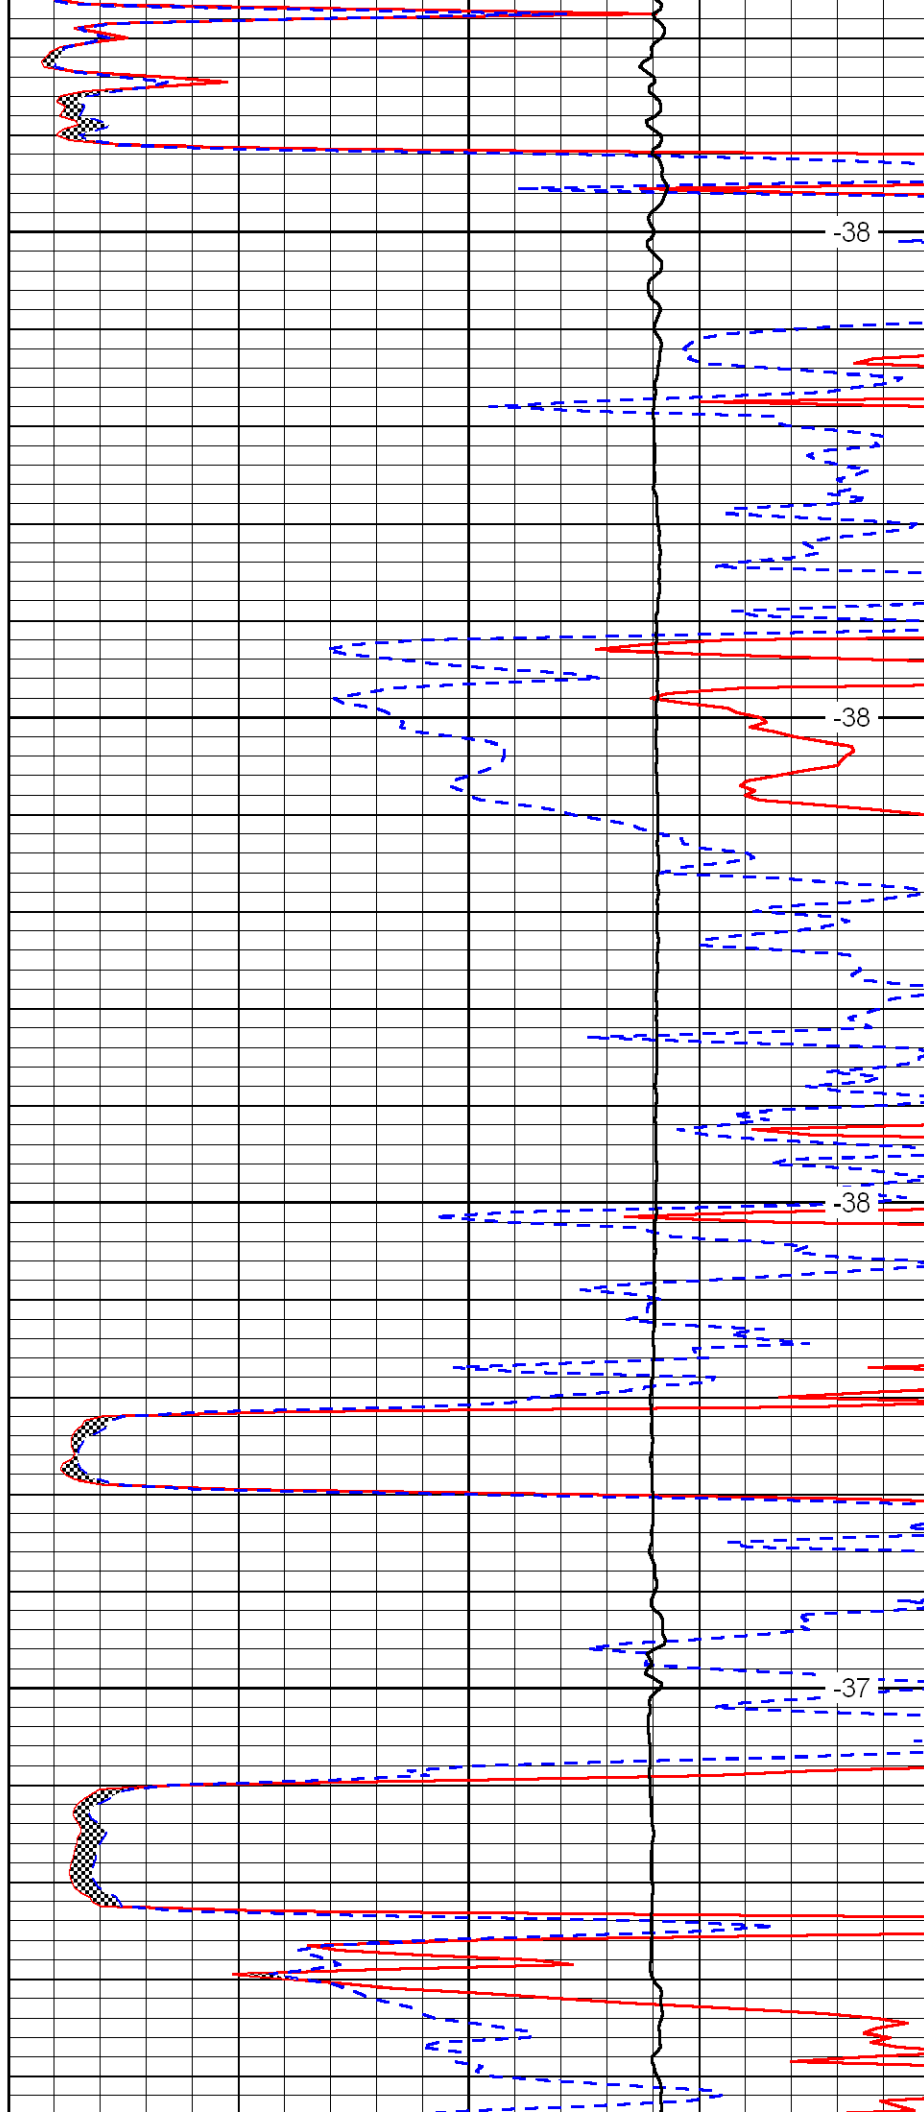


-38

-38

-38

-37

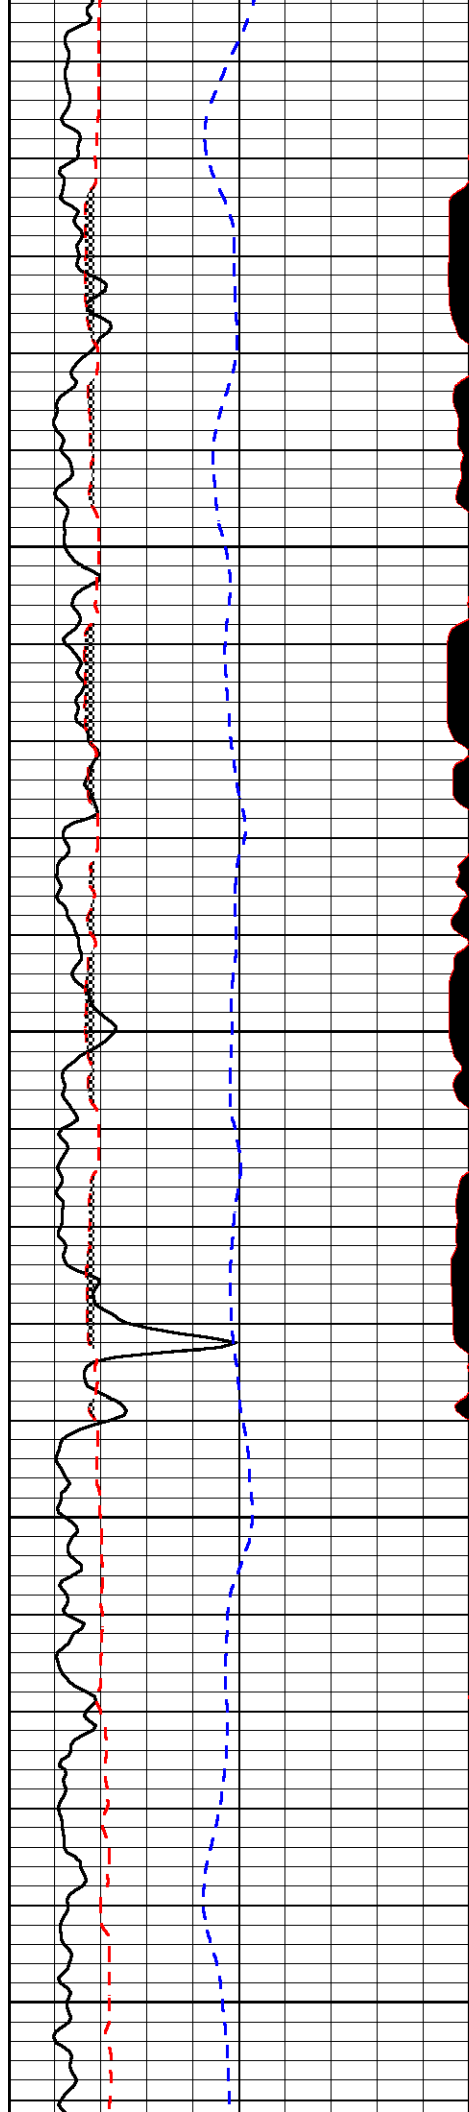


5500


5550

5600

5650

5700

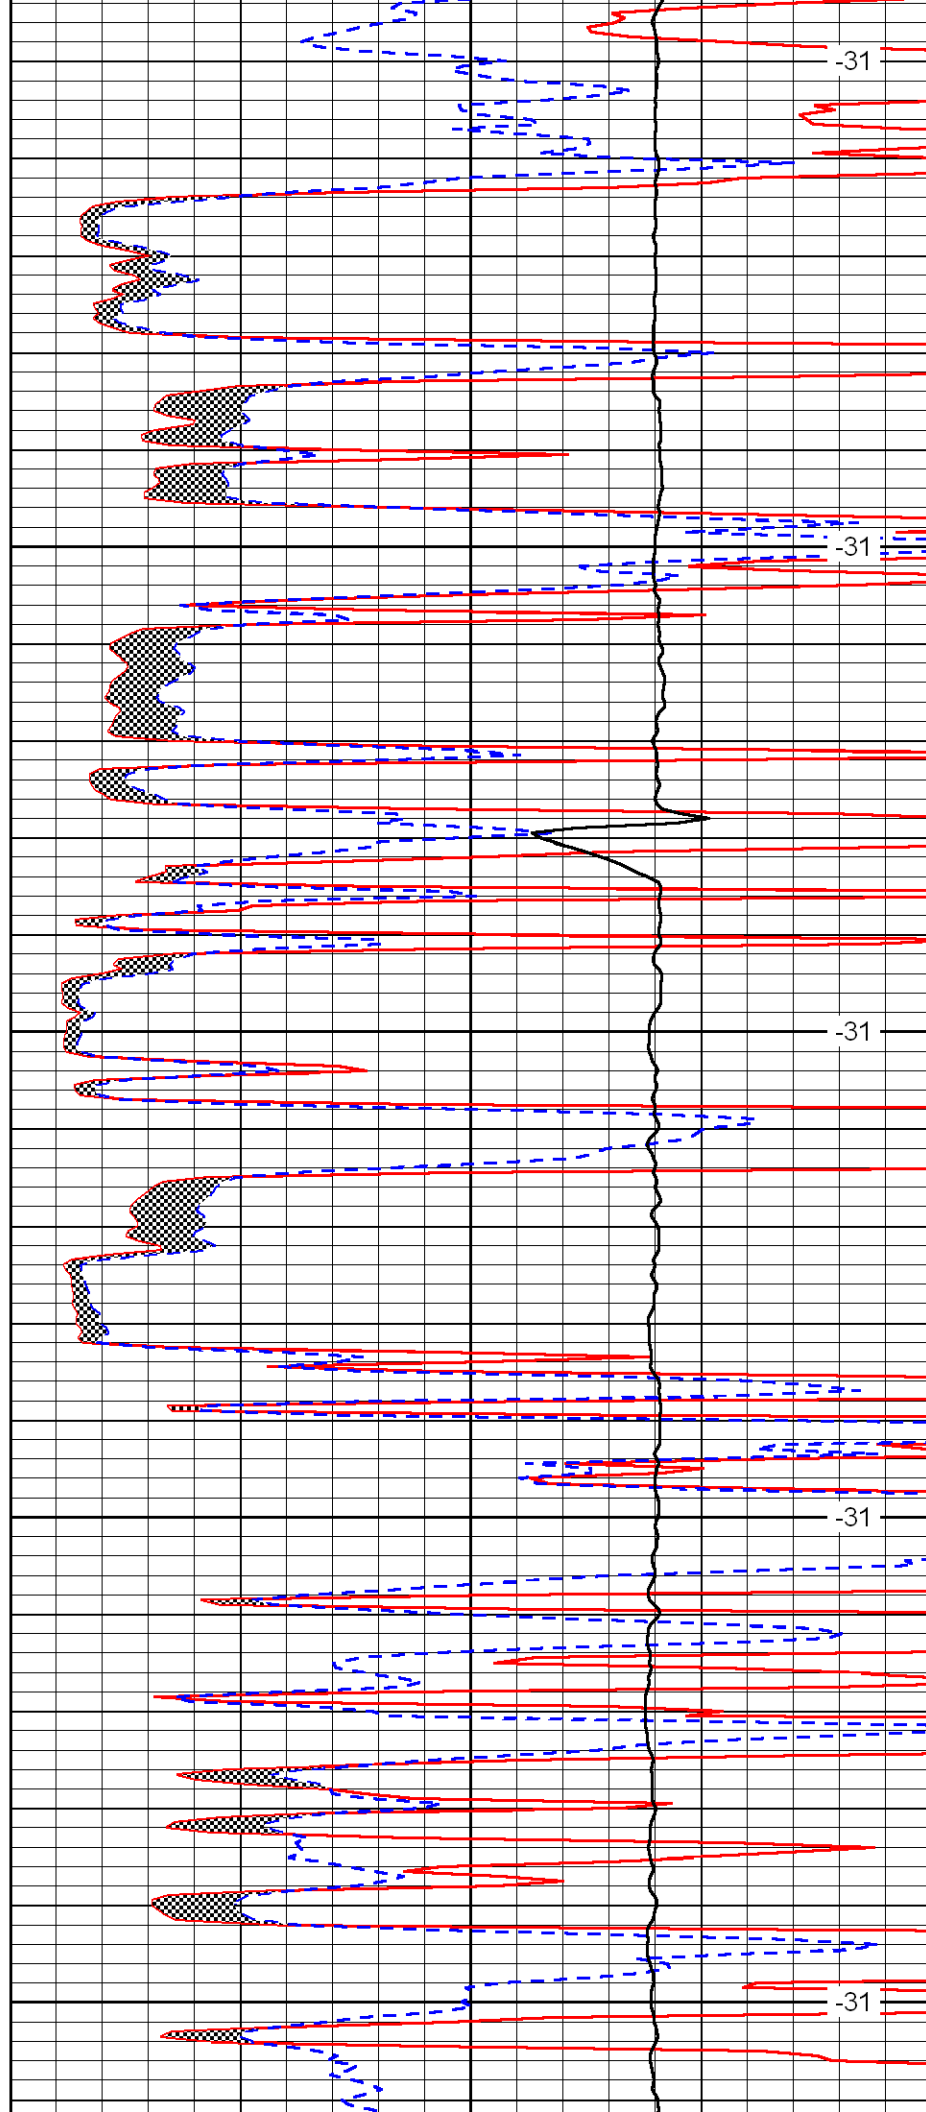

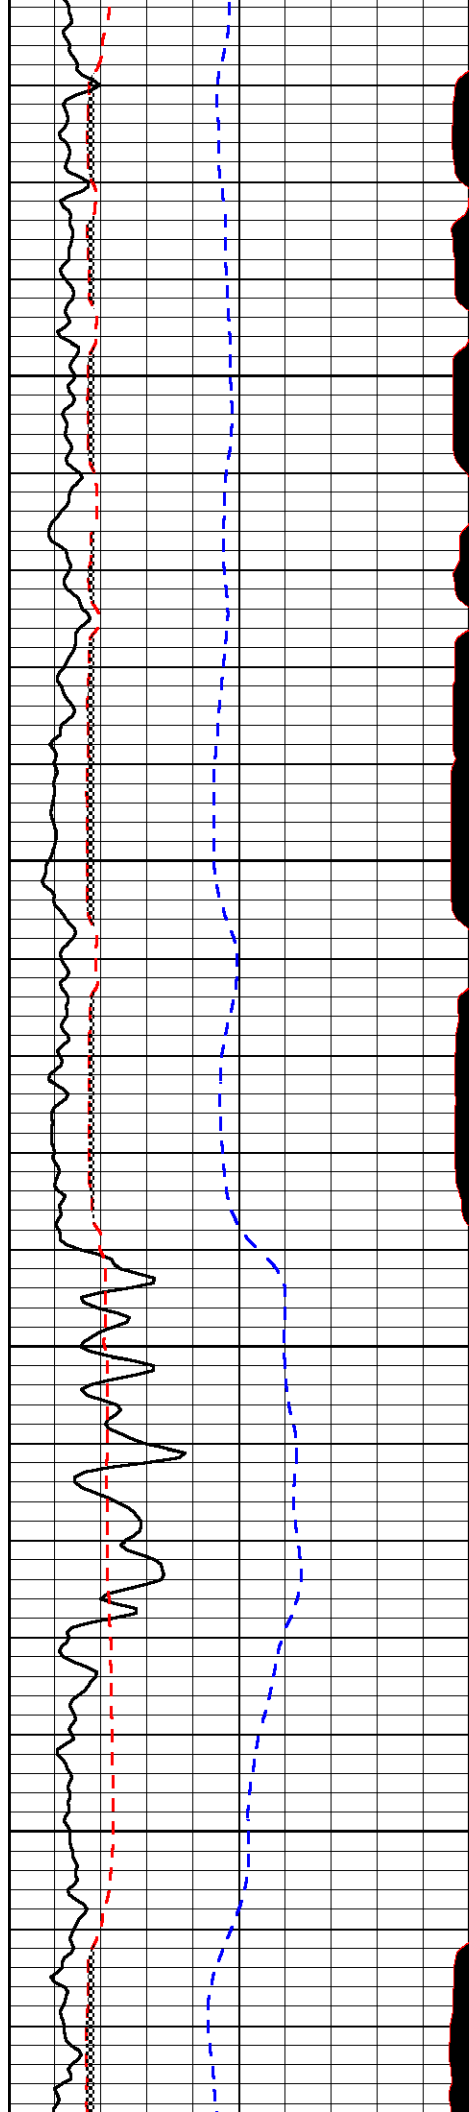


5750

5800

5850

5900

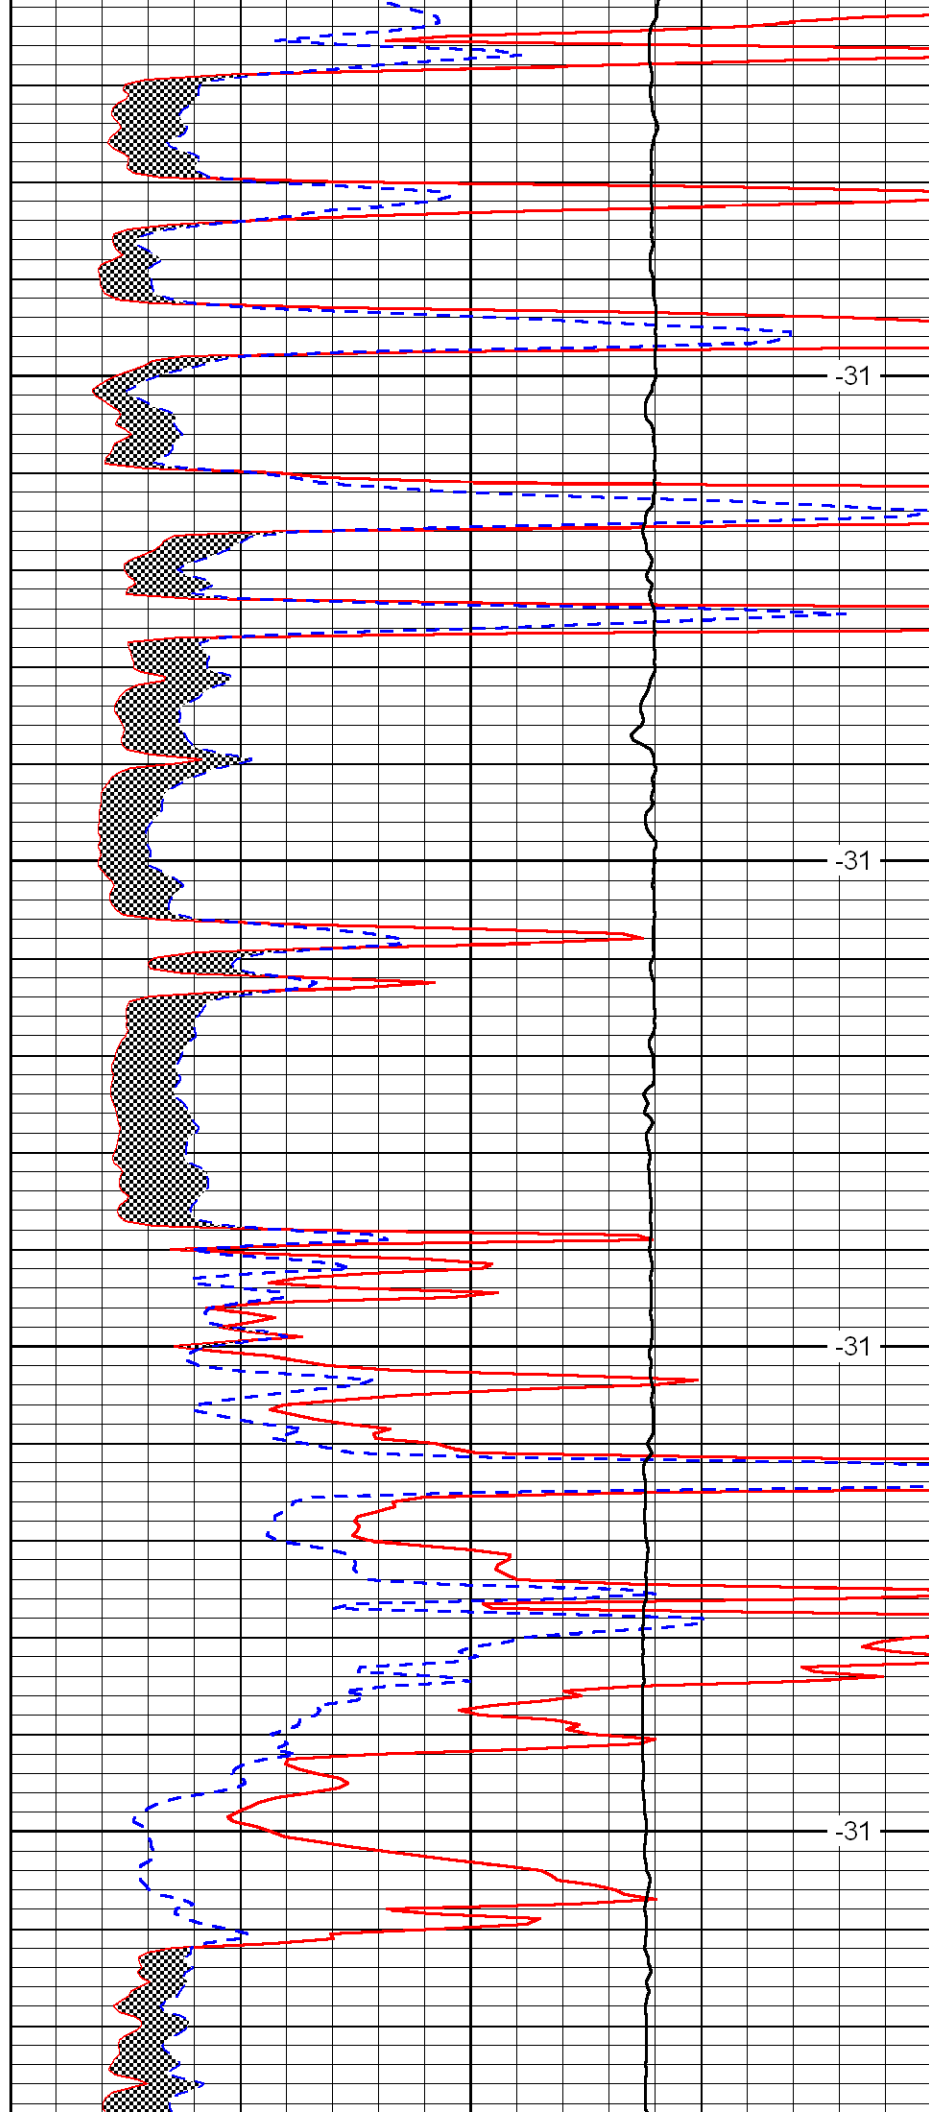


-31


-31

-31

-31

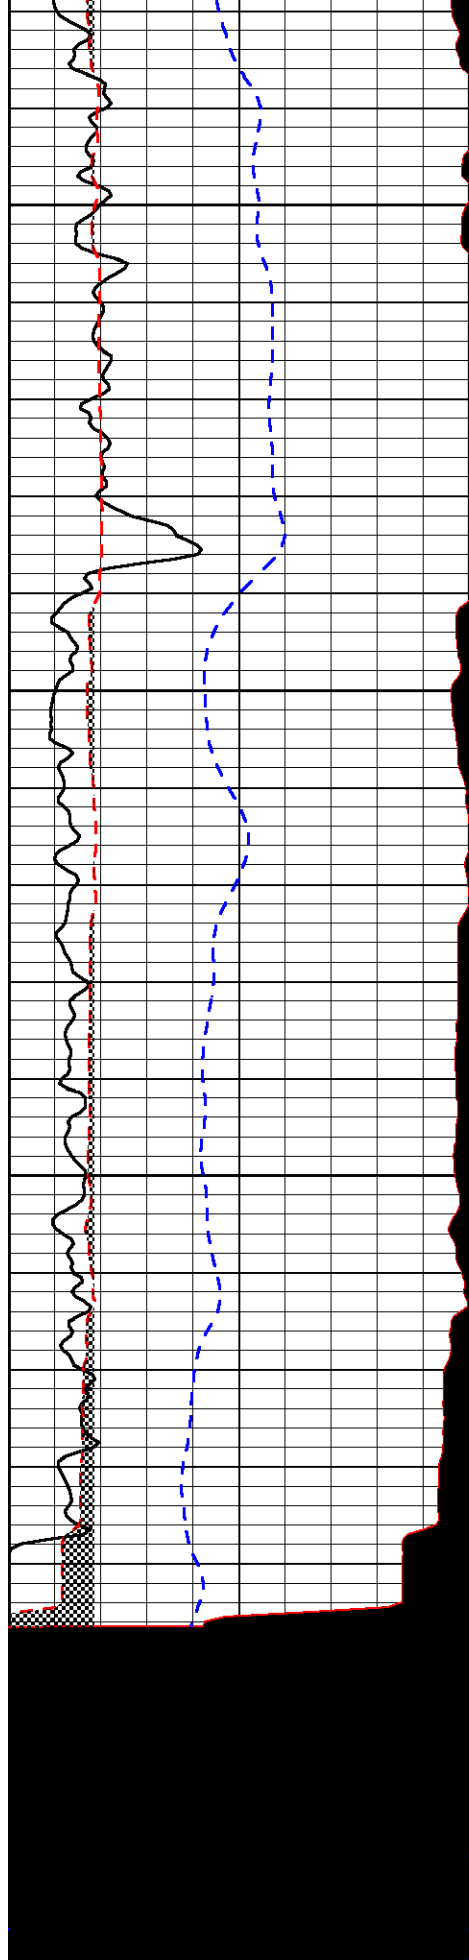

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875

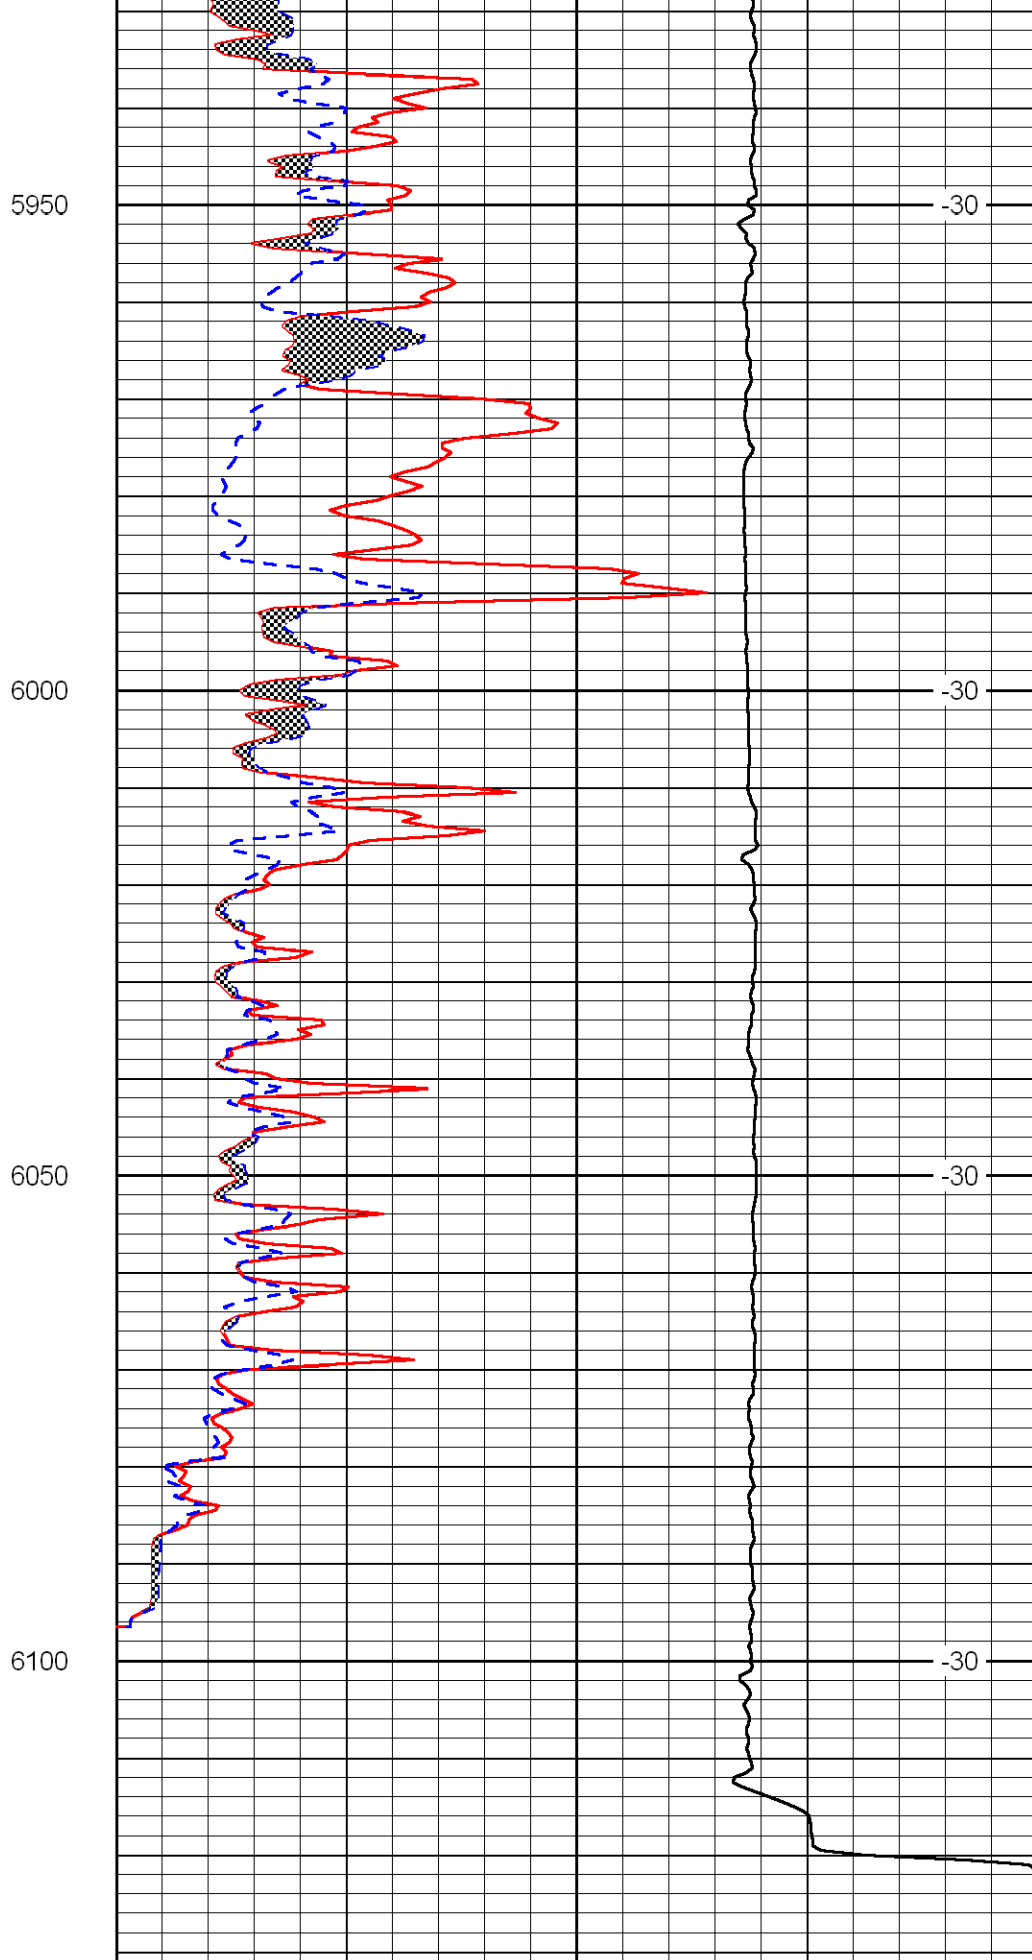

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

-200 SP 0

LSPD